

CLEANING SOLUTIONS

GENERAL CATALOGUE 2022

**HIGH PRESSURE WASHERS
STEAM GENERATORS
PURE WATER CLEANING SYSTEM
ELECTRIC VEHICLES**



IPC

IPC GROUP SUMMARY

#3 EUROPEAN MANUFACTURER OF PROFESSIONAL CLEANING EQUIPMENT

IPC knows every detail of cleaning equipment, with five rehown and dedicated factories, it is the undisputed Italian leader.

INNOVATIONS

INNOVATION THAT DELIVERS PRODUCTIVITY

IPC's large R&D team works as a group of experts in cleaning innovation to deliver tangible productivity benefits at a fast pace.

KEY VALUES

CLIENT-CENTRIC

IPC's tremendous depth of expertise and know-how are focused on delivering to customers specific solutions, addressing effectively emerging cleaning needs together.

KEY VALUES

COMMITTED TO SUSTAINABILITY

IPC's sustainable technologies contribute every year to always higher standards of energy savings, water savings, and recycling of materials.

NETWORK

GLOBAL DISTRIBUTION

IPC has a global commercial network covering over 120 countries, with wide and complete service in reference markets.


PRODUCTS

COMPLETE PORTFOLIO

IPC provides a complete range of professional equipment including scrubber driers, professional vacuum cleaners, high pressure washers and manual equipment.



MORE THAN 1.000 SPECIALISTS DEDICATED TO "CLEAN ON"



PORTOTECNICA

50.000 pieces of hp cleaners a year and a **4.500 sq/m** of warehouses.

Number of patents: 12

Certificates: UNI EN ISO 9001:2015, UNI EN ISO 14001:2015, BS OHSAS 18001:2007




GANSOW

30.000 pieces of floorcare machines a year and a **7.000 sq/m** of warehouses.

Number of patents: 35

Certificates: UNI EN ISO 9001:2015, BS OHSAS 18001:2007



SOTECO

250.000 pieces of vacuums a year and a **1.800 sq/m** of warehouses.

Number of patents: 8

Certificates: UNI EN ISO 9001:2015, UNI EN ISO 14001:2015, BS OHSAS 18001:2007



EUROMOP READYSYSTEM PULEX

7 million pieces of cleaning equipments a year and **11.500 sq/m** of warehouses.

Number of patents: 18

Certificates: UNI EN ISO 9001:2015

IPC IS ALWAYS WITH YOU ON PC, TABLET & SMARTPHONE



DOWNLOAD OUR
IPC CATALOGUES APP
DISCOVER OUR OFFICIAL WEBSITE
IPCWORLDWIDE.COM



VISIT OUR OFFICIAL WEBSITE IPCWORLDWIDE.COM

Easy access to product leaflets, pics and videos from any device.



DOWNLOAD OUR IPC CATALOGUES APP

Once downloaded, catalogues are always available, even offline.



REGISTER TO THE NEW BUSINESS AREA

You will have access to all IPC technical and commercial docs.



SIGN UP ON WEBSITE TO RECEIVE OUR NEWSLETTER

Keep updated on our latest news including new IPC products and events.

FOLLOW US



KEEP IN TOUCH WITH US

info@ipcworldwide.com





ONE AHEAD

ADDRESSING NEW CLEANING CHALLENGES

Cleaning is consistently evolving, as we seek to meet higher hygiene standards ever more effectively.

IPC is closely connected to the latest and best practises of cleaning and is committed to deliver new solutions that boost cleaning efficiency, addressing those areas and tasks that are evolving fastest.

We have thus developed a complete range of new solutions, responding to the latest precautionary practises focused to protect communities all around the world.



STEP LEAD





HIGH PRESSURE WASHERS - **COLD WATER**



PW-C04

P. 30



PW-C08

P. 32



PW-C09

P. 34



PW-C22/PW-C22 P

P. 36



PW-C23 P

P. 38



PW-C21

P. 40



PW-C25

P. 42



PW-C25 PLUS

P. 44



PW-C40

P. 46



PW-C40 PLUS

P. 50



PW-C40

P. 52

**SPECIAL
MODEL**



PW-C45 VALUE

P. 54

PW-C45 PREMIUM

P. 56



HIGH PRESSURE WASHERS - COLD WATER



(PAINTED
STEEL
STRUCTURE)



PW-C45

P. 58



PW-C50

P. 60



PW-C50 P

P. 62



PW-C55 VALUE

P. 64



(PAINTED
STEEL
STRUCTURE)



PW-C55

P. 68



PW-C70

P. 70



PW-C85

P. 72



ABSOLUTE-C

P. 74



BENZ-C

P. 76



DIESEL-C

P. 78



FIRE BOX

P. 80



HIGH PRESSURE WASHERS - HOT WATER



PW-H10

P. 86



PW-H28

P. 88



STAINLESS
STEEL
SERIES

PW-H28/4

P. 90



PW-H50⁺

P. 92



PW-H90⁺

P. 96



PW-H100⁺

P. 98

PW-H50 PLUS⁺

P. 94

PW-H100

P. 100



STAINLESS
STEEL
SERIES

PW-H100 P

P. 102



PW-H100 HTM

P. 104

PW-H100/4 HTM

P. 106



TWOCK-H

P. 108



SKID FUEGO

P. 110



HIGH PRESSURE WASHERS - COLD STATIONARY



MLC-C

P. 116



ML CMP

P. 118



ML-C

P. 120



SML-C

P. 122

HIGH PRESSURE WASHERS - HOT STATIONARY



IWD-H

P. 124

HIGH PRESSURE WASHERS - ELECTRICALLY HEATED BOILER



PW-E100

P. 130

PW-E100

P. 132



STAINLESS
STEEL
SERIES

PW-E100

P. 134



STAINLESS
STEEL
SERIES

IWD-E

P. 136



WEED REMOVAL SYSTEM - HOT WATER



GREEN JET 1010

P. 140



GREEN JET 7510

P. 142

STEAM GENERATORS



SG-08/SG-10

P. 150



SG-20/SG-30

P. 152



SG-45

P. 154



SG-48

P. 156



SG-50 (WITH TROLLEY)

P. 158



SG-55

P. 160



SG-70

P. 162



SG-10 + PT 04 (ONLY STEAM)

P. 164



SG-50 + PT 04 (ONLY STEAM)

P. 166



PURE WATER CLEANING SYSTEM - GREEN TUBE - HIGH PURE



HPO HIGH PURE

P. 176



HPB HIGH PURE

P. 177



HPE HIGH PURE

P. 178



HPG HIGH PURE

P. 179

ELECTRIC VEHICLES



TIGER 250/TIGER 250 BC

P. 184



TIGER 500

P. 184



TIGER 1000

P. 184



HIGH-PRESSURE WASHERS

INNOVATIONS	14
SUGGESTED SECTORS	23
COLD WATER	27
HOT WATER	83
STATIONARY	113
ELECTRICALLY HEATED BOILER	138
HOT WATER WEED REMOVAL SYSTEM	145

IPC pressure washers nomenclature allows an easy and fast identification of the main technical features of each model. Following an example on PW-H50 D1310P4 M pressure washer:

PRESSURE
WASHERS

PW

-

H

H = HOT WATER
PRESSURE WASHER
C = COLD WATER
PRESSURE WASHER

PLATFORM

50

D

CONTROL SYSTEM:
- = BY PASS
I = IMMEDIATE TOTAL STOP
D = DELAYED TOTAL STOP
S = SAFETY STOP

MPA PRESSURE

13

FLOW RATE
l/min

10

PUMP TYPE

P = PLUNGER PUMP
A = AXIAL PUMP

P

M

POWER
M = SINGLE-PHASE
T = THREE-PHASE



MSC™ MULTIFUNCTION SAFETY CONTROL

FULL CONTROL OVER YOUR MACHINE.

The innovation called Multifunction Safety Control is a high-tech system that protects both the machine and the operator.



ADVANTAGES


- 01 Reduced energy consumption.
- 02 Maximum machine protection and enhanced operator safety.
- 03 Reduced maintenance costs thanks to the innovative self-diagnosis system.
- 04 No floods from leaks in the hydraulic circuit



G6000™ CERAMIC TECH GUN

LONG-LASTING HIGH PERFORMANCES.

A comfortable and technological solution with a Low Activation Trigger and comfortable grip designed to help during long working hours.

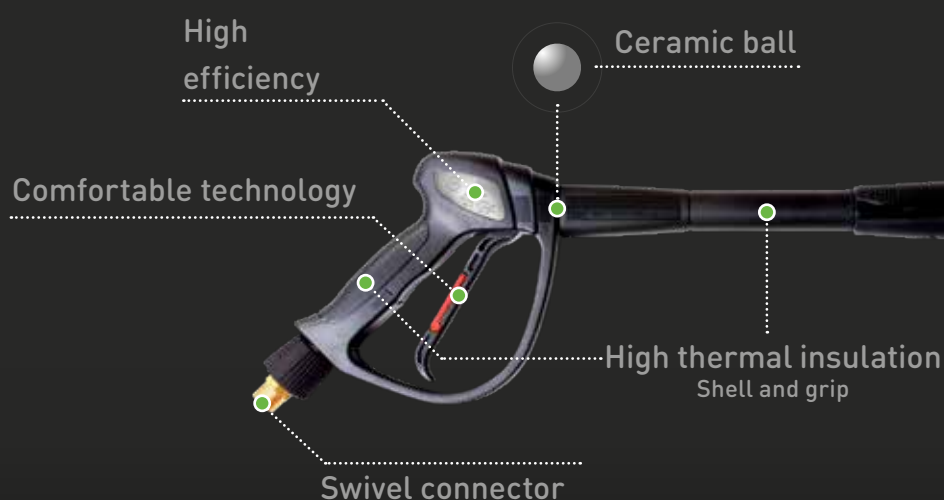

ADVANTAGES

- 01 Best category features: 350bar - 45l/min - 160°C.
- 02 Ceramic ball for excellent resistance to wear, corrosion, soap, acids and chlorine.
- 03 Trigger lock to prevent accidental activation.



ALL TERRAIN

EASE OF MOVEMENT.

Ease of movement on any type of floor. IPC's exclusive feature: all models are available in 3 or 4-wheel versions.

Industrial surface

Rough terrain



ADVANTAGES

- 01 The 3-wheel version can be perfectly handled on all industrial surfaces.
- 02 The 4-wheel version can be easily used on any type of surface, such as concrete, rough terrain, gravel, etc.



MODULAR BUILD UP (PW-H28 / PW-H50 / PW-H100)

REDUCED MAINTENANCE COSTS.

Easy maintenance. All components can be easily reached for maintenance/repair (simply) by removing the cover.



ADVANTAGES

- 01 Easy access to internal components by removing the cover.
- 02 Pump, valve and motor can be easily reached for fast maintenance and/or repair operations.
- 03 Sturdy structure with high resistance to thermal shocks, weather conditions, and corrosion from chemicals.



IPC'S EXCLUSIVE BOILER

A LONG WORKING LIFE GUARANTEED BY IPC.

IPC boilers are designed to offer the best heating capacity in any working condition. Their structure and internal components are in mild steel. This ensures a longer lifetime.



- Ignition device designed by IPC
- Open top cover
- Stainless steel structure
- Double system heating coil
- Fire-resistant and non-toxic bottom
- O-rings couplings

ADVANTAGES

- 01 High-performance combustion.
- 02 Stainless steel structure designed by IPC.
- 03 Water inlet and outlet at the bottom of the boiler in order to avoid water stagnation within the coils.



IPC PUMP

RELIABLE AND EFFICIENT.

The exclusive and highly reliable IPC's plunger pump have passed the 2000 hours working time test, carried out in real heavy-duty working conditions 8 hours/day.

Reinforced connecting rod

in a special alloy or bronze (depending on the model)

High- and low-pressure water seals

with high durability due to its exclusive IPC design

Brass head

designed for a long working life

Large oil sight glass

High-quality, oversize
and long-lasting bearings

High-efficiency intake valves
made from stainless steel

Large and extra-hard
ceramic pistons
for high resistance to wear
and thermal shocks

ADVANTAGES

- 01 Oversized components to withstand the hardest use.
- 02 Brass head for a long working life.
- 03 The double seals (high- and low- pressure) and the intermediate chamber keep the system cool and also recirculate liquid leaked from worn seals.



M421 Anti-scale

PREVENTS DAMAGE CAUSED BY HARD WATER.

The daily use of the IPC anti-scaling compound reduces maintenance operations on the machine's hydraulic circuit, thus preserving heating performance.

+30%

**MORE EFFICIENT
MORE CONCENTRATED**

**PREVENTS DAMAGES
CAUSED BY HARDWATER**



ADVANTAGES


- 01 Provides corrosion protection to components in contact with water.
- 02 Reduces maintenance costs due to overpressure on coil pipes with limescale build-up.
- 03 Prevents limescale from forming inside the hot water pressure washer coil, thus reducing fuel costs caused by heat loss.



ETSC™ ELECTRONIC TEMPERATURE CONTROL

CONSTANT TEMPERATURE FOR INCREASED SAVINGS.

An extremely accurate electronic control system that ensures constant water temperature.

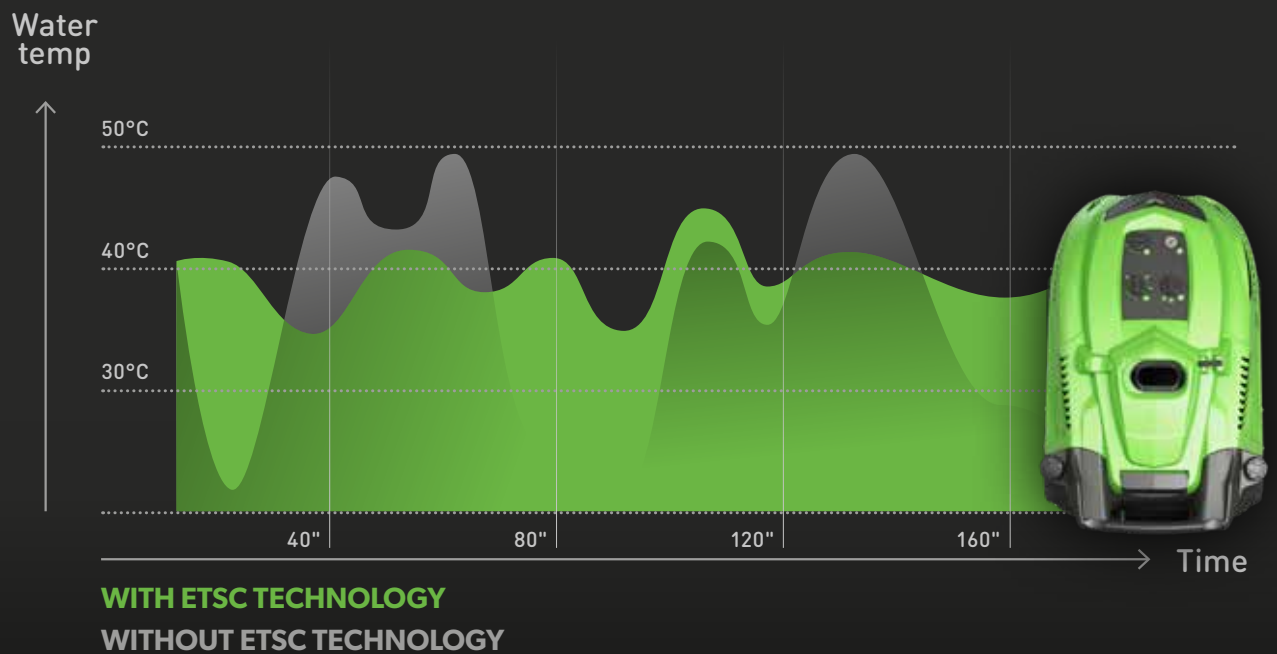

ADVANTAGES

- 01 Lower fuel consumption in ECO MODE.
- 02 Lower maintenance costs.
- 03 Stepless temperature control ensures the outlet water temperature.

AUTOMOTIVE



CAR WASHING

- ▶ DEGREASING AND DEWAXING
- ▶ HEAVY DIRT REMOVAL
- ▶ PRE-WASH OPERATIONS

GARAGES/BODY REPAIR SHOPS AND TYRE CENTRES

- ▶ PARTS CLEANING
- ▶ RIM CLEANING
- ▶ PRE-PAINTING OPERATIONS

CAR-HIRE AGENCIES/CAR DEALERS

- ▶ VEHICLE CLEANING
- ▶ PRE-WASH OPERATIONS
- ▶ SECOND HAND CARS RENOVATION

AGRICULTURE



FARMING

- ▶ ANIMAL PEN CLEANING
- ▶ LIVESTOCK TRUCK CLEANING
- ▶ DAIRY BARN AND LABORATORY CLEANING

VITICULTURE

- ▶ CELLAR FLOOR CLEANING
- ▶ CLEANING OF BOTTLING AND AGEING AREAS
- ▶ WINE SHOP CLEANING

CEREAL FARMING AND STORAGE

- ▶ GRAIN STORAGE SILOS
- ▶ GRAIN TRUCKS CLEANING
- ▶ GRAIN EQUIPMENTS CLEANING

CONSTRUCTION AND BUILDING



RENOVATIONS

- ▶ CONCRETE REMOVAL
- ▶ FACADE CLEANING
- ▶ DEBRIS REMOVAL

BUILDINGS

- ▶ EQUIPMENT CLEANING
- ▶ TRUCK CLEANING
- ▶ STORAGE AREA CLEANING

CONCRETE INDUSTRY

- ▶ EQUIPMENT CLEANING
- ▶ TRUCK CLEANING
- ▶ PARKING AND STORAGE AREA CLEANING

MUNICIPALITIES



ROAD MAINTENANCE

- ▶ TUNNEL CLEANING
- ▶ ROAD SURFACE AND PAVEMENT CLEANING
- ▶ MANHOLE AND STREET DRAIN CLEANING

BUILDING MAINTENANCE

- ▶ FACADE CLEANING
- ▶ GRAFFITI REMOVAL
- ▶ CLEANING OF PUBLIC SPACES AND GREEN AREAS

WASTE COLLECTION

- ▶ REFUSE TRUCK CLEANING
- ▶ LANDFILL SITE CLEANING
- ▶ CLEANING OF WASTE CONTAINERS AND BINS

DIY AND GARDENING



OUTDOOR CLEANING

- ▶ PATIO CLEANING
- ▶ MOSS REMOVAL
- ▶ PIPE AND GUTTER CLEANING

GARDENING

- ▶ CLEANING OF LAWNMOWERS AND TRIMMERS
- ▶ OUTDOOR FURNITURE CLEANING
- ▶ CLEANING OF WALLS, PAVEMENTS AND FENCES

CAR AND EQUIPMENT CARE

- ▶ CAR CLEANING
- ▶ UNDERBODY AND RIM CLEANING
- ▶ DIY TOOL CLEANING

HEAVY INDUSTRY



FOOD FACTORIES

- ▶ CONVEYOR BELT CLEANING
- ▶ SANITIZING FILTERS AND GRILLES
- ▶ CLEANING AND DEGREASING OF WORKBENCHES, WALLS AND CEILINGS

OIL AND GAS COMPANIES

- ▶ REMOVAL OF GREASE AND ENCRUSTATIONS FROM STRUCTURES AND STAIRS
- ▶ TANK AND CONTAINER CLEANING
- ▶ PIPE AND EQUIPMENT CLEANING

HEAVY INDUSTRIES

- ▶ GREASE ENCRUSTATIONS REMOVAL
- ▶ PRE-PAINTED PARTS CLEANING
- ▶ HARD FLOOR CLEANING



COLD WATER

EXCLUSIVE TECHNOLOGIES	28	PW-C45	VALUE MODELS	54
PW-C04	30	PW-C45	PREMIUM MODELS	56
PW-C08	32	PW-C45	PAINTED STEEL COVER	58
PW-C09	34	PW-C50		60
PW-C22/PW-C22 P	36	PW-C50 P	WITH HOSE REEL	62
PW-C23 P	38	PW-C55	VALUE MODELS	64
PW-C21	40	PW-C55	PREMIUM MODELS	66
PW-C25	42	PW-C55	PAINTED STEEL COVER	68
PW-C25	WITH HOSE REEL	44	PW-C70	70
PW-C40	BY-PASS	46	PW-C85	72
PW-C40	TOTAL STOP	48	ABSOLUTE-C	74
PW-C40	WITH HOSE REEL	50	BENZ-C	76
PW-C40	SPECIAL MACHINE	52	DIESEL-C	78
			FIRE BOX	80



EXCLUSIVE TECHNOLOGIES

REMOTE CONTROLS

BY-PASS (BYP)

This system activates the machine's water recycling function when the trigger is released

IMMEDIATE TOTAL STOP (ITS)

Instantly stops the machine when the trigger is released

DELAYED TOTAL STOP (DTS)

Stops the machine 30 seconds after its last use

REMOTE CONTROLLED SAFETY STOP (ST)

The Safety Stop remote control stops the machine 3 minutes after the By-pass system has been started. The machine needs to be reset to work again. This system prevents pump gaskets from overheating due to prolonged By-pass system operation.

ENGINE THROTTLE CONTROL (RS)

Reduced engine revolutions when the machine is in By-pass stage. It ensures long life and reduces fuel consumption

SAFETY DEVICES

INTELLIGENT PROPORTIONAL SWITCH OFF (IPSF)

Automatic total stop of the machine after a period of inactivity, which varies according to how long the machine has been used

MICRO LEAKAGE CONTROL (MLC)

The machine stops in case of dangerous leakage in the high-pressure hydraulic circuit

DRY RUNNING PROTECTION (DRP)

Stops the machine in case of lack of water

THERMOSTATIC VALVE (TSV)

In case of prolonged By-pass system operation, this system prevents water from overheating inside the high-pressure pump

LANCE NOZZLE CLOGGED CONTROL (NCC)

Stops the machine when the nozzle is clogged

IGNITION BOILER DELAY (IBD)

Ensures low fume emission levels when the boiler is started

WORKING HOURS COUNTER (WHC)

An electronic hour counter that shows the working hours of the machine

CONTROLS

FLOODING PREVENTION SYSTEM (FPS)

This system stops the machine after 60 minutes of continuous activity

EXCLUSIVE TECHNOLOGIES

PW-C04 PW-C08 PW-C09 PW-C22 PW-C23 PW-C21	PW-C40 (BYP) PW-C50 (BYP)	PW-C25 (ITS) PW-C40 (ITS)	PW-C45 (VALUE) PW-C55 (VALUE) PW-C45 (PAINTED) PW-C55 (PAINTED)	PW-C40 (DTS) PW-C45 (PREM) PW-C50 (DTS) PW-C55 (PREM) PW-C70 (DTS) PW-C85 (DTS)	PW-C50 (DTS) PW-C85 (DTS)	ABSOLUTE-C	BENZ-C DIESEL-C	FIRE BOX
	•						•	
•		•						
			•	•	•			
						•		
							•	
				•	•			
				•	•			
				•	•			
	•					•	•	
				•	•			
								•
				•	•			
				•	•			



HIGH-PRESSURE WASHERS - COLD WATER

PW-C04

PRESSURE

110 bar

FLOW RATE

360 l/h

ABSORBED POWER

1,4 kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE

DIY AND GARDENING

SPECS



ACCESSORIES "PRO" WITH METAL QUICK CONNECTION



ACCESSORIES HOLDER



POWER CORD HOUSING

TECHNICAL DATA

		PW-C04
		I1106A M
		IDAF94298
Code		
PERFORMANCE		
Operating pressure	bar/Mpa	110/11
Flow rate	l/h	360
Max inlet water temperature	°C	50
Power supply	Ph-V-Hz/A	1-230-50/8
Absorbed power	kW	1,4
Motor pole/rpm		universal
Remote control		ITS
Pump/head/pistons		Axial/aluminium/inox
Detergent tank	l	foamer (0,5l)
Detergent delivery		low pressure
Dimension (LxWxH)	cm	31x25x46
Weight	Kg	7

STANDARD EQUIPMENT

CODE: IPPR40021
HANDGRIP 1/4M
-BAYONET



CODE: LCPR40123
LANCE F-BAYONET D. 0,97



CODE: LCPR40128
TURBO LANCE
F-BAYOPNET D.1,15 (0)



CODE: TBAP40178
HIGH PRESSURE HOSE 4 m



CODE: KTRI40331
FOAMER 0,5 l



OPTIONAL ACCESSORIES (BLISTER PACKAGING)

CODE: KTRI40329
ROTATING WATER BRUSH
(BLISTER)



CODE: KTRI40330
FIXED WATER BRUSH
(BLISTER)



CODE: KTRI40331
FOAMER 0,5 l (BLISTER)



CODE: KTRI40325
SURFACE CLEANING
(BLISTER)



CODE: KTRI40324
FLOOR CLEANING
(BLISTER)



CODE: KTRI40327
PIPE CLEANING SET
(BLISTER)



CODE: KTRI40328
SANDBLASTING SET
(BLISTER)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C08

PRESSURE

110 bar

FLOW RATE

360 l/h

ABSORBED POWER

1,4 kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE

DIY AND GARDENING

SPECS



ACCESSORIES "PRO" WITH METAL QUICK CONNECTION



ACCESSORIES HOLDER



ERGONOMIC HANDLE

TECHNICAL DATA

		PW-C08
		I1106A M
		IDAF94299
Code		
PERFORMANCE		
Operating pressure	bar/Mpa	110/11
Flow rate	l/h	360
Max inlet water temperature	°C	50
Power supply	Ph-V-Hz/A	1-230-50/8,2
Absorbed power	kW	1,4
Motor pole/rpm		universal
Remote control		ITS
Pump/head/pistons		Axial/aluminium/inox
Detergent tank	l	foamer (0,5l)
Detergent delivery		low pressure
Dimension (LxWxH)	cm	31x25x73
Weight	Kg	8

STANDARD EQUIPMENT

CODE: IPPR40021
HANDGRIP 1/4 M
-BAYONET



CODE: LCPR40123
LANCE F-BAYONET D. 0,97



CODE: LCPR40128
TURBO LANCE
F-BAYOPNET D.1,15 (0)



CODE: TBAP40179
HIGH PRESSURE HOSE 6 m



CODE: KTRI40331
FOAMER 0,5 l



CODE: KTRI40330
FIXED BRUSH



OPTIONAL ACCESSORIES (BLISTER PACKAGING)

CODE: KTRI40329
ROTATING WATER BRUSH
(BLISTER)



CODE: KTRI40330
FIXED WATER BRUSH
(BLISTER)



CODE: KTRI40331
FOAMER 0,5 l (BLISTER)



CODE: KTRI40325
SURFACE CLEANING
(BLISTER)



CODE: KTRI40324
FLOOR CLEANING
(BLISTER)



CODE: KTRI40327
PIPE CLEANING SET
(BLISTER)



CODE: KTRI40328
SANDBLASTING SET
(BLISTER)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C09

PRESSURE

120 bar

FLOW RATE

380 l/h

ABSORBED POWER

1,8 kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE

DIY AND GARDENING

SPECS



ACCESSORIES "PRO" WITH METAL QUICK CONNECTION



ACCESSORIES HOLDER



ERGONOMIC HANDLE

TECHNICAL DATA

		PW-C09 I1207A M IDAF94300
Code		
PERFORMANCE		
Operating pressure	bar/Mpa	120/12
Flow rate	l/h	380
Max inlet water temperature	°C	50
Power supply	Ph-V-Hz/A	1-230-50/8,2
Absorbed power	kW	1,8
Motor pole/rpm		universal
Remote control		ITS
Pump/head/pistons		Axial/aluminium/inox
Detergent tank	l	foamer [0,5l]
Detergent delivery		low pressure
Dimension (LxWxH)	cm	25,5x25x78
Weight	Kg	10

STANDARD EQUIPMENT

CODE: IPPR40021
HANDGRIP 1/4M
-BAYONET



CODE: LCPR40124
LANCE F-BAYONET D. 0,97



CODE: LCPR40129
TURBO LANCE
F-BAYONET D.1,15 (0)



CODE: TBAP40179
HIGH PRESSURE HOSE 6 m



CODE: KTRI40331
FOAMER 0,5 l



CODE: KTRI40330
FIXED BRUSH



OPTIONAL ACCESSORIES (BLISTER PACKAGING)

CODE: KTRI40329
ROTATING WATER BRUSH
(BLISTER)



CODE: KTRI40330
FIXED WATER BRUSH
(BLISTER)



CODE: KTRI40331
FOAMER 0,5 l (BLISTER)



CODE: KTRI40325
SURFACE CLEANING
(BLISTER)



CODE: KTRI40324
FLOOR CLEANING
(BLISTER)



CODE: KTRI40327
PIPE CLEANING SET
(BLISTER)



CODE: KTRI40328
SANDBLASTING SET
(BLISTER)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C22/PW-C22 P

PRESSURE

120÷160
bar

FLOW RATE

380÷540
l/h

ABSORBED POWER

1,6÷3
kW



PW-C22



PW-C22P

EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE

DIY AND GARDENING

SPECS



ALL ACCESSORIES AND POWER CORD CAN BE STORED ON THE UNIT



4 LITRES DETERGENT TANK FOR A LOW-PRESSURE DETERGENT DELIVERY



ERGONOMIC HANDLE

TECHNICAL DATA

WITHOUT HOSE REEL			WITH HOSE REEL			NEW 3000W
		PW-C22 I1207A M	PW-C22P I1207A M	PW-C22P I1307A M	PW-C22P I1508A M	PW-C22P I1609AO M
Code		IDAF94301	IDAF94302	IDAF94303	IDAF94304	IDAF94339
PERFORMANCE						
Operating pressure	bar/Mpa	120/12	120/12	130/13	150/15	160/16
Flow rate	l/h	380	380	420	500	540
Max inlet water temperature	°C	50	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/9	1-230-50/9	1-230-50/9	1-230-50/11	1-230-50/11,2
Absorbed power	kW	1,6	1,6	2	2,5	3
Motor pole/rpm		2-2800	2-2800	2-2800	2-2800	2-2800
Remote control		ITS	ITS	ITS	ITS	ITS
Pump/head/pistons		Axial/aluminium/inox	Axial/aluminium/inox	Axial/aluminium/inox	Axial/aluminium/inox	Axial/brass/inox
Detergent tank	l	4	4	4	4	4
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	34,5x29,5x78	34,5x33x86,5	34,5x33x86,5	34,5x33x86,5	34,5x33x86,5
Weight	Kg	18	19	21	20	25

STANDARD EQUIPMENT

CODE: IPPR40019
HANDGRIP 1/4M M22



CODE: LCPR40120
LANCE M22 D. 0,95
(FOR 1207)



CODE: LCPR40121
LANCE M22 D. 0,90
(FOR 1307)



CODE: LCPR40116
LANCE M22 D. 0,91
(FOR 1508)



CODE: LCPR40146
LANCE M22 D. 1,00
(FOR 1609)



CODE: LCPR40125
TURBO LANCE D.1,15(0)
(FOR 1207)



CODE: LCPR40126
TURBO LANCE D.1,15(1)
(FOR 1307)



CODE: LCPR40117
TURBO LANCE D.1,15(2)
(FOR 1508)



CODE: LCPR40147
TURBO LANCE D.1,30(0)
(FOR 1609)



CODE: TBAP40180
HIGH PRESSURE HOSE 6 m
(FOR 1207)



CODE: TBAP40181
HIGH PRESSURE HOSE 8 m
(FOR 1207 P)



CODE: TBAP40182
HIGH PRESSURE HOSE 8 m
(FOR 1307)



CODE: TBAP40171
HIGH PRESSURE HOSE 8 m
(FOR 1508/1609)



OPTIONAL ACCESSORIES (BLISTER PACKAGING)

CODE: KTRI40329
ROTATING WATER BRUSH
(BLISTER)



CODE: KTRI40330
FIXED WATER BRUSH
(BLISTER)



CODE: KTRI40331
FOAMER 0,5 l (BLISTER)



CODE: KTRI40325
SURFACE CLEANING
(BLISTER)



CODE: KTRI40324
FLOOR CLEANING
(BLISTER)



CODE: KTRI40327
PIPE CLEANING SET
(BLISTER)



CODE: KTRI40328
SANDBLASTING SET
(BLISTER)



CODE: KTRI40543
MAINTENANCE KIT
(FOR 1207)



CODE: KTRI40544
MAINTENANCE KIT
(FOR 1307)



CODE: KTRI40545
MAINTENANCE KIT
(FOR 1508)



CODE: KTRI40546
MAINTENANCE KIT
(FOR 1609)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C23 P

PRESSURE

140÷160

bar

FLOW RATE

460÷600

l/h

ABSORBED POWER

2,3÷3

kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES




DIY AND GARDENING



SPECS



ROBUST AND ERGONOMIC HANDLE



PROFESSIONAL HOSE REEL



PROFESSIONAL GAUGE
(only for I1508 A0-M - I1610 A0-M)

TECHNICAL DATA

		WITH HOSE REEL			
		PW-C23P I1408A M IDAF94223	PW-C23P I 1610A M IDAF94227	PW-C23P I1508AO M IDAF94229	PW-C23P I1610AO M IDAF94231
Code					
PERFORMANCE					
Operating pressure	bar/Mpa	140/14	160/16	150/15	160/16
Flow rate	l/h	460	600	500	600
Max inlet watertemperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/10,9	1-230-50/11,5	1-230-50/14,2	1-230-50/14,2
Absorbed power	kW	2,3	2,5	3	3
Motor pole/rpm		2-2800	2-2800	2-2800	2-2800
Remote control		ITS	ITS	ITS	ITS
Pump/head/pistons		axial/aluminium/inox	axial/aluminium/inox	axial/brass/inox	axial/brass/inox
Detergent tank	l	2 x 0,6 l	2 x 0,6 l	2 x 0,6 l	2 x 0,6 l
Detergent delivery		low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	38x33x84	38x33x84	38x33x84	38x33x84
Weight	Kg	20,5	23,5	24	25

STANDARD EQUIPMENT

CODE: IPPR40012
HANDGRIP P270 + M22



CODE: LCPR40075
**LANCE P350 + M22 D.1,08
(FOR 1408)**



CODE: LCPR40076
**LANCE P440 + M22
D.1,03NE (FOR 1508)**



CODE: LCPR40074
**LANCE P440 + M22
D.1,07GR (FOR 1610)**



CODE: LCPR40078
**TURBO LANCE P440 +
M22 D.1.2B (FOR 1408)**



CODE: LCPR40080
**TURBO LANCE P440 +
M22 D.1.03NE (FOR 1508)**



CODE: LCPR40079
**TURBO LANCE P440 +
M22 D.1.07GRI (FOR 1610)**



CODE: TBAP40108
HIGH PRESSURE HOSE 12 m



OPTIONAL ACCESSORIES

CODE: SPID40010
FIXED BRUSH + M22



CODE: SPID40011
ROTOBRUSH + M22



CODE: LCLC40010
**LANCE FOR WASHING
FLORS + M22**



CODE: TBAP40111
DRAIN KIT 8 m



CODE: TBAP40112
HOSE EXTENSION 8 m



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: KTRI40239
SANDBLASTER KIT



CODE: LCPR29360
MUDGUARD LANCE





HIGH-PRESSURE WASHERS - COLD WATER

PW-C21

PRESSURE

130÷160
bar

FLOW RATE

480÷600
l/h

ABSORBED POWER

2,5÷3
kW



EXCLUSIVE CHARACTERISTICS

- IMMEDIATE TOTAL STOP - ITS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



SPECS



PLUNGER PUMP WITH BRASS
HEAD AND CERAMIC PISTONS



ADJUSTABLE PRESSURE



PROFESSIONAL
PRESSURE GAUGE

TECHNICAL DATA

		PW-C21 I1310P M IDAF94361	PW-C21 I1508P M IDAF94359	PW-C21 I1609P M IDAF94360
Code				
PERFORMANCE				
Operating pressure	bar/Mpa	130/13	150/15	160/16
Flow rate	l/h	600	480	540
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	1-230-50	1-230-50	1-230-50
Absorbed power	kW	2,9	2,5	2,9
Motor pole/rpm		2-2800	2-2800	2-2800
Remote control		ITS	ITS	ITS
Pump/head/pistons		plunger/brass/ceramic	plunger/brass/ceramic	plunger/brass/ceramic
Detergent tank	l	-	-	-
Deterget delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	46x28x26	46x28x26	46x28x26
Weight	Kg	18,4	16,8	18,4

STANDARD EQUIPMENT

CODE: IPIP40009
HANDGRIP 1/4 M M22



CODE: LCPR40162
LANCE P400 M22 1,21BI (FOR 1310)



CODE: LCPR40152
LANCE P400 M22 1,05NE (FOR 1508)



CODE: LCPR40154
LANCE P400 M22 1,00RS (FOR 1609)



CODE: TBAP40210
HIGH PRESSURE HOSE 1/4 8 m



OPTIONAL ACCESSORIES

CODE: KTRI40417
TROLLEY KIT



CODE: KTRI40419
HOSE REEL KIT FOR TROLLEY



CODE: KTRI40418
WALL SUPPORT KIT + HOSE REEL (WITHOUT HOSE)



CODE: KTRI40443
WALL SUPPORT KIT + HOSE REEL + HOSE 15 m



CODE: LCPR40151
TURBO LANCE TPR-20 + M22 D.1,30 (FOR 1310)



CODE: LCPR40150
TURBO LANCE TTR-16 + M22 D.1,25 (FOR 1508)



CODE: LCPR40155
TURBO LANCE TTR-16 + M22 D.1,15 (FOR 1609)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C25

IMMEDIATE TOTAL STOP MODELS

PRESSURE

130÷180
bar

FLOW RATE

540÷800
l/h

ABSORBED POWER

2,7÷4,7
kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



DESIGNED FOR AN EASY AND RAPID MAINTENANCE



STANDARD SUPPORTS FOR ACCESSORIES TO HAVE THEM READY TO BE USED



LANCE SUPPORT

TECHNICAL DATA

		PW-C25 I1310P4 M IDAF94168	PW-C25 I1509P M IDAF94166	PW-C25 I813P T IDAF94169
Code				
PERFORMANCE				
Operating pressure	bar/Mpa	30-130/3-13	30-150/3-15	30-180/3-18
Flow rate	l/h	600	540	800
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/13,3	1-230-50/12	3-400-50/8,6
Absorbed power	kW	2,7	2,8	4,7
Motor pole/rpm		4-1400	2-2800	2-2800
Remote control		ITS	ITS	ITS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	3	3	3
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	49x40x93	49x40x93	49x40x93
Weight	Kg	35,4	30	35

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40049
**EXTENSION P580
Ø 1,40BEI (FOR 1310)**



CODE: LCPR40057
**EXTENSION P580
Ø 1,20GL (FOR 1509)**



CODE: LCPR40046
**EXTENSION P580
Ø 1,50AZZ (FOR 1813)**



CODE: TBAP28305
HIGH PRESSURE HOSE 8 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCLC49492
**LANCE FOR WASHING
FLOORS (FOR 1509)**




CODE: LCLC49493
**LANCE FOR WASHING
FLOORS (FOR 1310/1813)**




CODE: LCPR40040
FOAMER KIT



CODE: LCPR14858
**SANDBLASTER KIT Ø 1,4
(FOR 1310/1813)**



CODE: LCPR24943
**SANDBLASTER KIT Ø 1,3
(FOR 1509)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
**FIXED HYDROBRUSH
LANCE**



CODE: LCPR40016
**TURBO LANCE TTR-16 M22
1,40 - (FOR 1310)**



CODE: LCPR93177
**TURBO LANCE TTR-16 M22
1,30 - (FOR 1509/1813)**



CODE: KTRI40312
**MAINTENANCE KIT 500H
(FOR 1310P4)**



CODE: KTRI40318
**MAINTENANCE KIT 500H
(FOR 1509/1813)**



CODE: KTRI40479
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1509/1813)**





HIGH-PRESSURE WASHERS - COLD WATER

PW-C25 PLUS

IMMEDIATE TOTAL STOP MODELS

PRESSURE

130÷180
bar

FLOW RATE

540÷800
l/h

ABSORBED POWER

2,7÷4,7
kW



EXCLUSIVE CHARACTERISTICS

► IMMEDIATE TOTAL STOP - ITS

WITH HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



SOLID STRUCTURE:
RESISTANT TO SHOCKS,
ATMOSPHERIC AGENTS AND
CHEMICAL CORROSION



IPC PUMP WITH SEPARATE
BY-PASS, AND ADJUSTABLE
PRESSURE



PROFESSIONAL HOSE REEL

TECHNICAL DATA

		PW-C25P I1310P4 M IDAF94187	PW-C25P I1509P M IDAF94170	PW-C25P I813P T IDAF94174
Code				
PERFORMANCE				
Operating pressure	bar/Mpa	30-130/3-13	30-150/3-15	30-180/3-18
Flow rate	l/h	600	540	800
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/13,3	1-230-50/12	3-400-50/8,6
Absorbed power	kW	2,7	2,8	4,7
Motor pole/rpm		4-1400	2-2800	2-2800
Remote control		ITS	ITS	ITS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	3	3	3
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	49x40x93	49x40x93	49x40x93
Weight	Kg	35	32,4	37,8

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40049
**EXTENSION P580
Ø 1,40BEI (FOR 1310)**



CODE: LCPR40057
**EXTENSION P580
Ø 1,20GL (FOR 1509)**



CODE: LCPR40046
**EXTENSION P580
Ø 1,50AZZ (FOR 1813)**



CODE: LCPR40016
**TURBO LANCE TTR-16 M22
1,40 (FOR 1310)**



CODE: LCPR93177
**TURBO LANCE TTR-16 M22
1,30 (FOR 1509 / 1813)**



CODE: TBAP93827
HIGH PRESSURE HOSE 12 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCLC49492
**LANCE FOR WASHING
FLOORS (FOR 1509)**



CODE: LCLC49493
**LANCE FOR WASHING
FLOORS (FOR 1310/1813)**



CODE: LCPR40040
FOAMER KIT



CODE: LCPR14858
**SANDBLASTER KIT
Ø 1,4 mm (FOR 1310/1813)**



CODE: LCPR24943
**SANDBLASTER KIT
Ø 1,3 mm (FOR 1509)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
**FIXED HYDROBRUSH
LANCE**



CODE: KTRI40312
**MAINTENANCE KIT 500H
(FOR 1310P4)**



CODE: KTRI40318
**MAINTENANCE KIT 500H
(FOR 1509/1813)**



CODE: KTRI40479
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1509/1813)**





HIGH-PRESSURE WASHERS - COLD WATER

PW-C40

BY-PASS MODELS

PRESSURE

130÷190
bar

FLOW RATE

600÷900
l/h

ABSORBED POWER

3÷5,1
kW



EXCLUSIVE CHARACTERISTICS

- BY-PASS - BYP
- THERMOSTATIC VALVE - TSV

WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



7,5 LITRES DETERGENT
TANK FOR A LOW-PRESSURE
DETERGENT DELIVERY



LARGE DIAMETER WHEELS
IN ORDER TO FACILITATE
MOVEMENTS



THERMOSTATIC VALVE TO
PROTECTING THE PUMP
FROM HIGH TEMPERATURES
IN BY-PASS PHASE

TECHNICAL DATA

		BY-PASS MODELS - 2 POLES		BY-PASS MODELS - 4 POLES	
		PW-C40 1310P M	PW-C40 1813P T	PW-C40 1310P4 M	PW-C40 1915P4 T
Code		IDAF40233	IDAF40237	IDAF40245	IDAF40253
PERFORMANCE					
Operating pressure	bar/Mpa	30-130/3-13	30-180/3-18	30-130/3-13	30-190/3-19
Flow rate	l/h	600	800	600	900
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,7	3-400-50/8,6	1-230-50/14,5	3-400-50/9,4
Absorbed power	kW	3,3	4,7	3,1	5,1
Motor pole/rpm		2-2800	2-2800	4-1400	4-1400
Remote control		BYP	BYP	BYP	BYP
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	7,5	7,5	7,5	7,5
Detergent delivery		low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	74x43x81	74x43x81	74x43x81	74x43x81
Weight	Kg	44	44	47	52

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40049
EXTENSION P580
Ø1,40BEI (FOR 1310P)



CODE: LCPR40046
EXTENSION P580 Ø1,50AZZ
(FOR 1813P)



CODE: LCPR40048
EXTENSION P580
Ø1,35BLU (FOR 1310P4)



CODE: LCPR40047
EXTENSION P580
Ø1,45GLO (FOR 1915P4)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 (FOR 1310/1813)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 (FOR 1915)



CODE: LCPR14859
SANDBLASTER KIT Ø1,5 mm
(FOR 1310P)



CODE: LCPR13557
SANDBLASTER KIT Ø1,6 mm
(FOR 1813P/1915P4)



CODE: LCPR14858
SANDBLASTER KIT Ø1,4 mm
(FOR 1310P4)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
TURBO LANCE TTR-16 M22
1,35 (FOR 1310/1915)



CODE: LCPR40016
TURBO LANCE TTR-16 M22
1,40 (FOR 1813P)



CODE: KTRI40317
MAINTENANCE KIT 500H
(FOR 1310P)



CODE: KTRI40319
MAINTENANCE KIT 500H
(FOR 1813P)



CODE: KTRI40311
MAINTENANCE KIT 500H
(FOR 1310P4)



CODE: KTRI40313
MAINTENANCE KIT 500H
(FOR 1915P4)



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P4 / 1915P4)



CODE: KTRI40478
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P/1813P)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C40

TOTAL STOP MODELS

PRESSURE

130÷190

bar

FLOW RATE

600÷900

l/h

ABSORBED POWER

3÷5,1

kW

EXCLUSIVE CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS ("I" MODELS)
- ▶ DELAYED TOTAL STOP - DTS ("D" MODELS)
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF ("D" MODELS)
- ▶ MICRO LEAKAGE CONTROL - MLC ("D" MODELS)
- ▶ NOZZLE CLOGGED CONTROL - NCC ("D" MODELS)
- ▶ WORKING HOURS COUNTER - WHC ("D" MODELS)
- ▶ FLOODING PREVENTION SYSTEM - FPS ("D" MODELS)
- ▶ DRY RUNNING PROTECTION - DRP (ONLY THREE PHASE MODELS WITH DELAYED TOTAL STOP)



WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



PRESSURE ADJUSTMENT
KNOB



LARGE FRONT FOOT FOR
GREATER STABILITY



ERGONOMIC HANDLE,
LANCE HOLDER AND HOSE
SUPPORTS

TECHNICAL DATA

		IMMEDIATE TOTAL STOP MODELS - 2 POLES		DELAYED TOTAL STOP MODELS - 4 POLES	
		PW-C40 I1310P M	PW-C40 I1813P T	PW-C40 D1310P4 M	PW-C40 D1915P4 T
Code		IDAF40234	IDAF40238	IDAF40246	IDAF40254
PERFORMANCE					
Operating pressure	bar/Mpa	30-130/3-13	30-180/3-18	30-130/3-13	30-190/3-19
Flow rate	l/h	600	800	600	900
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,7	3-400-50/8,6	1-230-50/14,5	3-400-50/9,4
Absorbed power	kW	3,3	4,7	3,1	5,1
Motor pole/rpm		2-2800	2-2800	4-1400	4-1400
Remote control		ITS	ITS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	7,5	7,5	7,5	7,5
Detergent delivery		low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	74x43x81	74x43x81	74x43x81	74x43x81
Weight	Kg	44	44	47	52

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40049
EXTENSION P580
Ø1,40BEI (FOR 1310P)



CODE: LCPR40046
EXTENSION P580 Ø1,50AZZ
(FOR 1813P)



CODE: LCPR40048
EXTENSION P580
Ø1,35BLU (FOR 1310P4)



CODE: LCPR40047
EXTENSION P580
Ø1,45GLO (FOR 1915P4)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 (FOR 1310/1813)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 (FOR 1915)



CODE: LCPR14859
SANDBLASTER KIT Ø1,5 mm
(FOR 1310P)



CODE: LCPR13557
SANDBLASTER KIT Ø1,6 mm
(FOR 1813P/1915P4)



CODE: LCPR14858
SANDBLASTER KIT Ø1,4 mm
(FOR 1310P4)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
TURBO LANCE TTR-16 M22
1,35 (FOR 1310/1915)



CODE: LCPR40016
TURBO LANCE TTR-16 M22
1,40 (FOR 1813P)



CODE: KTRI40317
MAINTENANCE KIT 500H
(FOR 1310P)



CODE: KTRI40319
MAINTENANCE KIT 500H
(FOR 1813P)



CODE: KTRI40311
MAINTENANCE KIT 500H
(FOR 1310P4)



CODE: KTRI40313
MAINTENANCE KIT 500H
(FOR 1915P4)



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P4 / 1915P4)



CODE: KTRI40478
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P/1813P)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C40 PLUS

DELAYED TOTAL STOP MODELS

PRESSURE

130÷190
bar

FLOW RATE

600÷900
l/h

ABSORBED POWER

3÷5,1
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ DRY RUNNING PROTECTION - DRP (ONLY D1915P4)



WITH HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



IPC PUMP WITH SEPARATE BY-PASS, PROVIDED WITH PRESSURE ADJUSTMENT KNOB



PROFESSIONAL HOSE REEL



INTEGRATED ERGONOMIC HANDLE, LANCE HOLDER

TECHNICAL DATA

		PW-C40P D1310P4 M IDAF40248	PW-C40P D1915P4 T IDAF40259
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	30-130/3-13	30-190/3-19
Flow rate	l/h	600	900
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,5	3-400-50/9,4
Absorbed power	kW	3,1	5,1
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	7,5	7,5
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	74x43x81	74x43x81
Weight	Kg	50	60

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40048
EXTENSION P580
Ø1,35BLU (FOR 1310P4)



CODE: LCPR40047
EXTENSION P580 Ø1,45GLO
(FOR 1915P4)



CODE: LCPR93178
TURBO LANCE TTR-16 M22
1,35



CODE: TBAP40062
HIGH PRESSURE HOSE 15 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 M



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 (FOR 1310)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 (FOR 1915)



CODE: LCPR40040
FOAMER KIT 1 l



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 mm
(FOR 1915P4)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 1310P4)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: KTRI40311
MAINTENANCE KIT 500H
(FOR 1310P4)



CODE: KTRI40313
MAINTENANCE KIT 500H
(FOR 1915P4)



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION





HIGH-PRESSURE WASHERS - COLD WATER

PW-C40

SPECIAL MODEL

PRESSURE

100 bar

FLOW RATE

300 l/h

ABSORBED POWER

1,3 kW



HIGHPURE - HPE
CODE: APTA40015

TECNOLOGIE ESCLUSIVE

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS

**TO BE USED ONLY IN COMBINATION
WITH APTA40015 -
HIGHPURE HPE
(SEE IMAGE ON THE RIGHT)**

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/
TENSILE STRUCTURES



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



IPC PUMP WITH SEPARATE
BY-PASS, PROVIDED WITH
PRESSURE ADJUSTMENT
KNOB



PROFESSIONAL HOSE REEL



INTEGRATED ERGONOMIC
HANDLE, LANCE HOLDER

TECHNICAL DATA

PW-C40 D1005P4 M

Code

IDAF40884

PERFORMANCE

Operating pressure max	bar/Mpa	100/10
Flow rate	l/h	300
Inlet water max. temperature	°C	50
Power supply	Ph-V-Hz/A	1-230-50/8,6
Absorbed power	kW	1,3
Motor pole/rpm		4-1400
Remote control		DTS
Pump/head/pistons		lpc plunger/brass/ceramic
Detergent tank	l	7,5
Detergent delivery		low pressure
Dimension (LxWxH)	cm	74x43x81
Weight	Kg	47

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40013
EXTENSION P70 HY.JET



CODE: UGLN40038
H.P. NOZZLE 1/4 1502



CODE: TBAP40012
H.P. HOSE 1/4" 10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 m



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: KTRI40478
KIT FOR HOT WATER
FEEDING VERSION





HIGH-PRESSURE WASHERS - COLD WATER

PW-C45 VALUE

PRESSURE

110÷190
bar

FLOW RATE

500÷900
l/h

ABSORBED POWER

2,9÷4,9
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATION



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

		PW-C45 D1112P4 M	PW-C45 D1310P4 M	PW-C45 D1708P4 M	PW-C45 D1813P T	PW-C45 D1814P4 T	PW-C45 D1915P4 T
CODE		IDAF40901	IDAF40902	IDAF40903	IDAF40904	IDAF40905	IDAF40906
PERFORMANCE							
Operating pressure	bar/Mpa	30-110/3-11	30-130/3-13	30-170/3-17	30-180/3-18	30-180/3-18	30-190/3-19
Flow rate	l/h	300-720	300-600	400-500	450-800	450-840	450-900
Max inlet water temperature	°C	50	50	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,5	1-230-50/14,1	1-230-50/14,5	3-400-50/9,3	3-400-50/9,6	3-400-50/10,3
Absorbed power	kW	3	2,9	3	4,9	4,6	4,9
Motor pole/rpm		4-1400	4-1400	4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Detergent tank	l	-	-	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	67x42x95	67x42x95	67x42x95	67x42x95	67x42x95	67x42x95
Weight	Kg	40,2	40,1	40,2	42,2	44	47,3

STANDARD EQUIPMENT

CODE: IPPR40025
**HANDGRIP G6000 +
EXTENSION P330+M22**



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN05200
**H.P. NOZZLE 1/4 1505
(FOR 1112P4)**



CODE: UGLN11196
**H.P. NOZZLE 1/4 15035
(FOR 1310P4)**



CODE: UGLN75421
**H.P. NOZZLE 1/4 15025
(FOR 1708P4)**



CODE: UGLN49987
**H.P. NOZZLE LANCE
1/4 15045 - (FOR
1813P/1814P4/1915P4)**



CODE: TBAP40229
H.P. HOSE 1/4" 10 m



OPTIONAL ACCESSORIES

CODE: KTRI40505
**HOSE REEL KIT (WITHOUT
HOSE)**



CODE: KTRI40506
**HOSE REEL KIT (WITH 20 m
HOSE)**



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810
HOSE COUPLINGS M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: LCLC49492
**LANCE FOR WASHING
FLOORS 0,35 (FOR
1310P4/1708P4)**




CODE: LCLC49493
**LANCE FOR WASHING
FLOORS 0,45 (FOR 1112P4/
1813P/1814P4/1915P4)**



CODE: LCPR14859
**SANDBLASTERKIT Ø1,5mm
(FOR 1112P4/1813P/1814P4
/1915P4)**



CODE: LCPR24943
**SANDBLASTER KIT Ø 1,3 mm
(FOR 1310P4/1708P4)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
**FIXED HYDROBRUSH
LANCE**



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40053
**TURBO LANCE TPR-20 +
M22 Ø1,50 (FOR 1112/
1915)**



CODE: LCPR93178
**TURBO LANCE TTR-16 +
M22 Ø1,35
(FOR 1310P4)**



CODE: LCPR40011
**TURBO LANCE
TTR-16 + M22 Ø 1,15
(FOR 1708P4)**



CODE: LCPR40014
**TURBO LANCE TPR-20 +
M22 Ø1,30
(FOR 1813P/1814P4)**



CODE: KTRI40587
**MAINTENANCE KIT 500H
(FOR 1813P)**



CODE: KTRI40586
**MAINTENANCE KIT 500H
(FOR 1112P4/1310P4/
1708P4)**



CODE: KTRI40588
**MAINTENANCE KIT 500H
(FOR 1814P4/1915P4)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION -
(FOR 1813P)**



CODE: KTRI40479
**KIT FOR HOT WATER FEEDING
VERSION (FOR 1112P4/1310P4
/1708P4/1814P4/1915P4)**





HIGH-PRESSURE WASHERS - COLD WATER

PW-C45 PREMIUM

PRESSURE

110÷190
bar

FLOW RATE

500÷900
l/h

ABSORBED POWER

2,9÷4,9
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED
- ▶ WARNING LEDS
- ▶ DRY RUNNING PROTECTION - DRP



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATION



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MSC™
MULTIFUNCTION
SAFETY
CONTROL

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

		PW-C45 DP 1112P4 M	PW-C45 DP 1310P4 M	PW-C45 DP 1708P4 M	PW-C45 DP 1813P T	PW-C45 DP 1814P4 T	PW-C45 DP 1915P4 T
CODE		IDAF40912	IDAF40913	IDAF40914	IDAF40915	IDAF40916	IDAF40917
PERFORMANCE							
Operating pressure	bar/Mpa	30-110/3-11	30-130/3-13	30-170/3-17	30-180/3-18	30-180/3-18	30-190/3-19
Flow rate	l/h	300-720	300-600	400-500	450-800	450-840	450-900
Max inlet water temperature	°C	50	50	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,5	1-230-50/14,1	1-230-50/14,5	3-400-50/9,3	3-400-50/9,6	3-400-50/10,3
Absorbed power	kW	3	2,9	3	4,9	4,6	4,9
Motor pole/rpm		4-1400	4-1400	4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Detergent tank	l	-	-	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	67x42x95	67x42x95	67x42x95	67x42x95	67x42x95	67x42x95
Weight	Kg	40,2	40,1	40,2	42,2	44	47,3

STANDARD EQUIPMENT

CODE: IPPR40025
**HANDGRIP G6000 +
EXTENSION P330+M22**



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN05200
**H.P. NOZZLE 1/4 1505
(FOR 1112P4)**



CODE: UGLN11196
**H.P. NOZZLE 1/4 15035
(FOR 1310P4)**



CODE: UGLN75421
**H.P. NOZZLE 1/4 15025
(FOR 1708P4)**



CODE: UGLN49987
**H.P. NOZZLE LANCE
1/4 15045 - (FOR
1813P/1814P4/1915P4)**



CODE: TBAP40229
H.P. HOSE 1/4" 10 m



OPTIONAL ACCESSORIES

CODE: KTRI40505
**HOSE REEL KIT (WITHOUT
HOSE)**



CODE: KTRI40506
**HOSE REEL KIT (WITH 20 m
HOSE)**



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: RCIN10810
HOSE COUPLINGS M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: LCLC49492
**LANCE FOR WASHING
FLOORS 0,35 (FOR
1310P4/1708P4)**



CODE: LCLC49493
**LANCE FOR WASHING
FLOORS 0,45 (FOR 1112P4/
1813P/1814P4/1915P4)**



CODE: LCPR14859
**SANDBLASTERKIT Ø1,5mm
(FOR 1112P4/1813P/1814P4
/1915P4)**



CODE: LCPR24943
**SANDBLASTER KIT Ø 1,3 mm
(FOR 1310P4/1708P4)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: SPID24939
**FIXED HYDROBRUSH
LANCE**



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40053
**TURBO LANCE TPR-20 +
M22 Ø1,50 (FOR 1112/
1915)**



CODE: LCPR93178
**TURBO LANCE TTR-16 +
M22 Ø1,35
(FOR 1310P4)**



CODE: LCPR40011
**TURBO LANCE
TTR-16 + M22 Ø 1,30
(FOR 1708P4)**



CODE: LCPR40014
**TURBO LANCE TPR-20 +
M22 Ø1,30
(FOR 1813P/1814P4)**



CODE: KTRI40587
**MAINTENANCE KIT 500H
(FOR 1813P)**



CODE: KTRI40586
**MAINTENANCE KIT 500H
(FOR 1112P4/1310P4/
1708P4)**



CODE: KTRI40588
**MAINTENANCE KIT 500H
(FOR 1814P4/1915P4)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION -
(FOR 1813P)**



CODE: KTRI40479
**KIT FOR HOT WATER FEEDING
VERSION (FOR 1112P4/1310P4
/1708P4/1814P4/1915P4)**





HIGH-PRESSURE WASHERS - COLD WATER



PW-C45

(PAINTED STEEL STRUCTURE)

PRESSURE

130÷190
bar

FLOW RATE

600÷900
l/h

ABSORBED POWER

2,8÷4,9
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATION



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



IPC PLUNGER PUMP WITH BRASS HEAD AND CERAMIC PISTONS.



HEAVY-DUTY STRUCTURE, ANTI COLLISION, STEEL FRAME COVER.



LARGE WHEELS IMPROVE MANEUVERABILITY AND EASE TRANSPORT.

TECHNICAL DATA

		PW-C45 D1310P4m M	PW-C45 D1915P4m T
CODE		IDAF41104	IDAF41105
PERFORMANCE			
Operating pressure max	bar/Mpa	40-130/4-13	40-190/4-19
Flow rate	l/h	300-600	360-900
Inlet water max. temperature	°C	50	50
Power supply	Ph-V-Hz/A	1-230-50/13,4	3-400-50/10,2
Absorbed power	kW	2,8	4,9
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-
Detergent delivery		-	-
Dimension (LxWxH)	cm	78x45x100	78x45x100
Weight	Kg	47	53

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 +
EXTENSION P330+M22



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN11196
H.P. NOZZLE 1/4 15035
(FOR 1310)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915)



CODE: TBAP40229
H.P. HOSE 10 m 1/4"



OPTIONAL ACCESSORIES

CODE: RCIN10810
HOSE COUPLINGS
M22-M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: LCPR29360
MUDGUARD LANCE P90



ACCESSORIES TO DELIVERY CHEMICAL PRODUCT

OPTION (1)

OPTION (2)

CODE: LCPR40040
FOAMER KIT 1 I



CODE: KTRI40527
EJECTOR KIT + P70 HYJET



CODE: TBAP40229
H.P.HOSER1 15 m 5/16"



CODE: TBAP44379
H.P.HOSE R1 20 m N5/16"



CODE: LCPR13557
SANDBLASTER KIT D.1,6 -
(FOR 1915)



CODE: LCPR14858
SANDBLASTER KIT D.1,4 -
(FOR 1310)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
TURBO LANCE TTR-16
Ø 1,35



CODE: LCLC49492
LANCE FOR WASHING
FLOORS 0,35 - (FOR 1310)



CODE: LCLC49493
LANCE FOR WASHING
FLOORS 0,45 - (FOR 1915)



CODE: KTRI40505
HOSE REEL KIT



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION





HIGH-PRESSURE WASHERS - COLD WATER

PW-C50

DELAYED TOTAL STOP MODELS

PRESSURE

160÷210
bar

FLOW RATE

1000÷1300
l/h

ABSORBED POWER

6,3÷6,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS



WITHOUT HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



PROFESSIONAL PRESSURE
GAUGE ENABLING A
CONSTANT CHECK OF
WORKING PRESSURE



LARGE DIAMETER WHEELS
(PUNCTURE PROOF)



STURDY PAINTED STEEL
FRAME

TECHNICAL DATA

		PW-C50 D2117P T	PW-C50 D1718P T	PW-C50 D1622P T
Code		IDAF40261	IDAF40265	IDAF40270
PERFORMANCE				
Operating pressure	bar/Mpa	30-210/3-21	30-170/3-17	30-160/3-16
Flow rate	l/h	1000	1100	1300
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/12	3-400-50/12,2	3-400-50/13
Absorbed power	kW	6,4	6,3	6,7
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	4	4	4
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	77x51x88	77x51x88	77x51x88
Weight	Kg	68	68	67

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40047
EXTENSION P580
1,45GLO (FOR 2117)



CODE: LCPR40050
EXTENSION P580 1,65VLA
(FOR 1718)



CODE: LCPR40056
EXTENSION P580 1,75GRI
(FOR 1622)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: SPID24911
HYDROBRUSH LANCE



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 m
(FOR 2117)



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1718/1622)



CODE: LCPR40040
FOAMER KIT 1 l



CODE: LCLC49494
LANCE FOR WASHING
FLOOR 0,55



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 2117)



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 1718/1622)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: LCPR40054
TURBO LANCE TPR255
M22 0,40 (FOR 2117)



CODE: LCPR40052
TURBO LANCE TPR20 M22
1,60 (FOR 1718)



CODE: LCPR40055
TURBO LANCE R.J. 255
M22 0,70 (FOR 1622)



CODE: KTRI40436
MAINTENANCE KIT 500H
(FOR 1622)



CODE: KTRI40338
MAINTENANCE KIT 500H
(FOR 2117/1718)



CODE: KTRI40304
KIT FOR HOT WATER
FEEDING VERSION -
(FOR 1622)



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION - (2117)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C50 P

DELAYED TOTAL STOP MODELS

PRESSURE

160÷210
bar

FLOW RATE

1000÷1300
l/h

ABSORBED POWER

6,3÷6,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS



WITH HOSE REEL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



4 POLES MOTOR, AIR-COOLED
AND PROTECTED WITH
THERMAL CUTOUT



STURDY PAINTED STEEL
FRAME



ERGONOMIC HANDLE WITH
LANCE HOLDER AND HOSE
CABLE SUPPORT REEL

TECHNICAL DATA

		PW-C50P D2117P T	PW-C50P D1718P T	PW-C50P D1622P T
Code		IDAF40263	IDAF40267	IDAF40272
PERFORMANCE				
Operating pressure	bar/Mpa	30-210/3-21	30-170/3-17	30-160/3-16
Flow rate	l/h	1000	1100	1300
Max inlet water temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/12	3-400-50/12,2	3-400-50/13
Absorbed power	kW	6,4	6,3	6,7
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	4	4	4
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	77x51x88	77x51x88	77x51x88
Weight	Kg	74	74	76

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40047
EXTENSION P580
1,45GLO (FOR 2117)



CODE: LCPR40050
EXTENSION P580 1,65VLA
(FOR 1718)



CODE: LCPR40056
EXTENSION P580 1,75GRI
(FOR 1622)



CODE: LCPR40054
TURBO LANCE TPR255
M22 0,40 (FOR 2117)



CODE: LCPR40052
TURBO LANCE TPR20 M22
1,60 (FOR 1718)



CODE: LCPR40055
TURBO LANCE R.J. 255
M22 0,70 (FOR 1622)



CODE: TBAP40062
HIGH PRESSURE HOSE 15 m



OPTIONAL ACCESSORIES

CODE: SPID24911
HYDROBRUSH LANCE



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP23853
DRAIN KIT 10 m
(FOR 2117)



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1718/1622)



CODE: LCPR40040
FOAMER KIT 1 l



CODE: LCLC49494
LANCE FOR WASHING
FLOOR 0,55



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 2117)



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 1718/1622)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: KTRI40436
MAINTENANCE KIT 500H
(FOR 1622)



CODE: KTRI40338
MAINTENANCE KIT 500H
(FOR 2117/1718)



CODE: KTRI40304
KIT FOR HOT WATER
FEEDING VERSION -
(FOR 1622)



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION - (2117)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C55 VALUE

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

6,4÷8,4
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATION



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

CODE		PW-C55 D2117PT IDAF40922	PW-C55 D1721PT IDAF40923	PW-C55 D2021PT IDAF40924	PW-C55 D2515PT IDAF40925
PERFORMANCE					
Operating pressure	bar/Mpa	30-210/3-21	30-170/3-17	30-200/3-20	30-250/3-25
Flow rate	l/h	300-1000	300-1300	400-1300	450-900
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/13,3	3-400-50/14	3-400-50/15,8	3-400-50/14,9
Absorbed power	kW	6,4	7,3	8,4	7,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	88x48x104	88x48x104	88x48x104	88x48x104
Weight	Kg	61,4	63,3	69	69,1

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 M22



CODE: LCPR40087
**EXTENSION P70 INOX
(FOR 1721/2117)**



CODE: LCPR40159
**LANCE P70 INOX 0°
(FOR 2021/2515)**



CODE: UGLN49987
**H.P. NOZZLE 1/4 15045
(FOR 2117)**



CODE: UGLN02303
**H.P. NOZZLE 1/4 15065
(FOR 2021)**



CODE: UGLN49986
**H.P. NOZZLE 1/4 1504 (FOR
2515)**



CODE: UGLN49997
**H.P. NOZZLE 1/4 25075
(FOR 1721)**



CODE: TBAP25324
**HIGH PRESSURE HOSE
10 m**



OPTIONAL ACCESSORIES

CODE: KTRI40505
**HOSE REEL KIT (WITHOUT
HOSE)**



CODE: KTRI40506
**HOSE REEL KIT (WITH 20 m
HOSE)**



CODE: LCPR29360
MUDGUARD LANCE P90



ACCESSORIES TO DELIVERY CHEMICAL PRODUCT

OPTION [1]

OPTION [2]

CODE: LCPR40040
FOAMER KIT 1 l



CODE: KTRI40527
EJECTOR KIT + P70 HY.JET



CODE: TBAP23853
**DRAIN KIT 10 m
(FOR 2117)**



CODE: TBAP24406
**DRAIN KIT 20 m
(FOR 1721/2021)**



CODE: RCIN10810
HOSE COUPLINGS M22



CODE: LCPR14859
**SANDBLASTER KIT Ø 1,5 mm
(FOR 2117P)**



CODE: LCPR14858
**SANDBLASTER KIT Ø 1,4 mm
(FOR 2515P)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40135
**EXTENSION P70 + TPR-
255 Ø0,45 (FOR 2117)**



CODE: LCPR40170
**EXTENSION P70 + R.J.255
Ø0,75 (FOR 1721)**



CODE: LCPR40174
**EXTENSION P70 + R.J.255
Ø0,70 (FOR 2021)**



CODE: LCPR40103
**EXTENSION P70 + TPR-
255 Ø0,40 (FOR 2515)**



CODE: SPID24939
**FIXED HYDROBRUSH
LANCE**



CODE: LCLC49494
**LANCE FOR WASHING
FLOORS 0,55**



CODE: KTRI40590
**MAINTENANCE KIT 500H
(FOR 1721P/2021P)**



CODE: KTRI40589
**MAINTENANCE KIT 500H
(FOR 2117P)**



CODE: KTRI40591
**MAINTENANCE KIT 500H
(FOR 2515)**



CODE: KTRI40336
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117)**



CODE: KTRI40323
**KIT FOR HOT WATER
FEEDING VERSION
(1721/2021)**



CODE: KTRI40304
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 2515)**





HIGH-PRESSURE WASHERS - COLD WATER

PW-C55 PREMIUM

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

6,4÷8,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ MAINTENANCE CHECK LED
- ▶ WARNING LEDS



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATION



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MSC™
MULTIFUNCTION
SAFETY
CONTROL

SPECS



COLLAPSIBLE HANDLE FOR
COMPACT STORAGE AND EASY
TRANSPORT



NEW STORAGE SPACE FOR ALL
EQUIPMENT AND ACCESSORIES



REMOVABLE COVER, AND EASY OIL
FILL-EMPTY SYSTEM FOR A RAPID
MAINTENANCE

TECHNICAL DATA

CODE		PW-C55 DP2117P T IDAF40926	PW-C55 DP1721P T IDAF40927	PW-C55 DP2021P T IDAF40928	PW-C55 DP2515P T IDAF40929
PERFORMANCE					
Operating pressure	bar/Mpa	30-210/3-21	30-170/3-17	30-200/3-20	30-250/3-25
Flow rate	l/h	300-1000	300-1300	400-1300	450-900
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/13,3	3-400-50/14	3-400-50/15,8	3-400-50/14,9
Absorbed power	kW	6,4	7,3	8,4	7,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	88x48x104	88x48x104	88x48x104	88x48x104
Weight	Kg	61,4	63,3	69	69,1

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 M22



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 1721/2117)



CODE: LCPR40159
LANCE P70 INOX 0°
(FOR 2021/2515)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2117)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE LANCE 1/4
25075 - (FOR 1721)



CODE: TBAP25324
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: KTRI40505
HOSE REEL KIT (WITHOUT
HOSE)



CODE: KTRI40506
HOSE REEL KIT (WITH 20 m
HOSE)



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP23853
DRAIN KIT 10 m
(FOR 2117)



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1721/2021)



CODE: RCIN10810
HOSE COUPLINGS M22



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI00038
INJECTOR KIT



CODE: LCPR40135
EXTENSION P70 + TPR-
255 Ø0,45 (FOR 2117)



CODE: LCPR40103
EXTENSION P70 + TPR-
255 Ø0,40 (FOR 2515)



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: LCLC49494
LANCE FOR WASHING
FLOORS 0,55



CODE: KTRI40591
MAINTENANCE KIT 500H
(FOR 2515)



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117)



CODE: KTRI40323
KIT FOR HOT WATER
FEEDING VERSION
(1721/2021)



ACCESSORIES TO DELIVERY CHEMICAL PRODUCT OPTION [1]

CODE: LCPR40040
FOAMER KIT 1 l



OPTION [2]

CODE: KTRI40527
EJECTOR KIT + P70 HY.JET



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 2117P)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 2515P)



CODE: LCPR40170
EXTENSION P70 + R.J.255
Ø0,75 (FOR 1721)



CODE: LCPR40174
EXTENSION P70 + R.J.255
Ø0,70 (FOR 2021)



CODE: KTRI40590
MAINTENANCE KIT 500H
(FOR 1721P/2021P)



CODE: KTRI40589
MAINTENANCE KIT 500H
(FOR 2117P)



CODE: KTRI40304
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2515)





HIGH-PRESSURE WASHERS - COLD WATER



PW-C55

(PAINTED STEEL STRUCTURE)

PRESSURE

170÷210
bar

FLOW RATE

1000÷1300
l/h

ABSORBED POWER

6,9÷8,1
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATION



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



IPC PLUNGER PUMP WITH BRASS HEAD AND CERAMIC PISTONS.



HEAVY-DUTY STRUCTURE, ANTI COLLISION, STEEL FRAME COVER.



LARGE WHEELS IMPROVE MANEUVERABILITY AND EASE TRANSPORT.

TECHNICAL DATA

		PW-C55 D2117P4m T	PW-C55 D1721P4m T	PW-C55 D2021P4m T
CODE		IDAF41106	IDAF41108	IDAF41109
PERFORMANCE				
Operating pressure max	bar/Mpa	40-210/4-21	40-170/4-17	40-200/4-20
Flow rate	l/h	360-1000	360-1300	390-1300
Inlet water max. temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/13,6	3-400-50/13,8	3-400-50/15,8
Absorbed power	kW	6,9	7,1	8,1
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-
Detergent delivery		-	-	-
Dimension (LxWxH)	cm	78x45x100	78x45x100	78x45x100
Weight	Kg	66,40	67,5	73

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 +
EXTENSION P330+M22



CODE: LCPR40087
EXTENSION P70 INOX
(FOR 2117)



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 1721/2021)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 2117)



CODE: UGLN49997
H.P. NOZZLE 1/4 15075
(FOR 1721)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065 -
(FOR 2021)



CODE: TBAP25324
H.P. HOSE R1 10 m
5/16"



OPTIONAL ACCESSORIES

CODE: RCIN10810
HOSE COUPLINGS M22



CODE: TBAP23853
DRAIN KIT 10 m - M22



CODE: TBAP24406
DRAIN KIT 20 M - M22 -
(FOR 1721/2021)



CODE: TBAP40062
H.P. HOSE R1 15 m 5/16"



CODE: TBAP44379
H.P. HOSE R1 20 m N5/16"



CODE: LCPR13557
SANDBLASTER KIT D.1,6 -
(FOR 1915)



CODE: LCPR40054
TURBO LANCE TPR255 Ø
0,40 - (FOR 2117)



CODE: LCPR40131
EXTENSION P70 + R.JET
255 Ø 0,75 - (FOR 1721)



CODE: LCPR40132
EXTENSION P70 + R.JET
255 Ø 0,65 - (FOR 2021)



CODE: KTRI40323
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1721)



CODE: KTRI40436
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2021)



ACCESSORIES TO DELIVERY CHEMICAL PRODUCT OPTION [1]

CODE: LCPR40040
FOAMER KIT 1 l



CODE: KTRI40527
EJECTOR KIT + P70 HY.JET



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: KTRI40505
HOSE REEL KIT



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C70

DELAYED TOTAL STOP MODELS

PRESSURE

200÷250
bar

FLOW RATE

1000÷1260
l/h

ABSORBED POWER

8,4÷9,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ DRY RUNNING PROTECTION - DRP



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



PROFESSIONAL PRESSURE
GAUGE



STURDY AND ERGONOMIC
HANDLE FOR AN EASY
MANOEUVRABILITY



A SINGLE KNOB FOR
MACHINE SWITCHING ON &
OFF AND FOR DETERGENT
DOSING

TECHNICAL DATA

		WITHOUT HOSE REEL		WITH HOSE REEL	
		PW-C70 D2021P T IDAF40319	PW-C70 D2517P T IDAF40321	PW-C70P D2021P T IDAF40320	PW-C70P D2517P T IDAF40322
PERFORMANCE					
Operating pressure	bar/Mpa	30-200/3-20	30-250/3/25	30-200/3-20	30-250/3/25
Flow rate	l/h	480-1260	480-1000	480-1260	480-1000
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/15,6	3-400-50/17	3-400-50/15,6	3-400-50/17
Absorbed power	kW	8,4	9,5	8,4	9,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Detergent tank	l	25	25	25	25
Detergent delivery		low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	82x48x87	82x48x87	82x48x87	82x48x87
Weight	Kg	83	83,2	84	85,2

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40160
EXTENSION PD70 INOX 0°



CODE: UGLN49996
H.P NOZZLE 1/4 2507
(FOR 2021)



CODE: UGLN49990
H.P NOZZLE 1/4 25034
(FOR 2517 WITH HOSE REEL)



CODE: UGLN49991
H.P NOZZLE 1/4 2504
(FOR 2517 WITHOUT HOSE REEL)



CODE: UGLN89941
L.P NOZZLE 1/4 6070
BRASS (FOR ALL MODELS)



CODE: TBAP25324
HIGH PRESSURE HOSE
10 m (WITHOUT HOSE REEL)



CODE: TBAP40013
HIGH PRESSURE HOSE
15 m (WITH HOSE REEL)



OPTIONAL ACCESSORIES

CODE: SPID24911
ROTATING HYDROBRUSH
LANCE



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 2021)



CODE: LCPR40045
TURBO LANCE P70 + M22
Ø0,45 - (FOR 2517)



CODE: LCPR40088
TURBO LANCE P70 + M22
Ø0,80 - (FOR 2021)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 2517)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER



CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR40040
FOAM HEAD KIT



CODE: LCLC49494
LANCE FOR WASHING
FLOORS 0,55



CODE: KTRI40436
MAINTENANCE KIT 500H
(FOR 2021)



CODE: KTRI40438
MAINTENANCE KIT 500H
(FOR 2517)



CODE: KTRI40304
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2517)



CODE: KTRI40323
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2021)





HIGH-PRESSURE WASHERS - COLD WATER

PW-C85

PRESSURE

200÷350
bar

FLOW RATE

900÷1800
l/h

ABSORBED POWER

12,3÷12,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ FLOODING PREVENTION SYSTEM - FPS



PAINTED STEEL STRUCTURE

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



IPC PLUNGER PUMP WITH
BRASS HEAD AND CERAMIC
PISTONS



HEAVY-DUTY STRUCTURE,
ANTI-COLLISION, STEEL
FRAME COVER



MAINTENANCE-FREE
ELECTRIC MOTOR, AIR-
COOLED AND PROTECTED
WITH THERMAL CUTOUT

TECHNICAL DATA

		15 HP	
		PW-C85 D2030P4 T IDAF40832	PW-C85 D3515P4 T IDAF40827
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	40-200/4-20	350/35
Flow rate	l/h	390-1800	900
Max inlet water temperature	°C	50	50
Power supply	Ph-V-Hz/A	3-400-50/23	3-400-50/22,4
Absorbed power	kW	12,5	12,3
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-
Detergent delivery		-	-
Dimension (LxWxH)	cm	78x59x90	78x59x90
Weight	Kg	115	115

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000
(FOR 2030)



CODE: IPIP42787
GRIP RL56 M24 + 3/8
(FOR 3515)



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 2030)



CODE: LCLC42786
EXTENSION L=105 cm
(FOR 3515)



CODE: UGLN02314
H.P. NOZZLE 1/4 2510
(FOR 2030)



CODE: UGLN40026
H.P. NOZZLE 1/4 15035
500 BAR (FOR 3515)



CODE: TBAP40010
H.P. HOSE R2 10 m 3/8"
M22 (FOR 2030)



CODE: TBAP00029
H.P. HOSE R2 10 m 5/16"
3/8M-M - (FOR 3515)



OPTIONAL ACCESSORIES

CODE: RCIN10810
HOSE COUPLINGS M22
(NOT FOR 3515)



CODE: TBAP24406
DRAIN KIT 20 m
(NOT FOR 3515)



CODE: LCPR29360
MUDGUARD LANCE P90
(NOT FOR 3515)



CODE: LCPR40040
FOAMER HEAD KIT 1 I
(NOT FOR 3515)



CODE: LCLC40022
SANDBLASTER KIT P105 cm
Ø0,35 (FOR 3515)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40133
EXTENSION P70 + R.J.255
Ø100 (FOR 2030)



CODE: LCLC47893
EXTENSION 105 cm
TURBO Ø035 (FOR 3515)



CODE: KTRI40400
HOSE REEL KIT (FOR 2030)



CODE: KTRI40441
MAINTENANCE KIT 500H
(FOR 2030)



CODE: KTRI40440
MAINTENANCE KIT 500H
(FOR 3515)





HIGH-PRESSURE WASHERS - COLD WATER

ABSOLUTE-C

PRESSURE

200÷500
bar

FLOW RATE

1000÷2500
l/h

ABSORBED POWER

16÷22
kW



EXCLUSIVE CHARACTERISTICS

- ▶ THERMOSTATIC VALVE - TSV
- ▶ REMOTE-CONTROLLED SAFETY STOP - ST
- ▶ DRY RUNNING PROTECTION - DRP

Ø40 STEEL TUBE FRAME WITH STAINLESS STEEL COVERS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



PROFESSIONAL PRESSURE
GAUGE ENABLING THE
CONSTANT MONITORING OF
WORKING PRESSURE



HIGH-CAPACITY &
SELF-CLEANING FILTER



THERMOSTATIC VALVE
PROTECTING THE
PUMP FROM POSSIBLE
OVERHEATING

TECHNICAL DATA

		ABSOLUTE-C S2041P T IDAF40349	ABSOLUTE-C S3521P T IDAF40350	ABSOLUTE-C S5015P T IDAF40351	NEW ABSOLUTE-C S5022P T IDAF40932
Code					
PERFORMANCE					
Operating pressure	bar/Mpa	200/20	350/25	500/50	500/50
Flow rate	l/h	2500	1300	1000	1320
Max inlet water temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/31	3-400-50/29,8	3-400-50/30,6	3-400-50/39,3
Absorbed power	kW	17,5	17,5	16	22
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		ST	ST	ST	ST
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		-	-	-	-
Dimension (LxWxH)	cm	120x70x100	120x70x100	120x70x100	120x70x100
Weight	Kg	190	182	185	220

STANDARD EQUIPMENT

CODE: IPPR40006
HANDGRIP G3600 + P330 M24 (FOR 2041)



CODE: IPPR40005
HANDGRIP G7300 + EXTENSION330 M24 M24 (FOR 3521)



CODE: IPPR40024
HANDGRIP ST3600 + P380 M24 (FOR 5015/5022)



CODE: LCPR40028
EXTENSION P70 INOX M24 (FOR 2041)



CODE: LCPR40026
EXTENSION P70 INOX M24 (FOR 3521/5015/5022)



CODE: UGLN07790
H.P NOZZLE 1/4 2513 (FOR 2041)



CODE: UGLN05200
H.P NOZZLE 1/4 1505 (FOR 3521)



CODE: UGLN40018
H.P NOZZLE 1/4 15028 500BAR (FOR 5015)



CODE: UGLN40040
H.P NOZZLE 1/4 15040 (FOR 5022)



CODE: TBAP40050
H.P HOSE R3 15 m 3/8" M24 (FOR 3521/5015/5022)



CODE: TBAP40054
H.P HOSE R2 15 m 1/2" M24 (FOR 2041)



OPTIONAL ACCESSORIES

CODE: RCIN40011
HOSE COUPLINGS M24 500B (FOR 5015)



CODE: RCIN40012
HOSE COUPLINGS M24 HF (FOR 2041/3521)



CODE: LCPR40032
ROTATING LANCE P70 M24 (FOR 3521)



CODE: LCPR40033
ROTATING LANCE P70 M24 (FOR 2041)



CODE: LCPR40031
ROTATING LANCE P70 M24(FOR 5015)



CODE: LCPR40173
ROTATING LANCE P70 M24 (FOR 5022)



CODE: TBAP40070
DRAIN KIT 10 m M24 CD.03 INOX (FOR 5015)



CODE: TBAP40071
DRAIN KIT 15 m M24 CD.03 INOX (FOR 5015)



CODE: TBAP40072
DRAIN KIT 10 m M24 CD.05 INOX (FOR 3521/5022)



CODE: TBAP40073
DRAIN KIT 15 m M24 CD.05 INOX (FOR 3521/5022)



CODE: LCPR40142
SANDBLASTER KIT 15028 (FOR 5015)



CODE: LCPR40144
SANDBLASTER KIT 1505 (FOR 3521)



CODE: LCPR40172
SANDBLASTER KIT 15040 (FOR 5022)



CODE: PRCH40041
SAND BAG 25 Kg





HIGH-PRESSURE WASHERS - COLD WATER

BENZ-C

ENDOTHERMIC ENGINE

PRESSURE

120÷250

bar

FLOW RATE

660÷1800

l/h

ENGINE POWER

6,5÷13

Hp

BENZ-C H1811

- Direct motor-pump coupling
- Without hydraulic decelerator

BENZ-C H2013 / BENZ-C H2515

- Equipped with elasting coupling
- Without hydraulic decelerator

BENZ-C DL2515

- Equipped with elasting coupling
- With hydraulic decelerator

BENZ-CL 2216 / BENZ-C L 2021

- Equipped with gearbox
- Without hydraulic decelerator

BENZ-C L DL2217 / BENZ-C L DL2021 / BENZ-C L DL1230

- Equipped with gearbox
- With hydraulic decelerator

EXCLUSIVE CHARACTERISTICS

- THERMOSTATIC VALVE - TSV
- ENGINE THROTTLE CONTROL
- RS (ONLY DL MODELS)



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN

SPECS



ONLY "L" VERSIONS ARE PROVIDED WITH A GEARBOX IN ORDER TO GUARANTEE PUMP LIFESPAN EXTENSION



FLEXIBLE COUPLING BETWEEN PUMP AND ENGINE FOR COMPONENTS LIFESPAN EXTENSION ("H" VERSION)



THERMOSTATIC VALVE PROTECTING THE PUMP FROM POSSIBLE OVERHEATING IN BY-PASS PHASE

TECHNICAL DATA

		BENZ-C H1811PI P	BENZ-C H2013PI P	BENZ-C H2515PI P	BENZ-C H DL2515PI P	BENZ-C L2216PI P	BENZ-C L2021PI P	BENZ-C L DL2217PI P	BENZ-C L DL2021PI P	BENZ-C L DL1230PI P
Code		IDAF40352	IDAF40353	IDAF40354	IDAF40355	IDAF40356	IDAF40357	IDAF40358	IDAF40359	IDAF40947
PERFORMANCE										
Operating pressure max	bar/Mpa	30-180/3-18	30-200/3-20	30-250/3-25	30-250/3-25	30-220/3-22	30-200/3-20	30-220/3-22	30-200/3-20	30-120/3-12
Flow rate	l/h	330-660	400-800	450-900	450-900	500-1000	400-1260	450-1000	450-1260	450-1800
Max inlet water temperature	°C	50	50	50	50	50	50	50	50	50
Engine type		Honda GX200 (gasoline)	Honda GX270 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)	Honda GX390 (gasoline)
Engine power	Hp	6,5	9	13	13	13	13	13	13	13
Engine speed	rpm	3600	3600	3600	3600	1500	1500	1500	1500	1500
Remote control		BYP	BYP	BYP	BYP	BYP	BYP	BYP	BYP	BYP
Pump/head/pistons		IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic
Detergent tank	l	-	-	-	-	-	-	-	-	-
Detergent delivery		low pressure	low pressure	low pressure	low pressure	low pressure	low pressure	low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	86x56x54	105x66x75	105x66x75	105x66x75	105x66x75	105x66x75	105x66x75	105x66x75	105x66x75
Weight	Kg	41,40	60,80	76,20	67,60	76,60	77,80	75,10	75	80,50
Motor-pump coupling		direct	elastic coupling	elastic coupling	elastic coupling	gearbox	gearbox	gearbox	gearbox	gearbox

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000 M22



CODE: LCPR40013
EXTENSION INOX P70 + HYJET



CODE: UGLN49990
H.P. NOZZLE 1/4 25034 (FOR 1811/2013/2515)



CODE: UGLN05199
H.P. NOZZLE 1/4 2505 (FOR 2216/2217)



CODE: UGLN49995
H.P. NOZZLE 1/4 25065 (FOR 2021)



CODE: UGLN75267
H.P. NOZZLE 1/4 2514 (FOR 1230)



CODE: TBAP25324
H.P. HOSE R1 10 m 5/16"



CODE: TBAP40010
H.P. HOSE R2 10 m 3/8" (FOR 1230)



OPTIONAL ACCESSORIES

CODE: RCIN10810
HOSE COUPLINGS M22



CODE: LCPR24906
LANCE WITH DOUBLE NOZZLE HOLDER



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP23853
DRAIN KIT 10 m (FOR 1811/2013)



CODE: TBAP24406
DRAIN KIT 20 m (FOR 2216/2217/2021)



CODE: TBAP40062
FLEXIBLE HOSE 15 m



CODE: TBAP44379
FLEXIBLE HOSE 20 m



CODE: LCPR40009
TURBO LANCE P70 Ø 035 (FOR 1811/2013/2515)



CODE: LCPR41973
TURBO LANCE P70 Ø 055 (FOR 2216/2217)



CODE: LCPR88522
TURBO LANCE P70 Ø 065 (FOR 2021)



CODE: KTRI40186
HOSE REEL KIT



CODE: LCPR40040
FOAMER HEAD KIT 1 l



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm (FOR 1811/2013/2515)



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 mm (FOR 2216/2217)



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm (FOR 2021)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCLC49492
LANCE FOR WASHING FLOORS 0,35 (FOR 1811/2013)



CODE: LCLC49494
LANCE FOR WASHING FLOORS 0,55 (FOR 2021)



CODE: KTRI00038
INJECTOR KIT





HIGH-PRESSURE WASHERS - COLD WATER

DIESEL-C

ELECTRIC STARTER

PRESSURE

200 bar

FLOW RATE

1000 l/h

ENGINE POWER

10 Hp



EXCLUSIVE CHARACTERISTICS

- ▶ THERMOSTATIC VALVE - TSV
- ▶ ENGINE THROTTLE CONTROL - RS

YANMAR SERIE
DIESEL ENGINE

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP

SPECS



LARGE DIAMETER, WIDE
TREAD TYRED WHEELS
SUITABLE FOR ANY SURFACE



PROVIDED WITH A
REDUCTION GEAR IN ORDER
TO EXTEND PUMP LIFESPAN



EQUIPPED WITH ENGINE
THROTTLE CONTROL IT
REDUCES ENGINE RPM WHEN
BY-PASS IS ACTIVATED

TECHNICAL DATA

Code		DIESEL-C L2017P D
PERFORMANCE		IDAF40794
Operating pressure max	bar/Mpa	30-200/3-20
Flow rate	l/h	630-1000
Max inlet water temperature	°C	50
Engine type		Yanmar L100N6 (diesel)
Engine power	Hp	10
Engine speed	rpm	1500
Remote control		BYP
Pump/head/pistons		IPC plunger/brass/ceramic
Detergent tank	l	-
Detergent delivery		low pressure
Dimension (LxWxH)	cm	105x66x75
Weight	Kg	120
Motor-pump coupling		gearbox

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40013
EXTENSION INOX P70 + HYJET



CODE: UGLN49987
H.P NOZZLE 1/4 15045



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: RCIN10810
HOSE COUPLINGS M22



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER



CODE: LCPR29360
MUDGUARD LANCE P90



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: TBAP40062
FLEXIBLE HOSE 15 m



CODE: TBAP44379
FLEXIBLE HOSE 20 m



CODE: KTRI40526
HOSE REEL KIT



CODE: LCPR40040
FOAM HEAD KIT 1 l



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40054
TURBO LANCE TPR-255
Ø0,40



CODE: LCLC49494
LANCE FOR WASHING
FLOORS Ø,55



CODE: KTRI40444
MAINTENANCE KIT 500H



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION





HOT WATER GENERATOR

FIRE BOX

PRESSURE

175÷350
bar

FLOW RATE

1260 l/h

ABSORBED POWER

0,3 kW



EXCLUSIVE CHARACTERISTICS

- BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



SPECS



SINGLE PHASE BURNER
MOTOR CONNECTED TO FAN
AND DIESEL FUEL PUMP



COVER AND TROLLEY IN
PAINTED SHEET METAL



ELECTRIC CONTROL PANEL
WITH ON-OFF SWITCH AND
THERMOSTAT

TECHNICAL DATA

Code		30M FIRE BOX	40M FIRE BOX	40/350 FIRE BOX
		CDVE49715	CDVE49716	CDVE40027
PERFORMANCE				
Operating pressure max	bar/Mpa	175/17,5	200/20	350/35
Flow rate	l/h	360-1260	360-1260	360-1260
Outlet water max. temperature	°C	140	140	140
Power supply	Ph-V-Hz/A	1-230-50/2	1-230-50/2	1-230-50/2
Absorbed power	kW	0,3	0,3	0,3
Fuel tank	l	18	18	18
Fuel consumption max	kg/h	5,8	7,2	7,2
Boiler thermal power	kW	70	90	90
Dimension (LxWxH)	cm	79x75x92	120x70x100	120x70x100
Weight	kg	108	111	112

STANDARD EQUIPMENT

CODE: RCIN03755
HOSE COUPLINGS



CODE: TBAP29050
HIGH PRESSURE HOSE
L2310 R2 3/8F - 3/8F





HOT WATER

EXCLUSIVE TECHNOLOGIES	84
PW-H10	86
PW-H28	88
PW-H28/4 STAINLESS STEEL COVER	90
PW-H50*	92
PW-H50 PLUS*	94
PW-H90*	96
PW-H100* BASIC VERSIONS	98
PW-H100 PLUS VERSIONS	100
PW-H100 P STAINLESS STEEL COVER	102
PW-H100 HTM SPECIAL MACHINES	104
PW-H100/4 HTM SPECIAL MACHINES	106
TWOCK-H	108
SKID FUEGO	110



EXCLUSIVE TECHNOLOGIES

REMOTE CONTROLS

BY-PASS (BYP)	This system activates the machine's water recycling function when the trigger is released
IMMEDIATE TOTAL STOP (ITS)	Instantly stops the machine when the trigger gun is released
DELAYED TOTAL STOP (DTS)	Stops the machine 30 seconds after its last use
ENGINE THROTTLE CONTROL (RS)	Reduced engine revolutions when the machine is in By-pass stage. It ensures a long life

SAFETY DEVICES

INTELLIGENT AUTOMATIC SWITCH OFF (IASF)	This intelligent system automatically switches off the machine after 20 minutes of inactivity
INTELLIGENT PROPORTIONAL SWITC OFF (IPSF)	Automatic total stop of the machine after a period of inactivity, which varies according to how long the machine has been used
MICRO LEAKAGE CONTROL (MLC)	The machine stops in case of dangerous leakage in the high-pressure hydraulic circuit
DRY RUNNING PROTECTION (DRP)	Stops the machine in case of lack of water
THERMOSTATIC VALVE (TSV)	In case of prolonged By-pass system operation, this system prevents water from overheating inside the high-pressure pump
LANCE NOZZLE CLOGGED CONTROL (NCC)	Stops the machine when the nozzle is clogged
IGNITION BOILER DELAY (IBD)	Ensures low fume emission levels when the boiler is started
WORKING HOUR COUNTER (WHC)	An electronic hour counter that shows the working hours of the machine
IPC TEMPERATURE STABILIZER (ATC)	It keeps the temperature of the boiler constant
ELECTRONIC TEMPERATURE STABILIZER CONTROL (ETSC)	An extremely accurate electronic control device that ensures constant water temperature
INFRARED FLAME CONTROL SYSTEM (FCS)	This system stops the machine in case of boiler malfunction

CONTROLS

MAINTENANCE CHECK LED (MCL)	This control device alerts you when maintenance is required (maintenance is scheduled every 200 hrs)
LIMESCALE/CORROSION PROTECTION UNIT (LCPU)	It protects hot-water machines against limescale and corrosion
FUEL LEVEL CONTROL (FLC)	Detects and reports the fuel lackage
ANTI-SCALE LEVEL CONTROL (ALC)	Detects and reports the descaler lackage and stops the machine burner to prevent limescale deposits
FLOODING PREVENTION SYSTEM (FPS)	This system stops the machine after 60 minutes of continuous activity

EXCLUSIVE TECHNOLOGIES

	PW-H10	PW-H28 (ITS)	PW-H28 (DTS)	PW-H50 (BASIC) PW-H100 (BASIC)	PW-H50 (PLUS)	PW-H90	PW-H100 (PLUS) PW-H100 HTM	TWOCK	SKID FUEGO
									•
	•	•							
			•	•	•	•	•	•	
									•
			•	•	•	•	•		
			•	•	•	•	•		
			•	•	•	•	•	•	
									•
			•	•	•	•	•		
	•	•	•	•	•		•		•
				•	•		•		
		•	•	•					
					•		•		
							•	•	
				•	•	•	•	•	
					•	•	•	•	
					•	•	•	•	
			•						



HIGH-PRESSURE WASHERS - HOT WATER

PW-H10

PRESSURE

120÷140
bar

FLOW RATE

430÷450
l/h

ABSORBED POWER

2,1÷2,5
kW



PW-H10 P I 1408 AOM

EXCLUSIVE CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS
- ▶ BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

DIY AND GARDENING



INNOVATIONS



G6000™
CERAMIC
TECH GUN

SPECS



LARGE FRONT FOOT FOR
GREATER STABILITY



STURDY ERGONOMIC
HANDLE FOR AN EASY
MANOEUVRABILITY



4 LITRES DIESEL TANK MADE
OF TRANSPARENT PLASTIC, IN
ORDER TO ENSURE CONSTANT
MONITORING OF DIESEL LEVEL

TECHNICAL DATA

		WITHOUT HOSE REEL		WITH HOSE REEL
		PW-H10 I1207AA M	PW-H10 I1408AA M	PW-H10P I1408AO M
Code		IDAC40572	IDAC40573	IDAC40574
PERFORMANCE				
Operating pressure	bar/Mpa	120/12	140/14	140/14
Flow rate	l/h	430	450	450
Outlet water temperature	°C	60	60	60
Power supply	Ph-V-Hz/A	1-230-50/9,4	1-230-50/9,7	1-230-50/11,2
Absorbed power	kW	2,1	2,3	2,5
Motor pole/rpm		2-2800	2-2800	2-2800
Remote control		ITS	ITS	ITS
Pump/head/pistons		Axial/aluminium/inox	Axial/aluminium/inox	Axial/brass/inox
Boiler thermal power	kW	26	26	26
Fuel consumption	kg/h	1,8	1,9	1,9
Fuel tank	l	4	4	4
Detergent tank	l	-	-	-
Detergent delivery		low pressure	low pressure	low pressure
Dimension (LxWxH)	cm	68x48x75	68x48x75	68x48x75
Weight	kg	44	50	55

STANDARD EQUIPMENT

CODE: IPPR40017
HANDGRIP MV2009
(FOR I1207AA/I1408AA)



CODE: IPPR40025
HANDGRIP G6000
(FOR I1408AO)



CODE: LCPR40037
EXTENSION P50
ZINC PLATED (FOR
I207AA/I408AA)



CODE: LCPR40071
LANCE WITH MULTIREG
NOZZLE Ø 1,10
(FOR I408AO)



CODE: UGLN49985
H.P NOZZLE 1/4 1503
(FOR I207)



CODE: UGLN75421
H.P NOZZLE 1/4 15025
(FOR I408AO)



CODE: TBAP28305
HIGH PRESSURE HOSE 8 m
(FOR I1207AA/I1408AA)



CODE: TBAP93872
HIGH PRESSURE HOSE 8 m
(FOR I1408AO)



CODE: LCPR40038
FOAMER M22
(FOR I1207AA/I1408AA)



CODE: LCPR40040
FOAMER M22 I I
(FOR I1408AO)



CODE: LCPR40011
TURBO LANCE M22 D. 1,15
(FOR I408AO)



OPTIONAL ACCESSORIES

CODE: SPID24911
ROTATING HYDROBRUSH
LANCE



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCPR14857
SANDBLASTER KIT Ø 1,2 mm
(FOR I408)



CODE: PRCH40041
SAND BAG 25 Kg





HIGH-PRESSURE WASHERS - HOT WATER

PW-H28

PRESSURE

130÷170
bar

FLOW RATE

500÷800
l/h

ABSORBED POWER

2,5÷4,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ IMMEDIATE TOTAL STOP - ITS ("I" MODELS)
- ▶ IGNITION BOILER DELAY - IBD
- ▶ IPC TEMPERATURE STABILIZER - ATC
- ▶ DELAYED TOTAL STOP - DTS ("D" MODELS)
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ IGNITION BOILER DELAY - IBD
- ▶ IPC TEMPERATURE STABILIZER - ATC



PW-H28/4

PW-H28

PW-H28 11308A M
WITHOUT PRESSURE ADJUSTMENT

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER

SPECS



LARGE DIAMETER WHEELS
IN ORDER TO FACILITATE
MOVEMENTS



ACCESSORY STORAGE
COMPARTMENT



STURDY AND LARGE TANK
IN ROTOMOULDED PLASTIC
MATERIAL

TECHNICAL DATA

		IMMEDIATE TOTAL STOP VERSION		DELAYED TOTAL STOP VERSION	
3 WHEELS		PW-H28 I1308A M		PW-H28 D1309P M	PW-H28 D1713P T
Code		IDAC40680		IDAC40681	IDAC40682
4 WHEELS		PW-H28/4 I1308A M		PW-H28/4 D1309P M	PW-H28/4 D1713P T
Code		IDAC40683		IDAC40684	IDAC40685
PERFORMANCE					
Operating pressure	bar/Mpa	130/13		40-130/4-13	40-170/4-17
Flow rate	l/h	500		280-540	400-800
Outlet water temperature	°C	30-110		30-130	30-130
Power supply	Ph-V-Hz/A	1-230-50/12,3		1-230-50/11,5	3-400-50/9,1
Absorbed power	kW	2,7		2,5	4,7
Motor pole/rpm		2-2800		2-2800	2-2800
Remote control		ITS		DTS	DTS
Pump/head/pistons		Axial/brass/ceramic		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	37,8		37,8	37,8
Fuel consumption	kg/h	3,2		3,2	3,2
Fuel tank	l	18		18	18
Detergent tank	l	-		-	-
Detergent delivery		low pressure		low pressure	low pressure
Dimension (LxWxH)	cm	82x63x87		82x63x87	82x63x87
Weight	kg	75		80	90

STANDARD EQUIPMENT

CODE: IPPR40017
HANDGRIP MV2009
(FOR 1308)



CODE: IPPR40025
HANDGRIP G6000
(FOR 1309/1713)



CODE: LCPR40037
EXTENSION P50 ZINC
PLATED



CODE: UGLN11196
H.P. NOZZLE 1/4 15035
(FOR 1308)



CODE: UGLN40000
H.P. NOZZLE 1/4 15034
(FOR 1309)



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 1713)



CODE: TBAP28305
HIGH PRESSURE HOSE 8 m



OPTIONAL ACCESSORIES

CODE: LCPR29362
HYDROBRUSH LANCE



CODE: SPID24939
FIXED HYDROBRUSH LANCE



CODE: KTRI40303
HOSE REEL KIT



CODE: LCPR40040
FOAMER KIT 1 l



CODE: RCIN10810
HOSE COUPLING M22



CODE: KTRI29377
FEEDING KIT



CODE: TBAP23853
DRAIN KIT 10 m



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø 0,4 - (FOR 1713)



CODE: LCPR40104
EXTENSION P70 + TPR255
Ø 0,35 (FOR 1308/1309)



CODE: LCPR24943
SANDBLASTER KIT Ø 1,3 mm
(FOR 1308/1309)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 1713)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCLC49492
LANCE FOR WASHING
FLOORS Ø 0,35



CODE: KTRI40306
MAINTENANCE KIT 500H
(FOR 1309)



CODE: KTRI40307
MAINTENANCE KIT 500H
(FOR 1713)





HIGH-PRESSURE WASHERS - HOT WATER

PW-H28/4

STAINLESS STEEL COVER

PRESSURE

130 ÷ 170
bar

FLOW RATE

600 ÷ 800
l/h

ABSORBED POWER

2,7 ÷ 4,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ BOILER IGNITION DELAY - IBD
- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ IPC TEMPERATURE STABILIZER - ATC



WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND
EASE TRANSPORT



STAINLESS STEEL COVER



LANCE HOLDER WITH
LOCKING SYSTEM

TECHNICAL DATA

		PW-H28/4 D1310P4 M IDAC41124	PW-H28/4 D1713PT IDAC41125
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	40-130/4-13	40-170/4-17
Flow rate	l/h	280-600	400-800
Outlet water temperature	°C	30-130	30-130
Power supply	Ph-V-Hz/A	1-230-50/12,3	3-400-50/9,1
Absorbed power	kW	2,7	4,7
Motor pole/rpm		4-1400	2-2800
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	37,8	37,8
Fuel consumption	kg/h	3,2	3,2
Fuel tank	l	18	18
Detergent tank	l	-	-
Detergent delivery		low pressure	low pressure
Dimension (LxWxH)	cm	82x63x87	82x63x87
Weight	kg	87	90

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP28305
H.P. HOSE 8 m



CODE: UGLN49986
H.P. NOZZLE 1/4 1504



OPTIONAL ACCESSORIES

CODE: LCPR29362
HYDROBRUSH LANCE



CODE: SPID24939
FIXED HYDROBRUSH LANCE



CODE: KTRI40303
HOSE REEL KIT



CODE: LCPR40040
FOAMER KIT 1 l



CODE: RCIN10810
HOSE COUPLING M22



CODE: KTRI29377
FEEDING KIT



CODE: TBAP23853
DRAIN KIT 10 m



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: LCPR40103
EXTENSION P70 + TPR255 Ø0,4



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4



CODE: PRCH40041
SAND BAG 25 kg



CODE: LCLC49492
LANCE FOR WASHING FLOORS Ø 0,35



CODE: LCLC41140
LANCE FOR WASHING FLOORS INOX



CODE: TBAP39120
NO-MARKING HIGH PRESSURE HOSE 10 m



CODE: TBAP39122
NO-MARKING HIGH PRESSURE HOSE 20 m



CODE: KTRI40316
MAINTENANCE KIT 500H - (FOR 1310)



CODE: KTRI40307
MAINTENANCE KIT 500H - (FOR 1713)





HIGH-PRESSURE WASHERS - HOT WATER

PW-H50*

DELAYED TOTAL STOP MODELS

PRESSURE

100÷200
bar

FLOW RATE

600÷1000
l/h

ABSORBED POWER

3÷6,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ BOILER IGNITION DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ IPC TEMPERATURE STABILIZER - ATC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU



PW-H50



PW-H50/4

* BASIC VERSION

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



PUMP WITH BRASS HEAD,
CERAMIC PISTONS AND
VISIBLE OIL LEVEL



SEPARATED PRESSURE
REGULATING UNLOADER VALVE



2 LANCE HOLDERS, ONE WITH
LOCKING SYSTEM

TECHNICAL DATA

3 WHEELS

		PW-H50 D1310P4 M	PW-H50 D1012P4 M	PW-H50 D1813P4 T	PW-H50 D1915P4 T	PW-H50 D2017P4 T
Code		IDAC40868	IDAC40869	IDAC40870	IDAC40871	IDAC40872
		PW-H50/4 D1310P4 M	PW-H50/4 D1012P4 M	PW-H50/4 D1813P4 T	PW-H50/4 D1915P4 T	PW-H50/4 D2017P4 T
Code		IDAC40878	IDAC40879	IDAC40880	IDAC40881	IDAC40882

PERFORMANCE

Operating pressure	bar/Mpa	30-130/3-13	30-100/3-10	30-180/3-18	30-190/3-19	30-200/3-20
Flow rate	l/h	300-600	360-720	450-800	450-900	500-1000
Outlet water temperature	°C	30-140	30-140	30-140	30-140	30-140
Power supply	Ph-V-Hz/A	1-230-50/13,8	1-230-50/14	3-400-50/9,7	3-400-50/10,6	3-400-50/13,2
Absorbed power	kW	3,1	3,2	5	5	6,4
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	40	55	70	70	≥70
Fuel consumption	kg/h	3,2	5,8	5,8	5,8	5,8
Fuel tank	l	25	25	25	25	25
Detergent tank	l	22	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90	110x70x90
Weight	kg	110	110	120	122	140

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 1310/1813)



CODE: UGLN05200
H.P. NOZZLE 1/4 1505
(FOR 1012)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915/2017)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCLC49492
LANCE FOR WASHING FLOORS
Ø 0,35 (FOR 1310/1915)



CODE: LCLC49494
LANCE FOR WASHING
FLOORS Ø 0,55 (FOR 1012)



CODE: LCLC49493
LANCE FOR WASHING FLOORS
Ø 0,45 (FOR 1813/2017)



CODE: KTRI40235
HOSE REEL KIT



CODE: RCIN10810
HOSE COUPLING M22



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCPR40104
EXTENSIO P70 + TPR255
Ø 0,35 (FOR 1310/1813)



CODE: LCPR40135
EXTENSIO P70 + TPR255
Ø 0,45 (FOR 1012/1915/2017)



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 1915/2017)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 1310/1813)



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 mm
(FOR 1012)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X 6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40316
MAINTENANCE KIT 500H
(FOR 1310)



CODE: KTRI40314
MAINTENANCE KIT 500H
(FOR 1813/1915)



CODE: KTRI40430
MAINTENANCE KIT 500H
(FOR 1012)



CODE: KTRI40431
MAINTENANCE KIT 500H
(FOR 2017)





HIGH-PRESSURE WASHERS - HOT WATER

PW-H50 PLUS*

DELAYED TOTAL STOP MODELS

PRESSURE

100÷200
bar

FLOW RATE

600÷1000
l/h

ABSORBED POWER

3÷6,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ BOILER IGNITION DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ ELECTRONIC TEMPERATURE STABILIZER CONTROL - ETSC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ MAINTENANCE CHECK LED - MCL

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



* PLUS VERSION

INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE



ETC™
ELECTRONIC
TEMPERATURE
CONTROL

SPECS



CONTROL PANEL WITH
INDICATORS LAMPS



ERGONOMIC HANDLE PROVIDED
WITH LANCE HOLDER FOR AN
EASY TRANSPORT



ACCESSORIES STORAGE
COMPARTMENT

TECHNICAL DATA

3 WHEELS

		PW-H50P D1310P4 M	PW-H50P D1012P4 M	PW-H50P D1813P4 T	PW-H50P D1915P4 T	PW-H50P D2017P4 T
--	--	-------------------	-------------------	-------------------	-------------------	-------------------

Code		IDAC40873	IDAC40874	IDAC40875	IDAC40876	IDAC40877
------	--	-----------	-----------	-----------	-----------	-----------

4 WHEELS

		PW-H50P/4 D1310P4 M	PW-H50P/4 D1012P4 M	PW-H50P/4 D1813P4 T	PW-H50P/4 D1915P4 T	PW-H50P/4 D2017P4 T
--	--	---------------------	---------------------	---------------------	---------------------	---------------------

Code		IDAC40883	IDAC40884	IDAC40885	IDAC40886	IDAC40887
------	--	-----------	-----------	-----------	-----------	-----------

PERFORMANCE

Operating pressure	bar/Mpa	30-130/3-13	30-100/3-10	30-180/3-18	30-190/3-19	30-200/3-20
Flow rate	l/h	300-600	360-720	450-800	450-900	500-1000
Outlet water temperature	°C	30-140	30-140	30-140	30-140	3-140
Power supply	Ph-V-Hz/A	1-230-50/13,8	1-230-50/14	3-400-50/9,7	3-400-50/10,6	3-400-50/13,2
Absorbed power	kW	3,1	3,2	5	5	6,4
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	40	55	70	70	≥70
Fuel consumption	kg/h	3,2	5,8	5,8	5,8	5,8
Fuel tank	l	25	25	25	25	25
Detergent tank	l	22	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90	110x70x90
Weight	kg	107	109	120	122	140

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 - INOX



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 1310/1813)



CODE: UGLN05200
H.P. NOZZLE 1/4 1505
(FOR 1012)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915/2017)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCLC49492
LANCE FOR WASHING FLOORS
Ø 0,35 (FOR 1310/1915)



CODE: LCLC49494
LANCE FOR WASHING
FLOORS Ø 0,55 (FOR 1012)



CODE: LCLC49493
LANCE FOR WASHING FLOORS
Ø 0,45 (FOR 1813/2017)



CODE: KTRI40235
HOSE REEL KIT



CODE: RCIN10810
HOSE COUPLING M22



CODE: TBAP23853
DRAIN KIT 10 m



CODE: LCPR40104
EXTENSIO P70 + TPR255
Ø 0,35 (FOR 1310/1813)



CODE: LCPR40135
EXTENSIO P70 + TPR255
Ø 0,45 (FOR 1012/1915/2017)



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm
(FOR 1915/2017)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 1310/1813)



CODE: LCPR13557
SANDBLASTER KIT Ø 1,6 mm
(FOR 1012)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X 6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40316
MAINTENANCE KIT 500H
(FOR 1310)



CODE: KTRI40314
MAINTENANCE KIT 500H
(FOR 1813/1915)



CODE: KTRI40430
MAINTENANCE KIT 500H
(FOR 1012)



CODE: KTRI40431
MAINTENANCE KIT 500H
(FOR 2017)





HIGH-PRESSURE WASHERS - HOT WATER

PW-H90*

PRESSURE

150÷190
bar

FLOW RATE

1300
l/h

ABSORBED POWER

7,1÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC



* BASIC VERSION

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



M421
ANTI-SCALE



IPC
PUMP



IPC'S
EXCLUSIVE
BOILER

SPECS



CONNECTION BETWEEN PUMP AND MOTOR IS PROVIDED WITH FLEXIBLE COUPLING



ELECTRIC PANEL IS PROVIDED WITH A TRANSPARENT COVER IN ORDER TO PROTECT IT FROM SPLASHES AND DIRT



ERGONOMIC HANDLE FOR AN EASY TRANSPORT

TECHNICAL DATA

		WITHOUT HOSE REEL	
		PW-H90 D1521P T	PW-H90 D1921P T
Code		IDAC40361	IDAC40362
PERFORMANCE			
Operating pressure	bar/Mpa	40-150/4-15	40-190/4-19
Flow rate	l/h	650-1300	650-1300
Outlet water temperature	°C	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/13	3-400-50/16
Absorbed power	kW	7,1	8,5
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Boiler thermal power	kW	85,5	85,5
Fuel consumption	kg/h	7,6	7,6
Fuel tank	l	30	30
Detergent tank	l	16	16
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	131x77x95	131x77x95
Weight	kg	175	182

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40160
EXTENSION PD70 INOX 0°



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1521 - 2PCS)



CODE: UGLN49996
H.P. NOZZLE 1/4 2507
(FOR 1921- 2PCS)



CODE: TBAP40009
HIGH PRESSURE HOSE
10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: LCPR29363
STEAM LANCE - P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS



CODE: RCIN10810
HOSE COUPLING M22



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 1921)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40088
EXTENSION P70 -
TURBO 0.80



CODE: TBAP24406
DRAIN KIT 20 m



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X 6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40433
MAINTENANCE KIT 500H





HIGH-PRESSURE WASHERS - HOT WATER

PW-H100*

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

7,5÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ BOILER IGNITION DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ IPC TEMPERATURE STABILIZER - ATC



PW-H100/4

PW-H100

* BASIC VERSION

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



STURDY AND LARGE TANKS
IN ROTOMOULDED PLASTIC
MATERIAL



BOILER CAN BE OPENED
FROM THE TOP FOR AN EASY
CLEANING



2 LANCE HOLDERS, ONE WITH
LOCKING SYSTEM

TECHNICAL DATA

3 WHEELS

Code

PW-H100 D2515P T

IDAC40888

PW-H100 D1721P T

IDAC40889

PW-H100 D2021P T

IDAC40890

4 WHEELS

Code

PW-H100/4 D2515P T

IDAC40894

PW-H100/4 D1721P T

IDAC40895

PW-H100/4 D2021P T

IDAC40896

PERFORMANCE

Operating pressure	bar/Mpa	30-250/3-25	30-170/3-17	30-200/3-20
Flow rate	l/h	450-900	650-1300	650-1300
Outlet water temperature	°C	30-140	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/16	3-400-50/14,6	3-400-50/16,6
Absorbed power	kW	7,7	7,9	8,5
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	≥70	≤100	≤100
Fuel consumption	kg/h	5,8	7,4	7,4
Fuel tank	l	25	25	25
Detergent tank	l	22	22	22
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90
Weight	kg	172	142	172

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1721)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: TBAP40009
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 2021)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 2515)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: TBAP24406
DRAIN KIT 20 m
(for 1721/2021)



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø0,4 (FOR 2515)



CODE: LCPR40171
EXTENSION P70 + R.J.255
Ø0,65 (FOR 2021)



CODE: LCPR40170
EXTENSION P70 + R.J.255
Ø0,75 (FOR 1721)



CODE: LCPR29363
STEAM LANCE - P70



CODE: KTRI40341
HOOSE REEL KIT



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40434
MAINTENANCE KIT 500H
(FOR 1721/2021)



CODE: KTRI40435
MAINTENANCE KIT 500H
(FOR 2515)





HIGH-PRESSURE WASHERS - HOT WATER

PW-H100 P

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

7,5÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ BOILER IGNITION DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ELECTRONIC TEMPERATURE STABILIZER CONTROL - ETSC
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL



PW-H100/4 PLUS

PW-H100 PLUS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE



ETC™
ELECTRONIC
TEMPERATURE
CONTROL

SPECS



CONTROL PANEL WITH
INDICATOR LAMPS



PRESSURE REGULATING
UNLOADER VALVE BOLT ON
TYPE



EASILY ACCESSIBLE
ANTISCALE TANK

TECHNICAL DATA

3 wheels		PW-H100P D2515P T	PW-H100P D1721P T	PW-H100P D2021P T
Code		IDAC40891	IDAC40892	IDAC40893
4 wheels		PW-H100/4P D2515P T	PW-H100/4P D1721P T	PW-H100/4P D2021P T
Code		IDAC40897	IDAC40898	IDAC40899
PERFORMANCE				
Operating pressure	bar/Mpa	30-250/3-25	30-170/3-17	30-200/3-20
Flow rate	l/h	450-900	650-1300	650-1300
Outlet water temperature	°C	30-140	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/16	3-400-50/14,6	3-400-50/16,6
Absorbed power	kW	7,7	7,9	8,5
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		IPC plunger/brass/ceramic	IPC plunger/brass/ceramic	IPC plunger/brass/ceramic
Boiler thermal power	kW	≥70	≤100	≤100
Fuel consumption	kg/h	5,8	7,4	7,4
Fuel tank	l	25	25	25
Detergent tank	l	22	22	22
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90
Weight	kg	172	142	172

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1721)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: TBAP40009
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70




CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 2021)



CODE: LCPR14858
SANDBLASTER KIT Ø 1,4 mm
(FOR 2515)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: TBAP24406
DRAIN KIT 20 m
(for 1721/2021)



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø0,4 (FOR 2515)



CODE: LCPR40171
EXTENSION P70 + R.J.255
Ø0,65 (FOR 2021)



CODE: LCPR40170
EXTENSION P70 + R.J.255
Ø0,75 (FOR 1721)



CODE: LCPR29363
STEAM LANCE - P70



CODE: KTRI40341
HOSE REEL KIT



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: KTRI40434
MAINTENANCE KIT 500H
(FOR 1721/2021)



CODE: KTRI40435
MAINTENANCE KIT 500H
(FOR 2515)





HIGH-PRESSURE WASHERS - HOT WATER

PW-H100 P

STAINLESS STEEL COVER

PRESSURE

170÷250
bar

FLOW RATE

900÷1300
l/h

ABSORBED POWER

5÷8,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ IGNITION BOILER DELAY - IBD
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ELECTRONIC TEMPERATURE STABILIZER CONTROL - ETSC
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL



STAINLESS STEEL COVER

WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSC™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND EASE
TRANSPORT



STAINLESS STEEL COVER



HANDLE AND TANKS IN
ROTOMOULDED PLASTIC MATERIAL

TECHNICAL DATA

		PW-H100P D1915P T	PW-H100P D2017P T	PW-H100P D1721P T	PW-H100P D2021P T	PW-H100P D2515P T
Code		IDAC41126	IDAC41127	IDAC41128	IDAC41129	IDAC41130
PERFORMANCE						
Operating pressure	bar/Mpa	30-190/3-19	30-200/3-20	30-170/3-17	30-200/3-20	30-250/3-25
Flow rate	l/h	450-900	500-1000	650-1300	650-1300	450-900
Outlet water temperature	°C	30-140	30-140	30-140	30-140	30-140
Power supply	Ph-V-Hz/A	3-400-50/10,6	3-400-50/13,2	3-400-50/14,6	3-400-50/16,6	3-400-50/16
Absorbed power	kW	5	6,4	7,9	8,5	7,7
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic	lpc plunger/brass/ ceramic
Boiler thermal power	kW	70	≥70	≤100	≤100	≥70
Fuel consumption	Kg/h	5,8	5,8	7,4	7,4	5,8
Fuel tank	l	25	25	25	25	25
Detergent tank	l	22	22	22	22	22
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90	110x70x90	110x70x90
Weight	Kg	144,70	168,60	158	186,60	186,60

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°
(FOR 1721/2021/2515)



CODE: LCPR40087
EXTENSION P70
INOX(FOR 1915/2017)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045
(FOR 1915/2017)



CODE: UGLN49986
H.P. NOZZLE 1/4 1504
(FOR 2515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075
(FOR 1721)



CODE: UGLN02303
H.P. NOZZLE 1/4 15065
(FOR 2021)



CODE: TBAP40009
H.P. HOSE 10 m R2 5/16"
(FOR 1721/2021/2515)



CODE: TBAP25324
H.P. HOSE 10 m R1 5/16"
(FOR 1915/2017)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: SPID24939
FIXED HYDRO BRUSH
LANCE



CODE: LCLC41140
LANCE FOR WASHING
FLOORS



CODE: LCPR29363
STEAM LANCE P70



CODE: LCPR14858
SANDBLASTER KIT D. 1,4
(FOR 2515)



CODE: LCPR14859
SANDBLASTER KIT D. 1,5
(FOR 1915/2017)



CODE: LCPR14860
SANDBLASTER KIT D. 1,7
(FOR 2021)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP23853
DRAIN KIT 10 m
(FOR 1915/2017)



CODE: TBAP24406
DRAIN KIT 20 m
(FOR 1721/2021)



CODE: PRCH40039
ANTI-SCALE TREATMENT
M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg



CODE: TBAP39120
NON-MARKING H.P.
HOSE R1 10 m 5/16"
(1915/2017/1721)



CODE: TBAP39121
NON-MARKING H.P. HOSE
R2 10 m 5/16"
(FOR 2021P4/2515P4)



CODE: TBAP39122
NON-MARKING H.P.
HOSE R1 20 m 5/16"
(1915/2017/1721)



CODE: TBAP39123
NON-MARKING H.P. HOSE
R2 20 m 5/16"
(FOR 2021P4/2515P4)



CODE: LCPR40135
EXTENSION P70 + TPR255
Ø0,45 - (FOR 1915/2017)



CODE: LCPR40103
EXTENSION P70 + TPR255
Ø0,4 - (FOR 2515)



CODE: LCPR40171
EXTENSION P70 + R.J. 255
Ø0,65 - (FOR 2021)



CODE: LCPR40170
EXTENSION P70 + R.J. 255
Ø0,75 - (FOR 1721)



CODE: KTRI40314
MAINTENANCE KIT 500H
(FOR 1915)



CODE: KTRI40431
MAINTENANCE KIT 500H
(FOR 2017)



CODE: KTRI40434
MAINTENANCE KIT 500H
(FOR 1721/2021)



CODE: KTRI40435
MAINTENANCE KIT 500H
(FOR 2515)





HIGH PRESSURE WASHERS - HOT WATER



PW-H100 HTM

PRESSURE

200 bar

FLOW RATE

900 l/h

ABSORBED POWER

6,4 kw

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ IGNITION BOILER DELAY - IBD
- ▶ ELECTRONIC TEMPERATURE STABILIZER - ETSC
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ MAINTENANCE CHECK LED - MCL
- ▶ INFRARED FLAME TEMPERATURE CONTRLOLS - FCS
- ▶ HIGH BRIGHTNESS LED SIGNALS - HBLs

MOST FREQUENTLY USE

AGRICULTURE/FARMING



AUTOMOTIVE



CONSTRUCTION



RETAIL



LOGISTICS AND TRANSPORT



INDUSTRY



COMMUNITIES



WASTE MANEGEMENT



ONE STEP AHEAD



SPECIAL MACHINE: 100°C MAX TEMPERATURE, BOTH HIGH AND LOW PRESSURE MODE

(WITH NO-MARKING RUBBER WHEELS / 3 WHEELS)

INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP



MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



WARNING LAMP INFORMS WHEN TEMPERATURE IS BETWEEN 90-100°C



PRESSURE REGULATING UNLOADER VALVE BOLT-ON TYPE



COMPLETE WITH NON MARKING WHEELS FOR FLAT SURFACED

TECHNICAL DATA

3 WHEELS

PW-H100HT D2015P T

IDAC41248

Code

PERFORMANCE

Operating pressure	bar/Mpa	30-200/3-20
Flow rate	l/h	450-900
Outlet water temperature	°C	100
Power supply	Ph-V-Hz	3-400-50/13
Absorbed power	kW	6.4
Motor pole / rpm		4-1400
Remote control		DTS
Pump/head/pistons		lpc plunger/brass/ceramic
Boiler thermal power	kW	100
Fuel consumption	Kg/h	7.4
Fuel tank	l	25
Detergent tank	l	22
Detergent delivery		High pressure
Dimensions (LxWxH)	cm	110x70x90
Weight	Kg	140

STANDARD EQUIPMENT

CODE: IPPR40029
HANDGRIP G6000
WITH CERAMIC VALVE

NEW



CODE: LCPR40191
EXTENSION PD70 cm
INOX



CODE: UGLN05200
H.P. NOZZLE 1/4 1505



CODE: UGLN07790
L.P. NOZZLE 1/4 2513



CODE: TBAP40237
H.P. HOSE 10MT 1/4"
(NO-MARKING)



OPTIONAL ACCESSORIES

CODE: KTRI40341
HOSE REEL KIT



CODE: LCLC41140
LANCE FOR WSHING
FLOORS INOX



CODE: PRCH40039
ANTISCALE TREATMENT
M421 1KgX6



CODE: PRCH40040
ANTISCALE TREATMENT
M421 10Kg



CODE: KTRI40568
MAINTENANCE KIT 500H



CODE: RCIN10810
HOSE COUPLING M22



CODE: LCLC40027
STAINLESS STEEL FLOOR
CLEANER





HIGH PRESSURE WASHERS - HOT WATER



PW-H100/4 HTM

PRESSURE

200 bar

FLOW RATE

900 l/h

ABSORBED POWER

6,4 kw

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ IGNITION BOILER DELAY - IBD
- ▶ ELECTRONIC TEMPERATURE STABILIZER - ETSC
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ MAINTENANCE CHECK LED - MCL
- ▶ INFRARED FLAME TEMPERATURE CONTRLOLS - FCS
- ▶ HIGH BRIGHTNESS LED SIGNALS - HBLS

MOST FREQUENTLY USE

AGRICULTURE/FARMING



AUTOMOTIVE



CONSTRUCTION



RETAIL



LOGISTICS AND TRANSPORT



INDUSTRY



COMMUNITIES



WASTE MANEGEMENT



ONE STEP AHEAD



SPECIAL MACHINE: 100°C MAX TEMPERATURE, BOTH HIGH AND LOW PRESSURE MODE

(4WHEELS)

INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP



MODULAR
BUILD-UP



ALL
TERRAIN



IPC'S
EXCLUSIVE
BOILER



M421
ANTI-SCALE

SPECS



WARNING LAMP INFORMS WHEN TEMPERATURE IS BETWEEN 90-100°C



PRESSURE REGULATING UNLOADER VALVE BOLT-ON TYPE



LARGE DIAMETER WHEELS IN ORDER TO FACILITATE MOVEMENTS

TECHNICAL DATA

4 WHEELS

PW-H100/4H D2015P T

IDAC41252

Code

PERFORMANCE

Operating pressure	bar/Mpa	30-200/3-20
Flow rate	l/h	450-900
Outlet water temperature	°C	100
Power supply	Ph-V-Hz	3-400-50/13
Absorbed power	kW	6.4
Motor pole / rpm		4-1400
Remote control		DTS
Pump/head/pistons		lpc plunger/brass/ceramic
Boiler thermal power	kW	100
Fuel consumption	Kg/h	7.4
Fuel tank	l	25
Detergent tank	l	22
Detergent delivery		High pressure
Dimensions (LxWxH)	cm	110x75x90
Weight	Kg	140

STANDARD EQUIPMENT

CODE: IPPR40029
HANDGRIP G6000
WITH CERAMIC VALVE

NEW



CODE: LCPR40191
EXTENSION PD70cm
INOX



CODE: UGLN05200
H.P. NOZZLE 1/4 1505



CODE: UGLN07790
L.P. NOZZLE 1/4 2513



CODE: TBAP40237
H.P. HOSE 10MT 1/4"
(NO-MARKING)



OPTIONAL ACCESSORIES

CODE: KTRI40341
HOSE REEL KIT



CODE: LCLC41140
LANCE FOR WSHING
FLOORS INOX



CODE: PRCH40039
ANTISCALE TREATMENT
M421 1KgX6



CODE: PRCH40040
ANTISCALE TREATMENT
M421 10Kg



CODE: KTRI40568
MAINTENANCE KIT 500H



CODE: RCIN10810
HOSE COUPLING M22



CODE: LCLC40027
STAINLESS STEEL FLOOR
CLEANER





HIGH-PRESSURE WASHERS - HOT WATER

TWOCK-H

PRESSURE

130÷200
bar

FLOW RATE

1800÷2500
l/h

ABSORBED POWER

11÷12,8
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ FUEL LEVEL CONTROL - FLC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



M421
ANTI-SCALE



IPC'S
EXCLUSIVE
BOILER

SPECS



FLEXIBLE COUPLING
BETWEEN MOTOR AND PUMP



CONTROL PANEL PROVIDED
WITH EMERGENCY
SHUTDOWN



PLUNGER PUMP WITH SIX
CERAMIC PISTONS AND TWO
BRASS HEADS

TECHNICAL DATA

		TWOCK-H D1341PI T	TWOCK-H D2030PI T
Code		IDAC49714	IDAC49713
PERFORMANCE			
Operating pressure	bar/Mpa	30-130/3-13	30-200/3-20
Flow rate	l/h	2500	1800
Outlet water temperature	°C	30-150	30-150
Power supply	Ph-V-Hz/A	3-400-50/24,9	3-400-50/24
Absorbed power	kW	11	12,8
Motor pole/rpm		4-1400	6-1000
Remote control		DTS	DTS
Pump/head/pistons		IPC plunger/ 2 brass/ceramic	IPC plunger/ 2 brass/ceramic
Boiler thermal power	kW	81	81
Fuel consumption	kg/h	8,4 x 2	8,4 x 2
Fuel tank	l	54	54
Detergnt tank	l	-	-
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	cm	140x86x86	140x86x86
Weight	kg	448	480

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN02317
H.P. NOZZLE 1/4 2515 (FOR 1341)



CODE: UGLN02312
H.P. NOZZLE 1/4 2509 (FOR 2030)



CODE: TBAP40011
HIGH PRESSURE HOSE 15 m



OPTIONAL ACCESSORIES

CODE: LCPR29363
STEAM LANCE - P70



CODE: PRCH40039
ANTI-SCALE TREATMENT M421 1 Kg X6



CODE: PRCH40040
ANTI-SCALE TREATMENT M421 10 Kg



CODE: LCPR40089
EXTENSION P70 TURBO D.1.0 (FOR 2030)



CODE: KTRI28935
LANCE HOLDER



CODE: KTRI28914
ROTATING ARM



CODE: KTRI29366
PLUNGER EJECTOR DEVICE



CODE: AVTB39119
INOX HOSE REEL KIT





HIGH-PRESSURE WASHERS - HOT WATER

SKID FUEGO

PRESSURE

180 bar

FLOW RATE

1080 l/h

ENGINE POWER

11 Hp

EXCLUSIVE CHARACTERISTICS

- BY-PASS - BYP
- ENGINE THROTTLE CONTROL - RS
- BOILER IGNITION DELAY - IBD

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



HEAVY INDUSTRY



PETROL ENGINE

INNOVATIONS



G6000™
CERAMIC
TECH GUN



M421
ANTI-SCALE



IPC'S
EXCLUSIVE
BOILER

SPECS



POWERFUL HONDA GX 340 LX
AIR COOLED 4 STROKE OHV
PETROL ENGINE



EPOXY POLYESTER POWDER
COATED TUBULAR FLAME-
TROLLEY



MOBILE UNITS OR TRUCK
MOUNTED

TECHNICAL DATA

SKID FUEGO-H L1818PI P	
Code	IDAC49710
PERFORMANCE	
Operating pressure	bar/Mpa70-180/7-18
Flow rate	l/h680-1080
Outlet water temperature	°C80-120
Engine type	Honda GX340 LX (gasoline)
Engine power	Hp11
Engine speed	Rpm1800
Remote control	BY-PASS
Pump/head/pistons	Plunger/brass/ceramic
Boiler thermal power	kW67
Fuel consumption	kg/h5,6
Fuel tank	l26
Detergent tank	loptional (16 l)
Detergent delivery	high pressure
Dimension (LxWxH)	cm117x68x87
Weight	kg235,4

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN49994
H.P. NOZZLE 1/4 2506



CODE: TBAP40009
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER



CODE: LCPR29363
STEAM LANCE - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE



CODE: LCPR29362
HYDROBRUSH LANCE



CODE: RCIN10810
HOSE COUPLINGS



CODE: TBAP24406
DRAIN KIT 20 m



CODE: LCPR88522
EXTENSION P70 TURBO
D. 0.65



CODE: KTRI37674
HOSE REEL KIT P 35-15
WALL



CODE: KTRI26685
TROLLEY KIT P 1-15
(WITH 3 WHEELS)

PICTURE
NOT
AVAILABLE

CODE: KTRI27587
HOSE REEL KIT P35-7
(FOR KTRI26685)

PICTURE
NOT
AVAILABLE

CODE: KTRI26686
TROLLEY KIT P 1-16
(WITH 4 WHEELS)

PICTURE
NOT
AVAILABLE

CODE: KTRI26688
HOSE REEL KIT P35-5 (FOR
KTRI26686)

PICTURE
NOT
AVAILABLE

CODE: KTRI26687
LANCE HOLDER KIT

PICTURE
NOT
AVAILABLE

CODE: KTRI26690
DETERGENT TANK

PICTURE
NOT
AVAILABLE

CODE: KTRI26689
DESCALING DEVICE

PICTURE
NOT
AVAILABLE

CODE: AVTB39119
STAINLESS STEEL HOSE
REEL



CODE: KTRI28914
ROTATING ARM



CODE: LCPR14860
SANDBLASTER KIT D.1,7



CODE: PRCH40041
SAND BAG 25 Kg



CODE: PRCH00039
ANTISCALE TREATMENT
M421 (1 Kg X 6)



CODE: PRCH00040
ANTISCALE TREATMENT
M421 10 Kg





STATIONARY

EXCLUSIVE TECHNOLOGIES	114
-------------------------------	-----

MLC-C	116
--------------	-----

ML CMP	118
---------------	-----

ML-C	120
-------------	-----

SML-C	122
--------------	-----

IWD-H	124
--------------	-----



EXCLUSIVE TECHNOLOGIES

REMOTE CONTROLS

DELAYED TOTAL STOP (DTS)	Stops the machine 30 seconds after its last use
---------------------------------	---

SAFETY DEVICES

MICRO LEAKAGE CONTROL (MLC)	The machine stops in case of dangerous leakage in the high-pressure hydraulic circuit
------------------------------------	---

DRY RUNNING PROTECTION (DRP)	Stops the machine in case of lack of water
-------------------------------------	--

LANCE NOZZLE CLOGGED CONTROL (NCC)	Stops the machine when the nozzle is clogged
---	--

IGNITION BOILER DELAY (IBD)	Ensures low fume emission levels when the boiler is started
------------------------------------	---

WORKING HOUR COUNTER (WHC)	An electronic hour counter that shows the working hours of the machine
-----------------------------------	--

INTELLIGENT PROPORTIONAL SWITCHING OFF (IPSF)	Automatic total stop of the machine after a period of inactivity, which varies according to how long the machine has been used
--	--

INTELLIGENT AUTOMATIC SWITCH OFF (IASF)	This intelligent system automatically switches off the machine after 20 minutes of inactivity
--	---

INFRARED FLAME CONTROL SYSTEM (FCS)	This system stops the machine in case of boiler malfunction
--	---

CONTROLS

LIMESCALE/CORROSION PROTECTION UNIT (LCPU)	It protects the hot water machines against limescale and corrosion
---	--

FUEL LEVEL CONTROL (FLC)	Detects and reports the fuel lackage
---------------------------------	--------------------------------------

ANTI-SCALE LEVEL CONTROL (ALC)	Detects and reports the descaler lackage and stops the machine burner to prevent limescale deposits
---------------------------------------	---

FLOODING PREVENTION SYSTEM (FPS)	This system stops the machine after 60 minutes of continuous activity
---	---

EXCLUSIVE TECHNOLOGIES

	MLC-C	MLCMP	ML-C SML-C	IWD-H
	•	•	•	•
	•	•		•
		•		• (optional)
	•	•		•
				•
	•	•		
	•	•		
				•
				•
				•
				• (optional)
				• (optional)
	•	•	•	



HIGH-PRESSURE WASHERS - COLD WATER STATIONARY

MLC-C

DELAYED TOTAL STOP MODELS

PRESSURE

130÷210
bar

FLOW RATE

600÷1000
l/h

ABSORBED POWER

3÷6,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ INTELLIGENT PROPORTIONAL SWITCH OFF - IPSF
- ▶ DRY RUNNING PROTECTION - DRP



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



EQUIPPED WITH A PAINTED
METAL PLATE FOR WALL-
MOUNTING



PUMP WITH BRASS HEAD
AND THREE CERAMIC
PISTONS ENSURING LONG-
TERM LIFESPAN



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL
OF WORKING PRESSURE

TECHNICAL DATA

		MLC-C D1310P4 M	MLC-C D1813P T	MLC-C D1915P4 T	MLC-C D2117P4 T
Code		PPEL40079	PPEL40081	PPEL40083	PPEL40085
PERFORMANCE					
Operating pressure	bar/Mpa	30-130/3-13	30-180/3-18	30-190/3-19	30-210/3-21
Flow rate	l/h	300-600	400-800	450-900	480-1000
Inlet water max. temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/14,3	3-400-50/8,6	3-400-50/9,4	3-400-50/12
Absorbed power	kW	3	4,7	5,1	6,4
Motor pole/rpm		4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		-	-	-	-
Dimension (LxWxH)	cm	53x34x60	53x34x60	53x36x60	58x39x60
Weight	kg	31	40	45,2	50,2

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: UGLN40000
**H.P. NOZZLE 1/4 15034
(FOR 1310)**



CODE: UGLN49987
**H.P. NOZZLE 1/4 15045
(FOR 1813/1915/2117)**



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: IPIP40022
GRIP G6000 BAYONET



CODE: LCLC40004
**EXTENSION P70 - INOX
BAYONET**



CODE: LCPR40039
**FOAMER KIT 1 l BAYONET
(FOR IPIP40022)**



CODE: LCPR40040
**FOAMER KIT M22 1 l
(FOR IPPR40025)**



CODE: LCPR14858
**SANDBASTER KIT Ø 1,4
(FOR 1310) TO USE WITH
IPPR40025**



CODE: LCPR14859
**SANDBASTER KIT Ø 1,5
(FOR 2117) TO USE WITH
IPPR40025**



CODE: LCPR13557
**SANDBASTER KIT Ø 1,6
(FOR 1813/1915) TO USE
WITH IPPR40025**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR93178
**TURBO LANCE TTR-16
D.1,35 - (FOR 1310/1915)
TO USE WITH IPPR40025**



CODE: LCPR40016
**TURBO LANCE TTR-16 D.1,40
(FOR 1813) TO USE WITH
IPPR40025**



CODE: LCPR40054
**TURBO LANCE TPR-255
D.O.40 - (FOR 2117) TO
USE WITH IPPR40025**



CODE: KTRI40311
**MAINTENANCE KIT 500H
(FOR 1310)**



CODE: KTRI40317
**MAINTENANCE KIT 500H
(FOR 1813)**



CODE: KTRI40313
**MAINTENANCE KIT 500H
(FOR 1915)**



CODE: KTRI40338
**MAINTENANCE KIT 500H
(FOR 2117)**



CODE: KTRI40479
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P4/1915P4)**



CODE: KTRI40478
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 1813P)**



CODE: KTRI40336
**KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117P4)**





HIGH-PRESSURE WASHERS - COLD WATER STATIONARY

ML CMP

DELAYED TOTAL STOP MODELS

PRESSURE

130÷210
bar

FLOW RATE

600÷1000
l/h

ABSORBED POWER

3÷7,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ NOOZLE CLOG CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ INTELLIGENT PROPORTIONAL SWITCHING OFF - IPSF



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC
PUMP

SPECS



EASY ACCESS TO ALL
COMPONENTS FOR AN EASY
MAINTENANCE



HIGH CAPACITY INLET WATER
FILTER



BY-PASS VALVE IS PROVIDED
WITH 1 HOLDING METAL
PLATE IN ORDER TO PROTECT
IT FROM MECHANICAL STRESS

TECHNICAL DATA

		ML CMP D1310P4 M	ML CMP D1813P T	ML CMP D1915P4 T	ML CMP D2117P4 T
Code		IDAF40486	IDAF40535	IDAF40536	IDAF40537
PERFORMANCE					
Operating pressure	bar/Mpa	30-130/3-13	30-180/3-18	30-190/3-19	30-210/3-21
Flow rate	l/h	300-600	400-800	450-900	480-1000
Inlet water max. temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	1-230-50/15	3-400-50/8,5	3-400-50/9,5	3-400-50/12
Absorbed power	kW	3	5,1	6,5	7,5
Motor pole/rpm		4-1400	2-2800	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Detergent tank	l	-	-	-	-
Detergent delivery		-	-	-	-
Dimension (LxWxH)	cm	59x39x29	59x39x29	59x39x29	59x39x29
Weight	kg	49,2	50	56,4	67

STANDARD EQUIPMENT

CODE: IPIP40022
GRIP G6000 BAYONET



CODE: LCLC40004
EXTENSION P70 INOX
BAYONET



CODE: UGLN49990
H.P NOZZLE 1/4 25034
(FOR 1310)



CODE: UGLN49991
H.P NOZZLE 1/4 2504
(FOR 1813)



CODE: UGLN49987
H.P NOZZLE 1/4 15045
(FOR 1915/2117)



CODE: TBAP25324
HIGH PRESSURE HOSE 10 m



OPTIONAL ACCESSORIES

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: LCPR14858
SADBASTER KIT Ø 1,4
(FOR 1310) TO USE WITH
IPPR40025



CODE: LCPR14859
SADBASTER KIT Ø 1,5
(FOR 2117) TO USE WITH
IPPR40025



CODE: LCPR13557
SADBASTER KIT Ø 1,6
(FOR 1813/1915) TO USE
WITH IPPR40025



CODE: LCPR93178
TURBO LANCE TTR-16
D.1,35 - (FOR 1310/1915)
TO USE WITH IPPR40025



CODE: LCPR40016
TURBO LANCE TTR-16 D.1,40
(FOR 1813) TO USE WITH
IPPR40025



CODE: LCPR40054
TURBO LANCE TPR-255
D.0,40 - (FOR 2117) TO
USE WITH IPPR40025



CODE: KTRI37674
HOSE REEL KIT



CODE: AVTB39119
INOX HOSE REEL KIT



CODE: RCIN10810
HOSE COUPLINGS



CODE: KTRI28914
ROTATING ARM



CODE: LCPR40039
FOAMER KIT BAYONET



CODE: KTRI40311
MAINTENANCE KIT 500H
(FOR 1310)



CODE: KTRI40317
MAINTENANCE KIT 500H
(FOR 1813)



CODE: KTRI40313
MAINTENANCE KIT 500H
(FOR 1915)



CODE: KTRI40338
MAINTENANCE KIT 500H
(FOR 2117)



CODE: KTRI40479
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1310P4/1915P4)



CODE: KTRI40478
KIT FOR HOT WATER
FEEDING VERSION
(FOR 1813P)



CODE: KTRI40336
KIT FOR HOT WATER
FEEDING VERSION
(FOR 2117P4)





HIGH-PRESSURE WASHERS - COLD WATER STATIONARY

ML-C

PRESSURE

150÷200
bar

FLOW RATE

900÷1260
l/h

ABSORBED POWER

5,5÷7,1
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

STAINLESS STEEL STRUCTURE

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL

SPECS



HIGH-PRESSURE DETERGENT
DELIVERY DOSING SYSTEM



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL OF
WORKING PRESSURE



PUMP WITH BRASS HEAD
AND THREE CERAMIC
PISTONS ENSURING A LONG-
TERM LIFESPAN

TECHNICAL DATA

		ML-C D1515PIT	ML-C D1521PIT	ML-C D1618PIT	ML-C D2015PIT
Code		IDAF40366	IDAF40367	IDAF40368	IDAF40369
PERFORMANCE					
Operating pressure	bar/Mpa	150/15	150/15	160/16	200/20
Flow rate	l/h	900	1260	1080	900
Inlet water max. temperature	°C	50	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/9,4	3-400-50/14	3-400-50/14,1	3-400-50/13,2
Absorbed power	kW	5,5	7,1	7,1	7,1
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS	DTS
Pump/head/pistons		IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic	IPG plunger/brass/ceramic
Detergent tank	l	optional [2x25 l]	optional [2x25 l]	optional [2x25 l]	optional [2x25 l]
Detergent delivery		high pressure	high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	77x41x41	77x41x41	77x41x41	77x41x41
Weight	kg	85	90	92	92
Motor -pump coupling		elastic coupling	elastic coupling	elastic coupling	elastic coupling

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX (FOR 1515/2015)



CODE: LCPR40159
EXTENSION P70 INOX 0° - (FOR 1521/1618)



CODE: UGLN49987
H.P. NOZZLE 1/4 15045 (FOR 2015)



CODE: UGLN49993
H.P. NOZZLE 1/4 25055 (FOR 1515)



CODE: UGLN49997
H.P. NOZZLE 1/4 25075 (FOR 1521)



CODE: UGLN49995
H.P. NOZZLE 1/4 25065 (FOR 1618)



CODE: TBAP25324
H.P. HOSE R1 10 m 5/16" (FOR 1515)



CODE: TBAP40010
H.P. HOSE R2 10 m 3/8" (FOR 1521/1618)



CODE: TBAP40009
H.P. HOSE R2 10 m 5/16" (FOR 2015)



OPTIONAL ACCESSORIES

CODE: KTRI37674
HOSE REEL KIT



CODE: AVTB39119
INOX HOSE REEL KIT



CODE: LCPR39134
FOAMER HEAD P30



CODE: KTRI28914
ROTATING ARM



CODE: LCCL41140
LANCE FOR WASHING FLOORS INOX



CODE: KTRI28935
LANCE HOLDER



CODE: LCPR14859
SANDBLASTER KIT Ø 1,5 mm (FOR 2015)



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm (FOR 1515/1618)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: KTRI39249
PAINTED WALL FIXING BRACKET



CODE: KTRI75463
STAINLESS STEEL WALL FIXING BRACKET



CODE: KTRI39250
PAINTED STAND



CODE: KTRI75370
STAINLESS STEEL STAND



CODE: KTRI39246
REMOTE CONTROL



CODE: KTRI75367
REMOTE CONTROL WITH DETERGENT CONTROL



CODE: KTRI39247
REMOTE CONTROL WITH DETERGENT CONTROL + WAX CONTROL



CODE: KTRI49930
KIT FOR HOT WATER FEEDING VERSION (FOR 1515/1521/2015)



CODE: KTRI49931
KIT FOR HOT WATER FEEDING VERSION (FOR 1618)



CODICE: MPVR13701
25L DETERGENT TANK 2 PCS



CODICE: LCPR41973
TURBO LANCE Ø 0.55 (FOR 1515)



CODE: LCPR40088
TURBO LANCE Ø 0.80 (FOR 1521)



CODE: LCPR88522
TURBO LANCE Ø 0.65 (FOR 1618)



CODE: LCPR40045
TURBO LANCE Ø 0.45 (FOR 2015)





HIGH-PRESSURE WASHERS - COLD WATER STATIONARY

SML-C

PRESSURE

100÷200
bar

FLOW RATE

1260÷1800
l/h

ABSORBED POWER

6,3÷9,4
kW



EXCLUSIVE CHARACTERISTICS

► DELAYED TOTAL STOP - DTS

MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



STAINLESS STEEL STRUCTURE

INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL

SPECS



HIGH-PRESSURE DETERGENT
DELIVERY DOSING SYSTEM



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL OF
WORKING PRESSURE



STAINLESS STEEL WATER
TANK

TECHNICAL DATA

		SML-C D1030P T	SML-C D1530PIT	SML-C D2021PIT
Code		IDAF40370	IDAF40371	IDAF40372
PERFORMANCE				
Operating pressure	bar/Mpa	100/10	150/15	200/20
Flow rate	l/h	1800	1800	1260
Inlet water max. temperature	°C	50	50	50
Power supply	Ph-V-Hz/A	3-400-50/12,8	3-400-50/18,5	3-400-50/17
Absorbed power	kW	6,3	7,5	9,4
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpg plunger/brass/ceramic	lpg plunger/brass/ceramic	lpg plunger/brass/ceramic
Detergent tank	l	optional (2x25)	optional (2x25)	optional (2x25)
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	93x44x41	93x44x41	77x41x41
Weight	kg	80	90	120

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40159
EXTENSION P70 INOX 0°



CODE: UGLN02317
H.P. NOZZLE 1/4 2515
(FOR 1030)



CODE: UGLN02314
H.P. NOZZLE 1/4 2510
(FOR 1530)



CODE: UGLN49994
H.P. NOZZLE 1/4 2506
(FOR 2021)



CODE: TBAP40010
H.P. HOSE R2 10 m 3/8"



OPTIONAL ACCESSORIES

CODE: KTRI37674
HOSE REEL KIT



CODE: AVTB39119
INOX HOSE REEL KIT INOX



CODE: LCPR39134
FOAMER HEAD P30



CODE: KTRI28914
ROTATING ARM



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: KTRI28935
LANCE HOLDER



CODE: LCPR14860
SANDBLASTER KIT Ø 1,7 mm
(FOR 2021)



CODE: PRCH40041
SAND BAG 25 Kg



CODE: LCPR40089
EXTENSION P70 TURBO
D.10 (FOR 1530)



CODE: LCPR88522
EXTENSION P70 TURBO
D.065 (FOR 2021)



CODE: KTRI75461
PAINTED WALL FIXING
BRACKET



CODE: KTRI75369
PAINTED STAND



CODE: KTRI75462
STAINLESS STEEL WALL
FIXING BRACKET



CODE: KTRI75371
STAINLESS STEEL STAND



CODE: KTRI49930
KIT FOR HOT WATER
FEEDING VERSION



CODE: KTRI39246
REMOTE CONTROL



CODE: KTRI75367
REMOTE CONTROL WITH
DETERGENT CONTROL



CODE: KTRI39247
REMOTE CONTROL WITH
DETERGENT CONTROL +
WAX CONTROL



CODE: MPVR13701
25L DETERGENT TANK
2 PCS





HIGH-PRESSURE WASHERS - HOT WATER STATIONARY

IWD-H

PRESSURE

100÷200
bar

FLOW RATE

720÷1260
l/h

ABSORBED POWER

3,2÷9,5
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ BOILER IGNITION DELAY - IBD
- ▶ FUEL LEVEL CONTROL - FLC (OPTIONAL)
- ▶ ANTI-SCALE LEVEL CONTROL - ALC (OPTIONAL)
- ▶ LIMESCALE/CORROSION PROTECT UNIT - LCPU
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF



MOST FREQUENTLY USE

AUTOMOTIVE



AGRICULTURE



CONSTRUCTION INDUSTRY



MUNICIPALITIES



DIY AND GARDENING



HEAVY INDUSTRY



INNOVATIONS



G6000™
CERAMIC
TECH GUN



MSC™
MULTIFUNCTION
SAFETY
CONTROL



IPC'S
EXCLUSIVE
BOILER

SPECS



STAINLESS STEEL
STRUCTURE



PILOT LIGHTS INDICATING
MACHINE AND BURNER
FUNCTIONING, PLUS FLAME
CONTROL



PROFESSIONAL PRESSURE
GAUGE ENSURING A
CONSTANT CONTROL OF
WORKING PRESSURE

TECHNICAL DATA

		MUR. IWD-H D1012PI M IDAC48036	MUR. IWD-H D1615PI T IDAC48037	MUR. IWD-H D1618PI T IDAC48038	MUR. IWD-H D2015PI T IDAC48039	MUR. IWD-H D1521PI T IDAC48040	MUR. IWD-H D2021PI T IDAC48041
Code							
PERFORMANCE							
Operating pressure	bar/Mpa	100/10	160/16	165/16,5	200/20	150/15	200/20
Flow rate	l/h	720	900	1080	900	1260	1260
Outlet water max. temperature	°C	30-120	30-120	30-120	30-120	30-120	30-145
Power supply	Ph-V-Hz/A	1-230-50/14	3-400-50/10,5	3-400-50/13	3-400-50/14	3-400-50/13	3-400-50/16
Absorbed power	kW	3,2	6,5	7,2	7,2	7,2	9,5
Motor pole/rpm		4-1400	4-1400	4-1400	4-1400	4-1400	4-1400
Boiler thermal power	kW	67	67	88	88	88	88
Fuel consumption	l/h	5,8	5,8	7,4	7,4	7,4	7,4
Remote control		DTS	DTS	DTS	DTS	DTS	DTS
Fuel tank	l	optional (25 l)	optional (25 l)	optional (25 l)	optional (25 l)	optional (25 l)	optional (25 l)
Detergent tank	l	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)	optional (2x25 l)
Detergent delivery		high pressure	high pressure	high pressure	high pressure	high pressure	high pressure
Anti-scale tank	l	2	2	2	2	2	2
Pump/head/pistons		ipg plunger/brass/ ceramic	ipg plunger/brass/ ceramic	ipg plunger/brass/ ceramic	ipg plunger/brass/ ceramic	ipg plunger/brass/ ceramic	ipg plunger/brass/ ceramic
Dimension (LxWxH)	cm	122x60x75	122x60x75	122x60x75	122x60x75	122x60x75	122x60x75
Weight	kg	170	185	190	186	186	210

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
**EXTENSION P70 INOX
(FOR 1012/1615/2015)**



CODE: LCPR40159
**EXTENSION P70 INOX 0°
(FOR 1618/1521/2021)**



CODE: UGLN49993
**H.P. NOZZLE 1/4 25055
(FOR 1012/1615)**



CODE: UGLN49995
**H.P. NOZZLE 1/4 25065
(FOR 1618/2021)**



CODE: UGLN49987
**H.P. NOZZLE 1/4 15045
(FOR 2015)**



CODE: UGLN49997
**H.P. NOZZLE 1/4 15075
(FOR 1521)**



CODE: TBAP40008
**H.P. HOSE R1 10 m 5/16"
(FOR 1012/1615/1618/1521)**



CODE: TBAP40009
**H.P. HOSE R2 10 m 5/16"
(FOR 2015)**



CODE: TBAP40010
**H.P. HOSE R2 10 m 3/8"
(FOR 2021)**



OPTIONAL ACCESSORIES

CODE: AVTB39119
INOX HOSE REEL KIT



CODE: KTRI28914
ROTATING ARM



CODE: LCLC41140
**LANCE FOR WASHING
FLOOR - INOX**



CODE: LCPR29360
MUDGUARD LANCE



CODE: KTRI48114
**REMOTE CONTROL WITH
DETERGENT + WAX CONTROL**



CODE: KTRI48110
WALL FIXING BRACKET



CODE: KTRI48111
STAND



CODE: LCPR41973
**TURBO LANCE Ø0,55 -
(FOR 1012/1615)**



CODE: LCPR88522
**TURBO LANCE Ø0,65 -
(FOR 1618/2021)**



CODE: LCPR40088
**TURBO LANCE Ø0,80 -
(FOR 2015/1521)**



CODE: LAFN48112
FLUE EXTENSION



CODE: LCPR13557
**SANDBLASTER KIT Ø 1,6 mm
(FOR 1012/1615)**



CODE: LCPR14860
**SANDBLASTER KIT Ø 1,7 mm
(FOR 1618/2021)**



CODE: LCPR14859
**SANDBLASTER KIT Ø 1,5 mm
(FOR 2015)**



CODE: PRCH40041
SAND BAG 25 Kg



CODE: MPVR13701
25 l FUEL TANK 1 PCS



CODE: MPVR13701
**25 l DETERGENT TANK
2 PCS**





ELECTRICALLY HEATED BOILER

EXCLUSIVE TECHNOLOGIES	128
-------------------------------	-----

PW-E100 SPECIAL-HIGH TEMPERATURE	130
---	-----

PW-E100 PLASTIC COVER	132
------------------------------	-----

PW-E100 STAINLESS STEEL COVER	134
--------------------------------------	-----

IWD-E	136
--------------	-----



EXCLUSIVE TECHNOLOGIES

REMOTE CONTROLS

DELAYED TOTAL STOP (DTS)

It stops the machine after 30" from the trigger gun closing.

INTELLIGENT AUTOMATIC SWITCH OFF (IASF)

Switch Off the machine after 20 minutes of no-use.

INTELLIGENT PROPORTIONAL SWITCH OFF (IPSF)

Automatic stop of the machine after a period of inactivity, which varies according to how long the machine has been used.

MICRO LEAKAGE CONTROL (MLC)

Stops the machine in case of dangerous leakage in the HP hydraulic circuit.

DRY RUNNING PROTECTION (DRP)

Stops the machine in case of water lack.

LANCE NOZZLE CLOGGED CONTROL (NCC)

Stops the machine when the nozzle is clogged.

WORKING HOURS COUNTER (WHC)

Electronic hours counter indicating the working hours of the machine.

MAINTENANCE CHECK LED (MCL)

This control device alerts you when maintenance is required.

LIMESCALE/CORROSION PROTECTION UNIT (LCPU)

Protects the hot water machines from limescale deposits and corrosion.

INTELLIGENT BOILER TEMPERATURE SETTING SYSTEMS (ITSS)

An extremely accurate electronic control device that ensures constant water temperature.

CHEMICAL LEVEL CONTROL (CLC)

Detects and reports the fuel lackage.

ANTI-SCALE LEVEL CONTROL (ALC)

Detects and reports the descaler lackage and stops the machine burner to prevent limescale deposits.

FLOODING PREVENTION SYSTEM (FPS)

This system stops the machine after 60 minutes of continuous activity.

EXCLUSIVE TECHNOLOGIES

	PW-E100 PLASTIC	PW-E100 INOX	IWD-E
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•
	•	•	•



HIGH-PRESSURE WASHERS - HOT WATER (ELECTRIC BOILER)

PW-E100

ELECTRICALLY HEATED BOILER

PRESSURE

140 bar

FLOW RATE

240 l/h

ABSORBED POWER

14,1÷27,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LANCE NOZZLE CLOGGED CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL

- WITHOUT EXHAUST GAS
- GREATER EFFICIENCY WITHOUT USE FUEL



SPECIAL - HIGH TEMPERATURE

WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN

SPECS



LARGE WHEELS IMPROVE MANEUVERABILITY AND EASE TRANSPORT.



22L DETERGENT TANK AND 25L ANTISCALE TANK.



3 STAGE HIGH EFFICIENCY BOILER WITH AISI 316 STAINLESS STEEL STRUCTURE.

TECHNICAL DATA

		PW-E100 D1404 P12 T	PW-E100 D1404 P24 T
Code		IDAC41288	IDAC41289
PERFORMANCE			
Operating pressure	bar/Mpa	30-140/3-14	30-140/3-14
Flow rate	l/h	240	240
Outlet water temperature max.	°C	80	80
Power supply	Ph-V-Hz/A	3-400-50/21,6	3-400-50/40
Absorbed power	kW	14,1	27,4
Motor pole/rpm		4-1400	4-1400
Remote control		DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	24
Antiscale tank	l	25	25
Detergent tank	l	22	22
Detergent delivery		high pressure	high pressure
Dimension (LxWxH)	Cm	110x70x90	110x70x90
Weight	Kg	113	113

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P HOSE
10 m 1/4"



CODE: UGLN40042
H.P. NOZZLE 1/4" 1515



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI40542
REMOTE CONTROL



**OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS**



HIGH-PRESSURE WASHERS - HOT WATER (ELECTRIC BOILER)

PW-E100

ELECTRICALLY HEATED BOILER

PRESSURE

170
bar

FLOW RATE

600÷720
l/h

ABSORBED POWER

16,3÷35,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL

- WITHOUT EXHAUST GAS
- GREATER EFFICIENCY WITHOUT USE FUEL



WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN

SPECS



LARGE WHEELS IMPROVE MANEUVERABILITY AND EASE TRANSPORT.



22L DETERGENT TANK AND 25L ANTISCALE TANK.



3 STAGE HIGH EFFICIENCY BOILER WITH AISI 316 STAINLESS STEEL STRUCTURE.

TECHNICAL DATA

Code		PW-E100 D1710 P12 T IDAC41121	PW-E100 D1712 P24 T IDAC41122	PW-E100 D1712 P36 T IDAC41123
PERFORMANCE				
Operating pressure	bar/Mpa	30-170/3-17	30-170/3-17	30-170/3-17
Flow rate	l/h	450-600	450-720	450-720
Outlet water temperature	°C	70	70	70
Power supply	Ph-V-Hz/A	3-400-50/25	3-400-50/43,2	3-400-50/53
Absorbed power	kW	16,3	29	35,7
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	24	36
Antiscale tank	l	25	25	25
Detergent tank	l	22	22	22
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90
Weight	Kg	113	113	113

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P HOSE
10 m 1/4"



CODE: UGLN49986
H.P. NOZZLE 1/4" 1504 -
(FOR 24kW/ 36kW)



CODE: UGLN11196
H.P. NOZZLE 1/4" 15035 -
(FOR 12kW)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI40542
REMOTE CONTROL



**OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS**



HIGH-PRESSURE WASHERS - HOT WATER (ELECTRIC BOILER)

PW-E100

**ELECTRICALLY HEATED BOILER
STAINLESS STEEL SERIES**

PRESSURE

170
bar

FLOW RATE

600÷720
l/h

ABSORBED POWER

16,3÷35,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ ANTI-SCALE LEVEL CONTROL - ALC
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL



WITH NO-MARKING RUBBER WHEELS

MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MODULAR
BUILD-UP



MSCT™
MULTIFUNCTION
SAFETY
CONTROL



ALL
TERRAIN

SPECS



LARGE WHEELS IMPROVE
MANEUVERABILITY AND EASE
TRANSPORT



STAINLESS STEEL COVER



HANDLE AND TANKS IN
ROTOMOULDED PLASTIC MATERIAL

TECHNICAL DATA

Code		PW-E100 D1710 P12 T IDAC41131	PW-E100 D1712 P24 T IDAC41132	PW-E100 D1712 P36 T IDAC41133
PERFORMANCE				
Operating pressure	bar/Mpa	30-170/3-17	30-170/3-17	30-170/3-17
Flow rate	l/h	450-600	450-720	450-720
Outlet water temperature	°C	70	70	70
Power supply	Ph-V-Hz/A	3-400-50/25	3-400-50/43,2	3-400-50/53
Absorbed power	kW	16,3	29	35,7
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	24	36
Antiscale tank	l	25	25	25
Detergent tank	l	22	22	22
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	110x70x90	110x70x90	110x70x90
Weight	Kg	130	130	130

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P HOSE
10 m 1/4"



CODE: UGLN49986
H.P. NOZZLE 1/4" 1504 -
(FOR 24kW/ 36kW)



CODE: UGLN11196
H.P. NOZZLE 1/4" 15035 -
(FOR 12kW)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: KTRI40341
HOSE REEL KIT



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI40542
REMOTE CONTROL



OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS



HIGH-PRESSURE WASHERS - HOT WATER (ELECTRIC BOILER)

IWD-E

ELECTRICALLY HEATED BOILER STAINLESS STEEL SERIES

PRESSURE

170
bar

FLOW RATE

600÷720
l/h

ABSORBED POWER

16,3÷35,7
kW

EXCLUSIVE CHARACTERISTICS

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ MICRO LEAKAGE CONTROL - MLC
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ NOZZLE CLOGGING CONTROL - NCC
- ▶ WORKING HOURS COUNTER - WHC
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ INTELLIGENT BOILER TEMPERATURE SETTING SYSTEM - ITSS
- ▶ CHEMICAL LEVEL CONTROL - CLC
- ▶ FLOODING PREVENTION SYSTEM - FPS
- ▶ MAINTENANCE CHECK LED - MCL

- WITHOUT EXHAUST GAS
- GREATER EFFICIENCY WITHOUT USE FUEL



MOST FREQUENTLY USE

INDUSTRY



AUTOMOTIVE



AGRICULTURE



MUNICIPALITIES



INNOVATIONS



G6000™
CERAMIC
TECH GUN



IPC
PUMP



MSCT™
MULTIFUNCTION
SAFETY
CONTROL

SPECS



PROFESSIONAL PRESSURE GAUGE ENSURING A COSTANT CONTROL OF WORKING PRESSURE.



HEAVY-DUTY STRUCTURE, WITH STAINLESS STEEL COVER.



3 STAGE HIGH EFFICIENCY BOILER WITH AISI 316 STAINLESS STEEL STRUCTURE.

TECHNICAL DATA

		IWD-E D1710 P12 T	IWD-E D1712 P24 T	IWD-E D1712 P36 T
Code		IDAC41134	IDAC41135	IDAC41136
PERFORMANCE				
Operating pressure	bar/Mpa	170/17	170/17	170/17
Flow rate	l/h	600	720	720
Outlet water temperature	°C	70	70	70
Power supply	Ph-V-Hz/A	3-400-50/25	3-400-50/43,2	3-400-50/53
Absorbed power	kW	16,3	29	35,7
Motor pole/rpm		4-1400	4-1400	4-1400
Remote control		DTS	DTS	DTS
Pump/head/pistons		lpc plunger/brass/ceramic	lpc plunger/brass/ceramic	lpc plunger/brass/ceramic
Boiler thermal power	kW	12	24	36
Antiscale tank	l	6	6	6
Detergent tank	l	25 (optional)	25 (optional)	25 (optional)
Detergent delivery		high pressure	high pressure	high pressure
Dimension (LxWxH)	cm	122x60x75	122x60x75	122x60x75
Weight	Kg	148,3	148,80	148,80

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR40087
EXTENSION P70 INOX



CODE: TBAP40237
NO-MARKING H.P HOSE
10 m 1/4"



CODE: UGLN49986
H.P. NOZZLE 1/4" 1504 -
(FOR 24kW/ 36kW)



CODE: UGLN11196
H.P. NOZZLE 1/4" 15035 -
(FOR 12kW)



OPTIONAL ACCESSORIES

CODE: LCPR29360
MUDGUARD LANCE - P90



CODE: LCPR24906
LANCE WITH DOUBLE
NOZZLE HOLDER - P70



CODE: SPID24939
FIXED HYDROBRUSH
LANCE P70



CODE: LCLC41140
LANCE FOR WASHING
FLOORS INOX



CODE: TBAP23853
DRAIN KIT 10 m



CODE: TBAP24406
DRAIN KIT 20 m



CODE: TBAP39122
NO-MARKING HIGH
PRESSURE HOSE 20 m



CODE: PRCH40040
10 Kg ANTI-SCALE TANK



CODE: KTRI48111
PAINTED STEEL STAND



CODE: KTRI40538
STAINLESS STEEL STAND



CODE: KTRI40536
REMOTE COTROL



OPTIONAL ACCESSORY
HAS TO BE INSTALLED
DURING MANUFACTURING
PROCESS

CODE: MPVR13701
DETERGENT TANK 25 l



HOT WATER WEED REMOVAL SYSTEM

CARATTERISTICHE ESCLUSIVE	139
GREEN JET 1010	140
GREEN JET 7510	142

EXCLUSIVE TECHNOLOGIES

		GREEN JET
REMOTE CONTROLS		
DELAYED TOTAL STOP - DTS	Stops the machine after 1" seconds and after 5" seconds stops the machine burner.	•
SAFETY DEVICES		
INTELLIGENT AUTOMATIC SWITCH OFF - IASF	This intelligent system automatically switches off the machine after 20 minutes of inactivity.	•
DRY RUNNING PROTECTION - DRP	Stops the machine after 15" seconds in case of lack of water.	•
INFRARED FLAME CONTROL SYSTEM - FCS	This system stops the machine in case of boiler malfunction.	•
CONTROLS		
MAINTENANCE CHECK LED - MCL	This control device allerts you when maintenance is required (maintenance is scheduled every 150 hrs).	•
LIMESCALE/CORROSION PROTECTION UNIT - LCPU	It protects hot-water machines againts limescale and corrosion.	•
ANTISCALE LEVEL CONTROL - ALC	Detects and reports the descaler lackage and stops the machine burner to prevents limescale deposits. (Necessary to fill the tank with ant-scale liquid).	•



HOT WATER WEED REMOVAL SYSTEM

GREEN JET 1010

PRESSURE

8
bar

FLOW RATE

600
l/h

ABSORBED POWER

0,8
kW

EXCLUSIVE TECNOLOGIES

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL



MOST FREQUENTLY USE

AGRICULTURE



PUBLIC WORK



MUNICIPALITIES



INNOVATIONS



MSCMTM
MULTIFUNCTION
SAFETY
CONTROL



M421
ANTI-SCALE



MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER

SPECS



STANDARD LIFTING HOOK TO
BE RAISED AND TRANSPORTED
ANYWHERE



DIRECT WATER SUPPLY OR
SUCTION WITH EXTERNAL
TANK



CONTROL PANEL SHOWING:
ON/OFF SWITCH, NETWORK
INDICATOR LIGHT, FLAME
CONTROL LIGHT, WARMING
LACK OF ANTISCALE, SERVICE
WARNING LIGHT (150 HRS),
READY WARNING LIGHT
(TEMPERATURE REACHED)

TECHNICAL DATA

GREEN JET 1010 M		
Code	GNVA40051	
Operating pressure	bar/Mpa	8/0,8
Flow rate	l/h	600
Outlet water temperature max	°C	~100
Power supply	Ph-V-Hz/A	1-230-50/3,8
Absorbed power	kW	0,8
Motor power	kW	0,55
Remote control	DTS	
Pump(type)	IPC volumetric rotary vane pump is self-priming, high-performance. The pump body is brass made	
Boiler thermal power	kW	74
Fuel consumption	Kg/h	5,2
Fuel tank	l	18
Antiscale tank	l	2
Dimension (LxWxH)	cm	83x109x100
Weight	Kg	142

STANDARD EQUIPMENT

CODE: IPPR40027
HANDGRIP ML330 +
EXTENSION 350 mm



CODE: LCLC40025
70 cm LANCE WITH SPRAY
BAR (SPRAY BAR L= 50 cm)



CODE: TBAP39122
H.P. HOSE 20 m
(NO-MARKING)



OPTIONAL

CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg





HOT WATER WEED REMOVAL SYSTEM



GREEN JET 7510

PRESSURE

75
bar

FLOW RATE

600
l/h

ABSORBED POWER

1,9
kW

EXCLUSIVE TECNOLOGIES

- ▶ DELAYED TOTAL STOP - DTS
- ▶ INTELLIGENT AUTOMATIC SWITCH OFF - IASF
- ▶ DRY RUNNING PROTECTION - DRP
- ▶ LIMESCALE/CORROSION PROTECTION UNIT - LCPU
- ▶ ANTISCALE LEVEL CONTROL - ALC
- ▶ INFRARED FLAME CONTROL SYSTEM - FCS
- ▶ MAINTENANCE CHECK LED - MCL



SPECIAL APPLICATIONS - CLEANING, WASHING AND WEED CONTROL WITH ONE MACHINE

MOST FREQUENTLY USE

AGRICULTURE

PUBLIC WORK

MUNICIPALITIES

INNOVATIONS



MSC™
MULTIFUNCTION
SAFETY
CONTROL



M421
ANTI-SCALE



MODULAR
BUILD-UP



IPC'S
EXCLUSIVE
BOILER

SPECS



2 FIXED PNEUMATIC WHEELS AND 2 PIVOT WHEELS (1 WITH BREAK)



DIRECT WATER SUPPLY OR SUCTION WITH EXTERNAL TANK



CONTROL PANEL SHOWING: BURNER LOCKOUT INDICATOR LIGHT, WARNING LACK OF ANTISCALE, SCHEDULED MAINTENANCE (150 HRS), MAX TEMPERATURE INDICATOR (TEMPERATURE REACHED).

TECHNICAL DATA

GREEN JET 7510 M		
Code	GNVA40078	
Operating pressure	bar/Mpa	75/7,5
Flow rate	l/h	600
Outlet water temperature max	°C	~100 (constant temperature)
Power supply	Ph-V-Hz/A	1-230-50
Absorbed power	kW	1,9
Motor pole	rpm	4-1400
Remote control	DTS	
Pump(type)	IPC plunger/brass/ceramic	
Boiler thermal power	kW	75
Fuel consumption	Kg/h	6,3
Fuel tank	l	18
Antiscale tank	l	2
Dimension (LxWxH)	cm	83x109x100
Weight	Kg	142

STANDARD EQUIPMENT

CODE: IPPR40025
HANDGRIP G6000



CODE: LCPR89117
70 cm DOUBLE STAINLESS
STEEL LANCE



CODE: UGLN02299
H.P. NOZZLE 1/4 1506



CODE: TBAP40229
H.P. HOSE 10 m 1/4''



CODE: LCLC40025
70 cm LANCE WITH SPRAY
BAR (SPRAY BAR L= 50 cm)



OPTIONAL

CODE: PRCH40040
ANTI-SCALE TREATMENT
M421 10 Kg





STEAM GENERATORS

SUGGESTED SECTORS	146
EXCLUSIVE TECHNOLOGIES	148
SG-08/SG-10	150
SG-20/SG-30	152
SG-45	154
SG-48	156
SG-50	158
SG-55	160
SG-70	162
SG-10 + PT 04	164
SG-50 + PT 04	166

AUTOMOTIVE



CAR WASHING

- ▶ EXTERNAL DEGREASING AND DEWAXING
- ▶ INTERNAL DEEP CLEANING OF SEATS, MATS AND CEILINGS
- ▶ AC PIPELINE DEEP CLEANING

GARAGES/BODY REPAIR SHOPS AND TYRE CENTRES

CAR-HIRE AGENCIES/CAR DEALERS

- ▶ EXTERNAL DEGREASING AND DEWAXING
- ▶ INTERNAL DEEP CLEANING OF SEATS, MATS AND CEILINGS
- ▶ AC PIPELINE DEEP CLEANING

HO.RE.CA.



HOTELS

- ▶ DEEP GUEST ROOM CLEANING
- ▶ DEEP TOILET CLEANING
- ▶ DEEP MAT, PILLOW, CURTAIN CLEANING AND ODOR CONTROL

RESTAURANTS

- ▶ CARPET AND FURNITURE CLEANING
- ▶ DEEP TOILET CLEANING
- ▶ DEEP AND DAILY KITCHEN CLEANING

CATERING

- ▶ MACHINE AND FOOD PROCESSOR CLEANING
- ▶ DEEP TOILET CLEANING
- ▶ DEEP AND DAILY CLEANING

FOOD INDUSTRY AND RETAILERS



FOOD PROCESSING

- ▶ DEEP CLEANING OF MACHINERY AND FURNITURE
- ▶ DEEP CLEANING OF CONVEYOR BELTS
- ▶ DEEP CLEANING OF TRAYS AND CONTAINERS

FOOD TRANSPORT & STORAGE

- ▶ DEEP INTERNAL CLEANING OF TRUCKS AND VANS
- ▶ DEEP CLEANING OF STORAGE AREAS

FOOD DISPLAY

- ▶ DEEP CLEANING OF COLD DISPLAY UNITS
- ▶ GLASSES AND BENCHES DEEP CLEANING

LARGE COMMON AREAS



SCHOOLS

- ▶ DEEP CLEANING OF COMMON AREAS
- ▶ DEEP TOILET CLEANING AND ODOR CONTROL
- ▶ DAILY/DEEP CLEANING OF RESTAURANTS/KITCHENS

AIRPORTS

- ▶ DEEP CLEANING OF COMMON AREAS
- ▶ DEEP TOILET CLEANING AND ODOR CONTROL
- ▶ DAILY/DEEP CLEANING OF RESTAURANTS/KITCHENS

MARINE TERMINALS AND BUS/ TRAIN/UNDERGROUNDS/STATIONS

- ▶ DEEP CLEANING OF COMMON AREAS
- ▶ DEEP TOILET CLEANING AND ODOR CONTROL
- ▶ DAILY/DEEP CLEANING OF RESTAURANTS/KITCHENS



BOILER POWER

Steam boilers designed to ensure best energy performance, component protection against limestone and corrosion. IPC boilers comply with the PED (Pressure Equipment Directive) which regulates the manufacturing of pressure equipment

ANTI-BUG

Our machines' dry saturated steam (for a temperature of 140-160°C within the boiler) ensures efficient disinfection. It is particularly useful in eliminating

POWER FILTER

A special stainless-steel filter that keeps machine circuits and accessories clean from impurities and limestone

SUCTION POWER

Available on some models as an integration to steam. Great suction performance both on textiles and hard surfaces, and it can vacuum both dust and liquids

AUTOMATIC SHUTDOWN

This system automatically deactivates all machine functions when the pressure is lower than 2,5bar

SAFETY

Our products are protected against high temperatures and our electric panels are protected against humidity and infiltration. Maximum safety is ensured by a protection system that protects against accidental steam discharges

ERGONOMICS

Devices that make the product very functional thanks to intuitive, noiseless, comfortable and easy to use components

FLEX POWER

Flexible hoses designed to resist heavy use or twisting forces

DURABILITY

High-quality boilers, heaters, pumps and electronic components. joints and valves in stainless steel or brass, plastic anti-shock device of maximum thickness.

EXCLUSIVE TECHNOLOGIES

	SG-08 SG-10	SG-20 SG-30	SG-45	SG-48	SG-50	SG-55	SG-70
	•	•	•	•	•	•	•
	•	•	•	•	•	•	•
			•	•	•	•	•
		•		•	•	•	
			•		•	•	•
	•	•	•	•	•	•	•
	•	•	•	•	•	•	•
	•						
	•	•	•	•	•	•	•
	•	•	•	•	•	•	•



STEAM GENERATORS

SG-08/SG-10 (ONLY STEAM)

PRESSURE

4,5÷6
bar

STEAM FLOW RATE

50÷80
g/min

ABSORBED POWER

2÷3,2
kW

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTIBUG
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY

MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS



SPECS



HANDLE FOR A CONVENIENT TRANSPORTATION



STAINLESS STEEL STRUCTURE SUITABLE FOR AREAS WHERE HYGENE IS A MUST



DIGITAL INDICATOR OF:
- BOILER TEMPERATURE
- STEAM READY
- WATER LACK



SG-10
BOILER WITH AUTO FILLING TANK

TECHNICAL DATA

		SG-8 S 4507 M	SG-10 S 5007 M	SG-10 S 6008 M
Code		GNVA40036	GNVA40037	GNVA40038
PERFORMANCE				
Operating pressure	bar/Mpa	4,5/0,45	5/0,5	6/0,6
Steam flow rate	g/min	~ 50÷60	~ 60÷70	~ 65÷80
Max steam temperature	°C	150	160	165
Start up time	min	~ 8	~ 3	~ 2,5
Power supply	Ph-V-Hz	1-230-50	1-230-50	1-230-50
Max absorbed power	kW	2	2,2	3,2
Boiler volume	l	2	1,8 (continuous recharge)	1,8 (continuous recharge)
Water tank	l	-	2,5	2,5
Dimension (LxWxH)	cm	45x28x31	45x28x31	45x28x31
Weight	kg	10	8	10

STANDARD EQUIPMENT

CODE: IPIP40019
HANDGRIP + STEAM HOSE
2,5 m



CODE: MPVR40851
EXTENSION TUBE
L=500 mm (2 PCS)



CODE: MPVR40852
NOZZLE JOINT



CODE: SPPV40052
BRUSH FOR WINDOW
CLEANING



CODE: SPPV40053
MULTIPURPOSE BRUSH



CODE: SPPV40054
TRIANGULAR BRUSH



CODE: SPPV40055
STEAM LANCE CURVED
L= 175



CODE: SPPV40056
SMALL ROUND BRUSH WITH
POLYESTER BRISTLES D.28



CODE: SPPV40057
SMALL ROUND BRUSH
WITH BRASS BRISTLES D.28



CODE: SPPV40058
RECTANGULAR CLOTH



OPTIONAL ACCESSORIES

CODE: MPVR40857
SELF REFFILING BOTTLE



CODE: AZMC40024
WRENCH FOR
MAINTENANCE



CODE: KTRI40446
TROLLEY





STEAM GENERATORS

SG-20/SG-30 (STEAM+SUCTION)

PRESSURE

5÷5,5
bar

STEAM FLOW RATE

80÷100
g/min

ABSORBED POWER

3
kW



SG-20

SG-30 - BOILER WITH AUTO-FILLING TANK

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI-BUG
- ▶ SUCTION POWER
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY

MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS




LARGE COMMON AREAS



SPECS



HANDLE FOR A CONVENIENT TRANSPORTATION.



CONTROL PANEL ENSURING A CONSTANT CHECK OF MACHINE MAIN FUNCTIONS.



ROTARY KNOB FOR STEAM QUANTITY CONTROLLER

TECHNICAL DATA

		SG-20 S 5008 M	SG-30 P 5510 M
Code		GNVA40016	GNVA40017
PERFORMANCE			
Operating pressure	bar/Mpa	5/0,5	5,5/0,55
Steam flow rate	g/min	0-80	0-100
Max steam temperature	°C	140	140
Start up time	min	~ 7	~ 7
Power supply	Ph-V-Hz	1-230-50	1-230-50
Max absorbed power	kW	3	3
Boiler volume	l	2,2	2,2 (auto-filling)
Water/detergent tank	l	2	2
Dimension (LxWxH)	cm	57x40x65	57x40x65
Weight	kg	16	18

STANDARD EQUIPMENT

CODE: IPIP45757
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(FOR SG-20)



CODE: IPIP40001
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(FOR SG-30)



CODE: KTRI46482
ACCESSORIES KIT
STEAM/SUCTION



OPTIONAL ACCESSORIES

CODE: IPIP47898
HANDGRIP + HOSE
STEAM 2,5 m
(FOR SG-20)



CODE: IPIP45815
HANDGRIP + HOSE
STEAM 5 m
(FOR SG-30)



CODE: KTRI40275
STEAM ONLY
ACCESSORIES KIT



CODE: KTRI89496
TROLLEY



CODE: KTRI40269
DESCALING KIT
(10 PHIALS)



CODE: SPPV46076
BRASS BRUSH Ø30



CODE: SPPV40035
BRASS BRUSH Ø50





STEAM GENERATORS

SG-45 (ONLY STEAM)

SOFT TOUCH PANEL

PRESSURE

5
bar

STEAM FLOW RATE

100
g/min

ABSORBED POWER

2,9
kW



EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI-BUG
- ▶ POWER FILTER
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY

MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS




SPECS



STEAM HOSE HOOK
EQUIPPED WITH SAFETY
PANEL



ROTARY KNOB FOR STEAM
FLOW RATE CONTROLLER



NON-MARKING WHEELS

TECHNICAL DATA

		SG-45 5008 M
Code		GNVA40020
PERFORMANCE		
Operating pressure	bar/Mpa	2,5-5/0,25-0,5
Steam flow rate	g/min	0-100
Max steam temperature	°C	160
Start up time	min	~ 6
Power supply	Ph-V-Hz/A	1-230-50/13
Max absorbed power	kW	2,9
Boiler volume	l	3
Water tank	l	7
Detergent tank	l	2
Dimension (LxWxH)	cm	66x43x67
Weight	Kg	20

STANDARD EQUIPMENT

CODE: IPIP45815
HANDGRIP + HOSE
STEAM 5 m



CODE: KTRI40275
STEAM ONLY
ACCESSORIES KIT



CODE: MPVR88900
TANK 5 l



OPTIONAL ACCESSORIES

CODE: IPIP40003
HANDGRIP + HOSE
STEAM 8 m



CODE: KTRI89495
TROLLEY



CODE: KTRI40269
DESCALING KIT
(10 PHIALS)





STEAM GENERATORS

SG-48 (STEAM+SUCTION)

PRESSURE

8
bar

STEAM FLOW RATE

100
g/min

ABSORBED POWER

3,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ SUCTION POWER
- ▶ POWER BOIL
- ▶ ANTI BUGS
- ▶ POWER FILTER
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY
- ▶ DURABILITY



MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS



SPECS



DIGITAL INDICATOR OF:
STEAM TEMPERATURE,
STEAM READY AND LACK OF
WATER.



STAINLESS STEEL STRUCTURE



5 LITRES DETERGENT AND
WATER TANK

TECHNICAL DATA

Code		SG-48 8010 M
PERFORMANCE		GNVA40043
Operating pressure	bar/Mpa	8/0,8
Steam flow rate	g/min	80÷100
Steam temperature (max)	°C	185
Start up time	min	6
Power supply	Ph-V-Hz/A	1-230-50/15,2
Absorbed power max.	kW	3,5
Vacuum power	kW	1,4
Boiler power	kW	3,4
Boiler volume	l	3,2
Water tank	l	5
Detergent tank	l	5
Dimension (LxWxH)	cm	74,5x48x104
Weight	Kg	32

STANDARD EQUIPMENT

CODE: IPIP40021
HANDGRIP + HOSE 4 m



CODE: MPVR40958
HOSE EXTENSION
L=500 mm 2 PZ



CODE: SPPV40060
MULTIPURPOSE FLOOR
BRUSH



CODE: SPPV40061
CARPET PROTECTION FOR
MULTIPURPOSE BRUSH



CODE: SPPV40062
FRAME WITH BRISTLES AND
RUBBER SCRAPERS FOR
MULTIPURPOSE BRUSH



CODE: SPPV40063
BRUSH FOR WINDOW
CLEANING



CODE: SPPV40064
TRANSPARENT NOZZLE



CODE: SPPV40065
LARGE SUCTION NOZZLE
+ SQUEEGEE



CODE: SPPV40066
SMALL SUCTION NOZZLE



CODE: SPPV40067
STEAM LANCE



CODE: SPPV40056
ROUND BRUSH POLYESTER
BRISTLE Ø28 mm



CODE: SPPV40068
ROUND BRUSH POLYESTER
BRISTLE Ø65 mm



CODE: SPPV40069
ROUND BRUSH POLYESTER
BRISTLE Ø40 mm



CODE: SPPV40070
ROUND BRUSH INOX
BRISTLE Ø40 mm



CODE: AZMC40024
WRENCH FOR
MAINTENANCE



CODE: SPPV40058
RECTANGULAR CLOTH



CODE: SPPV40072
INJECTION/EXTRACTION
NOZZLE



CODE: SPPV40073
BRISTLE FRAME FOR
INJECTION/EXTRACTION
NOZZLE L=150 mm



ACCESSORIES SUITABLE FOR INTERNAL CAR CLEANING

CODE: TTRT40000
ROTATING LANCE



CODE: TBFX40013
STEAM HOSE 6MT



ACCESSORY FOR CLEANING / SANITIZING BARRIQUE



STEAM GENERATOR - STEAM+SUCTION

SG-50 (WITH TROLLEY)

PRESSURE

5÷7
bar

FLOW RATE

100÷140
g/min

ABSORBED POWER

2,9÷7,1
kW

ONE **STEP**
AHEAD

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI BUGS
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY
- ▶ POWER FILTER
- ▶ POWER SUCTION

MOST FREQUENTLY USE

HEALTHCARE



FOOD PROCESSING



FOOD RETAIL



TRANSPORT



INDUSTRY



EDUCATION



WINERY



HO.RE.CA.



INNOVATIONS



MODULAR
BUILD-UP

SPECS



STAINLESS STEEL
STRUCTURE, SUITABLE FOR
AREAS WHERE HYGIENE IS A
MUST



INTEGRATED TROLLEY
AND VACUUM CLEANER
TO FACILITATE
MANOEUVRABILITY AND
TRANSPORT



CONTROL PANEL WITH
MICRO TOUCH BUTTONS AND
ROTARY KNOB FOR STEAM
QUANTITY CONTROL

TECHNICAL DATA

		SG-50 S 5008 M	SG-50 S 5010 M	SG-50 S 5014 T
Code		GNVA40067	GNVA40068	GNVA40069
PERFORMANCE				
Operating pressure	bar/Mpa	2,5-5/0,25-0,5	2,5-5/0,25-0,5	4,5-7/0,45-0,7
Steam flow rate	g/min	0-80	0-100	0-140
Steam temperature	°C	160	160	160
Start up time	min	~ 5	~ 5	~ 5
Power supply	Pw-V-Hz/A	1-230-50/12,8	1-230-50/15	3-400-50/10,7
Absorbed power	kW	2,9	3,5	7,1
Boiler volume	l	4	4	5
Water tank	l	6	6	6
Detergent tank	l	6	6	6
Dimensions (LxWxH)	cm	109x40x107	109x40x107	109x40x107
Weight	kg	45	45	50

STANDARD EQUIPMENT (STEAM AND SUCTION)

CODE: IPIP40004

HANDGRIP + 5 m HOSE

CODE: KTRI40277

ACCESSORIES KIT *



SINGLE COMPONENTS INCLUDED IN KIT KTRI40277*

CODE: SPPV45770

MULTIUSE FLOOR BRUSH



CODE: SPPV45762

INJECTION + EXTRACTION NOZZLE



CODE: SPPV45769

BRASS SQUEEGEE



CODE: SPPV45764

UNIVERSAL STEAM LANCE



CODE: SPPV46531

SLOPING NOZZLE



CODE: SPPV87590

INSERT FOR RECTANGULAR BRUSH (TO BE USED WITH SLOPING NOZZLE SPPV46531)



CODE: MPVR45761

L= 50 cm HOSES EXTENSION (2PCS)



CODE: KTRI46580

O-RING KIT (FOR HOSE EXTENSION MPVR45761)



OPTIONAL ACCESSORIES (ONLY STEAM)

CODE: IPIP45815

HANDGRIP + 5 m HOSE



CODE: KTRI40275 **

ACCESSORIES KIT



CODE: SPPV40083

L=21 cm RECTANGULAR MULTIUSE BRUSH (TO BE USED WITH IPIP45815 + MPVR45785)



CODE: SPPV40084

STEAM CONTACT NOZZLE



CODE: SPPV40079

BASIC STEAM MOP



CODE: SPPV40080

ERGONOMIC STEAM MOP



CODE: FRAN01859

1 PCS MICROFIBER CLOTH (TO BE USED WITH STEAM MOP SPPV40079/40080)



CODE: FRAN01860

10 PCS KIT MICROFIBER CLOTH (TO BE USED WITH STEAM MOP SPPV40079/40080)



CODE: PANN00125

1 PCS MICROFIBER CLOTH L=20 cm (TO BE USED WITH RECTANGULAR MULTIUSE BRUSH SPPV40083)



CODE: PANN00138

10 PCS KIT MICROFIBER CLOTH L=20 cm (TO BE USED WITH RECTANGULAR MULTIUSE BRUSH SPPV40083)



CODE: PANN00136

1 PCS MICROFIBER CLOTH 20 X3 cm (TO BE USED WITH STEAM CONTACT NOZZLE SPPV40084)



CODE: PANN00139

10 PCS KIT MICROFIBER CLOTH 20 X3 cm (TO BE USED WITH STEAM CONTACT NOZZLE SPPV40084)



SINGLE COMPONENTS INCLUDED IN KIT KTRI40275**

CODE: SPPV89000

RECTANGULAR MULTI-USE BRUSH



CODE: MPVR45785

L= 50 cm HOSE EXTENSION (2PCS)



CODE: SPPV45789

BRUSH FOR WINDOW CLEANING



CODE: SPPV45793

120° CURVED STEAM LANCE



CODE: SPPV89931

30 mm NYLON BRISTLES BRUSH (3PCS)



CODE: SPPV87589

50 mm NYLON BRISTLES BRUSH (3PCS)



CODE: KTRI89902

O-RING KIT (FOR HOSE EXTENSION MPVR45785)





STEAM GENERATORS

SG-55

(STEAM+SUCTION)



PRESSURE

8
bar

STEAM FLOW RATE

250
g/min

ABSORBED POWER

10,4
kW

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOIL
- ▶ ANTI BUGS
- ▶ POWER FILTER
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY



MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS



SPECS



STANDARD VACUUM
CLEANER IN STAINLESS
STEEL STRUCTURE.



STAINLESS STEEL STRUCTURE



CONTROL PANEL:
- PRESSURE GAUGE
- BOILER TEMPERATURE DIGITAL
INDICATOR
- STEAM READY INDICATOR LIGHT
- DETERGENT LACK INDICATOR
LIGHT
- POWER SUPPLY INDICATOR
LIGHT
- STEAM OUTPUT REGULATOR
- BOILER SWITCH
- DETERGENT SWITCH
- MAIN SWITCH

TECHNICAL DATA

Code		SG-55 8025 T
PERFORMANCE		GNVA40047
Operating pressure	bar/Mpa	8/0,8
Steam flow rate	g/min	250
Steam temperature (max)	°C	180
Start up time	min	~ 5
Power supply	Ph-V-Hz	3-400-50
Absorbed power max.	kW	10,4
Vacuum power	kW	1,4
Boiler volume	l	4,2
Water tank	l	15
Detergent tank	l	5
Dimension (LxWxH)	Cm	80x55x102
Weight	Kg	47

STANDARD EQUIPMENT

CODE: IPIP40021
HANDGRIP + HOSE 4 m



CODE: MPVR40958
HOSE EXTENSION
L=500 mm 2 PZ



CODE: SPPV40060
MULTIPURPOSE FLOOR
BRUSH



CODE: SPPV40061
CARPET PROTECTION FOR
MULTIPURPOSE BRUSH



CODE: SPPV40062
FRAME WITH BRISTLES AND
RUBBER SCRAPERS FOR
MULTIPURPOSE BRUSH



CODE: SPPV40063
GLASS CLEANER



CODE: SPPV40065
LARGE SUCTION NOZZLE
+ SQUEEGEE



CODE: SPPV40066
SMALL SUCTION NOZZLE



CODE: SPPV40067
STEAM LANCE



CODE: SPPV40056
ROUND BRUSH POLYESTER
BRISTLE Ø28 mm



CODE: SPPV40068
ROUND BRUSH POLYESTER
BRISTLE Ø65 mm



CODE: SPPV40069
ROUND BRUSH POLYESTER
BRISTLE Ø40 mm



CODE: SPPV40070
ROUND BRUSH INOX
BRISTLE Ø40 mm



CODE: AZMC40024
WRENCH FOR
MAINTENANCE



CODE: SPPV40073
BRISTLE FRAME FOR
INJECTION/EXTRACTION
NOZZLE L=150 mm



CODE: SPPV40072
INJECTION/EXTRACTION
NOZZLE



CODE: TTRT40000
ROTATING LANCE



CODE: TBFX40013
STEAM HOSE 6MT



ACCESSORIES SUITABLE FOR INTERNAL CAR CLEANING

ACCESSORY FOR CLEANING / SANITIZING BARRIQUE



STEAM GENERATORS

SG-70

(ONLY STEAM - 50l WATER TANK)

PRESSURE

9

bar

FLOW RATE

330

g/min

ABSORBED POWER

11,4

kW



EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI BUGS
- ▶ POWER FILTER
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ POWER FLEX
- ▶ DURABILITY

MOST FREQUENTLY USE

AUTOMOTIVE



HO.RE.CA.



FOOD INDUSTRY AND RETAILERS



LARGE COMMON AREAS




INNOVATIONS



MODULAR
BUILD-UP

SPECS



STAINLESS STEEL
STRUCTURE



ERGONOMIC HANDLE



STAINLESS STEEL - STORAGE
COMPARTMENT

TECHNICAL DATA

SG-70 9536 T 400V

Code		GNVA40042
PERFORMANCE		
Operating pressure	bar/Mpa	9/0,9
Steam flow rate	g/min	~330
Steam temperature (max)	°C	180
Start up time	min	~ 10
Power supply	Ph-V-Hz/A	3-400-50/16,3
Absorbed power max.	kW	11,4
Boiler volume	l	16
Water tank	l	50
Detergent tank	l	6
Dimension (LxWxH)	cm	115x65x100
Weight	Kg	167,20

STANDARD EQUIPMENT

CODE: IPIP40016

HANDGRIP + HOSE STEAM
10 m (ONLY HANDGRIP
CODE: IPIP40015)



CODE: LCPR40109

STEAM LANCE 1/4 - F INOX



CODE: UGEI40012

STEAM NOZZLE 1/4F - INOX



OPTIONAL ACCESSORIES

CODE: SPPV40051

RECTANGULAR BRUSH - L300 mm



CODE: UGLN40037

STEAM NOZZLE 1/4F PLATE



CODE: LCPR40165

CURVED STEAM LANCE L=250 mm M22 - (FOR RECTANGULAR BRUSH)



CODE: LCPR40166

CURVED STEAM LANCE L=450 mm M22 - (FOR RECTANGULAR BRUSH)



CODE: LCPR40167

CURVED STEAM LANCE L=1050 mm M22 - (FOR RECTANGULAR BRUSH)



CODE: LCPR40111

CURVED STEAM LANCE L=450 mm M22 + 1/4 M - (FOR STEAM NOZZLE)



CODE: LCPR40130

CURVED STEAM LANCE L=1050 mm M22 + 1/4 M - (FOR STEAM NOZZLE)



CODE: LCPR40108

STEAM LANCE L=250 mm M22 + 1/4M (FOR STEAM NOZZLE)



CODE: LCPR40110

STEAM LANCE L=450 mm M22 + 1/4M (FOR STEAM NOZZLE)



CODE: LCPR40112

STEAM LANCE L=900 mm M22 + 1/4M (FOR STEAM NOZZLE)



CODE: LCPR40113

STEAM LANCE L=1050 mm M22 + 1/4M - (FOR STEAM NOZZLE)



CODE: APTA40024

REGENERATION STATION





MULTIPURPOSE STEAM TROLLEY



SG-10 + PT 04 (ONLY STEAM)

PRESSURE

5÷6
bar

FLOW RATE

70÷80
g/min

ABSORBED POWER

2,2÷3,2
kW



ONE STEP
AHEAD

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI BUGS
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY

MOST FREQUENTLY USE

HEALTHCARE



FOOD PROCESSING



FOOD RETAIL



TRANSPORT



INDUSTRY



EDUCATION



WINERY



HO.RE.CA.



INNOVATIONS



SPECS



TROLLEY WITH 125 mm
WHEELS (N° 2 WHEELS WITH
BREAK).



DIGITAL INDICATOR:
- BOILER TEMP
- STEAM READY
- WATER LACK



SG-10 HAS A STAINLESS
STEEL STRUCTURE

TECHNICAL DATA



		SG-10 S 5007 M GNVA40037*	SG-10 S 6008 M GNVA40038*
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	5/0,5	6/0,6
Steam flow rate max	g/min	~60-70	~65-80
Steam temperature	°C	160	165
Start up time	min	~3	~2,5
Power supply	Ph-V-Hz	1-230-50	1-230-50
Absorbed power boiler	kW	2,2	3,2
Boiler volume	l	1,8	1,8
Water tank	l	2,5	2,5
Detergent tank	l	-	-
Weight	Kg	8	10
Dimensions (LxWxH)	cm	45x28x31	45x28x31

* Codes are refer to machines and do not include trolley.



Code disassembled		CLEANING TROLLEY PT 04
Code assembled		CARR03159
PERFORMANCE		CARR03171
1 Working plan holder		v
1 Lid for bag holder		v
2 x 70l bag holder		v
1 Gloves or mask box holder		v
1 Gel bottle holde		v
2 Safety sign holders		v
2 Plastic holder for handle		v
1 Door with metal key		v
1 20l drawer		v
4 125mm castors		v
Supporting parts for steam applications		v
Dimensions (LxWxH)	cm	120x66x97
Weight	Kg	32

* Codes are refer to trolley and do not include machines.

STANDARD EQUIPMENT (ONLY STEAM)

CODE: IPIP40019
2,5 m HANDGRIP + STEAM HOSE



CODE: MPVR40851
L=500 mm EXTENSION HOSES (2 PCS)



CODE: MPVR40852
BRUSH FOR WINDOW CLEANING



CODE: SPPV40052
GLASS CLEANER



CODE: SPPV40053
MULTIPURPOSE BRUSH



CODE: SPPV40054
TRIANGULAR BRUSH



CODE: SPPV40055
L= 175 mm CURVED STEAM LANCE



CODE: SPPV40056
Ø28 mm SMALL ROUND BRUSH WITH POLYESTER BRISTLES



CODE: SPPV40057
Ø28 mm SMALL ROUND BRUSH WITH BRASS BRISTLES



CODE: SPPV40058
RECTANGULAR CLOTH



OPTIONAL ACCESSORIES

CODE: SPPV40077
STEAM MOP



CODE: SPPV40076
CLOTH (FOR STEAM MOP SPPV40077)



CODE: MPVR40857
SELF REFFILING BOTTLE



CODE: AZMC40024
WRENCH FOR MAINTENANCE



CODE: SPPV40085
STEAM CONTACT NOZZLE



CODE: PANN00136
1 PCS MICROFIBER CLOTH 20 X3 cm (TO BE USED WITH STEAM CONTACT NOZZLE SPPV40084)



CODE: PANN00139
10 PCS KIT MICROFIBER CLOTH 20 X3 cm (TO BE USED WITH STEAM CONTACT NOZZLE SPPV40084)





MULTIPURPOSE STEAM TROLLEY



SG-50 + PT 04 (ONLY STEAM)

PRESSURE

5
bar

FLOW RATE

100
g/min

ABSORBED POWER

2,9÷3,5
kW



ONE STEP
AHEAD

EXCLUSIVE CHARACTERISTICS

- ▶ POWER BOILER
- ▶ ANTI BUGS
- ▶ AUTOMATIC SHUTDOWN
- ▶ SAFETY
- ▶ ERGONOMICS
- ▶ FLEX POWER
- ▶ DURABILITY
- ▶ POWER FILTER

MOST FREQUENTLY USE

HEALTHCARE



FOOD PROCESSING



FOOD RETAIL



TRANSPORT



INDUSTRY



EDUCATION



WINERY



HO.RE.CA.



INNOVATIONS



SPECS



TROLLEY WITH 125 mm
WHEELS (N° 2 WHEELS WITH
BREAK)



EQUIPPED OF MOP AND
ACCESSORIES SUPPORTS



SG-50 STEAM GENERATOR
HAS A STAINLESS STEEL
STRUCTURE

TECHNICAL DATA



		SG-50 BX 5008 M GNVA40070*	SG-50 BX 5010 M GNVA40071*
Code			
PERFORMANCE			
Operating pressure	bar/Mpa	5/0,5	5/0,5
Steam flow rate max	g/min	80	100
Steam temperature	°C	160	160
Start up time	min	~5	~5
Power supply	Ph-V-Hz/A	1-230-50/12,8	1-230-50/15
Absorbed power boiler	kW	2,9	3,5
Boiler volume	l	4	4
Water tank	l	6	6
Detergent tank	l	6	6
Weight	Kg	30	30
Dimensions (LxWxH)	cm	57x40x80	57x40x80

* Codes are refer to machines and do not include trolleys



Code disassembled		CLEANING TROLLEY PT 04
Code assembled		CARR03159**
PERFORMANCE		CARR03171**
1 Working plan holder		v
1 Lid for bag holder		v
2 x 70l bag holder		v
1 Gloves or mask box holder		v
1 Gel bottle holde		v
2 Safety sign holders		v
2 Plastic holder for handle		v
1 Door with metal key		v
1 20l drawer		v
4 125mm castors		v
Supporting parts for steam applications		v
Dimensions (LxWxH)	cm	120x66x97
Weight	Kg	32

** Codes are refer to trolleys and do not include machines

STANDARD EQUIPMENT (ONLY STEAM)

CODE: IPIP45815
HANDGRIP + 5 m HOSE



CODE: KTRI40275**
ACCESSORIES KIT



CODE: MPVR88900
5 l WATER FILLING TANK



SINGLE COMPONENTS INCLUDED IN KIT KTRI40275**

CODE: SPPV89000
**RECTANGULAR
MULTI-USE BRUSH**



CODE: MPVR45785
**L= 50 cm HOSE
EXTENSION (2PCS)**



CODE: SPPV45789
**BRUSH FOR
WINDOW CLEANING**



CODE: SPPV45793
**120° CURVED STEAM
LANCE**



CODE: SPPV89931
**30 mm NYLON
BRISTLES BRUS
(3 PCS)**



CODE: SPPV87589
**50 mm NYLON
BRISTLES BRUS
(3 PCS)**



CODE: KTRI89902
**O-RING KIT (FOR HOSE
EXTENSION MPVR45785)**



OPTIONAL ACCESSORIES (ONLY STEAM)

CODE: SPPV40083
**L=21 cm RECTANGULAR
MULTIUSE BRUSH (TO BE USED
WITH IPIP45815 + MPVR45785)**



CODE: SPPV40084
STEAM CONTACT NOZZLE




CODE: SPPV40079
BASIC STEAM MOP




CODE: SPPV40080
**ERGONOMIC STEAM
MOP**



CODE: FRAN01859
**1 PCS MICROFIBER CLOTH
(TO BE USED WITH STEAM MOP
SPPV40079/40080)**



CODE: FRAN01860
**10 PCS KIT MICROFIBER
CLOTH (TO BE USED WITH STEAM
MOP SPPV40079/40080)**



CODE: PANN00125
**1 PCS MICROFIBER CLOTH
L=20 cm (TO BE USED WITH
RECTANGULAR MULTIUSE BRUSH
SPPV40083)**



CODE: PANN00138
**10 PCS KIT MICROFIBER
CLOTH L=20 cm (TO BE USED
WITH RECTANGULAR MULTIUSE
BRUSH SPPV40083)**



CODE: PANN00136
**1 PCS MICROFIBER CLOTH
20 X3 cm (TO BE USED WITH
STEAM CONTACT NOZZLE
SPPV40084)**



CODE: PANN00139
**10 PCS KIT MICROFIBER
CLOTH 20 X3 cm (TO BE USED
WITH STEAM CONTACT NOZZLE
SPPV40084)**



STEAM + SUCTION BASIC ACCESSORIES

CODE: KTRI40272
WET & DRY VACUUM
SERVICE FOR SG-50



CODE: IPIP45757
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(STANDARD FOR SG-20)



CODE: IPIP40001
HANDGRIP + HOSE
STEAM/SUCTION 2,5 m
(STANDARD FOR SG-30)



CODE: IPIP40004
HANDGRIP + HOSE
STEAM/SUCTION 5 m
(OPTIONAL FOR SG-50)



CODE: KTRI40277
ACCESSORIES KIT
STEAM/SUCTION
(FOR SG-50)



CODE: KTRI46482
ACCESSORIES KIT
STEAM/SUCTION
(FOR SG-20 / SG-30)



SINGLE COMPONENTS INCLUDED IN KIT KTRI46482

CODE: SPPV45770
MULTIUSE FLOOR BRUSH



CODE: SPPV45762
INJECTION + EXTRACTION
NOZZLE



CODE: SPPV45769
SQUEEGE NOZZLE



CODE: SPPV45764
UNIVERSAL STEAM LANCE



CODE: SPPV46531
SLOPING NOZZLE



CODE: SPPV87590
RECTANGULAR NYLON
BRUSH



CODE: MPVR45761
HOSE EXTENSION
STEAM/SUCTION (2 PCS)



CODE: KTRI46580
O-RING KIT



CODE: SPPV45763
STEAM NEBULIZER



CODE: MPVR45765
CURVED STEAM LANCE



CODE: SPPV89931
Ø30 NYLON BRISTLES
BRUSH (1 PCS)



CODE: SPPV87585
ROUND BRUSH INSERT



CODE: SPPV87587
TRIANGULAR BRUSH
INSERT



CODE: SPPV45766
Ø30 HALF NYLON
BRISTLES BRUSH (3PCS)



SINGLE COMPONENTS INCLUDED IN KIT KTRI40277

CODE: SPPV45770
MULTIUSE FLOOR BRUSH



CODE: SPPV45762
INJECTION + EXTRACTION
NOZZLE



CODE: SPPV45769
SQUEEGE NOZZLE



CODE: SPPV45764
UNIVERSAL STEAM LANCE



CODE: SPPV46531
SLOPING NOZZLE



CODE: SPPV87590
RECTANGULAR NYLON
BRUSH



CODE: MPVR45761
HOSE EXTENSION
STEAM/SUCTION (2 PCS)



CODE: KTRI46580
O-RING KIT



SINGLE COMPONENTS INCLUDED IN MULTIUSE FLOOR BRUSH COD: SPPV45770

CODE: SPPV87588
DUST BRUSH INSERT



CODE: SPPV45774
STRIP BRISTLES BRUSH
L=300 mm



CODE: SPPV45772
STRIP BRISTLES BRUSH
L=300 mm



CODE: SPPV45773
STRIP BRISTLES BRUSH
L=300 mm



CODE: MPVR45775
STRIP BRISTLES BRUSH
L=300 mm



STEAM + SUCTION SPECIAL APPLICATIONS ACCESSORIES

CODE: SPPV40032
23 cm TRANSPARENT
INJECTION + EXTRACTION
NOZZLE



CODE: SPID45330
DEPRESSION TURBO BRUSH



CODE: SPPV40033
WALL PAPER REMOVER
210X290 mm



CODE: SPPV40038
WINDOW CLEAN NOZZLE



CODE: SPPV48971
ROUND BRUSH INSERT
(TO USE WITH SPPV46531)



CODE: SPPV45763
SPRAYER
(TO USE WITH SPPV45764)



CODE: MPVR45765
CURVED STEAM LANCE
(TO USE WITH SPPV45764)



CODE: SPPV87587
TRIANGULAR BRUSH
INSERT (TO USE WITH
SPPV46531)



STEAM ONLY - BASIC ACCESSORIES

CODE: IPIP47898
HANDGRIP + HOSE
STEAM 2,5 m
(OPTIONAL FOR SG-20)



CODE: IPIP45815
HANDGRIP + HOSE STEAM
5 m (STANDARD FOR SG-45
OPTIONAL FOR SG-30 SG-50)



CODE: IPIP40003
HANDGRIP + HOSE STEAM
8 m (OPTIONAL FOR
SG-45/SG-50)



CODE: KTRI40275
STEAM ONLY ACCESSORIES
KIT (STANDARD FOR SG-45
OPTIONAL FOR
SG-20/SG-30/SG-50)



SINGLE COMPONENTS INCLUDED IN KIT KTRI40275

CODE: SPPV89000
RECTANGULAR MULTI-USE
BRUSH



CODE: MPVR45785
EXTENSION HOSES 2PCS



CODE: SPPV45789
WINDOW CLEANER
STEAM BRUSH



CODE: SPPV45793
120° CURVED STEAM
LANCER



CODE: SPPV89931
Ø30 mm NYLON BRISTLES
BRUSH (3PCS)



CODE: SPPV87589
Ø50 mm NYLON BRISTLES
BRUSH (3PCS)



CODE: KTRI89902
O-RINGS FOR HOSE
EXTENSION



STEAM ONLY - SPECIAL APPLICATIONS ACCESSORIES

CODE: KTRI89215
STEAM MOP



CODE: SPPV40039
MICROFIBER SLEEVE
FOR DELICATE SURFACES
(10PCS)



CODE: SPPV40034
Ø50 mm STAINLESS STEEL
BRUSH (1 PCS)



CODE: SPPV40035
Ø50 mm BRASS BRUSH
(1 PCS)



CODE: SPPV45791
STEAM WINDOW
CLEANER 25/35 cm



CODE: SPPV45787
TRIANGULAR BRUSH



CODE: KTRI45328
PROFESSIONAL FLATIRON
KIT (OPTIONAL FOR SG-50)



OTHER ACCESSORIES

CODE: MPVR88900
TANK 5 l (STANDARD FOR
SG-40/SG-45/SG-50)



CODE: KTRI40269
DESCALING KIT
(10 PHIALS)



CODE: KTRI89496
TROLLEY (FOR SG-20 / SG-30)



CODE: KTRI89495
TROLLEY (FOR SG-45)



CODE: KTRI40271
TROLLEY (FOR SG-50)





PURE WATER CLEANING SYSTEM

SUGGESTED SECTORS	172
EXCLUSIVE TECHNOLOGIES	174
HPO HIGH PURE	176
HPB HIGH PURE	177
HPE HIGH PURE	178
HPG HIGH PURE	179
ACCESSORIES	180

BUILDING



RENOVATION

- WINDOW CLEANING

BUILDINGS

- WINDOW CLEANING
- SHOP WINDOW CLEANING

CONCRETE INDUSTRY

GREEN ENERGIES



PHOTOVOLTAIC PANELS

- SOLAR PANEL WASHING AND RINSING

WIND TURBINES

- STRUCTURE WASHING AND RINSING

NAUTICAL - AUTOMOTIVE - TRANSPORT



CAR WASHING

- ▶ EXTERNAL RINSING

BOATS AND SHIPS

- ▶ WINDOW CLEANING
- ▶ EXTERNAL SURFACE WASHING AND RINSING

BUSES & TRAINS

- ▶ WINDOW CLEANING
- ▶ EXTERNAL SURFACE WASHING AND RINSING

GREENHOUSES - GLASSHOUSES - TENSILE STRUCTURES



GREENHOUSES

- ▶ EXTERNAL AND INTERNAL ROOF/
WALL WASHING AND RINSING
- ▶ WINDOW CLEANING

GLASSHOUSES

- ▶ EXTERNAL AND INTERNAL ROOF/
WALL WASHING AND RINSING
- ▶ WINDOW CLEANING

TENSILE STRUCTURES

- ▶ TENSILE STRUCTURE WASHING
AND RINSING



EXCLUSIVE TECHNOLOGIES

POWER FILTER

A 4-stage filtration system for complete water purification

POWER PUMP

High-quality rotary blade pumps with a brass structure to prevent possible contamination of treated water

ERGONOMICS

Extreme ease of movement, thanks to a structure with handles and puncture-proof solid wheels

MANOMETER

Efficiency is always under control thanks to a flow meter that regulates the amount of water that passes through the filters. The manometer also controls membrane pressure

LONG LIFE

All components are designed to ensure long durability and reliability. The brass connectors control thanks possible contamination of treated water

EXCLUSIVE TECHNOLOGIES



PURE WATER CLEANING SYSTEM

HPO HIGH PURE



PRESSURE

Mains Power
Supply

FLOW RATE

Mains Power
Supply

EXCLUSIVE CHARACTERISTICS

- POWER FILTER
- ERGONOMICS
- DURABILITY
- MANOMETER

TECHNICAL DATA

Code

HPO
APTA40000

PERFORMANCE

Operating pressure	bar	mains power supply
Pure water flow	l/min	mains power supply
Water in/out connections	gas	3/4"
Maximum working height	m	~10
Productivity	m ² /h	up to 150
Power supply		-
Absorbed power	kW	-
Dimension (LxWxH)	cm	53x50x127
Weight	kg	34

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/ TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
**REVERSE OSMOSIS
MEMBRANE**



CODE: PRCH40034
**POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE**



CODE: KTRI40106
**FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge**



CODE: TBFX40010
DRAINAGE TUBE



CODE: TBFX40009
**30 m FLEXIBLE HOSE
WITH FITTINGS**



CODE: VVSF40018
**FLOW REGULATION
VALVE**



CODE: AZMC40006
**HAND-HELD TDS
METER**



CODE: CNPR40007
GASKET LUBRICANT





PURE WATER CLEANING SYSTEM

HPB HIGH PURE



PRESSURE

~5 bar

FLOW RATE

~5 l/min

BATTERY NOT INCLUDED

EXCLUSIVE CHARACTERISTICS

- ▶ POWER FILTER
- ▶ ERGONOMICS
- ▶ DURABILITY
- ▶ POWER PUMP
- ▶ MANOMETER

TECHNICAL DATA

Code

HPB

PERFORMANCE

APTA40016

Operating pressure	bar	~5
Pure water flow	l/min	~5
Water in/out connections	gas	3/4"
Maximum working height	m	16 (also with 2 poles)
Productivity	m ² /h	up to 200
Power supply		Gel battery
Dimension (LxWxH)	cm	53x50x127
Weight	kg	50

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/ TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
REVERSE OSMOSIS
MEMBRANE



CODE: PRCH40034
POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: KTRI40106
FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge



CODE: TBFX40010
DRAINAGE TUBE



CODE: TBFX40009
30 m FLEXIBLE HOSE
WITH FITTINGS



CODE: VVSF40018
FLOW REGULATION
VALVE



CODE: AZMC40006
HAND-HELD TDS
METER



CODE: CNPR40007
GASKET LUBRICANT





PURE WATER CLEANING SYSTEM

HPE HIGH PURE

PRESSURE

~8 bar

FLOW RATE

~ 7 l/min



THIS MODEL
CAN BE COMBINED WITH:
IDAF40884 -
PW-C40 D1005P4 M
PAG. 50

EXCLUSIVE CHARACTERISTICS

- POWER FILTER
- ERGONOMICS
- DURABILITY
- POWER PUMP
- MANOMETER

TECHNICAL DATA

Code

HPE
APTA40015

PERFORMANCE

Operating pressure	bar	~8
Pure water flow	l/min	~7
Water in/out connections	gas	3/4"
Maximum working height	m	16 (also with 2 poles)
Productivity	m ² /h	up to 200
Power supply	Ph-V-Hz	1-230-50
Absorbed power	kW	0,6
Dimension (LxWxH)	cm	53x50x127
Weight	kg	55

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/ TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
REVERSE OSMOSIS
MEMBRANE



CODE: PRCH40034
POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: KTRI40106
FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge



CODE: VVSF40018
FLOW REGULATION
VALVE



CODE: TBFX40009
30 m FLEXIBLE HOSE
WITH FITTINGS



CODE: CNPR40007
GASKET LUBRICANT



CODE: AZMC40006
HAND-HELD TDS
METER



CODE: TBFX40010
DRAINAGE TUBE





PURE WATER CLEANING SYSTEM

HPG HIGH PURE

PRESSURE

~9 bar

FLOW RATE

~6,5 l/min



PETROL ENGINE

EXCLUSIVE CHARACTERISTICS

- ▶ POWER FILTER
- ▶ ERGONOMICS
- ▶ DURABILITY
- ▶ POWER PUMP
- ▶ MANOMETER

TECHNICAL DATA

Code

HPG

PERFORMANCE

APTA40012

Operating pressure	bar	~9
Pure water flow	l/min	~6,5
Water in/out connections	gas	3/4"
Maximum working height	m	16 (also with 2 poles)
Productivity	m ² /h	up to 200
Engine type		Honda GX120 (gasoline)
Engine power	Hp	4
Dimension (LxWxH)	cm	53x67x127
Weight	kg	60

MOST FREQUENTLY USE

CONSTRUCTION INDUSTRY



GREEN ENERGIES



NAUTICAL/AUTO/TRANSPORTS



GREENHOUSES/GLASSHOUSES/TENSILE STRUCTURES



STANDARD EQUIPMENT

CODE: FTAC40002
REVERSE OSMOSIS
MEMBRANE



CODE: PRCH40034
POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: KTRI40106
FILTER KIT: - 1 pcs
sediment filter - 1 pcs
active carbon filter - 1 pcs
deionizing resin cartridge



CODE: VVSF40018
FLOW REGULATION
VALVE



CODE: TBFX40009
30 m FLEXIBLE HOSE
WITH FITTINGS



CODE: CNPR40007
GASKET LUBRICANT



CODE: AZMC40006
HAND-HELD TDS
METER



CODE: TBFX40010
DRAINAGE TUBE



MODULAR POLES

CODE: KTRI40280
10 m CARBON FIBRE
MODULAR POLES KIT (8 Kg)



CODE: KTRI40281
16 m CARBON FIBRE
MODULAR POLES KIT (10 Kg)



KTRI40280 - SINGLE COMPONENTS INCLUDED IN KIT

CODE: LCPR40022
1,5 m CARBON FIBRE
SECTION (700g) - (6 PCS)



CODE: LCPR40083
0,75 m CARBON FIBRE
SECTION (484g) - (1 PCS)



CODE: KTRI40508
BAG FOR TRANSPORT
MODULAR POLES



CODE: TBFX40003
20 m FLEXIBLE HOSE WITH
FITTINGS



CODE: RCVR40107
5 cm DIRECT MOUNT
BRUSH ADAPTER



CODE: RCVR40053
FITTING WITH GASKET



KTRI40281 - SINGLE COMPONENTS INCLUDED IN KIT

CODE: LCPR40022
1,5 m CARBON FIBRE
SECTION (700g) - (10 PCS)



CODE: LCPR40083
0,75 m CARBON FIBRE
SECTION (484g) - (1 PCS)



CODE: KTRI40508
BAG FOR TRANSPORT
MODULAR POLES



CODE: TBFX40003
20 m FLEXIBLE HOSE WITH
FITTINGS



CODE: RCVR40107
5 cm DIRECT MOUNT
BRUSH ADAPTER



CODE: RCVR40053
FITTING WITH GASKET



TELESCOPIC POLES

CODE: LCPR40097
6 m GLASS FIBER
TELESCOPIC POLE KIT



CODE: LCPR40098
10 m FUSION TELESCOPIC
POLE KIT



CODE: LCPR40099
14 m CARBON FIBER
TELESCOPIC POLE KIT



LCPR40097 - LCPR40098 - LCPR40099 - SINGLE COMPONENTS INCLUDED IN KIT

CODE: TBBP40040
FLEXIBLE HOSE FOR
TELESCOPIC POLES AND
SPEED BRUSH (SOLD BY
METER)



CODE: RCVR40107
5 cm DIRECT MOUNT
BRUSH ADAPTER



CODE: RCVR40053
FITTING WITH GASKET



PLASTIC GOOSENECKS

CODE: RCVR40048
5 cm ADJUSTABLE
GOOSENECK



CODE: RCVR40070
25 cm ADJUSTABLE
GOOSENECK



ALUMINIUM GOOSENECKS

CODE: RCVR40104
10 cm ADJUSTABLE
GOOSENECK (192g)



CODE: RCVR40105
20 cm ADJUSTABLE
GOOSENECK (224g)



CODE: RCVR40106
40 cm ADJUSTABLE
GOOSENECK (269g)



ALUMINIUM GOOSENECKS FOR DOUBLE BRUSH

CODE: RCVR40108
10 cm ADJUSTABLE
GOOSENECK FOR DOUBLE
BRUSH (342 g)



CODE: RCVR40109
20 cm ADJUSTABLE
GOOSENECK FOR DOUBLE
BRUSH (364g)



CODE: RCVR40110
40 cm ADJUSTABLE
GOOSENECK FOR DOUBLE
BRUSH(464g)




SOFT SPEED BRUSH (FOR ORDINARY CLEANING)


CODE: SPID40006
35 cm NYLON BRUSH
WITH 0° NOZZLES (482g)



CODE: SPID40007
35 cm NYLON BRUSH WITH
0°/25° NOZZLES (486g)



CODE: SPID40012
45 cm NYLON BRUSH WITH
0°/25° NOZZLES (720g)



BACK SCRUB (REAR WASHING FLEECE SUPPORT)

CODE: SPPV40029
25 cm WASHING
FLEECE SUPPORT
TECHNOLITE (TO BE
USED WITH ALUMINIUM
GOOSENECKS)



CODE: SPPV40030
25 cm MICROTIGER
REPLACEMENT SLEEVE



CODE: SPPV40031
25 cm FT12 REPLACEMENT
SLEEVE WITH ABRASIVE
STRIP



BATTERIES AND BATTERY CHARGERS

CODE: BAAC00134
12V 45A/C5 BATTERY
(RUNNING TIME UP TO 2
HOURS)



CODE: BACA00176
12V 5A CBHD1 "STAND
ALONE" BATTERY CHARGER
(FOR BAAC00134)



CODE: BAAC00117
12V 74A/C5 BATTERY
(RUNNING TIME UP TO 4
HOURS)



CODE: BACA00177
12V 10A CBHD2 "STAND
ALONE" BATTERY CHARGER
(FOR BAAC00117)



OTHER ACCESSORIES

CODE: KTRI40112
Y VALVE FOR 2 POLES
INSTALLATION



CODE: RCVR40111
PLASTIC T VALVE (STD
WITH SPEED BRUSH, OPT.
WITH DOUBLE BRUSH)



CODE: PRCH40034
1 Kg POWDER FOR
OSMOTIC MEMBRANE
FILTER MAINTENANCE



CODE: TBBP40040
FLEXIBLE HOSE FOR
TELESCOPIC POLES AND
SPEED BRUSH (SOLD BY
METER)





ELECTRIC VEHICLES

TIGER 250/TIGER 250 BC	184
TIGER 500	184
TIGER 1000	184



ELECTRIC VEHICLE

TIGER 250/TIGER 250 BC

MOTOR

2/300
n°/W

BATTERY

2/12
n°/V

AUTONOMY

~3
h



ELECTRIC VEHICLE

TIGER 500

MOTOR

2/600
n°/W

BATTERY

2/12
n°/V

AUTONOMY

~4
h



ELECTRIC VEHICLE

TIGER 1000

MOTOR

2/1500
n°/W

BATTERY

4/6
n°/V

AUTONOMY

~6
h

TECHNICAL DATA

Code		TIGER 250G II *	TIGER 500S II *	TIGER 1000 *	TIGER 250 BC **
		ELVC42020	ELVC42022	ELVC41890	ELVC40000
PERFORMANCE					
Motor	N°/W	2/300	2/600	1/1500	2/300
Battery	N°/V	2x12V	2x12V	4x6V	2x12V
Recharging voltage	V	24	24	24	100/240v
Autonomy	h	~3	~4	~6	~3
Battery rec. time	h	~8	~8	~8	~8
Max capacity on flat surface	kg	140	170	170	140
Max capacity on flat surface + haulage	kg	150	270	340	150
Max negotiable gradient with driven only	% max	~5%	~12%	~20%	~5%
Speed forward gear	km/h	0-12	0-12	0-12	0-12
Speed reverse gear	km/h	0-12	0-12	0-12	0-12
Dimension (LxWxH)	cm	120x65x115	140x80x122	140x80x122	120x65x115
Weight	kg	110	150	180	110

* Battery and battery charger not included.

** Battery charger is included (battery non included).

OPTIONAL ACCESSORY TIGER 250

CODE: BAAC29876

BATTERY 12V-38A
(197X165X170 mm - 14 Kg)
(2PCS)

PICTURE
NOT
AVAILABLE

CODE: BACA43835

ELECTRONIC BATTERY CHARGER
(260X205X145 mm - 7,5 Kg)

PICTURE
NOT
AVAILABLE

CODE: KTRI30043

BASIC FLAT TRAILER FOR
TRANSPORTING MATERIAL
(80X60 cm - 22 Kg)
(MAX CAPACITY: 60 Kg)



CODE: KTRI30044

BASKET TO BE USED WITH THE
FLAT TRAILER WITH KTRI30043
(78X59X80 cm - 11 Kg)
(MAX CAPACITY: 55 Kg)



CODE: KTRI30040

FRONT CARRIER BASKET
(DIM:40X30X18 cm - 1,5 Kg)



CODE: KTRI30041

KIT OF N°2 REAR SIDE CARRIER
BASKET (40X30X18 cm - 1,5 Kg)



CODE: KTRI30042

LARGE-VOLUME REAR BASKET
"MARKET" (60X50X54 cm -
9,5 Kg) (MAX CAPACITY: 65 Kg)



CODE: KTRI45151

BASIC FLAT TRAILER FOR
TRANSPORTING MATERIALS
(135X70X25 cm - 40 Kg)
(MAX CAPACITY: 100 Kg)



CODE: KTRI43036

MOP MODULE (WEIGHT: 13 Kg)



CODE: KTRI41464

ROTATING HEADLIGHT KIT
(46X26X173 - 4 Kg)



CODE: KTRI01755

TOOLS EQUIPMENT CLEANING
TROLLEY



CODE: KTRI01756

TROLLEY TRANSFER
EQUIPMENT



CODE: KTRI40041

FRONT AND REAR TROLLEY
CONNECTIONS
(TO BE USED WITH TROLLEY
KTRI01755-KTRI01756)

PICTURE
NOT
AVAILABLE

OPTIONAL ACCESSORY TIGER 500

CODE: BAAC39925

BATTERY 12V-75A (265X175X210
mm - 20 Kg) (2PCS)

PICTURE
NOT
AVAILABLE

CODE: BACA00133

ELECTRONIC BATTERY
CHARGER

PICTURE
NOT
AVAILABLE

CODE: KTRI43848

ROTATING HEADLIGHT KIT
(46X16X140 cm - 5 Kg)



CODE: KTRI43160

MOP MODULE (13 Kg)



CODE: KTRI31323

ROTATING HEADLIGHT KIT
(71X68X106 cm - 30 Kg)



CODE: KTRI30052

KIT OF N°2 REAR SIDE CARRIER
BASKET (36X21X21 cm - 1,5 Kg)



CODE: KTRI30053

LARGE-VOLUME REAR BASKET
"MARKET" (70X95X45 cm -
9,5 Kg) (MAX CAPACITY: 90 Kg)



CODE: KTRI40041

TROLLEY FRONT AND REAR
CONNECTIONS (TO BE USED
WITH TROLLEY KTRI01755/
KTRI01756)

PICTURE
NOT
AVAILABLE

CODE: KTRI30055

BASKET TO BE USED WITH
THE FLAT TRAILER WITH
KTRI30054 (88X74X80 cm -
12 Kg)
(MAX CAPACITY: 70 Kg)



CODE: KTRI30054

BASIC FLAT TRAILER FOR
TRANSPORTING MATERIAL
(95X75 cm - 27 Kg)
(MAX CAPACITY: 120Kg)



CODE: KTRI45231

BASIC FLAT TRAILER FOR
TRANSPORTING MATERIALS
(136X80X55 cm - 70Kg)
(MAX CAPACITY: 200 Kg)



CODE: KTRI01755

TROLLEY CLEANING TOOLS
EQUIPMENT



CODE: KTRI01756

TROLLEY TRANSFER
EQUIPMENT



CODE: KTRI30051

FRONT CARRIER BASKET
(40X30X18 cm - 1,5 Kg)



OPTIONAL ACCESSORY TIGER 1000

CODE: BAAC21196

BATTERY 6V-240A
(244X190X275 mm - 30 Kg)
(4PCS)

PICTURE
NOT
AVAILABLE

CODE: BACA21194

ELECTRONIC BATTERY
CHARGER

PICTURE
NOT
AVAILABLE

CODE: KTRI30054

BASIC FLAT TRAILER FOR
TRANSPORTING MATERIAL
(95X75 cm - 27 Kg)
(MAX CAPACITY: 120 Kg)



CODE: KTRI30055

BASKET TO BE USED WITH
THE FLAT TRAILER WITH
KTRI30054 (88X74X80 cm -
12 Kg)
(MAX CAPACITY: 70 Kg)



CODE: KTRI30051

FRONT CARRIER BASKET
(40X30X18 cm - 1,5 Kg)



CODE: KTRI01755

TROLLEY CLEANING TOOLS
EQUIPMENT



CODE: KTRI01756

TROLLEY TRANSFER
EQUIPMENT



CODE: KTRI40041

TROLLEY FRONT AND REAR
CONNECTIONS (TO BE USED
WITH TROLLEY KTRI01755/
KTRI01756)

PICTURE
NOT
AVAILABLE



PACKAGING

HIGH PRESSURE WHASHERS - COLD WATER	190
HIGH PRESSURE WHASHERS - HOT WATER	192
HIGH PRESSURE WHASHERS - STATIONARY	194
ELECTRICALLY HEATED BOILER	194
HOT WATER WEED REMOVAL SYSTEM	194
STEAM GENERATORS	195
PURE WATER CLEANING SYSTEM	195
ELECTRIC VEHICLES	195

HIGH PRESSURE WHASHERS - COLD WATER

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm	m³	kg
IDAF94298	PW-C04 I1106A M	•		48	280	260	480	0,03	5,50
IDAF94299	PW-C08 I1106A M	•		48	330	290	400	0,04	8,00
IDAF94300	PW-C09 I1207A M	•		48	330	190	400	0,03	9,00
IDAF94301	PW-C22 I1207A M	•		15	940	415	538	0,20	18,00
IDAF94302	PW-C22P I1207A M	•		15	940	415	538	0,20	20,00
IDAF94303	PW-C22P I1307A M	•		15	940	415	538	0,20	23,00
IDAF94304	PW-C22P I1508A M	•		15	940	415	538	0,20	25,00
IDAF94339	PW-C22P I1609A0 M	•		15	940	415	538	0,20	28,50
IDAF94223	PW-C23P I1408A M	•		12	400	350	850	0,12	22,80
IDAF94227	PW-C23P I1610A M	•		12	400	350	850	0,12	25,50
IDAF94229	PW-C23P I1508A0 M	•		12	400	350	850	0,12	27,00
IDAF94231	PW-C23P I1610A0 M	•		12	400	350	850	0,12	28,00
IDAF94359	PW-C21 I1508P M	•		24	500	300	420	0,06	21,00
IDAF94360	PW-C21 I1609P M	•		24	500	300	420	0,06	22,60
IDAF94361	PW-C21 I1310P M	•		24	500	300	420	0,06	22,60
IDAF94168	PW-C25 I1310P4 M	•		6	480	370	950	0,17	39,20
IDAF94166	PW-C25 I1509P M	•		6	480	370	950	0,17	33,80
IDAF94169	PW-C25 I813P T	•		6	480	370	950	0,17	35,00
IDAF94187	PW-C25P I1310P4 M	•		6	480	370	950	0,17	35,00
IDAF94170	PW-C25P I1509P M	•		6	480	370	950	0,17	36,20
IDAF94174	PW-C25P I813P T	•		6	480	370	950	0,17	41,60
IDAF40233	PW-C40 I1310P M	•		6	870	580	580	0,29	47,60
IDAF40237	PW-C40 I813P T	•		6	870	580	580	0,29	47,60
IDAF40245	PW-C40 I1310P4 M	•		6	870	580	580	0,29	46,80
IDAF40253	PW-C40 I1915P4 T	•		6	870	580	580	0,29	53,20
IDAF40234	PW-C40 I1310P M	•		6	870	580	580	0,29	45,20
IDAF40238	PW-C40 I1813P T	•		6	870	580	580	0,29	46,80
IDAF40246	PW-C40 D1310P4 M	•		6	870	580	580	0,29	46,80
IDAF40254	PW-C40 D1915P4 T	•		6	870	580	580	0,29	53,80
IDAF40248	PW-C40P D1310P4 M	•		6	900	600	700	0,38	53,50
IDAF40259	PW-C40P D1915P4 T	•		6	900	600	700	0,38	60,60
IDAF40884	PW-C40P D1005P4 T	•		6	900	600	700	0,38	48,00
IDAF40901	PW-C45 D1112P4 M	•		6	690	500	660	0,32	52,00
IDAF40902	PW-C45 D1310P4 M	•		6	690	500	660	0,32	52,00
IDAF40903	PW-C45 D1708P4 M	•		6	690	500	660	0,32	52,00
IDAF40904	PW-C45 D1813P T	•		6	690	500	660	0,32	50,00
IDAF40905	PW-C45 D1814P4 T	•		6	690	500	660	0,32	52,00
IDAF40906	PW-C45 D1915P4 T	•		6	690	500	660	0,32	57,00
IDAF40912	PW-C45 DP1112P4 M	•		6	690	500	660	0,32	52,00
IDAF40913	PW-C45 DP1310P4 M	•		6	690	500	660	0,32	52,00
IDAF40914	PW-C45 DP1708P4 M	•		6	690	500	660	0,32	52,00
IDAF40915	PW-C45 DP1813P T	•		6	690	500	660	0,32	50,00
IDAF40916	PW-C45 DP1814P4 T	•		6	690	500	660	0,32	52,00
IDAF40917	PW-C45 DP1915P4 T	•		6	690	500	660	0,32	57,00
IDAF41104	PW-C45 D1310P4M M (PAINTED COVER)	•		6	700	500	660	0,23	60,00
IDAF41105	PW-C45 D1915P4M T (PAINTED COVER)	•		6	700	500	660	0,23	72,00

HIGH PRESSURE WHASHERS - COLD WATER

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm	m³	kg
IDAF40261	PW-C50 D2117P T	•		4	920	570	800	0,42	73,20
IDAF40265	PW-C50 D1718P T	•		4	920	570	800	0,42	73,20
IDAF40270	PW-C50 D1622P T	•		4	920	570	800	0,42	67,00
IDAF40263	PW-C50P D2117P T	•		4	920	570	910	0,48	80,40
IDAF40267	PW-C50P D1718P T	•		4	920	570	910	0,48	80,40
IDAF40272	PW-C50P D1622P T	•		4	920	570	910	0,48	85,00
IDAF40922	PW-C55 D2117P4 T	•		6	820	550	660	0,27	65,50
IDAF40923	PW-C55 D1721P4 T	•		6	820	550	660	0,27	67,30
IDAF40924	PW-C55 D2021P4 T	•		6	820	550	660	0,27	73,20
IDAF40925	PW-C55 D2515P4 T	•		6	820	550	660	0,27	73,20
IDAF40926	PW-C55 DP2117P4 T	•		6	820	550	660	0,27	65,50
IDAF40927	PW-C55 DP1721P4 T	•		6	820	550	660	0,27	67,30
IDAF40928	PW-C55 DP2021P4 T	•		6	820	550	660	0,27	73,20
IDAF40929	PW-C55 DP2515P4 T	•		6	820	550	660	0,27	73,20
IDAF41106	PW-C55 D2117P4m T	•		6	820	550	660	0,27	91,50
IDAF41108	PW-C55 D1721P4m T	•		6	820	550	660	0,27	83,20
IDAF41109	PW-C55 D2021P4m T	•		6	820	550	660	0,27	91,00
IDAF40319	PW-C70 D2021P4 T		•	1	890	540	1020	0,49	95,80
IDAF40321	PW-C70 D2517P T		•	1	890	540	1020	0,49	96,00
IDAF40320	PW-C70P D2021P T		•	1	890	540	1020	0,49	96,80
IDAF40322	PW-C70P D2517P T		•	1	890	540	1020	0,49	98,00
IDAF40832	PW-C85 D2030P T		•	1	900	680	970	0,59	124,00
IDAF40827	PW-C85 D3515P T		•	1	1160	760	1100	0,97	121,00
IDAF40349	ABSOLUTE-C S2041P T		•	1	1260	800	1170	1,18	211,00
IDAF40350	ABSOLUTE-C S3521P T		•	1	1260	800	1170	1,18	204,80
IDAF40351	ABSOLUTE-C S5015P T		•	1	1260	800	1170	1,18	211,00
IDAF40932	ABSOLUTE-C S5022P		•	1	1260	800	1170	1,18	186,00
IDAF40352	BENZ-C H1811I P		•	1	610	610	730	0,27	50,40
IDAF40353	BENZ-C H2013PI P		•	1	700	750	870	0,46	73,00
IDAF40354	BENZ-C H2515PI P		•	1	700	750	870	0,46	82,80
IDAF40355	BENZ-C DL2515PI P		•	1	700	750	870	0,46	79,80
IDAF40356	BENZ-C L2216PI P		•	1	700	750	870	0,46	86,80
IDAF40357	BENZ-C L2021PI P		•	1	700	750	870	0,46	89,80
IDAF40358	BENZ-C DL2217PI P		•	1	700	750	870	0,46	87,30
IDAF40359	BENZ-C DL2021PI P		•	1	700	750	870	0,46	87,40
IDAF40947	BENZ-C L DL1230PI P		•	1	930	760	870	0,56	94,50
IDAF40794	DIESEL-C L2017P D		•	1	1160	760	1100	0,97	134,20
CDVE49715	FIRE BOX 30M		•	1	850	790	1090	0,73	119,50
CDVE49716	FIRE BOX 40M		•	1	850	790	1090	0,73	129,00
CDVE40027	FIRE BOX 40/350		•	1	850	790	1090	0,73	129,00

HIGH PRESSURE WHASHERS - HOT WATER

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm	m³	kg
IDAC40572	PW-H10 I1207AA M	•		6	650	500	700	0,22	49,20
IDAC40573	PW-H10 I1408AA M	•		6	650	500	700	0,22	52,00
IDAC40574	PW-H10P I1408A0 M		•	1	770	560	940	0,40	58,50
IDAC40680	PW-H28 I1308A M		•	1	910	730	1010	0,67	86,50
IDAC40683	PW-H28/4 I1308A M		•	1	910	730	1010	0,67	87,50
IDAC40681	PW-H28 D1309P M		•	1	910	730	1010	0,67	93,40
IDAC40684	PW-H28/4 D1309P M		•	1	910	730	1010	0,67	94,40
IDAC40682	PW-H28 D1713P T		•	1	910	730	1010	0,67	105,20
IDAC40685	PW-H28/4 D1713P T		•	1	910	730	1010	0,67	106,60
IDAC41124	PW-H28/4 D1310P4 M STAINLESS STEEL		•	1	1130	810	1140	0,94	98
IDAC41125	PW-H28/4 D1713P T STAINLESS STEEL		•	1	1130	810	1140	0,94	100
IDAC40868	PW-H50 D1310P4 M		•	1	1130	750	1110	0,94	120,00
IDAC40878	PW-H50/4 D1310P4 M		•	1	1130	750	1110	0,94	128,00
IDAC40869	PW-H50 D1012P4 M		•	1	1130	750	1110	0,94	122,00
IDAC40879	PW-H50/4 D1012P4 M		•	1	1130	750	1110	0,94	128,00
IDAC40870	PW-H50 D1813P4 T		•	1	1130	750	1110	0,94	132,20
IDAC40880	PW-H50/4 D1813P4 T		•	1	1130	750	1110	0,94	131,00
IDAC40871	PW-H50 D1915P4 T		•	1	1130	750	1110	0,94	137,60
IDAC40881	PW-H50/4 D1915P4 T		•	1	1130	750	1110	0,94	143,60
IDAC40872	PW-H50 D2017P4 T		•	1	1130	750	1110	0,94	159,20
IDAC40882	PW-H50/4 D2017P4 T		•	1	1130	750	1110	0,94	159,20
IDAC40873	PW-H50P D1310P4 M		•	1	1130	750	1110	0,94	118,00
IDAC40883	PW-H50P/4 D1310P4 M		•	1	1130	750	1110	0,94	122,20
IDAC40874	PW-H50P D1012P4 M		•	1	1130	750	1110	0,94	122,00
IDAC40884	PW-H50P/4 D1012P4 M		•	1	1130	750	1110	0,94	128,00
IDAC40875	PW-H50P D1813P4 T		•	1	1130	750	1110	0,94	132,00
IDAC40885	PW-H50P/4 D1813P4 T		•	1	1130	750	1110	0,94	131,00
IDAC40876	PW-H50P D1915P4 T		•	1	1130	750	1110	0,94	142,40
IDAC40886	PW-H50P/4 D1915P4 T		•	1	1130	750	1110	0,94	143,60
IDAC40877	PW-H50P D2017P4 T		•	1	1130	750	1110	0,94	162,80
IDAC40887	PW-H50P/4 D2017P4 T		•	1	1130	750	1110	0,94	162,80
IDAC40361	PW-H90 D1521P T		•	1	1430	850	1070	1,30	195,00
IDAC40362	PW-H90 D1921P T		•	1	1430	850	1070	1,30	202,00
IDAC40888	PW-H100 D2515P T		•	1	1130	750	1110	0,94	174,20
IDAC40894	PW-H100/4 D2515P T		•	1	1130	750	1110	0,94	178,00
IDAC40889	PW-H100 D1721P T		•	1	1130	750	1110	0,94	186,00
IDAC40895	PW-H100/4 D1721P T		•	1	1130	750	1110	0,94	174,20
IDAC40890	PW-H100 D2021P T		•	1	1130	750	1110	0,94	181,00
IDAC40896	PW-H100/4 D2021P T		•	1	1130	750	1110	0,94	184,40
IDAC40891	PW-H100P D2515P T		•	1	1130	750	1110	0,94	176,40
IDAC40897	PW-H100/4P D2515P T		•	1	1130	750	1110	0,94	178,00
IDAC40892	PW-H100P D1721P T		•	1	1130	750	1110	0,94	186,00
IDAC40898	PW-H100/4P D1721P T		•	1	1130	750	1110	0,94	187,60
IDAC40893	PW-H100P D2021P T		•	1	1130	750	1110	0,94	183,80
IDAC40899	PW-H100/4P D2021P T		•	1	1130	750	1110	0,94	183,80

HIGH PRESSURE WHASHERS - HOT WATER

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm		
IDAC41126	PW-H100P D1915P T STAINLESS STEEL		•	1	1200	850	1100	1,12	167,90
IDAC41127	PW-H100P D2017P T STAINLESS STEEL		•	1	1200	850	1100	1,12	190
IDAC41128	PW-H100P D1721P T STAINLESS STEEL		•	1	1200	850	1100	1,12	180
IDAC41129	PW-H100P D2021P T STAINLESS STEEL		•	1	1200	850	1100	1,12	208
IDAC41130	PW-H100P D2515P T STAINLESS STEEL		•	1	1200	850	1100	1,12	208
IDAC41248	PW-H100HT D2015P T		•	1	1200	850	1100	1,12	160,00
IDAC41252	PW-H100/4HT D2015P T		•	1	1200	850	1100	1,12	160,00
IDAC49714	TWOCK-H D1341PI T		•	1	1600	1000	1660	2,66	498,60
IDAC49713	TWOCK-H D2030PI T		•	1	1600	1000	1660	2,66	532,00
IDAC49710	SKID FUEGO-H L1818PI P		•	1	1200	940	1350	1,52	266,00

HIGH PRESSURE WHASHERS - STATIONARY

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm	m³	kg
PPEL40079	MLC-C D1310P M	•		4	550	620	430	0,15	40,50
PPEL40081	MLC-C D1813P T	•		4	550	620	430	0,15	42,50
PPEL40083	MLC-C D1915P T	•		4	550	620	430	0,15	47,50
PPEL40085	MLC-C D2117P T	•		4	550	620	430	0,15	52,50
IDAF40486	ML CMP D1310P M		•	1	740	410	730	0,22	55,60
IDAF40535	ML CMP D1813P T		•	1	740	410	730	0,22	56,50
IDAF40536	ML CMP D1915P T		•	1	740	410	730	0,22	63,00
IDAF40537	ML CMP D2117P T		•	1	740	410	730	0,22	73,50
IDAF40366	ML-C D1515PI T		•	1	900	520	720	0,34	93,00
IDAF40367	ML-C D1521PI T		•	1	900	520	720	0,34	98,00
IDAF40368	ML-C D1618PI T		•	1	900	520	720	0,34	98,50
IDAF40369	ML-C D2015PI T		•	1	900	520	720	0,34	98,20
IDAF40370	SML-C D1030P T		•	1	1110	750	1070	0,89	80,00
IDAF40371	SML-C D1530PI T		•	1	1110	750	1070	0,89	88,00
IDAF40372	SML-C D2021PI T		•	1	1110	750	1070	0,89	136,50
IDAC48036	MUR. IWD-H D1012PI M		•	1	1400	650	1030	0,94	170,00
IDAC48037	MUR. IWD-H D1615PI T		•	1	1400	650	1030	0,94	207,80
IDAC48038	MUR. IWD-H D1618PI T		•	1	1400	650	1030	0,94	209,00
IDAC48039	MUR. IWD-H D2015PI T		•	1	1400	650	1030	0,94	207,80
IDAC48040	MUR. IWD-H D1521PI T		•	1	1400	650	1030	0,94	207,80
IDAC48041	MUR. IWD-H D2021PI T		•	1	1400	650	1030	0,94	230,00

ELECTRICALLY HEATED BOILER

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm	m³	kg
IDAC41288	PW-E100 D1404P12 T			1	1200	850	1100	1,12	130
IDAC41289	PW-E100 D1404P24 T			1	1200	850	1100	1,12	130
IDAC41121	PW-E100 D1710P12 T		•	1	1200	850	1100	1,12	130,4
IDAC41122	PW-E100 D1712P24 T		•	1	1200	850	1100	1,12	130,4
IDAC41123	PW-E100 D1712P36 T		•	1	1200	850	1100	1,12	130,4
IDAC41131	PW-E100 D1710P12 T		•	1	1200	850	1050	1,12	154,2
IDAC41132	PW-E100 D1712P24 T		•	1	1200	850	1050	1,12	154,2
IDAC41133	PW-E100 D1712P36 T		•	1	1200	850	1050	1,12	154,2
IDAC41134	IWD-E D1710P12 T		•	1	1400	650	1050	0,96	170
IDAC41135	IWD-E D1712P24 T		•	1	1400	650	1050	0,96	171
IDAC41136	IWD-E D1712P36 T		•	1	1400	650	1050	0,96	176

HOT WATER WEED REMOVAL SYSTEM

Code	Model	Carton	Pallet + carton	Dimension			Volume	Weight
				L mm	W mm	H mm	m³	kg
GNVA40051	GREEN JT 1010 M		•	1050	890	1160	1,08	161,20
GNVA40078	GREEN JET 7510 M		•	1050	890	1160	1,08	180

STEAM GENERATORS

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm		
GNVA40036	SG-8 S 4507 M	•		16	540	360	430	0,08	9,10
GNVA40037	SG-10 S 5007 M	•		16	540	360	430	0,08	10,00
GNVA40038	SG-10 S 6008 M	•		16	540	360	430	0,08	12,00
GNVA40016	SG-20 S 5008 M	•		12	570	400	650	0,15	18,20
GNVA40017	SG-30 S 5510 M	•		12	570	400	650	0,15	18,94
GNVA40020	SG-45 5008 M	•		4	560	390	850	0,19	23,77
GNVA40043	SG-48 S 8010M		•	1	800	600	710	0,34	42
GNVA40067	SG-50 S 5008 M		•	1	890	540	1020	0,49	58
GNVA40068	SG-50 S 5010 M		•	1	890	540	1020	0,49	58
GNVA40069	SG-50 S 5014 T		•	1	890	540	1020	0,49	62
GNVA40047	SG-55 8025 T		•	1	855	615	1150	0,60	64,50
GNVA40042	SG-70 9536 T		•	1	1320	889	1130	1,32	185,50

PURE WATER CLEANING SYSTEM

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm		
APTA40000	HPO		•	1	1300	590	660	0,51	44,60
APTA40016	HPB		•	1	1300	590	660	0,51	70,60
APTA40015	HPE		•	1	1300	590	660	0,51	66,00
APTA40012	HPG		•	1	1300	590	1220	0,94	67,20

ELECTRIC VEHICLES

Code	Model	Carton	Pallet + carton	N°/ pallet	Dimension			Volume	Weight
					L mm	W mm	H mm		
ELVC42020	TIGER 250G II		•	1	1250	700	880	0,77	122,80
ELVC40000	TIGER 250 BC		•	1	1250	700	880	0,77	122,80
ELVC42022	TIGER 500S II		•	1	1450	830	970	1,17	172,00
ELVC41890	TIGER 1000		•	1	1450	830	970	1,17	212,00

[illegible]

[illegible]

[illegible]

Ip Cleaning Srl
Viale Treviso 63 - 30026 Summaga di Portogruaro (VE) - Italy

Tel. +39 0421 205511 - Fax +39 0421 204227
info@ipcworldwide.com - www.ipcworldwide.com



IPC