



PNEUMAX



PROCESS AUTOMATION TECHNOLOGY

CATALOGUE

Process automation technology Catalogue

Stainless steel and aluminum
components and systems:
valves and solenoid valves, components for
air treatment and accessories
for applications in the process industry



Pneumax

Smart Technologies and Human Competence


Founded in 1976, **Pneumax S.p.A.** is today one of the leading, international manufacturers of components and systems for automation. It is at the fore front of a group comprised of 25 companies, with over 730 employees worldwide.

Ongoing investment in research and development has allowed **Pneumax** to continually expand its range of standard products and customised solutions, adding to the well-established pneumatic technology, a range of electric drive actuators and fluid control components.

The desire to provide the service and specific application skills has led to the creation of 3 business units, dedicated to Industrial Automation, Process Automation and Automotive sector.



**Pneumatic
technology**



**Electric
actuation**



**Fluid
control**




INDUSTRIAL AUTOMATION

PROCESS AUTOMATION TECHNOLOGY



AUTOMOTIVE

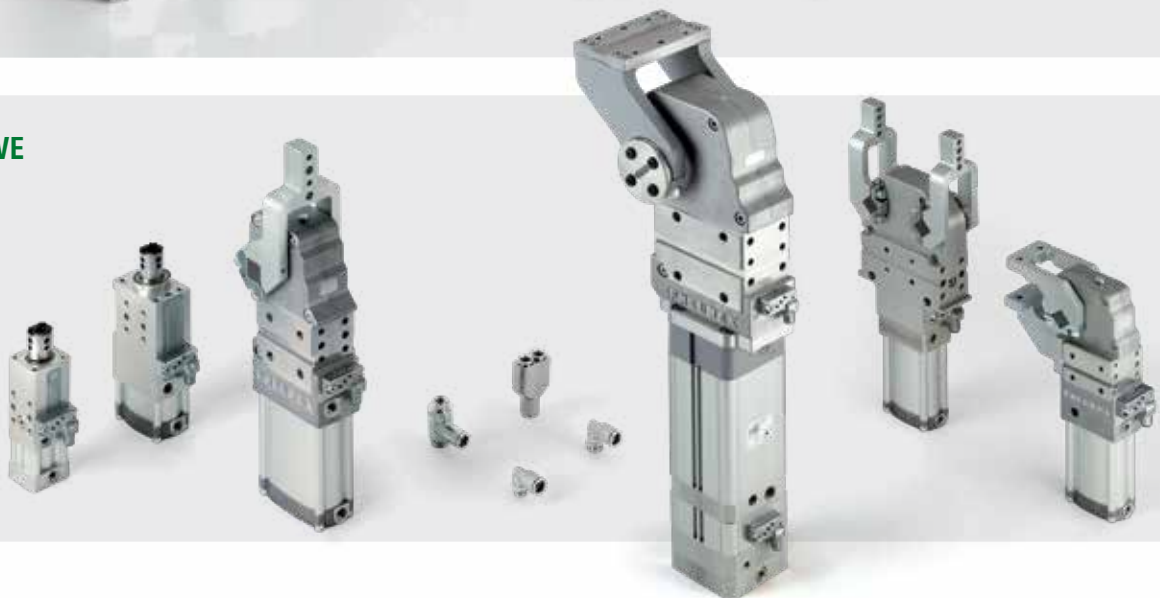

The ability to provide various technologies and solutions for each of our clients applications is the main objective of the Company, making Pneumax the ideal strategic partner.

What defines us is the “**Pneumax Business Attitude**”, born out of the capacity to combine industry sectors, technology and our application skills via the clients collaboration with our business and product specialists. The most effective solutions are studied around the TCO (Total cost of ownership) related to the entire life cycle of the product.

This represents the main Pneumax distinguishing factor.



Process automation technology

A wide range of standard components
and customized solutions

Pneumax S.p.A. offer a wide range of engineered solutions and components for the process automation industry. These have been designed to meet the latest industry standards and customer specifications. Long term performance and reliability are never compromised at Pneumax, a trustworthy partner to achieve full customer satisfaction for severe service and harsh environmental applications.

Pneumax products are designed and engineered in compliance with the latest international standards, following sophisticated and reliable prototyping as well as rigorous testing procedures to provide efficient and cost effective solutions. The combination of the latest technology and manufacturing experience allow Pneumax to add more products to their extensive portfolio with a wide range of components and services.



CUSTOMISED SOLUTIONS

Manifold and integrated systems

STANDARD PRODUCTS

Stainless steel and aluminium components





Application sectors

- Petrochemical
- Oil & gas
- Power generation
- Water treatment







Index 1/2

Process automation technology

Air service units series Airplus - aluminium

General.....	9
Filter.....	10
Filter regulator.....	15
Regulator.....	21

Air service units series 1700 Steel line

General.....	27
Regulator - Filter - Filter regulator size 2.....	28
Regulator - Filter - Filter regulator size 3.....	32
Regulator - Filter - Filter regulator size 4.....	36

Volume booster series Flowplus

General.....	40
Volume booster.....	41

Valves 1/4" NPT series Steel line

General.....	48
Valves 3/2, 1/4" NPT.....	50
Valves 5/2 - 5/3, 1/4" NPT.....	55

Solenoid valves 1/4" NPT series Steel line

General.....	60
Solenoid valves 3/2, 1/4" NPT.....	61
Solenoid valves 5/2, 1/4" NPT.....	62

Solenoid valves 1/4" NPT series Steel line - For safe area with IP66 stainless steel housing

General.....	63
Solenoid valves 3/2 - 5/2, 1/4" NPT.....	64

Solenoid valves 1/4" NPT series Steel line - IP66 Exd Explosion protection

General.....	68
Solenoid valves 3/2 - 5/2, 1/4" NPT.....	69

Solenoid valves 1/4" NPT series Steel line - Intrinsically safe Exia

General.....	73
Solenoid valves 3/2 - 5/2, 1/4" NPT.....	74

Accessories for series Steel line valves.....

	78
--	----

Valves 1/2" NPT series Steel line

General.....	82
Valves 3/2, 1/2" NPT.....	83
Valves 5/2 - 5/3, 1/2" NPT.....	86

Solenoid valves 1/2" NPT series Steel line - For safe area with IP66 stainless steel housing

General.....	88
Solenoid valves 3/2 - 5/2, 1/2" NPT.....	89



Index 2/2

Process automation technology

Solenoid valves 1/2" NPT series Steel line - IP66 Exd Explosion protection	
General.....	92
Solenoid valves 3/2 - 5/2, 1/2" NPT.....	93
Solenoid valves 1/2" NPT series Steel line - Intrinsically safe Exia	
General.....	96
Solenoid valves 3/2 - 5/2, 1/2" NPT.....	97
Accessories for series Steel line valves.....	100
Pneumatic actuated valves series SA - aluminium	
General.....	106
Pneumatic actuated valves 3/2 - 5/2, 1/4" NPT.....	107
Valves 3/2 - 5/2, 1/4" NPT push button version.....	109
Pneumatic actuated valves 3/2 - 5/2, 1/2" NPT.....	112
Pneumatic actuated valves 3/2 - 5/2, 1" NPT.....	114
Accessories for series SA valves - aluminium.....	116
Valves and Solenoid valves poppet system 1/2" NPT - 3/4" NPT - 1" NPT series SA - aluminium	
General.....	119
Valves and Solenoid valves poppet system 3/2, 1/2" NPT - 3/4" NPT - 1" NPT.....	120
Valves and Solenoid valves poppet system 1 1/2" NPT series SA - aluminium	
General.....	121
Valves and Solenoid valves poppet system 3/2, 1 1/2" NPT.....	122
Valves and Solenoid valves with "Namura" interface series 514	
General.....	123
Valves and Solenoid valves with "Namura" interface G1/4" - 1/4" NPT.....	124
Valves and Solenoid valves with "Namura" interface series 515	
General.....	131
Valves and Solenoid valves with "Namura" interface G1/4" - 1/4" NPT.....	132
Solenoid coils and accessories series 514 - 515.....	136

Air service units series Airplus - aluminium



- **Modular system**
- **Compact and linear design**
- **Maximum flexibility and reliability**
- **Plug-n-play connection thru couplig flanges**
- **Available in 3 sizes with connections from 1/4" to 1"**
- **ATEX certification (II 2GD)**

Construction and working characteristics

Pneumax AIRPLUS air treatment units have been designed and developed to increase reliability, modularity and user-friendly operation and installation.

This range of filters, regulators and filter regulators are constructed using a light weight aluminum body which ensures strength whilst at the same time making them suitable for a wide range of applications in temperatures from -40 to +80°C.

The filters operated in pressures up to 12 bar with filtration available from 5 to 50 microns.

Pneumax Airplus air treatment units can be integrated with safety elements that comply with EN-ISO 13849-1 and CE marking according to EU Machinery Directive, Annex V.

AIRPLUS air treatment units are available in 3 different sizes, with connections from 1/4 "to 1" BSP and NPT and flow rates performances up to 8000NI/min.

Instruction for installation and operation

The FRL unit should be installed as close as possible to the 'point of use'. The air flow direction should follow the direction indicated on the individual modules, following threaded connections (IN and OUT). Units fitted with a bowl should be mounted vertically with the bowl facing down.

All units should be operated in accordance to the specified pressure and temperature ranges and should never exceed 0.2 Hz max frequency whether pulsing inlet pressure occur.

Fittings shall be mounted according to the maximum torque specified.

Maintenance

To carry out maintenance which involves the removal of the caps or supports above the body and where the retaining screws are present, it is necessary to remove the cover plates beforehand. If you attempt to dis-assemble the caps or supports without removing the cover plates and retaining screws, the integrity and function of the device could be compromised.

Bowls, plugs and supports are assembled with a bayonet type mechanism. In order to remove them, rotate anti-clockwise until the mechanical stop is reached and then remove from the body (for the bowls firstly press down the green safety button).

Bowls and transparent parts can be cleaned with water and neutral soap. Do not use solvents or alcohol.

Filtering elements (present in filters and filter regulators) made of HDPE can be regenerated by washing and blowing them.

In order to remove them it is necessary to remove the bowl unscrew the filter element and replace it with a new one or clean it.

Lubricator oil recharge might be performed during normal operation (apart Size 1) depressurizing the bowl thru dedicated plug.



Pneumax suggest refilling oil directly into the bowl.

No others maintenance operation shall be carried out by client itself, due to complexity of the assembly and Pneumax dedicated post-maintenance testing activities.

Filters (F)



- ▶ Double filter action: air flow centrifugation and filter element
- ▶ Available in 3 sizes with flow rates up to 14000 NI/min and connections from 1/4" to 1"
- ▶ Filtering cartridge made of HDPE available in three different filtration grades (5µm, 20µm, 50µm)
- ▶ Filter cartridge can be regenerated by washing / blowing it or replaced
- ▶ Bowl assembly via bayonet type quick coupling mechanism with safety button
- ▶ Semi-automatic or automatic drain
- ▶ Atex certification (II 2GD)
- ▶ Inlet pressures up to 20 bar



Note

In order to ensure that any fluid discharged by the auto drain assembly is adequately drained away, it is recommended you use a 6mm fitting and tube.

Technical characteristics


Size		Size 2	Size 3	Size 4
Body and connections type		Aluminium body, integrated aluminium connections		
Protection and bowl type		Metal protection - PC bowl Metal protection - PA bowl Metal bowl (blind metal bowl)		
IN / OUT connections	P and L version	G3/8" - 1/4" NPT	G1/2" - 1/2" NPT	G1" - 1" NPT
Assembly configuration		Stand alone Panel mounted		
Assembly positions		Vertical ±5°		
Filter pore size		5 µm 20 µm 50 µm		
Bowl capacity		34 cm³	68 cm³	90 cm³
Condensation drain		Semi-automatic Automatic		
Max. fittings torque IN / OUT connections		G1/4" metal: 20Nm G3/8" metal: 25Nm	G3/8" metal: 25Nm G1/2" metal: 30Nm	G1" metal: 35Nm

Operational characteristics

Size	Size 2	Size 3	Size 4	Size 2	Size 3	Size 4
Condensation drain	Semi-automatic			Automatic		
Maximum working pressure	20 bar (only with body and metal bowl)			16 bar (only with body and metal bowl)		
Minimum working pressure	0,5 bar			0,5 bar		
Working temperature	-5°C ... +50°C (technopolymer bowl) -30°C ... +80°C (only for P version and metal bowl) -40°C ... +80°C (only for L version and metal bowl)			-5°C ... +50°C		

Weights				
	Size	Size 2	Size 3	Size 4
Aluminium body version, aluminium bowl protection and technopolymer bowl		344 g	514 g	1306 g
Aluminium body version and aluminium bowl		389 g	587 g	1330 g


Materials

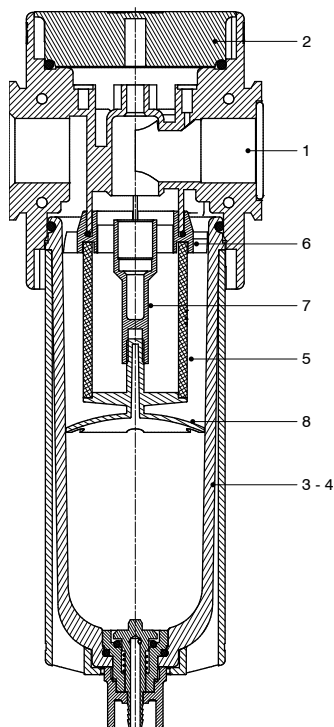


Filter		
1	Body	Polyamide Die-cast aluminium
2	Upper plug	Polyamide
3	Technopolymer bowl	Polycarbonate Polyamide
4	Metal bowl Bowl protection	Die-cast aluminium Die-cast aluminium
5	Filtering element	Polyethylene
6	Baffle	Acetal resin
7	Spool support	Acetal resin
8	Filtering element support	Acetal resin

Design

Size 2 - Size 3
Protection / Metal bowl

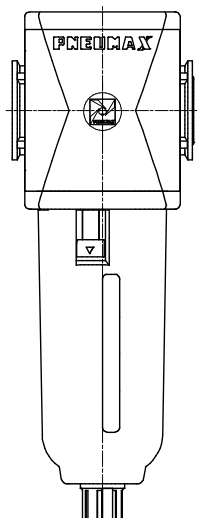

Size 4
All versions

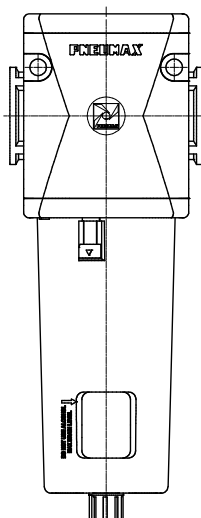



Order codes

P 17 3B F B S T

Version

P : Aluminum body
L : Aluminum body, low temperature

Size and connections

2B : Size 2 - G3/8"
2C : Size 2 - 1/4" NPT
3B : Size 3 - G1/2"
3C : Size 3 - 1/2" NPT
4B : Size 4 - G1"
4C : Size 4 - 1" NPT

Filter pore size

A : 5 μ m
B : 20 μ m
C : 50 μ m

Condensation drain

: Semi-automatic drain
S : Automatic drain

Bowl options


P : Metal protection - PC bowl
R : Metal protection - PA bowl
T : Metal bowl

Example : P173BFBST : Size 3 filter G1/2" 20 μ m, automatic drain and metal bowl

Flow charts

Flow rate chart


Size 2

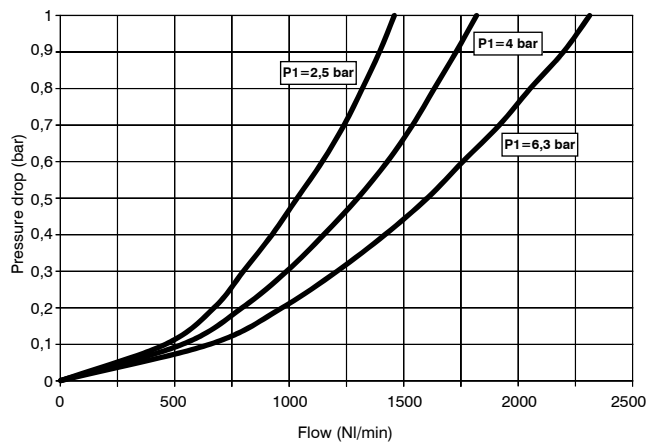


Flow rate chart

Size 3

Size 4

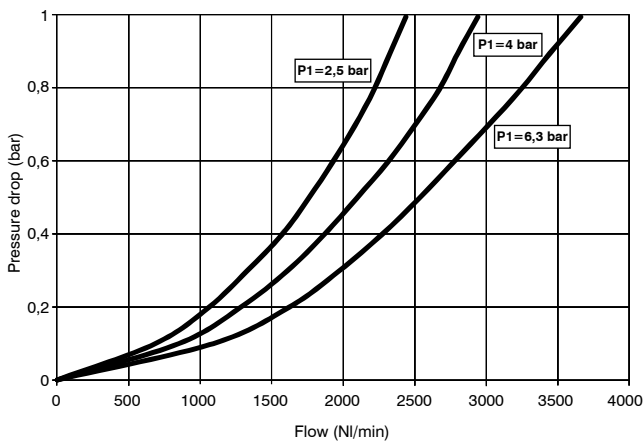


Flow rate chart

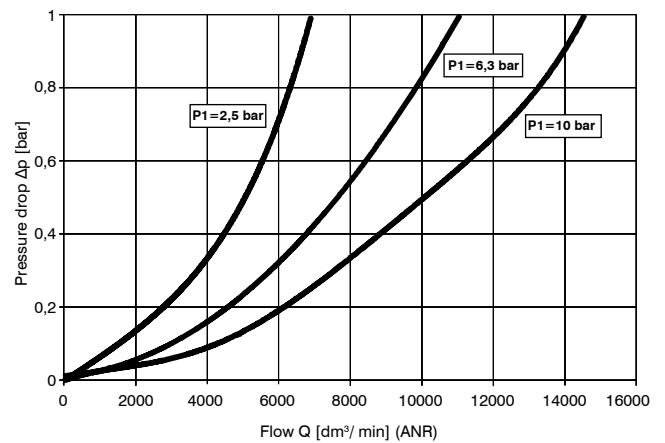


Dimensions

Semi-automatic drain version

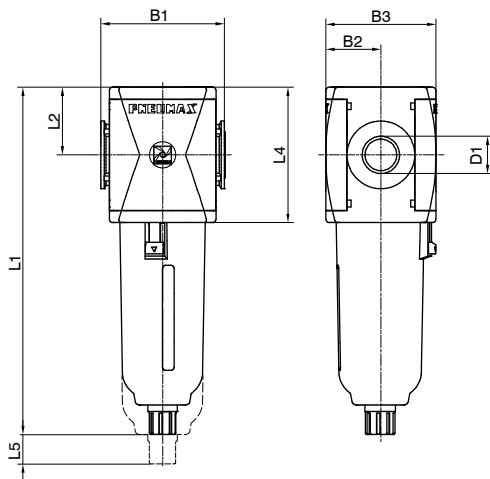


Fixing holes dimension detail
(only for size 4)

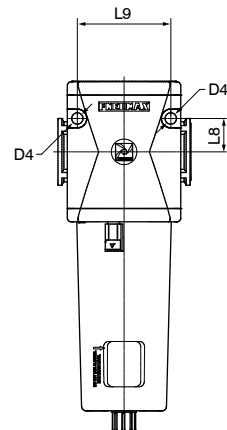


Model	B1	B2	B3	D1	D4	L1 - Bowl material		L2	L4	L5	L8	L9
						Technopolymer	Metal					
#172..	62	28,5	57	G3/8" 1/4" NPT	/	169,1	171,5	34	68	50	/	/
#173..	73	32,5	65	G1/2" 1/2" NPT	/	207,2	209,5	40	80	65	/	/
#174..	99	44	88	G1" 1" NPT	8,5	262	264,5	52,5	105	103	25	70

Variable dimensions

Semi-automatic drain version

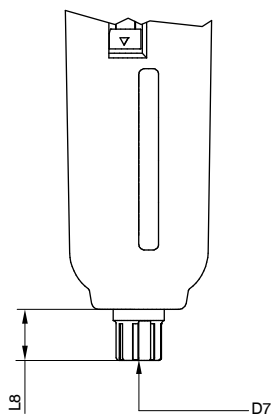

Automatic drain version

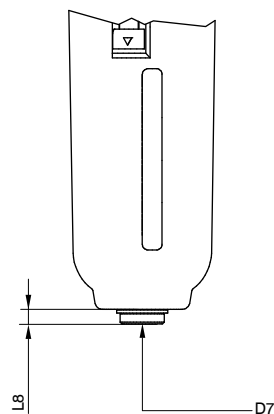


Model	L8 - Bowl material		D7
	Technopolymer	Metal	
Semi-automatic drain	15,7	18	Plastic hose connector
Automatic drain	2	4,5	G1/8"



Filter regulators (E)



- ▶ Filter - diaphragm pressure regulator with relieving
- ▶ Available in 3 sizes with flow rates up to 8000 NI/min and connections from 1/4" to 1"
- ▶ Low hysteresis rolling diaphragm and balanced spool
- ▶ Filtering element made of HDPE available in 3 different filtration grades (5µm, 20µm and 50µm)
- ▶ Bowl assembly via bayonet type quick coupling mechanism with safety button
- ▶ Semi-automatic or automatic drain
- ▶ Available in four pressure ranges up to 12 bar
- ▶ Fitted with panel mounting locking ring
- ▶ Atex certification (II 2GD)
- ▶ Inlet pressures up to 20 bar

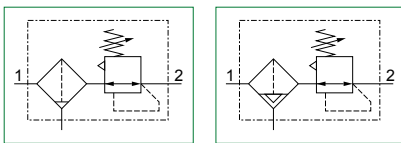

Note


For installations where a more accurate and constant pressure is required, the unit should be installed as close as possible to the point of use. In order to ensure that any fluid discharged by the auto drain assembly is adequately drained away, it is recommended you use a 6mm fitting and tube.

Technical characteristics				
Size		Size 2	Size 3	Size 4
Body and connections type		Aluminium body, integrated aluminium connections		
Protection and bowl type		Metal protection - PC bowl Metal protection - PA bowl Metal bowl (blind metal bowl)		
IN / OUT connections	P and L version	G3/8" - 1/4" NPT	G1/2" - 1/2" NPT	G1" - 1" NPT
Assembly configuration		Stand alone Panel mounting With fixing bracket / Panel mounted		
Assembly positions		Vertical ±5°		
Filter pore size		5 µm 20 µm 50 µm		
Pressure range		0-2 bar 0-4 bar 0-8 bar 0-12 bar		
Bowl capacity		34 cm³	68 cm³	90 cm³
Condensation drain		Semi-automatic Automatic		
Regulation		Manual push and lock with pressure Manual lockable with accessories		
Pressure measurement		G1/8" - 1/8" NPT pressure gauge connection port (only for versions with IN / OUT NPT connections)		
Max. fittings torque IN / OUT connections		G3/8" metal: 25Nm	G1/2" metal: 30Nm	G1" metal: 35Nm
Max. fitting torque pressure gauge connection port		G1/8" metal: 15Nm		

Operational characteristics						
Size	Size 2	Size 3	Size 4	Size 2	Size 3	Size 4
Condensation drain	Semi-automatic			Automatic		
Maximum working pressure	20 bar (only with body and metal bowl)			16 bar (only with body and metal bowl)		
Minimum working pressure	0,5 bar			0,5 bar		
Working temperature	-5°C ... +50°C (technopolymer bowl) -30°C ... +80°C (only for P version and metal bowl) -40°C ... +80°C (only for L version and metal bowl)			-5°C ... +50°C		

Weights				
	Size	Size 2	Size 3	Size 4
Aluminium body version, aluminium bowl protection and technopolymer bowl		510 g	730 g	1600 g
Aluminium body version and aluminium bowl		560 g	790 g	1620 g


Materials

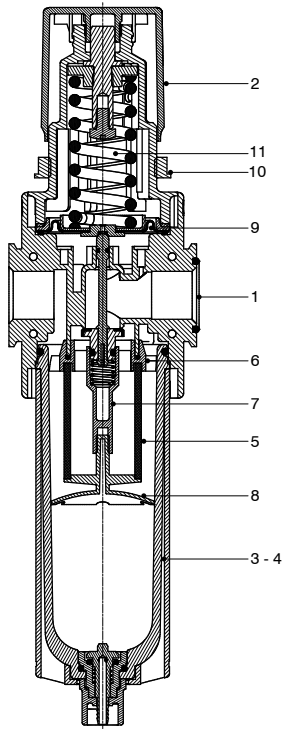


Filter regulator		
1	Body	Die-cast aluminium
2	Adjusting knob	Polyamide
3	Technopolymer bowl	Polycarbonate Polyamide
4	Metal bowl Bowl protection	Die-cast aluminium Die-cast aluminium
5	Filtering element	Polyethylene
6	Baffle	Acetal resin
7	Spool support	Acetal resin
8	Filtering element support	Acetal resin
9	Diaphragm	NBR
10	Panel mounting locking ring	Polyamide
11	Adjusting spring	Steel

Design

Size 2 - Size 3
Protection / Metal bowl

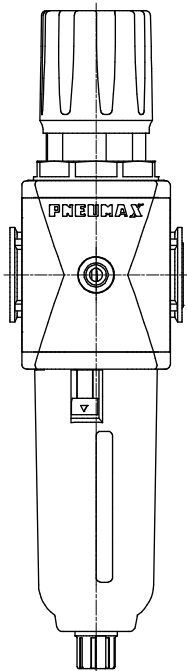

Size 4
All versions

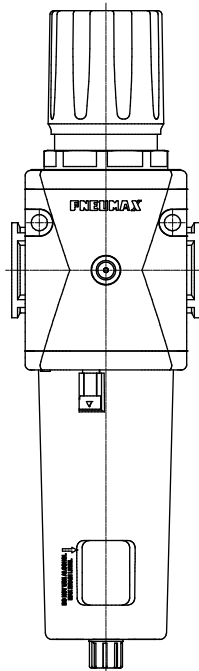




Order codes

	P	17	3B	E	B	D	S			T
Version										
P : Aluminum body										
L : Aluminum body, low temperature										
Size and connections										
2B : Size 2 - G3/8"										
2C : Size 2 - 1/4" NPT										
3B : Size 3 - G1/2"										
3C : Size 3 - 1/2" NPT										
4B : Size 4 - G1"										
4C : Size 4 - 1" NPT										
Filter pore size										
A : 5 µm										
B : 20 µm										
C : 50 µm										
Pressure range										
A : 0 - 2 bar										
B : 0 - 4 bar										
C : 0 - 8 bar										
D : 0 - 12 bar										
Condensation drain										
: Semi-automatic drain										
S : Automatic drain										
Relieving options										
: With relieving										
L : Without relieving										
Knob options										
: Non-lockable version										
K : Lockable version										
U : Lockable version with universal key										
Bowl options										
P : Metal protection - PC bowl										
R : Metal protection - PA bowl										
T : Metal bowl										


Example : P173BEBDST : Size 3 filter regulator G1/2" 20 µm 0 - 12 bar, automatic drain and metal bowl

Flow charts


Flow rate chart

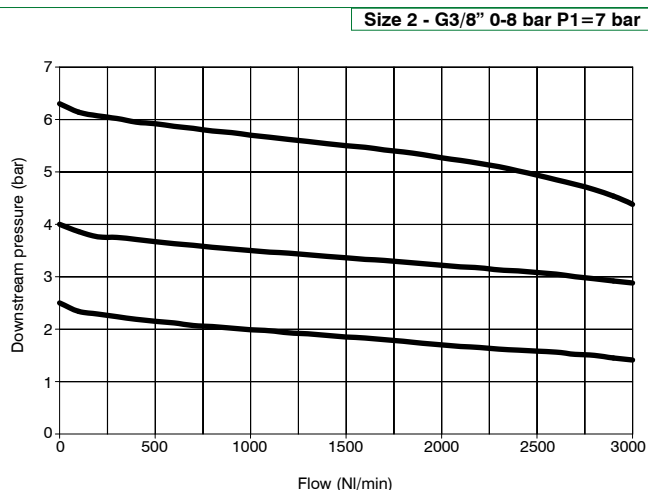


Adjustment characteristic

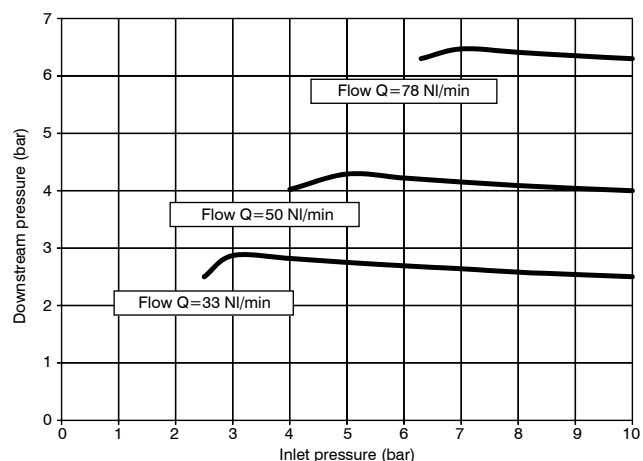


Flow rate chart

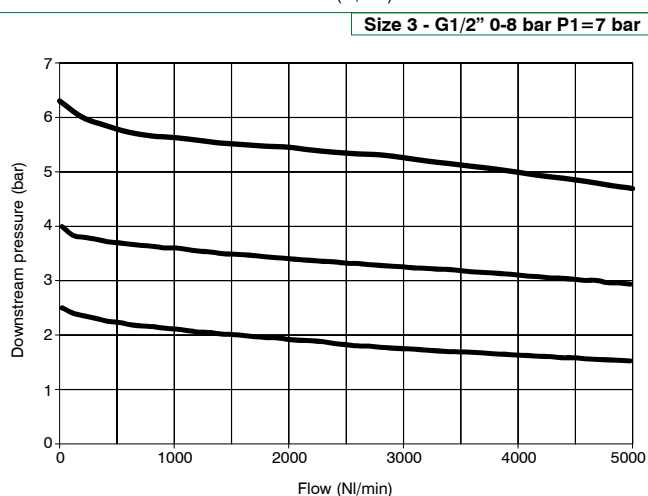


Adjustment characteristic

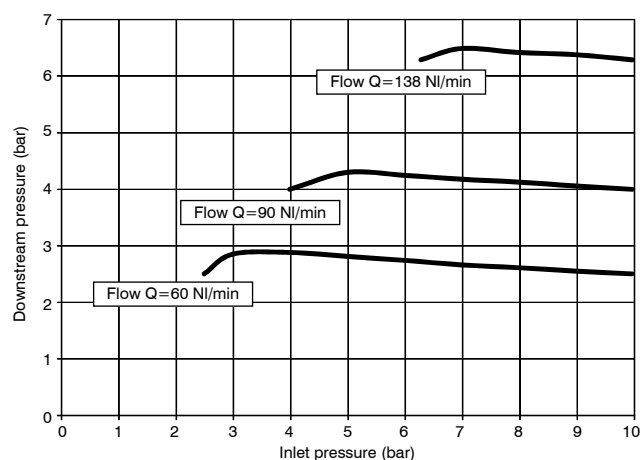


Flow rate chart

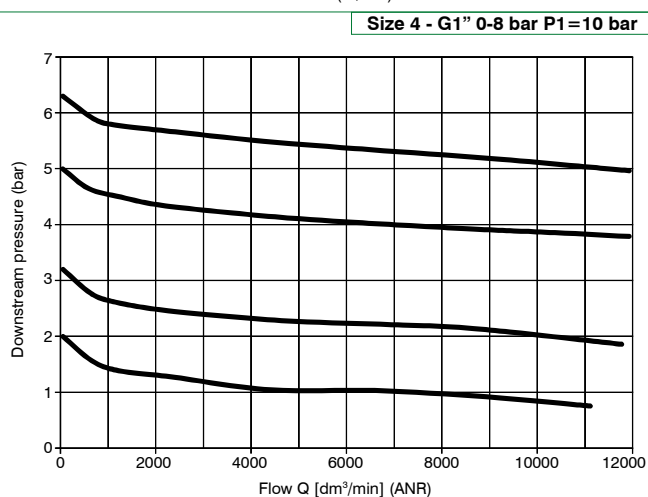

Adjustment characteristic

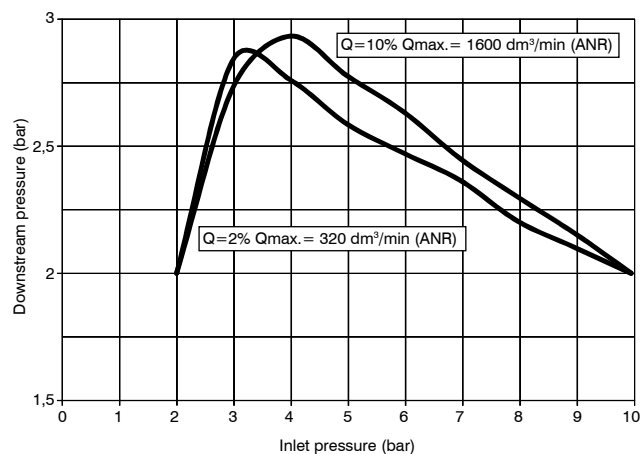

Dimensions

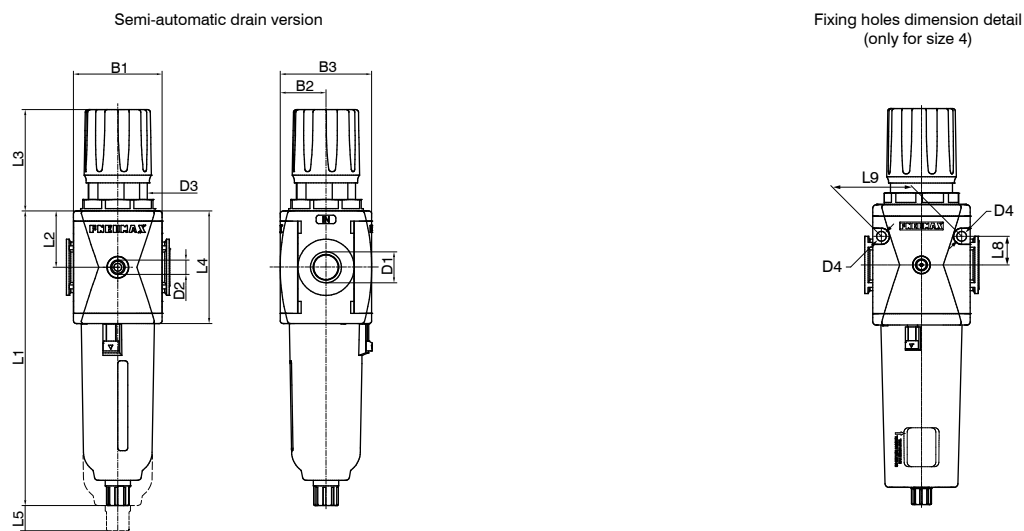

Model	B1	B2	B3	D1	D2	D3	D4	L1 - Bowl material		L2	L3	L4	L5	L8	L9
								Technopolymer	Metal						
#172..	62	28,5	57	G3/8" 1/4" NPT	G1/8" 1/8" NPT	M42x1,5	/	169,1	171,5	34	71,8	68	50	/	/
#173..	73	32,5	65	G1/2" 1/2" NPT	G1/8" 1/8" NPT	M42x1,5	/	207,2	209,5	40	72,8	80	65	/	/
#174..	99	44	88	G1" 1" NPT	G1/8" 1/8" NPT	M54x1,5	8,5	262	264,5	52,5	87,5	105	103	25	70

Variable dimensions




Model	L8 - Bowl material		D7
	Technopolymer	Metal	
Semi-automatic drain	15,7	18	Plastic hose connector
Automatic drain	2	4,5	G1/8"

Fixing bracket

T172 50

Size

T172 : Size 2 - Size 3

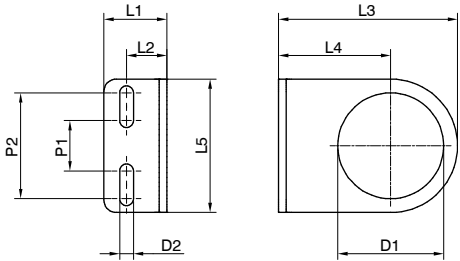

Model	L1	L2	L3	L4	L5	D1	D2	P1	P2
T17250	25	16	71	44,5	53	42	5,5	20	42



Regulators (R)



- ▶ Diaphragm pressure regulator with relieving
- ▶ Available in 3 sizes with flow rates up to 8000 NI/min and connections from 1/4" to 1"
- ▶ Low hysteresis rolling diaphragm and balanced spool
- ▶ Available in four pressure ranges up to 12 bar
- ▶ Fitted with panel mounting locking ring
- ▶ Atex certification (II 2GD)
- ▶ Inlet pressures up to 20 bar

**Note**

For installations where a more accurate and constant pressure is required, the unit should be installed as close as possible to the point of use.


Technical characteristics				
Size		Size 2	Size 3	Size 4
Body and connections type		Aluminium body, integrated aluminium connections		
IN / OUT connections	P and L version	G3/8" - 1/4" NPT	G1/2" - 1/2" NPT	G1" - 1" NPT
Assembly configuration		Stand alone Panel mounting With fixing bracket / Panel mounted		
Assembly positions		Indifferent		
Pressure range		0-2 bar 0-4 bar 0-8 bar 0-12 bar		
Regulation		Manual push and lock with pressure Manual lockable with accessories		
Pressure measurement		G1/8" - 1/8" NPT pressure gauge connection port (only for versions with IN / OUT NPT connections)		
Max. fittings torque IN / OUT connections		G3/8" metal: 25Nm	G1/2" metal: 30Nm	G1" metal: 35Nm
Max. fitting torque pressure gauge connection port		G1/8" metal: 15Nm		

Operational characteristics				
Size		Size 2	Size 3	Size 4
Maximum working pressure		20 bar		
Minimum working pressure		0.5 bar		
Working temperature		-30°C ... +80°C (only for P version) -40°C ... +80°C (only for L version)		

Weights

	Size	Size 2	Size 3	Size 4
Aluminium body version		400 g	560 g	1260 g

Materials

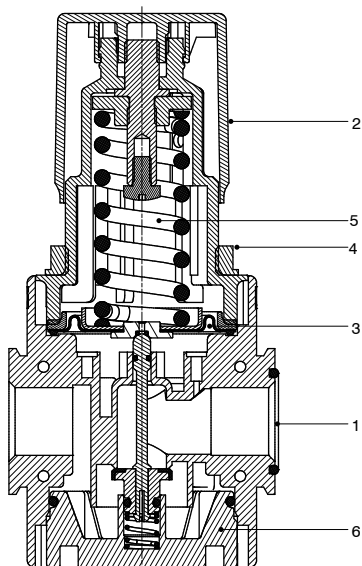


Regulator


1	Body	Polyamide Die-cast aluminium
2	Adjusting knob	Polyamide
3	Diaphragm	NBR
4	Panel mounting locking ring	Polyamide
5	Adjusting spring	Steel
6	Rear end cap	Polyamide / Die-cast aluminium

Design

Size 2 - Size 3

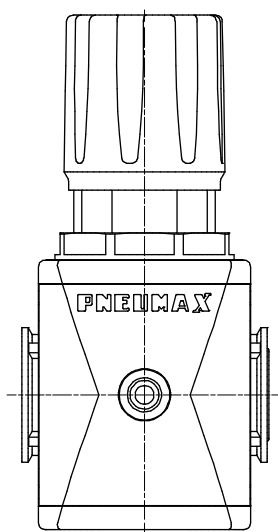

Size 4
All versions

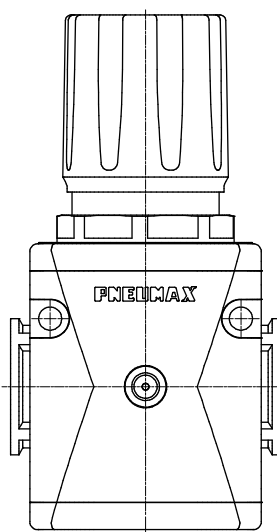



Order codes


	P	17	3B	R	D		
Version							
P : Aluminum body							
L : Aluminum body, low temperature							
Size and connections							
2B : Size 2 - G3/8"							
2C : Size 2 - 1/4" NPT							
3B : Size 3 - G1/2"							
3C : Size 3 - 1/2" NPT							
4B : Size 4 - G1"							
4C : Size 4 - 1" NPT							
Pressure range							
A : 0 - 2 bar							
B : 0 - 4 bar							
C : 0 - 8 bar							
D : 0 - 12 bar							
Relieving options							
: With relieving							
L : Without relieving							
Knob options							
: Non-lockable version							
K : Lockable version							
U : Lockable version with universal key							

Example : P173BRD : Size 3 regulator G1/2" 0 - 12 bar


Flow charts

Flow rate chart

Size 2 - G3/8" 0-8 bar P1=7 bar

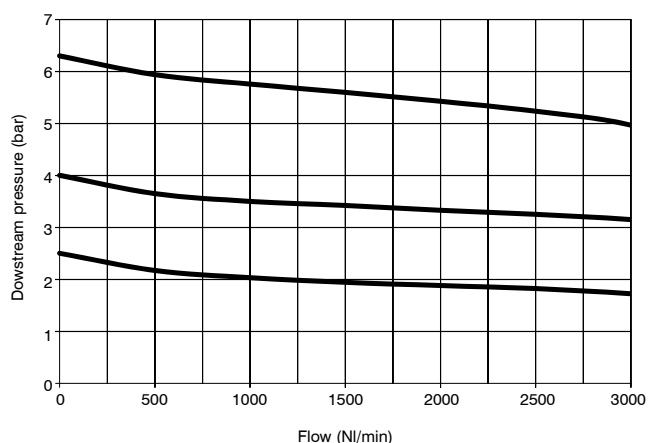


Adjustment characteristic

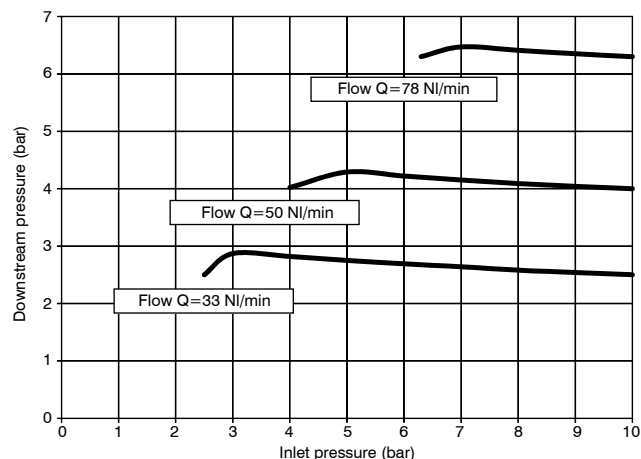


Flow rate chart

Size 3 - G1/2" 0-8 bar P1=7 bar

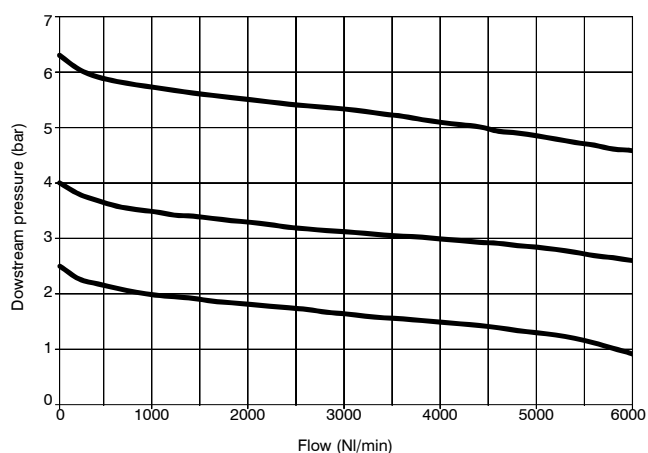


Adjustment characteristic

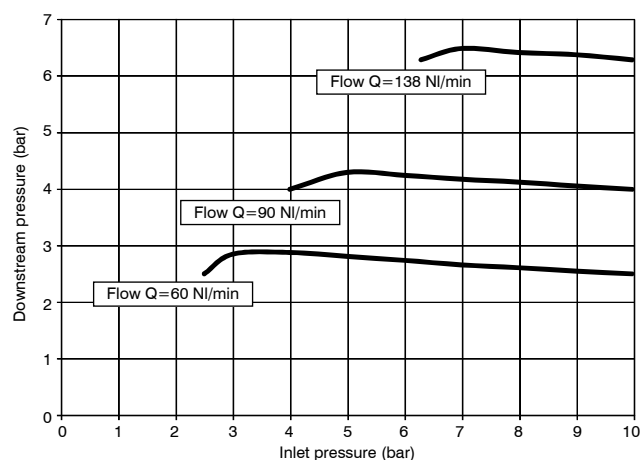


Flow rate chart

Size 4 - G1" 0-8 bar P1=10 bar

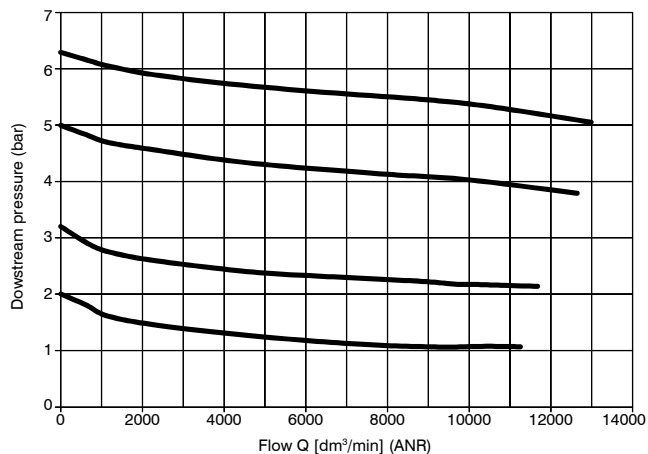


Adjustment characteristic

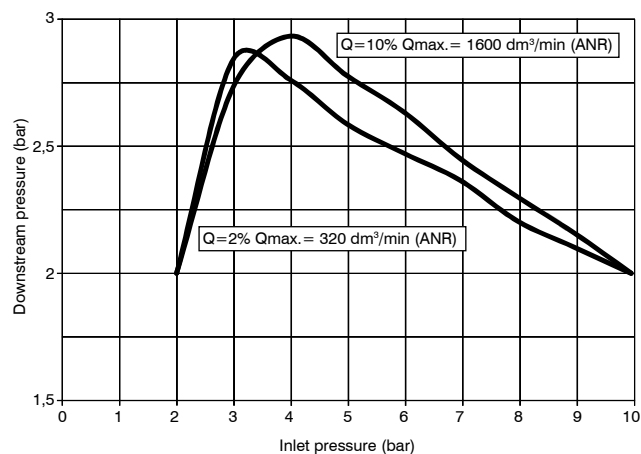


Dimensions

Pressure gauge connection port version

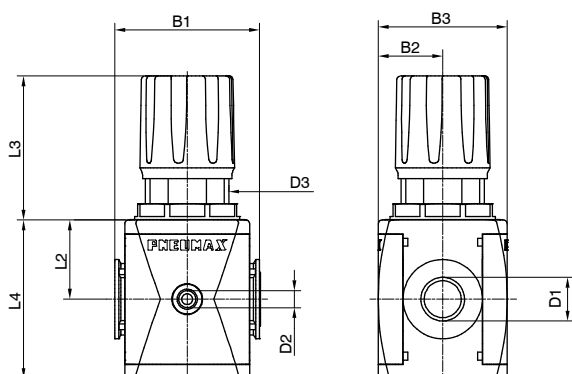

Fixing holes dimension detail
(only for size 4)




Model	B1	B2	B3	D1	D2	D3	D4	L2	L3	L4	L5	L8	L9
#172..	62	28,5	57	G3/8" 1/4" NPT	G1/8" 1/8" NPT	M42x1,5	/	34	71,8	68	/	/	/
#173..	73	32,5	65	G1/2" 1/2" NPT	G1/8" 1/8" NPT	M42x1,5	/	40	72,8	80	/	/	/
#174..	99	44	88	G1" 1" NPT	G1/8" 1/8" NPT	M54x1,5	8,5	52,5	87,5	105	54,5	25	70

Fixing bracket

T172 50

Size

T172 : Size 2 - Size 3

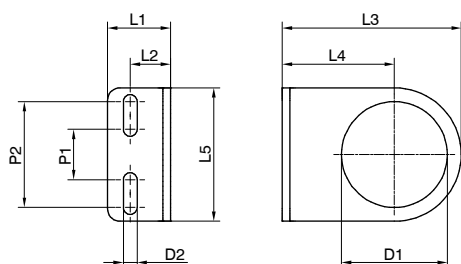

Model	L1	L2	L3	L4	L5	D1	D2	P1	P2
T17250	25	16	71	44,5	53	42	5,5	20	42


Quick coupling flanges

Pneumax Airplus quick coupling flanges series allow both module rapid fixing and panel mounted configuration. Due to its design, Pneumax connection flanges allow user-friendly maintenance activities with no need of entire manifold disassembling procedure.


Two types of flange are available: X type flange for assembling the modules together, and Y type flange suitable for panel mounted also. Both types are made of die-cast aluminum.

Aluminium flanges

Flange Y

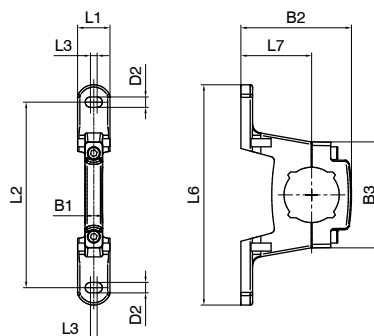

Flange X



Model	B1	B2	B3	D2	L1	L2	L3	L4	L5	L6	L7
N172Y	9,7	64,6	55,6	Ø5,2	18	95	6,8	/	86,5	117,9	40,5
N172X		55,6		/	/	/	/	96,5	72,5	/	/
N173Y	9,7	75,5	56	Ø5,2	18	110	6,8	/	98,3	133	44,5
N173X		62		/	/	/	/	112,8	85	/	/
N174Y	13,7	106,5	102	Ø8,5	25	148	6,5	/	133,5	175	64
N174X		85		/	/	/	/	153,5	112	/	/

Air service units series 1700 Steel line



General

The stainless steel SS1700 air treatment series has been engineered and developed to approach specifically the OIL & GAS industry and more widely for all the severe service applications that require excellent corrosion resistance due to chemical and/or harsh environmental condition.

All external and internal parts (except for the automatic drain version) are AISI 316L stainless steel material in compliance with NACE standard MR0175/ISO 15156/1. The product range includes FILTER, with filtration elements up to 3 filtration degree ($5\mu\text{m}$ - $20\mu\text{m}$ - $50\mu\text{m}$), available in AISI316 stainless steel or HDPE (high density polyethylene), and manual or automatic condensed exhaust; The PRESSURE REGULATOR is supplied with low hysteresis rolling diaphragm and an over-pressure exhaust valve (RELIEVING), available in 4 different adjustment ranges from 0 to 12 bar. As a last the FILTER REGULATOR range, which combines the features of a filter and pressure regulator into a one single device. "CLEAN PROFILE" version is available for all the sizes, featuring a glossy finish on the external surface. The over-pressure exhaust hole (RELIEVING) has a 1/8" NPT threading, and it is protected by an AISI 316 sintered filter series. Note: for CLEAN PROFILE series this is a simple unthread hole.

Construction and operational characteristics

Body, bowl and adjustment mechanism	AISI 316L stainless steel
Caseback regulator	AISI 316L stainless steel
Adjustment screw, locking nut and fastening screws	AISI 316L stainless steel (stainless steel A4-70)
Internal components	AISI 316L stainless steel
Filtering elements	AISI 316 stainless steel or HDPE (High density polyethylene)
Spring	AISI 316 stainless steel
Seals	

NBR (standard versions and automatic drain)	NBR for low temperatures (L versions)	Silicone - PU (Z version)
FPM - HNBR (H versions)	EPDM-FDA (EF versions)	

Automatic drain
Brass, stainless steel AISI 304 and AISI 302, sintered bronze
Acetal resin, NBR, FPM

Operating Range

Fluid
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert gases.
Natural gases

Temperature

-30°C ... +80°C (standard version)	-5°C ... +150°C (high temperature H version)	-40°C ... +100°C (EPDM-FDA version)
-50°C ... +80°C (low temperature L version)	-5°C ... +70°C (automatic drain S version)	
-60°C ... +80°C (low temperature version -60 °C Z)	-5°C ... +70°C (reduced orifice automatic drain SR version)	

Maximum working pressure

20 bar (standard, low and high temperature versions)	16 bar (automatic drain version)	10 bar (reduced orifice automatic drain version)
--	----------------------------------	--

Instructions for installation and use

Product shall be installed reducing the distance from inlet point. Check and install the device following the flow direction (clearly marked with an arrow stamped on the body). Vertical position installation with condensed exhaust tap pointing downward is recommended.

Devices must be used in compliance with pressure and temperature operating range. To set the pressure there is an adjustable knob, located on the top of the device. Pneumax recommend selection of pressure regulator adjusting range option in line with client required performance. The condensed exhaust action for the manual drain version shall be performed only in the absence of pressure. To discharge liquid, turn the tap clockwise until the discharge of liquid is triggered, then tighten it all the way.

Maintenance




Filtration elements and filter regulator are reusable through blowing and/or washing and is made of stainless steel or HDPE (high density polyethylene). To replace, remove the cup, loosen the set screw of the support and replace the filter element with a new one or refurbished one. Replace the regulator diaphragm whenever the performance is compromised or if there is a continuous discharge from the relieving hole (over-pressure exhaust). Fully discharge the adjustment spring before removing the adjustment mechanism. For other maintenance activities, due to complexity of assembly and requirement for dedicated PNEUMAX testing activities, it is strongly recommended to contact the manufacturer.

Certifications available



CE II 2 GD c IIC




Suitable up to SIL 3



CU - TR 012

Filters

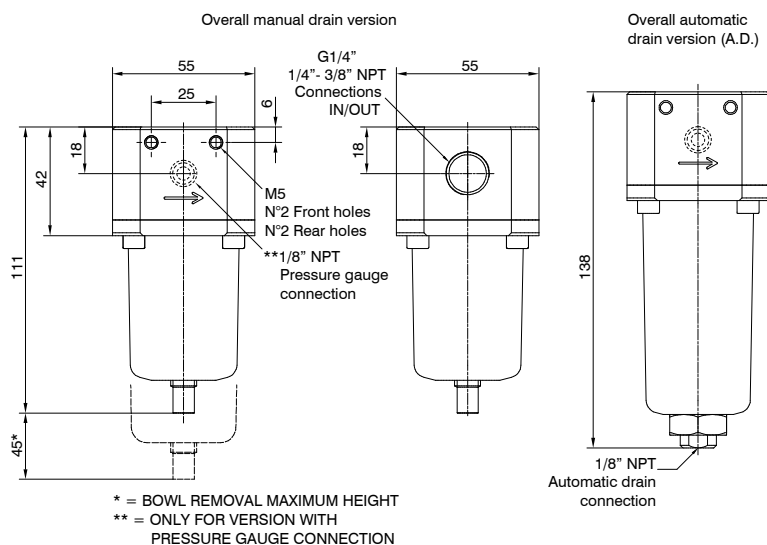

Ordering code

SV172CF502

VERSION

V S = Standard surface finishing
F = Clean profile

CONNECTIONS

C A = 1/4" NPT
B = 3/8" NPT
C = G1/4"

FILTER PORE SIZE

A = 5 μ m - 316 stainless steel
B = 20 μ m - 316 stainless steel
S C = 50 μ m - 316 stainless steel
D = 5 μ m - HDPE
E = 20 μ m - HDPE
F = 50 μ m - HDPE

OPTIONS

= Standard*
L = Low temperature
Z = Low temperature (-60 °C)
O H = High temperature
S = Automatic drain
SR = Reduced orifice automatic drain
EF = EPDM-FDA

ENCLOSURE OPTIONS

= Standard*
Z G = pressure gauge connection


* no additional letter required

Construction characteristics


- Body, bowl and internal components in AISI 316L stainless steel.
- A4 (AISI 316) stainless steel fixing screws.
- Manual or automatic condensed drain.

Technical characteristics

Maximum inlet pressure (standard version)	20 bar
Maximum inlet pressure (automatic drain version)	16 bar
Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
Temperature (standard version)	-30°C ... +80°C
Temperature (low temperature version)	-50°C ... +80°C
Temperature (low temperature version -60 °C)	-60°C ... +80°C
Temperature (high temperature version)	-5°C ... +150°C
Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
Temperature (EPDM-FDA version)	-40°C ... +100°C
Weight	1070 (gr.)
Bowl capacity	15 cm ³
Assembly positions	Vertical

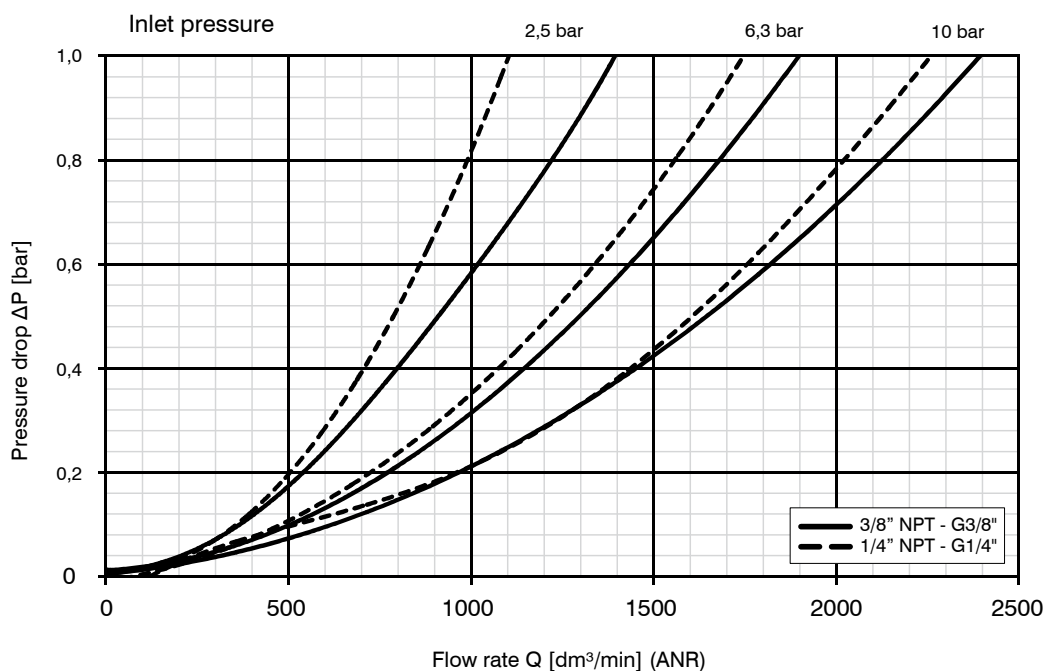

Regulators

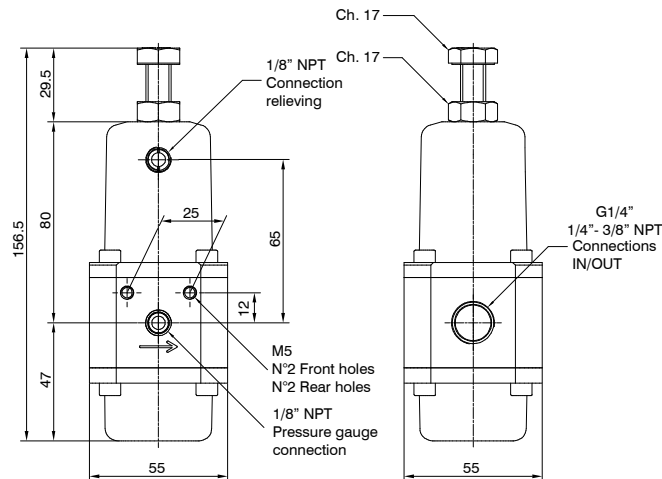

Ordering code

SV172CRGTO

VERSION

- V** S = Standard surface finishing
- F = Clean profile

CONNECTIONS

- C** A = 1/4" NPT
- B = 3/8" NPT
- C = G1/4"

PRESSURE RANGE

- G** A = 0-2 bar
- B = 0-4 bar
- C = 0-8 bar
- D = 0-12 bar

TYPE


- T** = Standard*
- N = Without relieving

OPTIONS


- = Standard*
- O** L = Low temperature
- Z = Low temperature (-60 °C)
- H = High temperature
- EF = EPDM-FDA

* no additional letter required


Construction characteristics	Technical characteristics	
- Body, adjustment mechanism, AISI 316L stainless steel and caseback inter. components - AISI 316 stainless steel adjustment springs. - Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel. - Pressure regulator diaphragm with over-pressure drain (Relieving). - Low hysteresis rolling diaphragm. - Balanced system.	Maximum inlet pressure (standard version)	20 bar
	Temperature (standard version)	-30°C ... +80°C
	Temperature (low temperature version)	-50°C ... +80°C
	Temperature (low temperature version -60 °C)	-60°C ... +80°C
	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
Note	Pressure gauge connection	1/8" NPT
The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.	Weight	1270 (gr.)
	Assembly positions	Indifferent

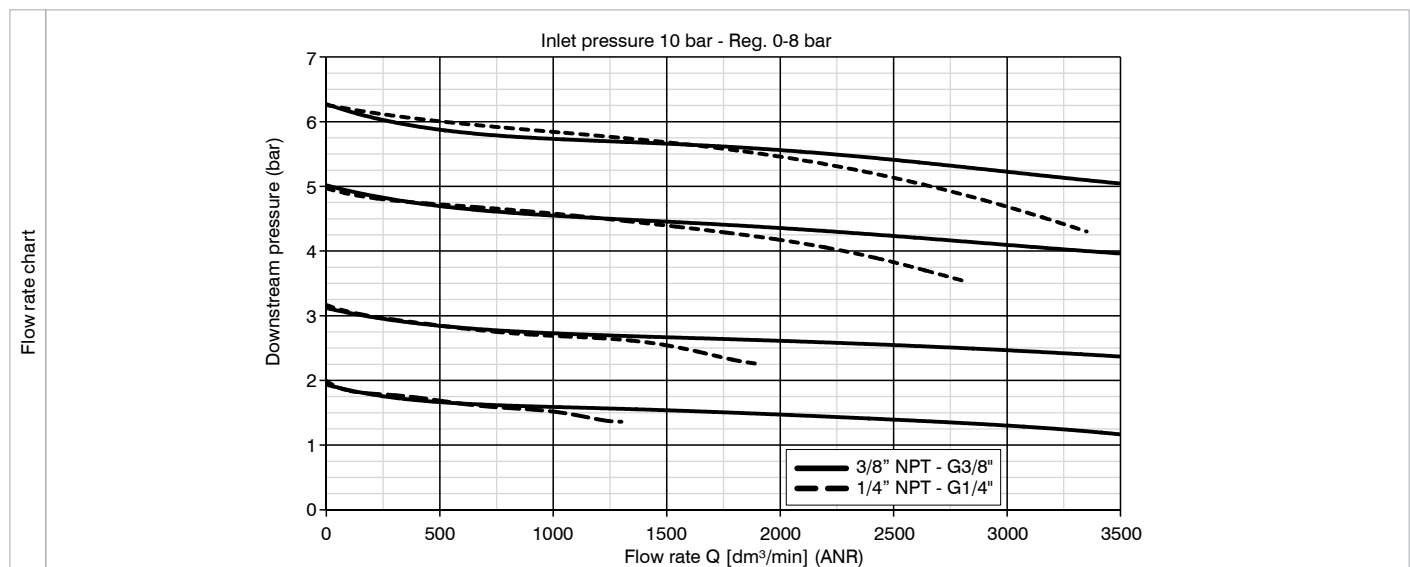

Pressure regulator Stainless steel line have been designed to withstand a **60 bar** maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

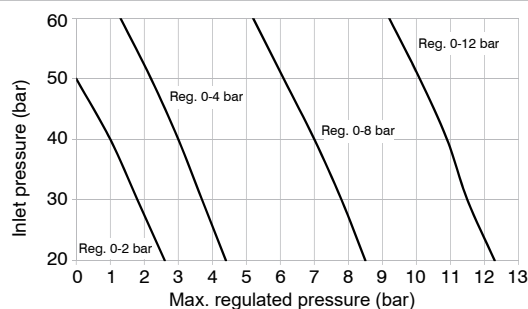

Filter regulators

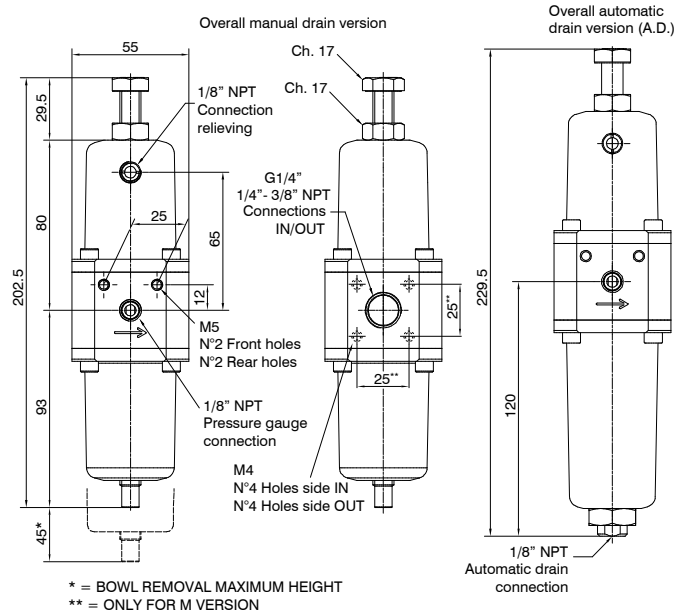

Ordering code

SV172CESGTO

VERSION

- S = Standard surface finishing
- F = Clean profile
- M = Modular assembly version

CONNECTIONS

- A = 1/4" NPT
- B = 3/8" NPT
- C = G1/4"

FILTER PORE SIZE

- A = 5 µm - 316 stainless steel
- B = 20 µm - 316 stainless steel
- S = C = 50 µm - 316 stainless steel
- D = 5 µm - HDPE
- E = 20 µm - HDPE
- F = 50 µm - HDPE

PRESSURE RANGE

- A = 0-2 bar
- G = B = 0-4 bar
- C = 0-8 bar
- D = 0-12 bar

TYPE

- 1 = Standard*
- N = Without relieving

OPTIONS

- = Standard*
- L = Low temperature
- Z = Low temperature (-60 °C)
- H = High temperature
- S = Automatic drain
- SR = Reduced orifice automatic drain
- EF = EPDM-FDA

* no additional letter required

Construction characteristics

- Body, adjustment mechanism, AISI 316L stainless steel and caseback intern. components
- AISI 316 stainless steel adjustment springs.
- Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel.
- Filter-pressure regulator diaphragm with over-pressure drain (Relieving).
- Low hysteresis rolling diaphragm.
- Balanced system.
- Manual or automatic condensed drain.


Technical characteristics

Maximum inlet pressure (standard version)	20 bar
Maximum inlet pressure (automatic drain version)	16 bar
Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
Temperature (standard version)	-30°C ... +80°C
Temperature (low temperature version)	-50°C ... +80°C
Temperature (low temperature version -60 °C)	-60°C ... +80°C
Temperature (high temperature version)	-5°C ... +150°C
Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
Temperature (EPDM-FDA version)	-40°C ... +100°C
Pressure gauge connection	1/8" NPT
Weight	1470 (gr.)
Bowl capacity	15 cm³
Assembly positions	Vertical


Note

The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.

Flow rate chart

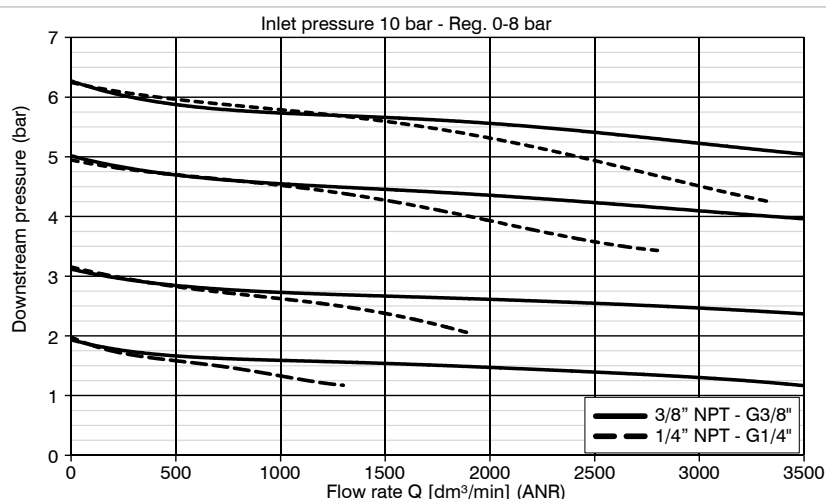


Pressure regulator Stainless steel line have been designed to withstand a 60 bar maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

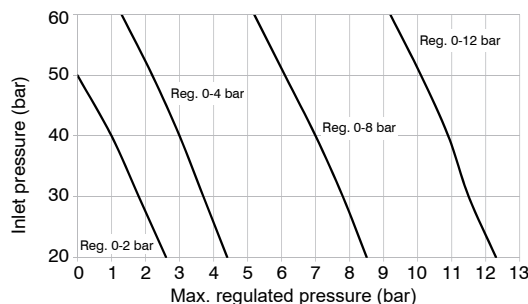

Fixing bracket

Ordering code

SS17250

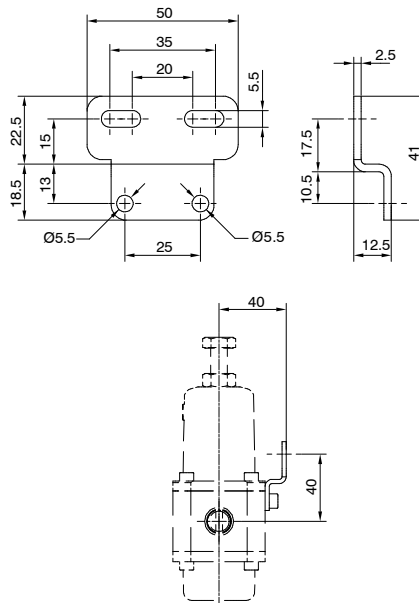

Weight 32 gr.
AISI 316L stainless steel material.
Allows wall fixing of individual products.

Pressure gauge


Ordering code

SS17070A^S

SCALE

^S A = 0 - 4 bar

B = 0 - 12 bar

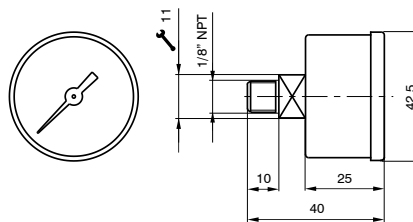


Weight 60 gr.
AISI 316 stainless steel material.
Glass transparent part with an AISI 316 stainless steel retaining ring.
Available with 0 - 4 bar and 0 - 12 bar scale.

Tamper-proof kit


Ordering code

SS17255

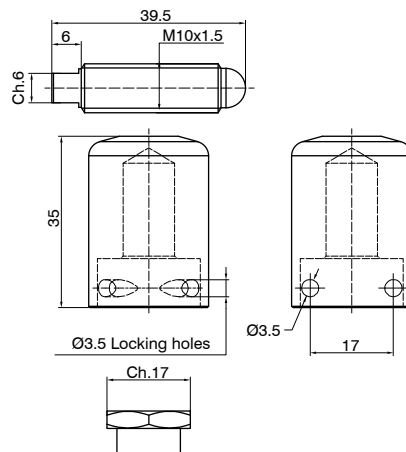

Weight 116 gr.
AISI 316L stainless steel material.
Padlockable tamper-proof kit.
Replace screw and nut with those included in the kit, insert the cover, lock with padlock or metal wire.

Filters

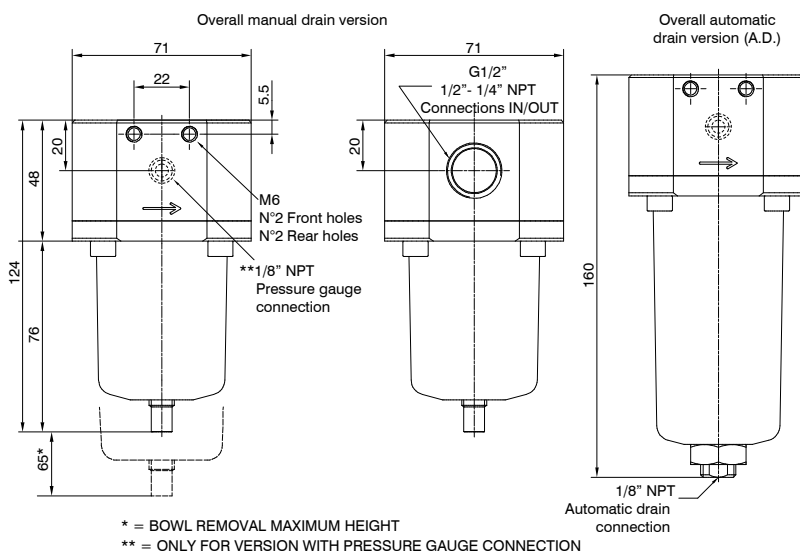

Ordering code

SV173CF502


VERSION	
V S = Standard surface finishing	
F = Clean profile	
CONNECTIONS	
C A = 1/4" NPT	
B = 1/2" NPT	
D = G1/2"	
FILTER PORE SIZE	
A = 5 µm - 316 stainless steel	
B = 20 µm - 316 stainless steel	
S C = 50 µm - 316 stainless steel	
D = 5 µm - HDPE	
E = 20 µm - HDPE	
F = 50 µm - HDPE	
OPTIONS	
= Standard*	
L = Low temperature	
Z = Low temperature (-60 °C)	
O H = High temperature	
S = Automatic drain	
SR = Reduced orifice automatic drain	
EF = EPDM-FDA	
ENCLOSURE OPTIONS	
= Standard*	
G = pressure gauge connection	
* no additional letter required	

Construction characteristics


- Body, bowl and internal components in AISI 316L stainless steel.
- A4 (AISI 316) stainless steel fixing screws.
- Manual or automatic condensed drain.

Technical characteristics

Maximum inlet pressure (standard version)	20 bar
Maximum inlet pressure (automatic drain version)	16 bar
Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
Temperature (standard version)	-30°C ... +80°C
Temperature (low temperature version)	-50°C ... +80°C
Temperature (low temperature version -60 °C)	-60°C ... +80°C
Temperature (high temperature version)	-5°C ... +150°C
Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
Temperature (EPDM-FDA version)	-40°C ... +100°C
Weight	1650 (gr.)
Bowl capacity	25 cm³
Assembly positions	Vertical

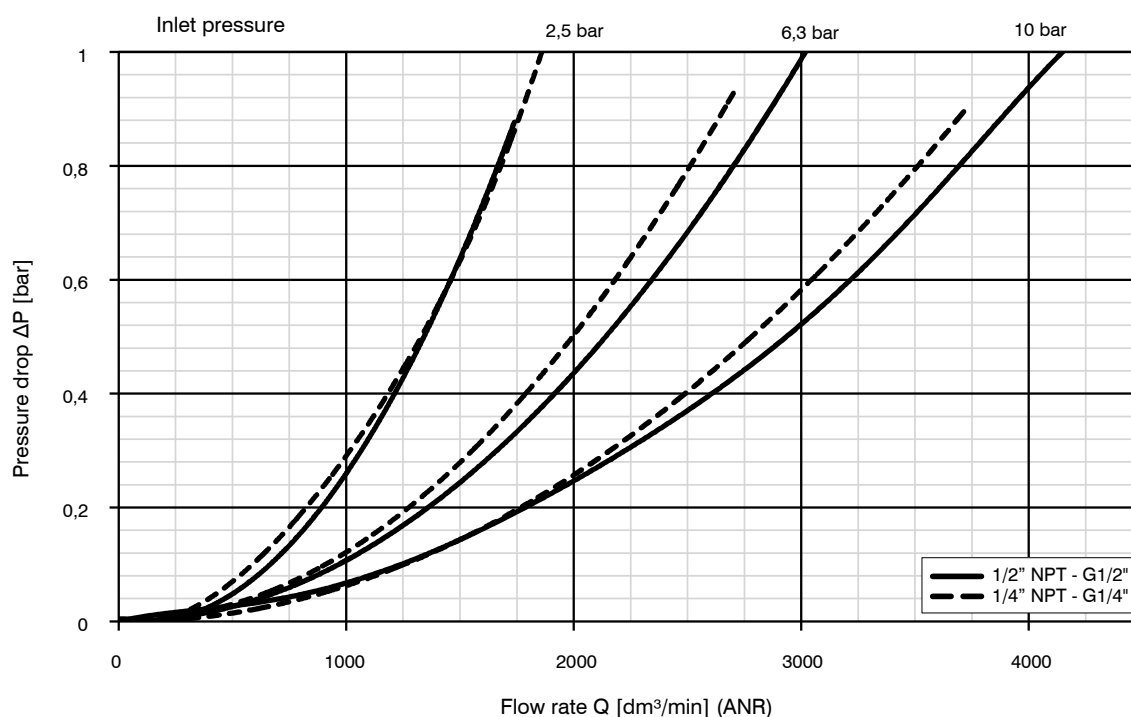

Regulators

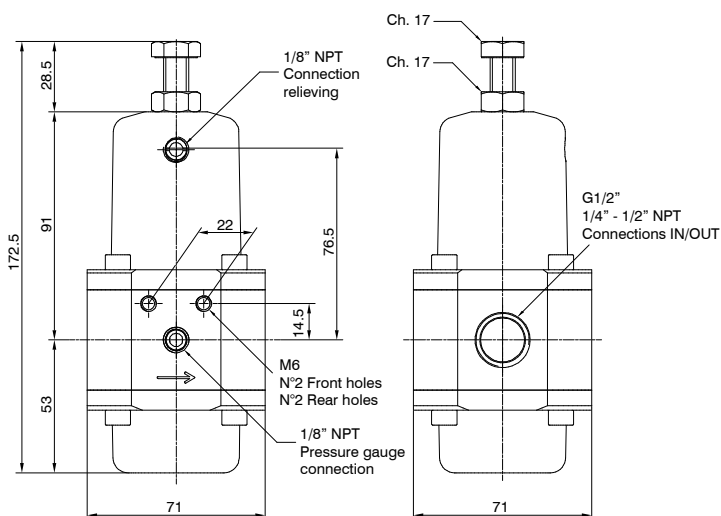

Ordering code

SV173CRGTO

VERSION

- V S = Standard surface finishing
- F = Clean profile

CONNECTIONS

- C A = 1/4" NPT
- B = 1/2" NPT
- D = G1/2"

PRESSURE RANGE


- G A = 0-2 bar
- B = 0-4 bar
- C = 0-8 bar
- D = 0-12 bar

TYPE


- T = Standard*
 - N = Without relieving
- OPTIONS
- = Standard*
 - L = Low temperature
 - Z = Low temperature (-60 °C)
 - H = High temperature
 - EF = EPDM-FDA

* no additional letter required


Construction characteristics	Technical characteristics	
- Body, adjustment mechanism, AISI 316L stainless steel and caseback inter. components - AISI 316 stainless steel adjustment springs. - Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel. - Pressure regulator diaphragm with over-pressure drain (Relieving). - Low hysteresis rolling diaphragm. - Balanced system.	Maximum inlet pressure (standard version)	20 bar
	Temperature (standard version)	-30°C ... +80°C
	Temperature (low temperature version)	-50°C ... +80°C
	Temperature (low temperature version -60 °C)	-60°C ... +80°C
	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
Note	Pressure gauge connection	1/8" NPT
The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.	Weight	1830 (gr.)
	Assembly positions	Indifferent

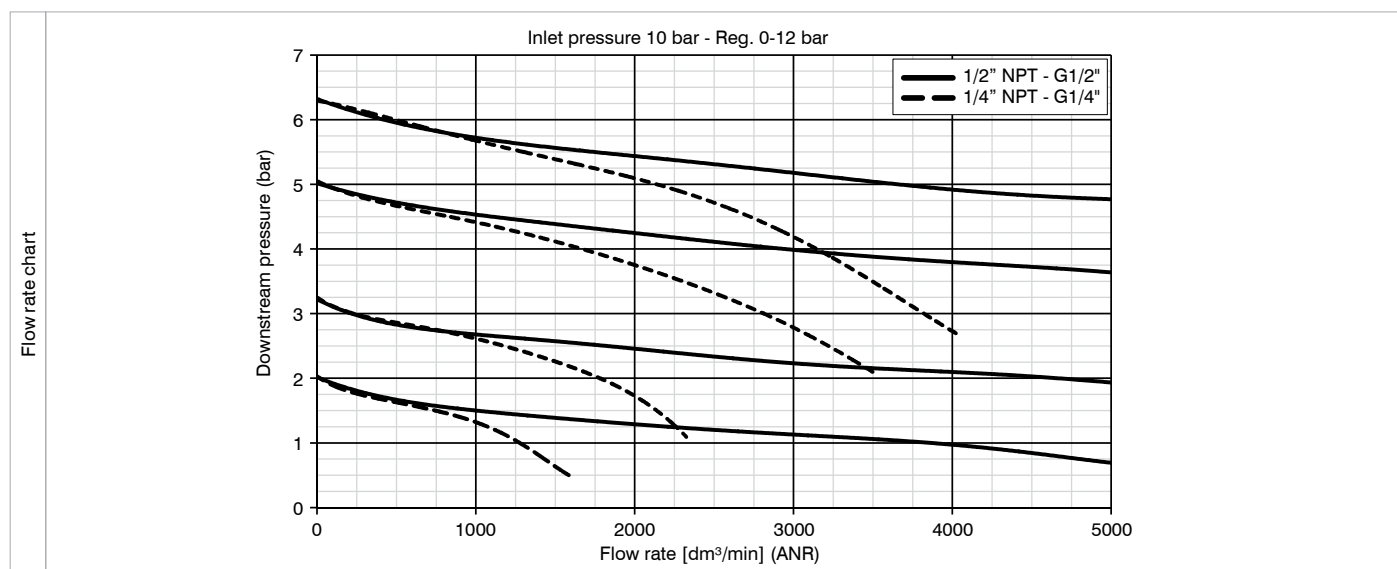

Pressure regulator Stainless steel line have been designed to withstand a 60 bar maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

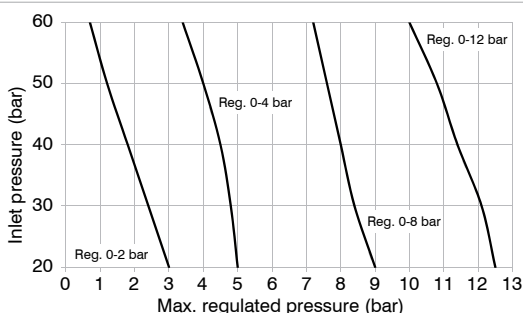


Filter regulators

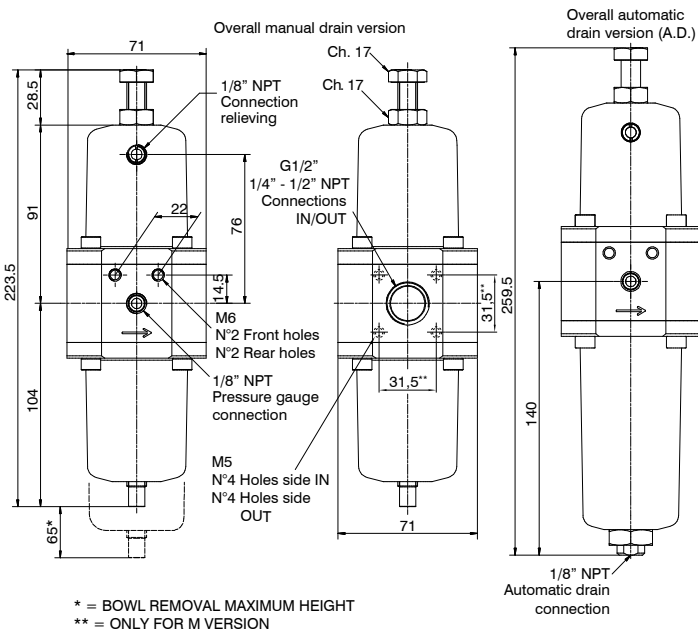


Ordering code	
S01730ESG00	
VERSION	
S	Standard surface finishing
F	Clean profile
M	Modular assembly version
CONNECTIONS	
A	1/4" NPT
B	1/2" NPT
D	G1/2"
FILTER PORE SIZE	
A	5 µm - 316 stainless steel
B	20 µm - 316 stainless steel
C	50 µm - 316 stainless steel
D	5 µm - HDPE
E	20 µm - HDPE
F	50 µm - HDPE
PRESSURE RANGE	
A	0-2 bar
B	0-4 bar
C	0-8 bar
D	0-12 bar
TYPE	
1	Standard*
N	Without relieving
OPTIONS	
	Standard*
L	Low temperature
Z	Low temperature (-60 °C)
H	High temperature
S	Automatic drain
SR	Reduced orifice automatic drain
EF	EPDM-FDA
* no additional letter required	

Construction characteristics	Technical characteristics	
- Body, adjustment mechanism, AISI 316L stainless steel and caseback intern. components - AISI 316 stainless steel adjustment springs. - Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel. - Filter-pressure regulator diaphragm with over-pressure drain (Relieving). - Low hysteresis rolling diaphragm. - Balanced system. - Manual or automatic condensed drain.	Maximum inlet pressure (standard version)	20 bar
	Maximum inlet pressure (automatic drain version)	16 bar
	Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
	Temperature (standard version)	-30°C ... +80°C
	Temperature (low temperature version)	-50°C ... +80°C
	Temperature (low temperature version -60 °C)	-60°C ... +80°C
	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
	Pressure gauge connection	1/8" NPT
Note	Weight	2110 (gr.)
The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.	Bowl capacity	25 cm³
	Assembly positions	Vertical

Flow rate chart

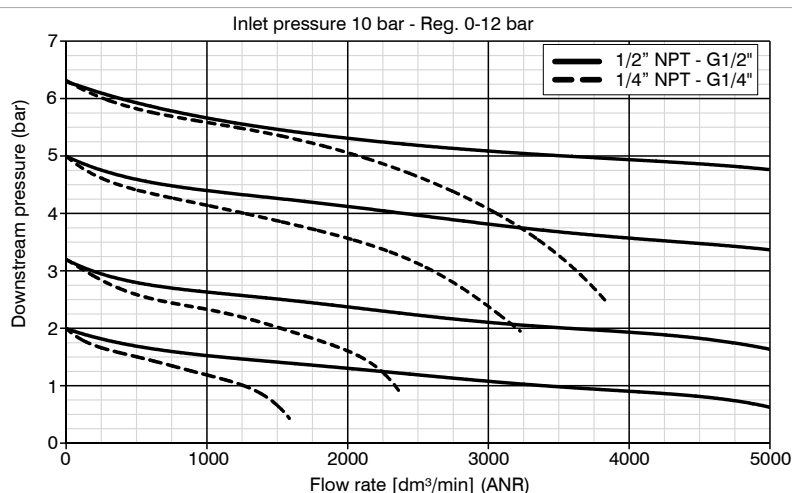


Pressure regulator Stainless steel line have been designed to withstand a 60 bar maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

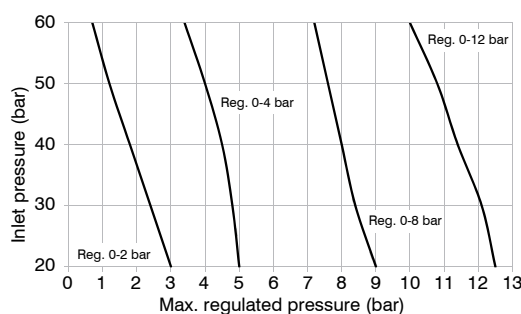

► Fixing bracket

Ordering code

SS17350

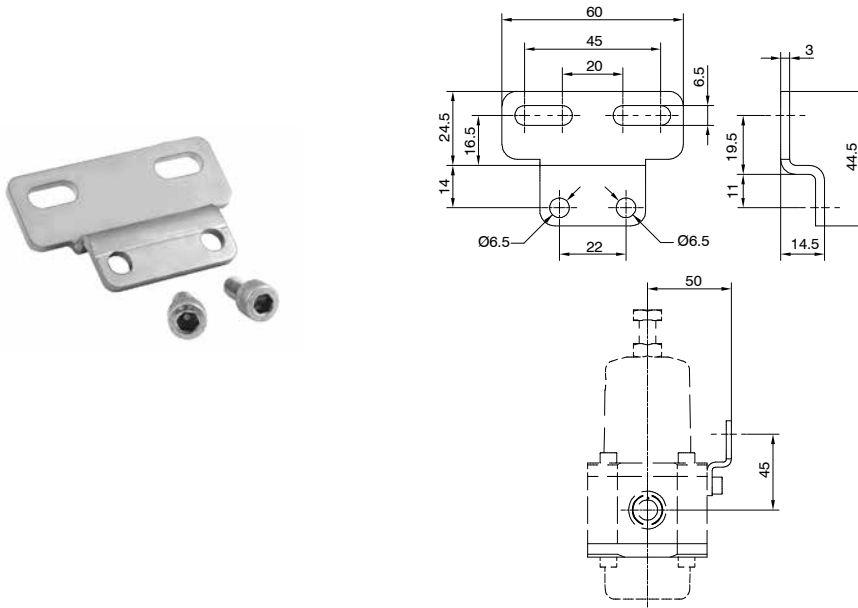

Weight 32 gr.
AISI 316L stainless steel material.
Allows wall fixing of individual products.

► Pressure gauge


Ordering code

SS17070A^S

SCALE

^S A = 0 - 4 bar

B = 0 - 12 bar

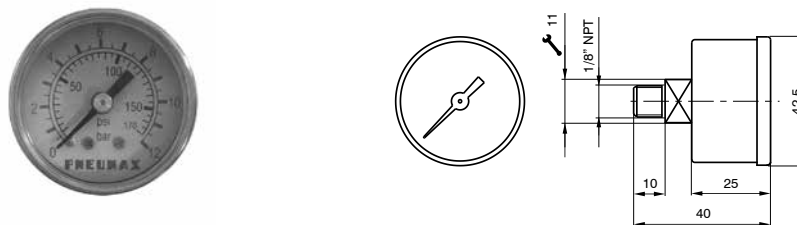


Weight 60 gr.
AISI 316 stainless steel material.
Glass transparent part with an AISI 316 stainless steel retaining ring.
Available with 0 - 4 bar and 0 - 12 bar scale.

► Tamper-proof kit


Ordering code

SS17255

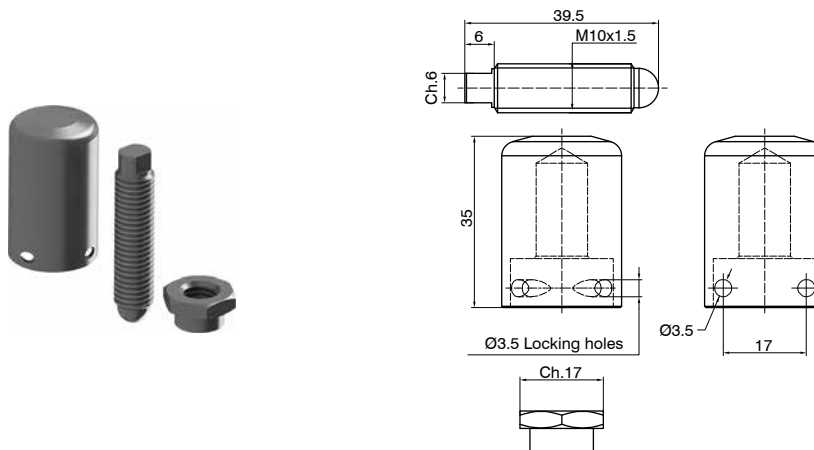

Weight 116 gr.
AISI 316L stainless steel material.
Padlockable tamper-proof kit:
Replace screw and nut with those included in the kit, insert the cover, lock with padlock or metal wire.

Filters

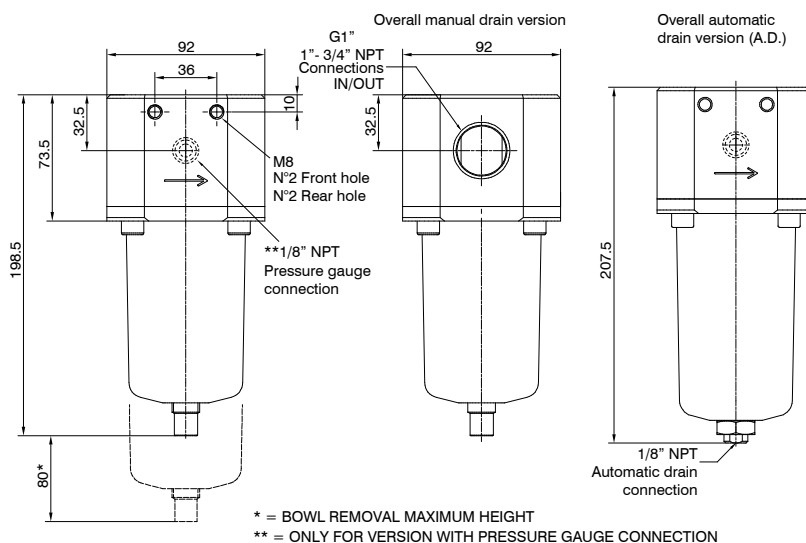

Ordering code

SV174CF502

VERSION

- V** S = Standard surface finishing
F = Clean profile
- CONNECTIONS
- C** A = 3/4" NPT
B = 1" NPT
D = G1"

FILTER PORE SIZE

- A = 5 μ m - 316 stainless steel
B = 20 μ m - 316 stainless steel
S C = 50 μ m - 316 stainless steel
D = 5 μ m - HDPE
E = 20 μ m - HDPE
F = 50 μ m - HDPE

OPTIONS

- = Standard*
L = Low temperature
Z = Low temperature (-60 °C)
O H = High temperature
S = Automatic drain
SR = Reduced orifice automatic drain
EF = EPDM-FDA

ENCLOSURE OPTIONS

- = Standard*
G = pressure gauge connection
* no additional letter required


Construction characteristics

- Body, bowl and internal components in AISI 316L stainless steel.
- A4 (AISI 316) stainless steel fixing screws.
- Manual or automatic condensed drain.


Technical characteristics

Maximum inlet pressure (standard version)	20 bar
Maximum inlet pressure (automatic drain version)	16 bar
Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
Temperature (standard version)	-30°C ... +80°C
Temperature (low temperature version)	-50°C ... +80°C
Temperature (low temperature version -60 °C)	-60°C ... +80°C
Temperature (high temperature version)	-5°C ... +150°C
Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
Temperature (EPDM-FDA version)	-40°C ... +100°C
Weight 3/4" NPT - G 3/4"	4700 (gr.)
Weight 1" NPT - G 1"	4600 (gr.)
Bowl capacity	78 cm ³
Assembly positions	Vertical

Flow rate chart

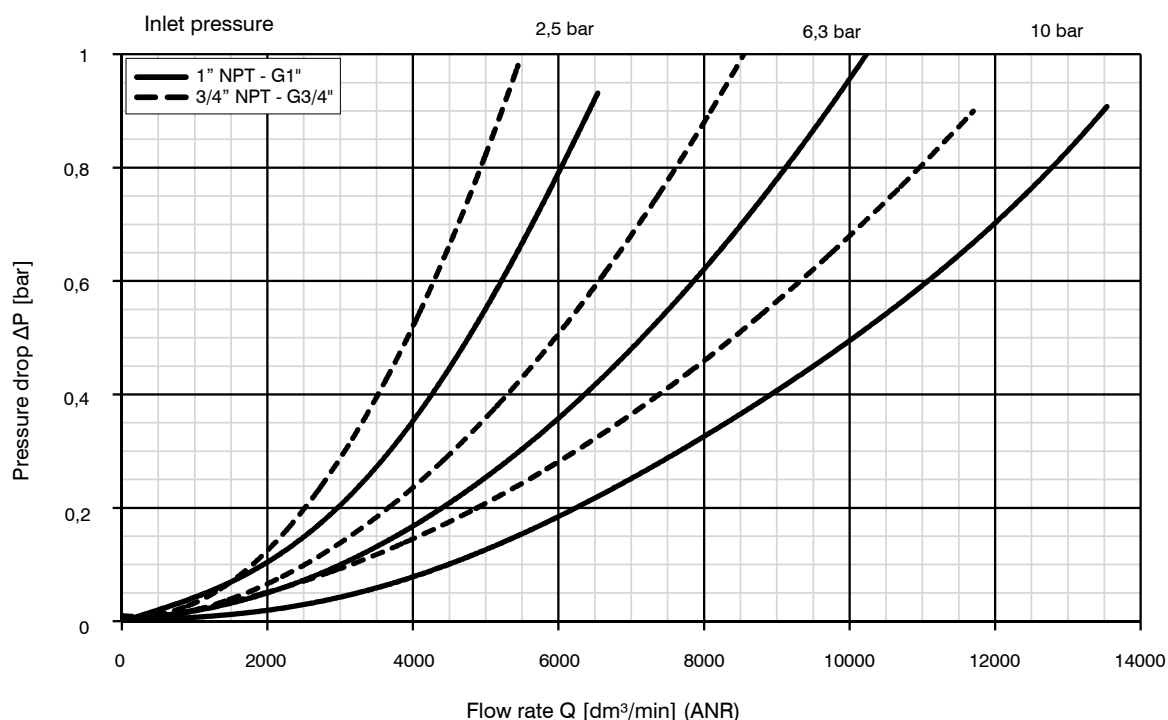

Regulators

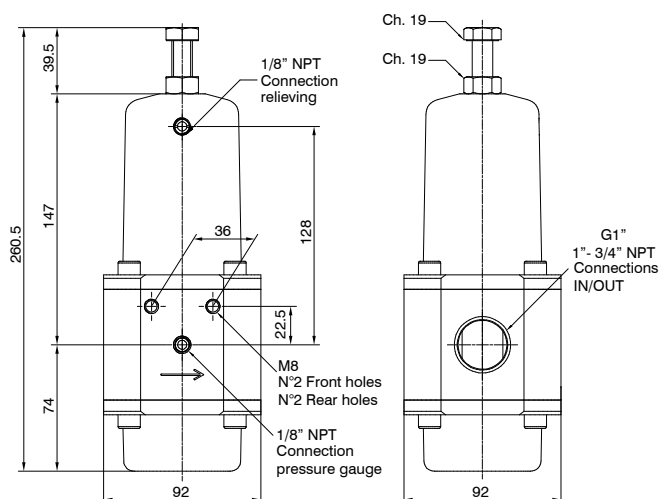

Ordering code

SV174CRGT0

VERSION

- V S = Standard surface finishing
- F = Clean profile

CONNECTIONS

- C A = 3/4" NPT
- B = 1" NPT
- D = G1"

PRESSURE RANGE

- A = 0-2 bar
- G B = 0-4 bar
- C = 0-7 bar
- D = 0-10 bar

TYPE

- T = Standard*

OPTIONS

- = Standard*
- L = Low temperature
- Z = Low temperature (-60 °C)
- H = High temperature
- EF = EPDM-FDA

* no additional letter required

Construction characteristics

- Body, adjustment mechanism, AISI 316L stainless steel and caseback inter. components
- AISI 316 stainless steel adjustment springs.
- Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel.
- Pressure regulator diaphragm with over-pressure drain (Relieving).
- Low hysteresis rolling diaphragm.
- Balanced system.


Technical characteristics

Maximum inlet pressure (standard version)	20 bar
Temperature (standard version)	-30°C ... +80°C
Temperature (low temperature version)	-50°C ... +80°C
Temperature (low temperature version -60 °C)	-60°C ... +80°C
Temperature (high temperature version)	-5°C ... +150°C
Temperature (EPDM-FDA version)	-40°C ... +100°C
Pressure gauge connection	1/8" NPT
Weight 3/4" NPT - G 3/4"	5500 (gr.)
Weight 1" NPT - G 1"	5400 (gr.)
Assembly positions	Indifferent


Note

The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.


Flowrate chart

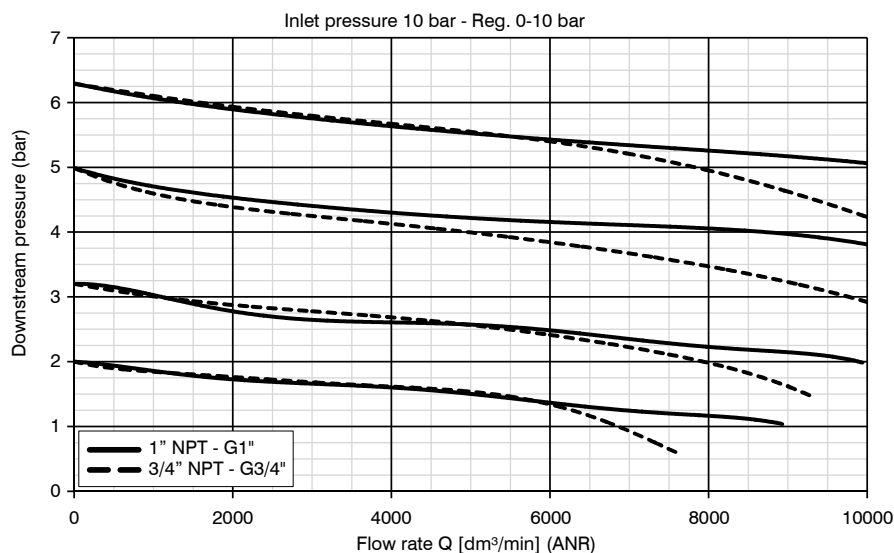

Pressure regulator Stainless steel line have been designed to withstand a **60 bar** maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

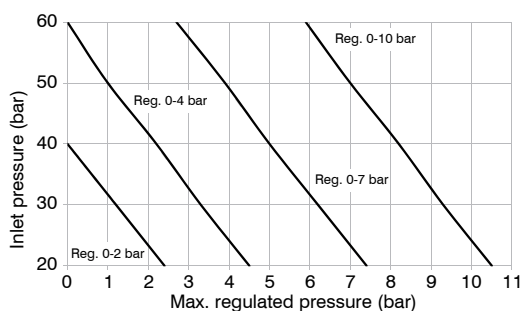


Filter regulators

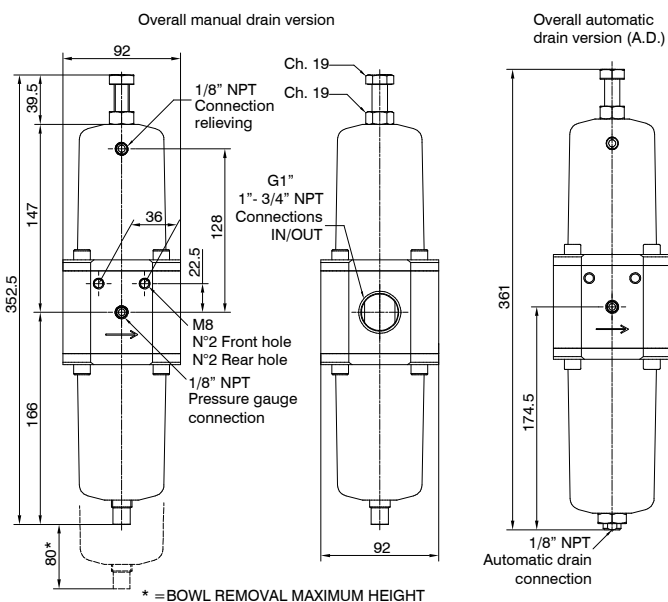


Ordering code	
S01740ESG10	
VERSION	
V S = Standard surface finishing	
F = Clean profile	
CONNECTIONS	
C A = 3/4" NPT	
B = 1" NPT	
D = G1"	
FILTER PORE SIZE	
A = 5 µm - 316 stainless steel	
B = 20 µm - 316 stainless steel	
S C = 50 µm - 316 stainless steel	
D = 5 µm - HDPE	
E = 20 µm - HDPE	
F = 50 µm - HDPE	
PRESSURE RANGE	
G A = 0-2 bar	
B = 0-4 bar	
C = 0-7 bar	
D = 0-10 bar	
TYPE	
T = Standard*	
N = Without relieving	
OPTIONS	
= Standard*	
L = Low temperature	
Z = Low temperature (-60 °C)	
O H = High temperature	
S = Automatic drain	
SR = Reduced orifice automatic drain	
EF = EPDM-FDA	
* no additional letter required	

Construction characteristics	Technical characteristics	
- Body, adjustment mechanism, AISI 316L stainless steel and caseback intern. components - AISI 316 stainless steel adjustment springs. - Fixing screws, adjustment screws and locknut in A4 (AISI 316) stainless steel. - Filter-pressure regulator diaphragm with over-pressure drain (Relieving). - Low hysteresis rolling diaphragm. - Balanced system. - Manual or automatic condensed drain.	Maximum inlet pressure (standard version)	20 bar
	Maximum inlet pressure (automatic drain version)	16 bar
	Maximum inlet pressure (reduced orifice automatic drain version)	10 bar
	Temperature (standard version)	-30°C ... +80°C
	Temperature (low temperature version)	-50°C ... +80°C
	Temperature (low temperature version -60 °C)	-60°C ... +80°C
	Temperature (high temperature version)	-5°C ... +150°C
	Temperature (automatic and reduced orifice drain version)	-5°C ... +70°C
	Temperature (EPDM-FDA version)	-40°C ... +100°C
	Pressure gauge connection	1/8" NPT
Note	Weight 3/4" NPT - G 3/4"	6300 (gr.)
The pressure must be always regulating while increasing. For a more precise regulation and higher sensibility, the use of a regulator with a pressure range as close as possible to the regulated pressure is recommended.	Weight 1" NPT - G 1"	6200 (gr.)
	Bowl capacity	78 cm³
	Assembly positions	Vertical


Flow rate chart

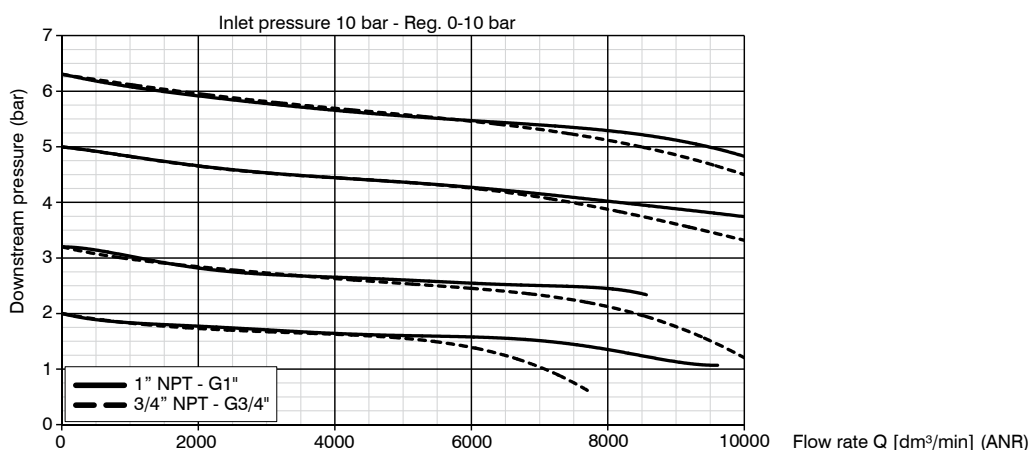

Pressure regulator Stainless steel line have been designed to withstand a **60 bar** maximum inlet pressure.
Maximum regulated outlet pressure is 20 bar.
For performance details please refer to diagram alongside.

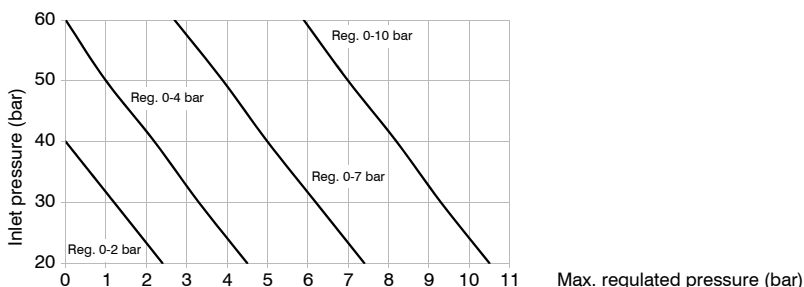

Fixing bracket

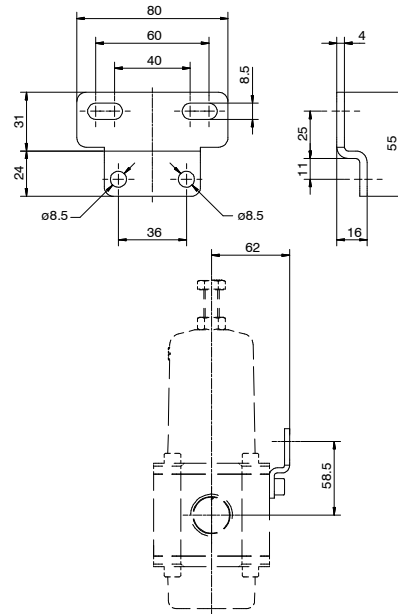


Ordering code

SS17450

Weight 32 gr.
AISI 316L stainless steel material.
Allows wall fixing of individual products.

Pressure gauge

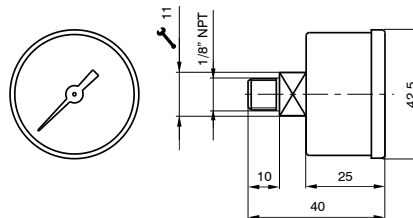

Ordering code

SS17070A^S


SCALE

^S A = 0 - 4 bar

B = 0 - 12 bar

Weight 60 gr.
AISI 316 stainless steel material.
Glass transparent part with an AISI 316 stainless steel retaining ring.
Available with 0 - 4 bar and 0 - 12 bar scale.

Tamper-proof kit

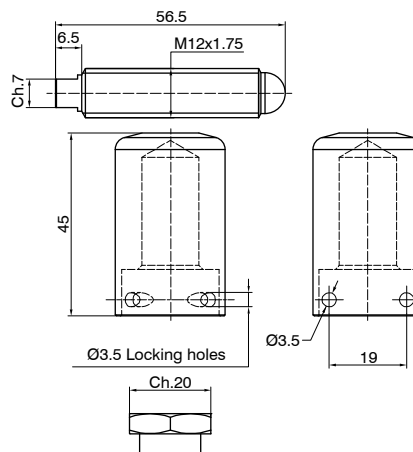

Ordering code

SS17455

Weight 185 gr.
AISI 316L stainless steel material.
Padlockable tamper-proof kit.
Replace screw and nut with those included in the kit, insert the cover, lock with padlock or metal wire.

Volume booster series Flowplus



General

Pneumax high flow capacity air volume booster - stainless steel SS and aluminium SA series - has been engineered and developed to specifically approach the Oil & Gas industry and more widely for all the severe service applications that require excellent performances due to chemical and/or harsh environmental conditions.

Moreover, **Pneumax** booster represent performing and reliable choice in case of high flow exhaust ratio, for the whole process and industrial automation applications in general.

Both stainless steel and aluminum versions are corrosion and wear resistant, due to the same stainless steel trim type selection, with a wide range of sealing materials for extended operating temperature applications (to extreme low temperature up to high temperature application).

Pneumax volume booster is 1:1 signal to output relay, capable to provide fast response, delivering high air volume for fast actuator movement and increased stroking speed for both control and on/off valves actuators.

As a standard, an adjustable integrated by-pass valve device is available, to reduce or avoid (thru fully closed position in case of on-off application) excessive actuator overshoot or over-damping.

In addition, in order to precisely adjust actuator travel speed, **Pneumax** booster can be equipped with integral flow regulators for air delivery and exhaust.

Operating principle


The device is pneumatic operated thru inlet port. When a pressure signal from 2,5 to 8 bar is applied to the pilot port **P**, the main valve assembly opens the loading shutter **D** to allow the passage of a high volumetric flow from the inlet port to the outlet port. When the system detects that the outlet pressure is equal to the pilot signal pressure, and consequently the forces acting on the membranes **A** and **B** are equivalent, the main valve moves to the de-energized position, i.e. with the shutters **D** and **E** closed.

This condition is maintained until there is a change in signal pressure or a change in outlet pressure value. If the outlet pressure figure is higher than the pilot signal pressure, the main valve group opens the shutter of drain **E** to exhaust. If the system detects an outlet pressure lower than the pilot signal, the main valve opens to restore the outlet at correct pressure.

The signal input and output ports are connected by an integrated and adjustable by-pass valve **C**.

The adjustment, in addition to control the sensitivity of the system to changes in the pilot signal, ensures the exact equalization between the input signal and the supply occurs output.





This allows that low volume signal provide a output high volume with a signal to output pressure ratio of 1: 1.

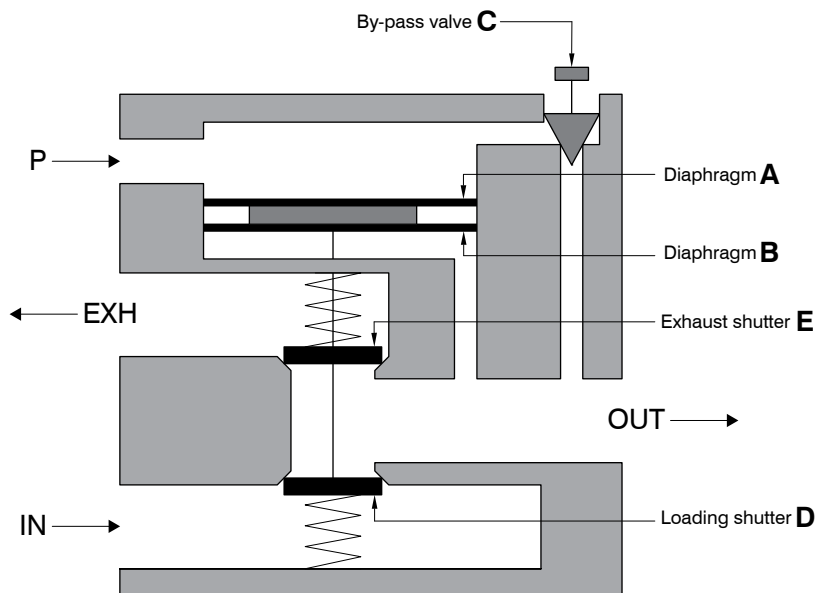

► Volume booster



- Available in 2 sizes with connections from 1/4" NPT to 1" NPT
- Available in aluminium with epoxy coating paint or in stainless steel AISI 316L
- Stainless steel AISI 316L versions according to NACE MR0175 - ISO15156/1
- Compact and linear design
- Robust and reliable construction
- Double hysteresis rolling membrane system
- High stability and repeatability
- High flow rate performances
- Wide temperature range application
- 1:1 ratio between pilot pressure and outlet pressure
- Integrated by-pass valve for reliable adjustment of the system sensitivity
- Uni and bi-directional flow regulators available
- Atex certification II 2GD, SIL3 and CU-TR 012



Technical characteristics

Size	Size 3	Size 4
Version	Aluminium with epoxy coating paint Stainless steel AISI 316L	
IN / OUT / EXH connections	1/4" NPT - 1/2" NPT	3/4" NPT - 1" NPT
Pilot connection	1/4" NPT	
Assembly configuration	Stand alone With fixing bracket	
Assembly positions	Indifferent	

Operational characteristics

Size	Size 3	Size 4
Fluid	Dry and clean air Inert gas Natural gas	
Maximum working pressure	13 bar	
Minimum working pressure	2,5 bar	
Maximum signal pressure	8 bar	
Minimum signal pressure	2,5 bar	
Working temperature and seals	-30°C ... +80°C - NBR seals (Standard version) -50°C ... +80°C - NBR LT seals (L version) -60°C ... +80°C - PUR - SILICONE seals (Z version) -5°C ... +150°C - FPM - HNBR seals (H version) -40°C ... +100°C - EPDM-FDA seals (EF version)	
Signal pressure / outlet pressure ratio	1:1 ± 5%	

Flow capacity Cv table

Size	Size 3		Size 4	
Connection	1/4" NPT	1/2" NPT	3/4" NPT	1" NPT
Output	2,5	4,2	7	9,4
Exhaust	2,5	4,2	7	9,4


Weights

Size	Size 3		Size 4	
Connection	1/4" NPT	1/2" NPT	3/4" NPT	1" NPT
Aluminium version without flow regulators	2040 g	2010 g	4470 g	4380 g
Aluminium version with uni-directional flow control regulator	2098 g	2070 g	4478 g	4394 g
Aluminium version with bi-directional flow control regulators	2122 g	2094 g	4515 g	4433 g
Stainless steel AISI 316L version without flow regulators	5460 g	5344 g	11532 g	11308 g
Stainless steel AISI 316L with uni-directional flow control regulator	5476 g	5360 g	11560 g	11336 g
Stainless steel AISI 316L with bi-directional flow control regulators	5491 g	5375 g	11574 g	11350 g

Materials

Pneumax volume booster is manufactured in two versions, one aluminum epoxy painted and one in AISI 316L stainless steel, both highly resistant to corrosion and wear.


Nuts, screws, pins and adjusting pins, as well as all the internal parts in contact with the fluid are made of AISI 316L stainless steel.

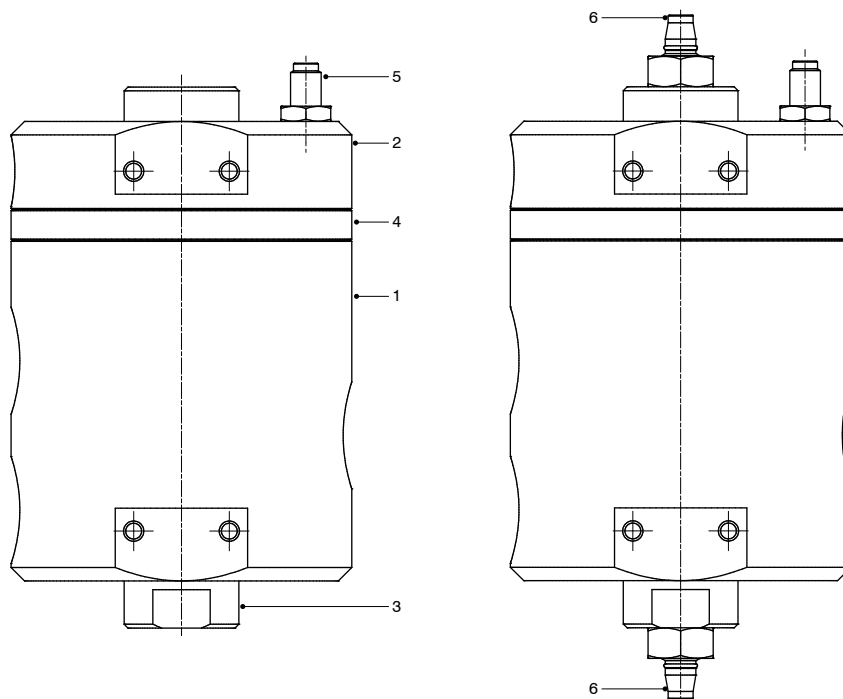

Volume booster		
1	Body	Aluminium with epoxy coating paint Stainless steel AISI 316L
2	Piloting operator	Aluminium with epoxy coating paint Stainless steel AISI 316L
3	Rear end cap	Aluminium with epoxy coating paint Stainless steel AISI 316L
4	Intermediate body	Aluminium with epoxy coating paint Stainless steel AISI 316L
5	By-pass valve	Stainless steel AISI 316L
6	Adjusting pins	Stainless steel AISI 316L
7	Springs	Stainless steel AISI 316L
8	Fixing screws and nuts	Stainless steel A4-70
9	Diaphragm and seals	NBR NBR-LT HNBR FPM SILICONE

Design

Pneumax volume booster is equipped with a by-pass valve as standard, and can be supplied with no flow regulator device or complete with uni-directional or bi-directional flow regulators.








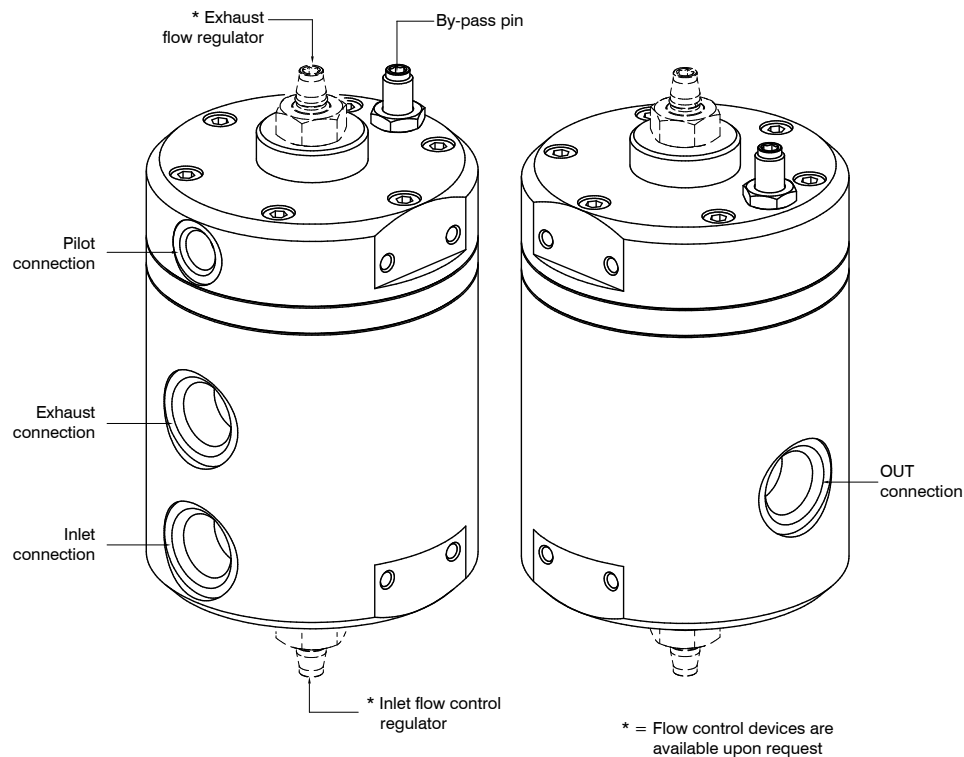


Order codes


	SA	17	3B	VB	R2	L
Version						
SA : Aluminium with epoxy coating paint						
SS : Stainless steel AISI 316L						
Size and connections						
3A : Size 3 - 1/4" NPT						
3B : Size 3 - 1/2" NPT						
4A : Size 4 - 3/4" NPT						
4B : Size 4 - 1" NPT						
Flow regulators options						
: without flow regulators						
RS : with exhaust flow regulator						
RM : with inlet flow control regulator						
R2 : with bi-directional flow control regulators						
Temperature options						
: Standard (-30°C ... +80°C)						
L : Low temperature (-50°C ... +80°C)						
Z : Low temperature (-60°C ... +80°C)						
H : High temperature (-5°C ... +150°C)						
EF : EPDM-FDA (-40°C ... +100°C)						

Example : SA173BVBR2L : Size 3 Volume booster, 1/2" NPT, with bi-directional flow control regulators, low temperature

Flow charts

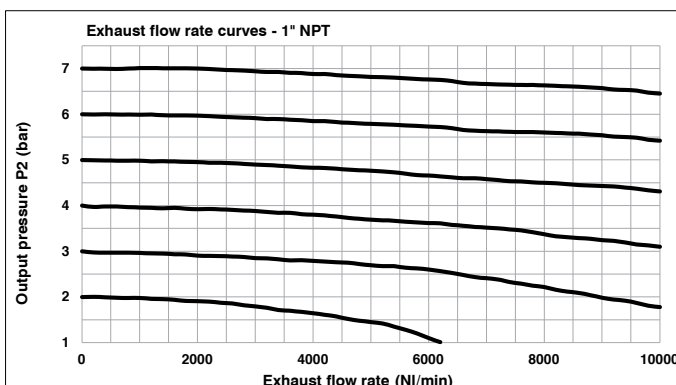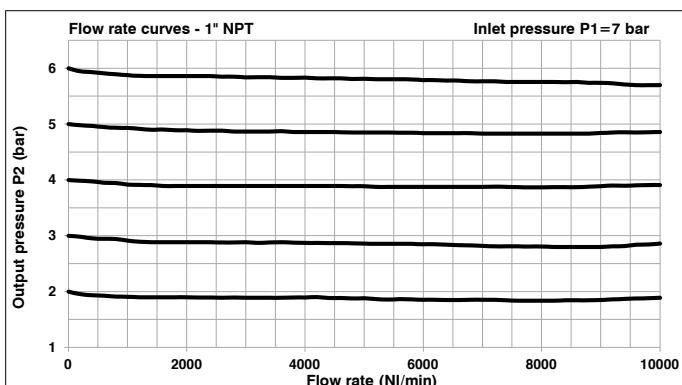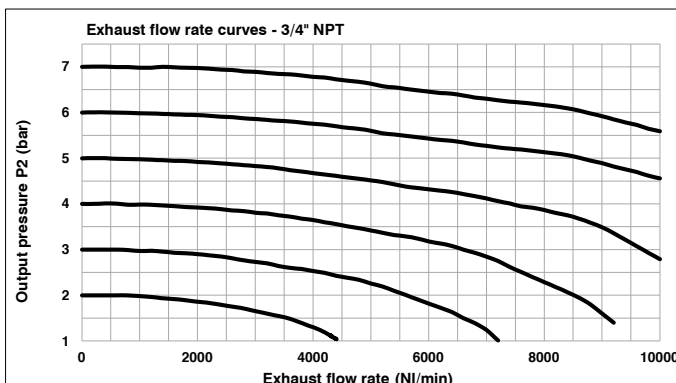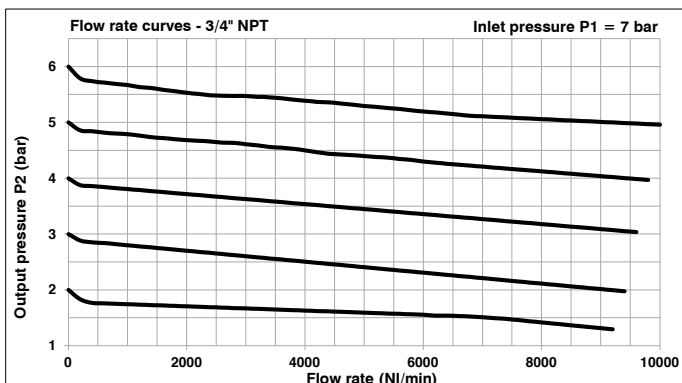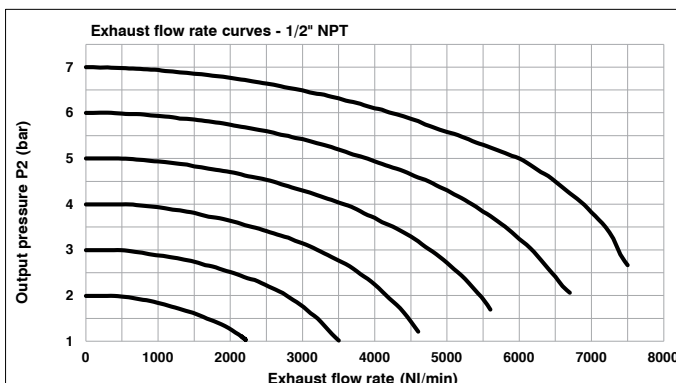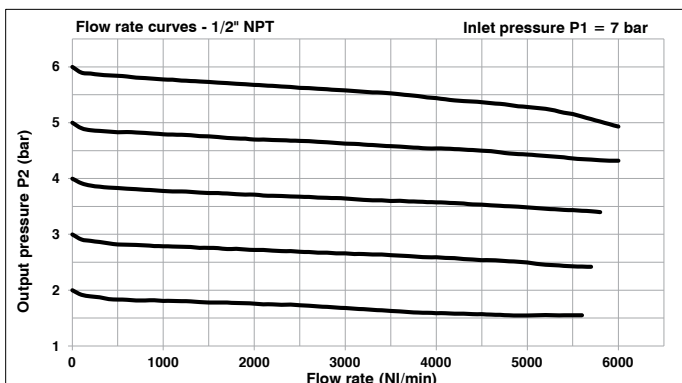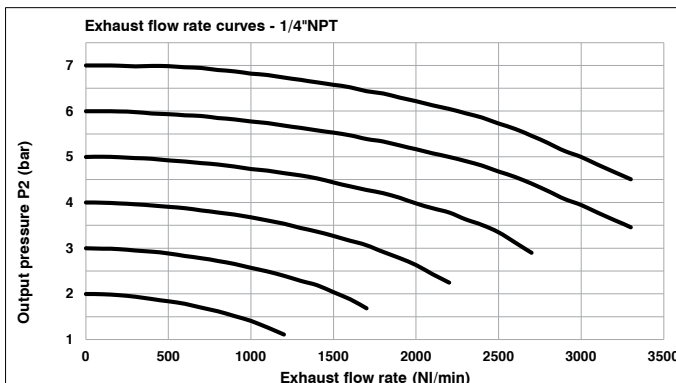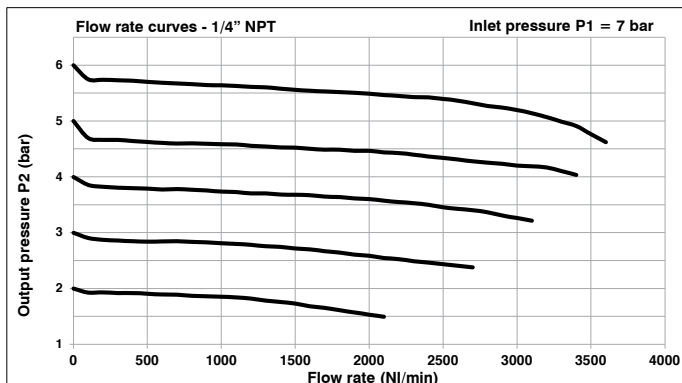


Dimensions

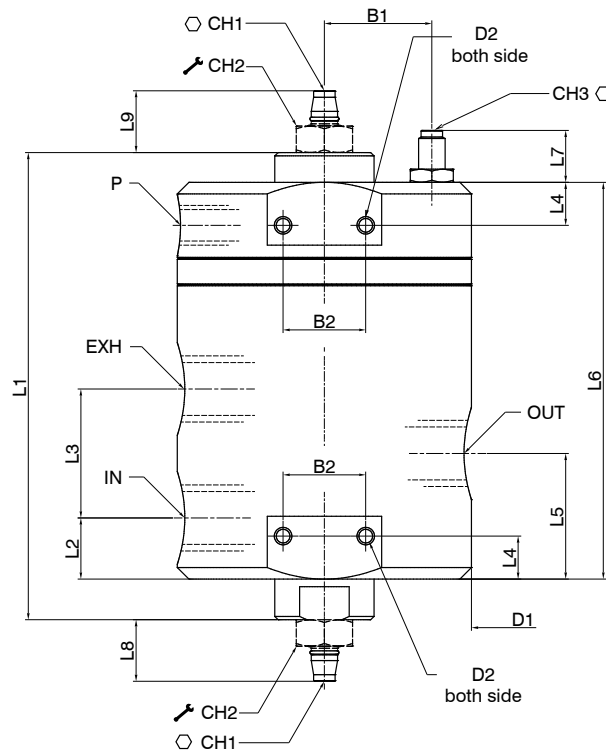

Model	B1	B2	D1	D2 (both side)	L1	L2	L3	L4	L5	L6	L7	L8	L9	IN - OUT - EXH	P	CH1	CH2	CH3
SA173...	32,5	25	89	M5	141,5	18,5	39	13	38	120	15,5	/	/	1/4" NPT 1/2" NPT	1/4" NPT	ES.4	17	ES.4
SS173...	33,5																	
SA173...R#	32,5																	
SS173...R#	33,5											19	19					
SA174...	41	22	109	M6	205	27,5	63,5	14	59,5	175	15,5	/	/	3/4" NPT 1" NPT	1/4" NPT	ES.4	19	ES.4
SS174...	43																	
SA174...R#	41																	
SS174...R#	43											24,5	26,5					

Accessories and fixing

Special fixing brackets made of AISI 316L stainless steel are provided upon request. Fixing position for every need is confirmed by using one or two brackets.

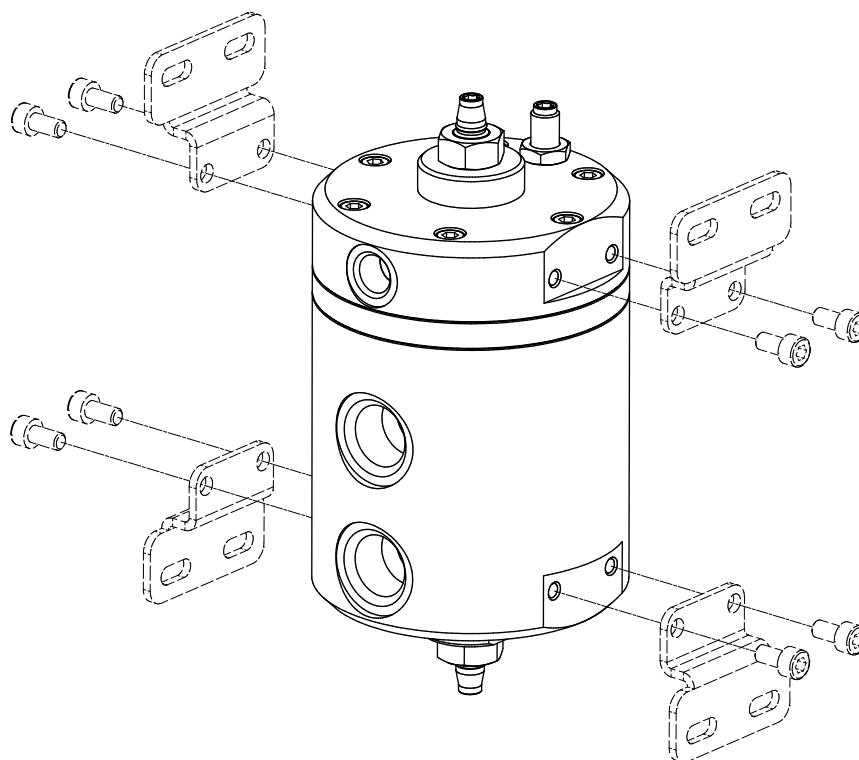



Fixing bracket

SS17250


Model

SS17250 : applicable to model SS173... and SA173...

SS17350 : applicable to model SS174... and SA174...

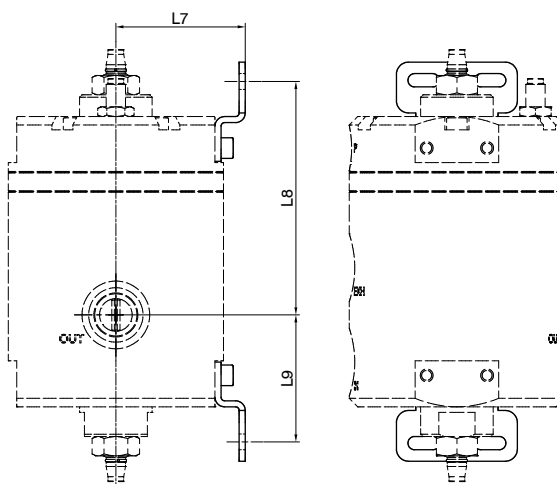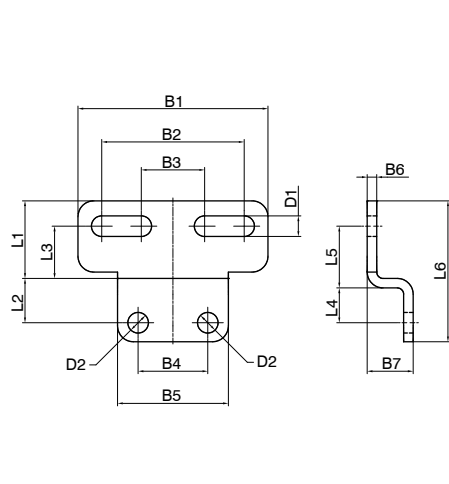

Model	L1	L2	L3	L4	L5	L6	L7	L8	L9	B1	B2	B3	B4	B5	B6	B7	D1	D2	Weight (g)
SS17250	22,5	13	15	10,5	17,5	41	53,5	96,5	52,5	50	35	20	25	34	2,5	12,5	5,5	5,5	39
SS17350	24,5	14	16,5	11	19,5	44,5	65,5	132	76	60	45	20	22	35	3	14,5	6,5	6,5	57

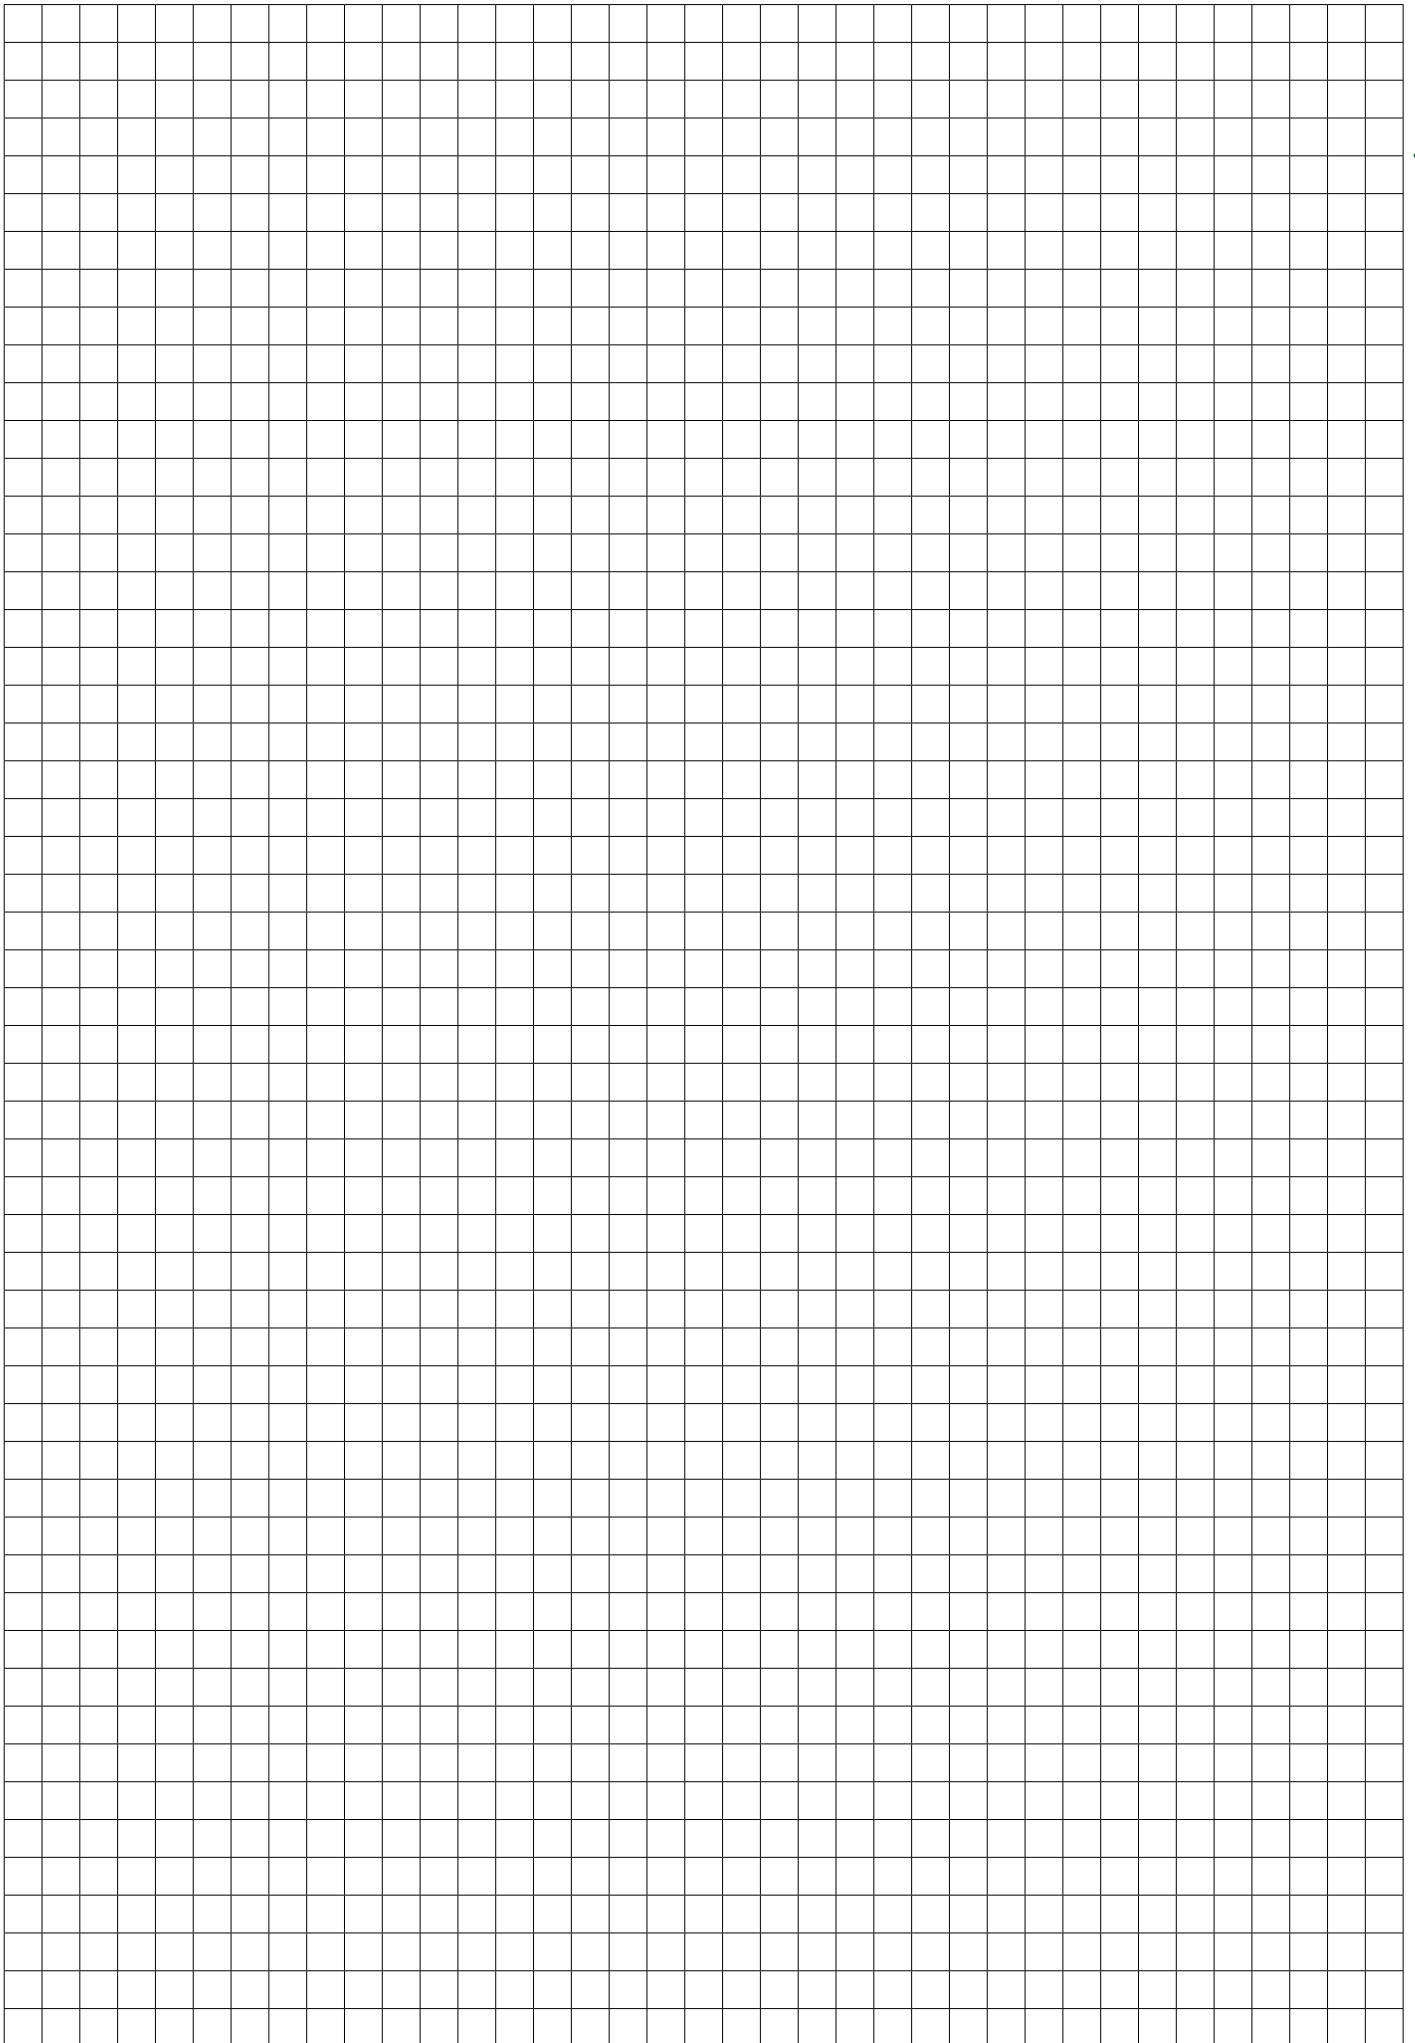

Valves 1/4" NPT series Steel line

Pneumax has wide experience and know-how to develop application-oriented solutions for the process industry, as well as a range of highperformance products aimed to improve the efficiency, productivity and quality of the process itself.

Each item passed thru internal long-ride severe test procedure and after validated through years of experience.

All certifications and relevant approvals are available.

Thanks to a global presence worldwide **Pneumax** can provide prompt assistance to any customer's specific needs. Our complete product range includes large number of products for day-by-day business.

At Pneumax the focus is always on customer satisfaction.

General

Stainless steel brand series have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

Applications for actuation:

- ESDV – emergency shut-down valve.
- HIPPS - High-integrity pressure protection system.
- High pressure turbine control.
- Water service application.
- Control for gas/fluid.
- On-Off valve and control valve.

Applications:

- Severe service operations.
- Low and high temperature application.
- Fire control system.
- Hazardous area.
- Offshore.
- Refineries.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.


The range includes 3 and 5 way function valves, with the following functions available:

- Pneumatic-spring valve
- Pneumatic-pneumatic valve
- 2 position push-pull valve
- Push button-spring valve
- Push button-pneumatic return valve
- Tappet-spring valve
- Roller lever-spring valve
- Pneumatic valve with self-locking manual reset
- Pneumatic valve with self-locking manual reset inverted
- Key-spring valve
- Accessories which include: Non return valve, Uni/bidirectional flow regulator and Quick exhaust valve.
- Blocks dividers or shunts

Modularity

1/4" size connection components minimum flow rate from 1000NI/min.

Thanks to customized body design configuration, Pneumax can provide pneumatic manifold solution, with compact design and easy installation operation.

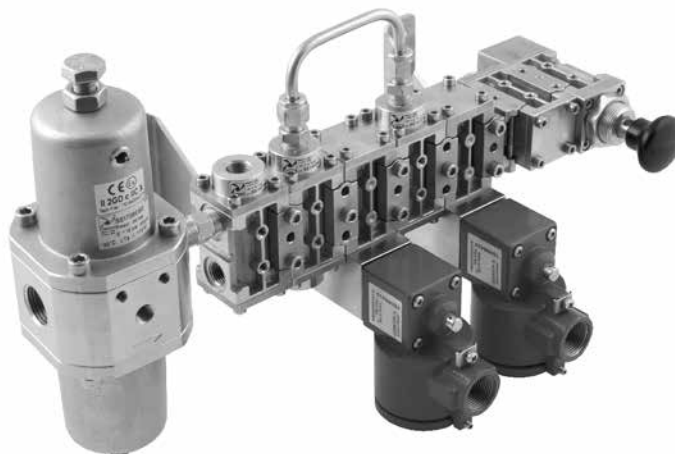


Example: Module with redundant solenoids valves

**Construction characteristics**


Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	FPM (Fluoroelastomer) NBR for low temperatures (-50°C) Standard

Operating range


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature (for low temperature version L)	-50°C ... +70°C
Operating temperature (for low temperature version H)	-10°C ... +150°C
Maximum operating pressure	12 bar

Certifications available:

Pneumatic-spring valve

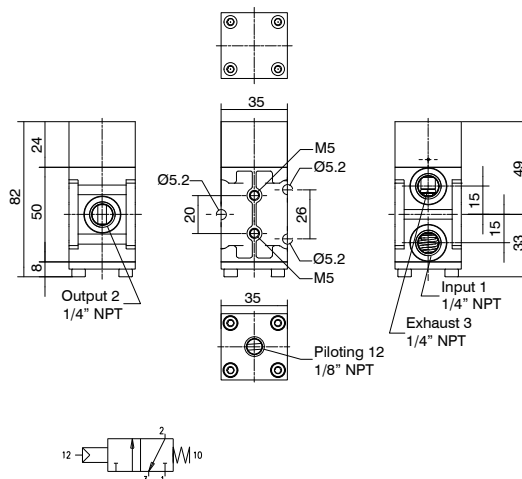

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	500	1,02	15,15

Ordering code


SS1432C1101

TYPE


L = Low temperature version
H = High temperature version



Pneumatic-pneumatic valve

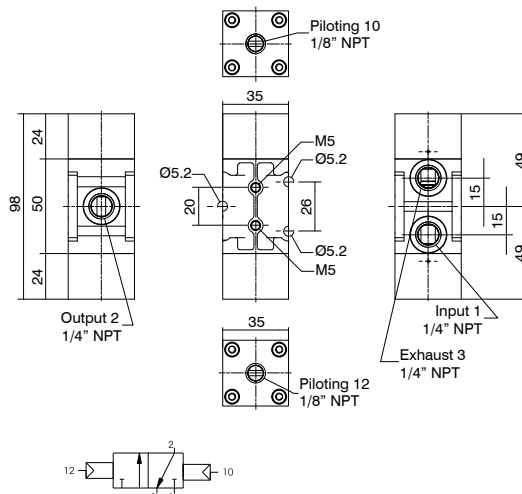

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	660	1,02	15,15

Ordering code


SS1432C1111

TYPE


L = Low temperature version
H = High temperature version



2 position push-pull valve

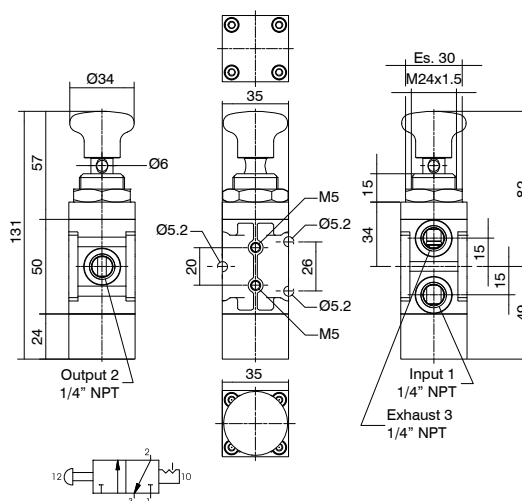

Actuation force 55N.
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	620	1,02	15,15

Ordering code


SS1432C0802

TYPE

L = Low temperature version
H = High temperature version



Push button-spring valve

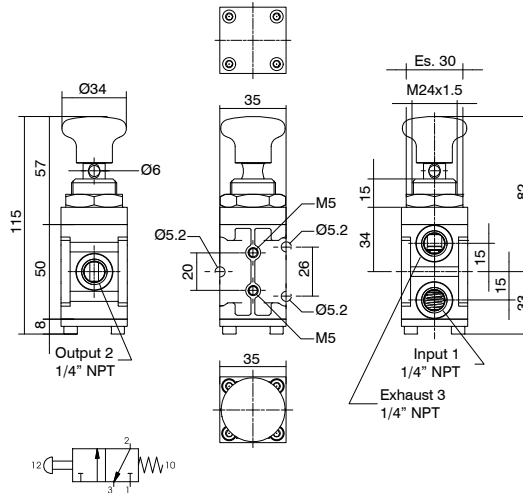

Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS1432C0801

TYPE

T L = Low temperature version
H = High temperature version




Actuation force at 2 bar = 55N
Actuation force at 12 bar = 105N

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	470	1,02	15,15

Push button-pneumatic return valve

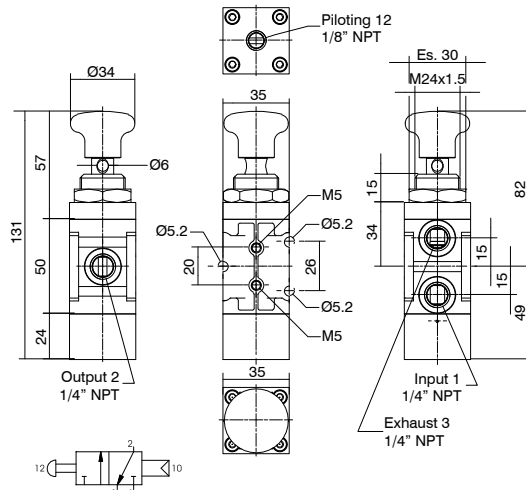

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS1432C0811

TYPE


T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	600	1,02	15,15

Tappet-spring valve

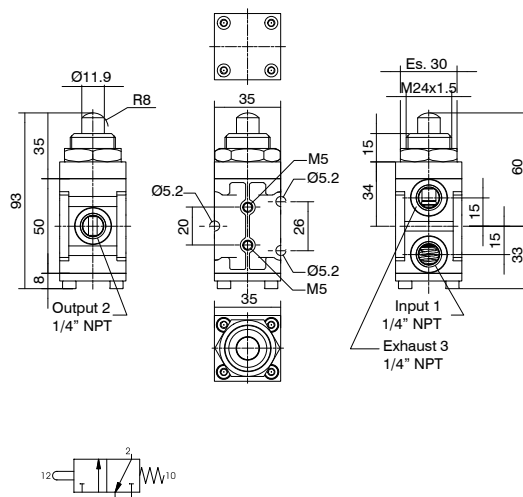

Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS1432C0001

TYPE

T L = Low temperature version
H = High temperature version




Actuation force at 2 bar = 55N
Actuation force at 12 bar = 105N

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	450	1,02	15,15

Roller lever-spring valve

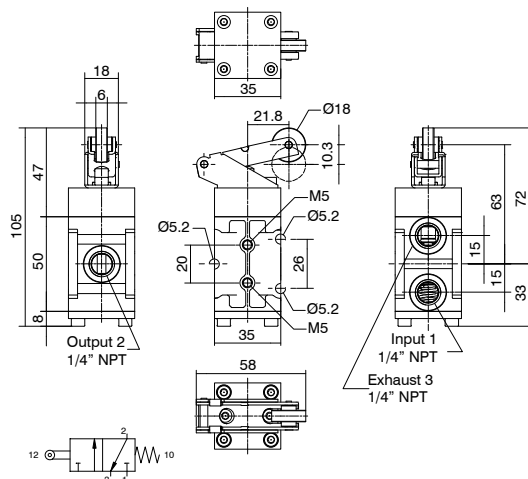


Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Actuation force at 2 bar = 55N
Actuation force at 12 bar = 105N

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	480	1,02	15,15

Roller lever-pneumatic valve

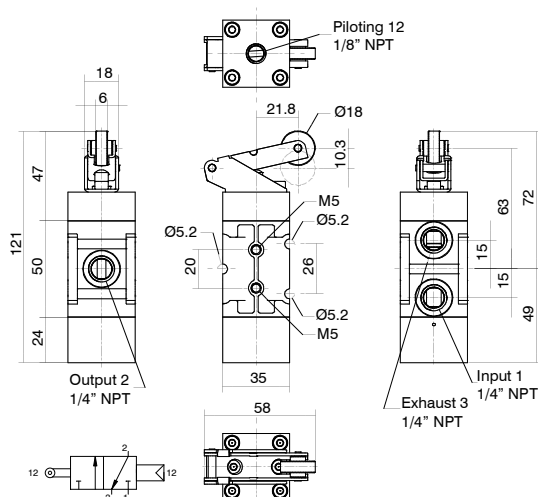


Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Minimum piloting pressure 2,5 bar

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	480	1,02	15,15

Pneumatic valve with self-locking manual reset

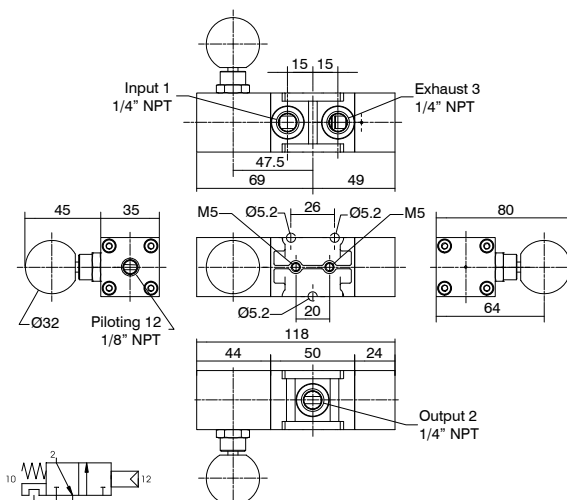

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS1432C1114

TYPE

L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	860	1,02	15,15

Pneumatic valve with self-locking manual reset inverted




Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).

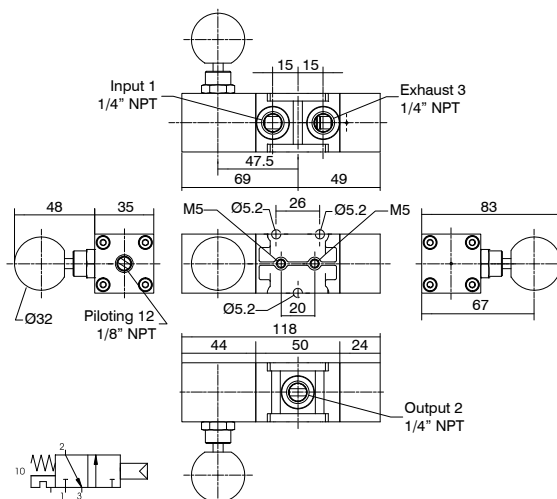

Ordering code

SS1432C1115T

	TYPE
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100



T L = Low temperature version
H = High temperature version



Operational characteristics

Operational characteristics						
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	860	1,02	15,15

Key-spring valve stable

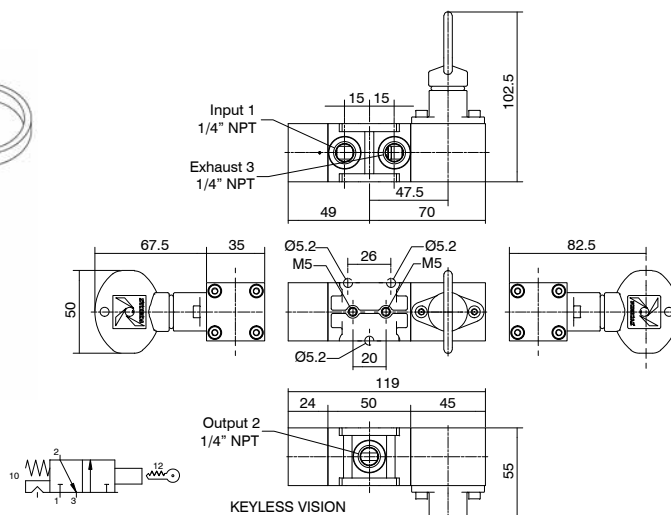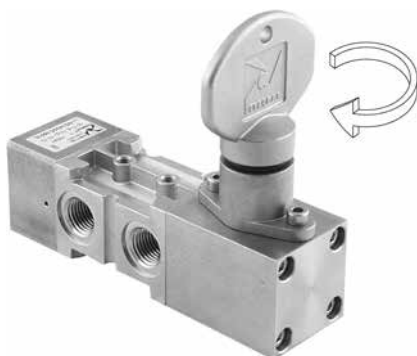

Ordering code

SS1432C1601T

	TYPE
--	------


T L = Low temperature version
H = High temperature version



Operational characteristics

Operational characteristics					
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1020	1,02	15,15

Key-spring valve instable

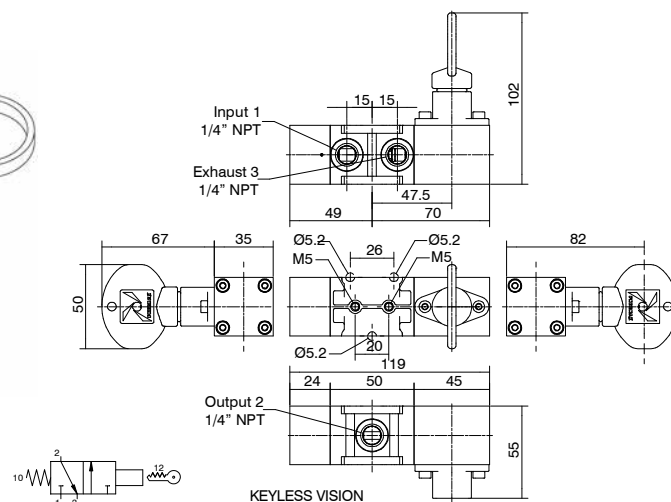

Ordering code

SS1432C2601T

	TYPE
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

T L = Low temperature version
H = High temperature version




Operational characteristics

Operational characteristics					
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1020	1,02	15,15

Pneumatic-key valve stable



Minimum piloting pressure 2,5 bar,
after the valve unlock.

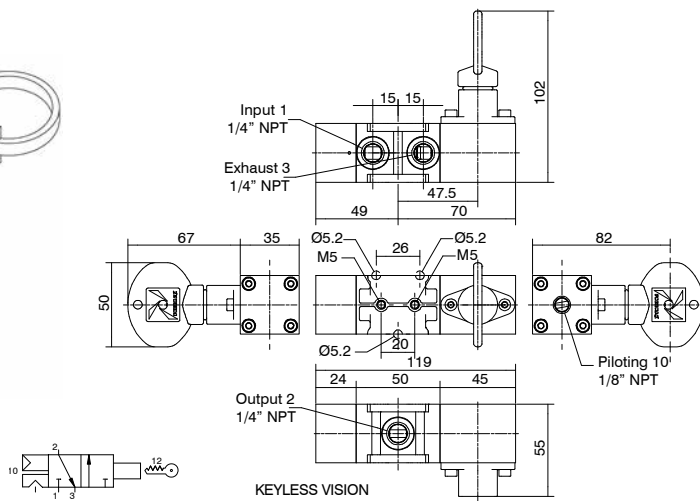

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1020	1,02	15,15

Ordering code

SS1432C1611

TYPE


1 L = Low temperature version
H = High temperature version



Pneumatic-key valve instable



Minimum piloting pressure 2,5 bar

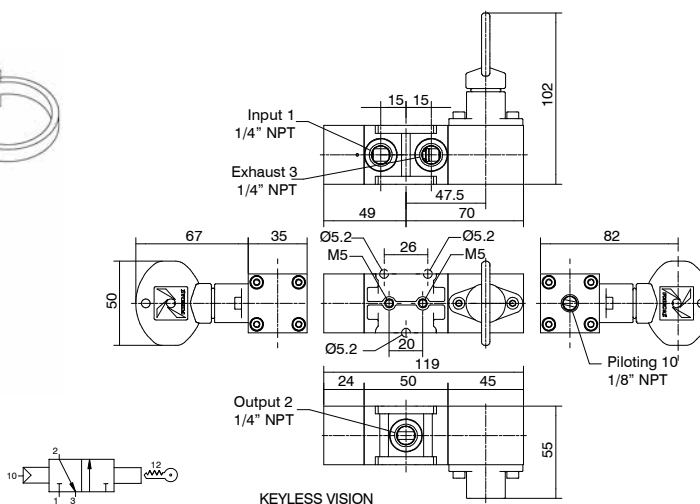

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1020	1,02	15,15

Ordering code


SS1432C2611

TYPE


1 L = Low temperature version
H = High temperature version



Pneumatic-spring valve

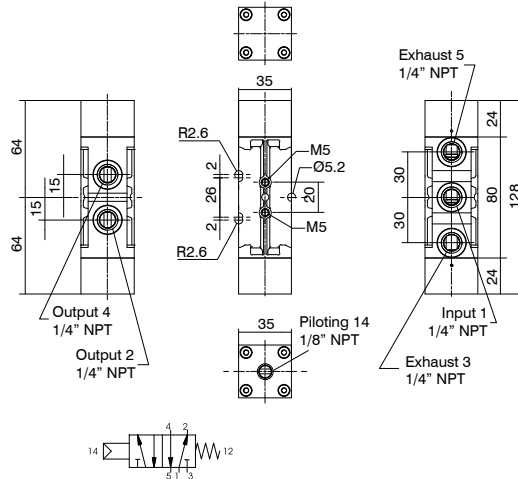


Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	820	1,02	15,15

Pneumatic-pneumatic valve

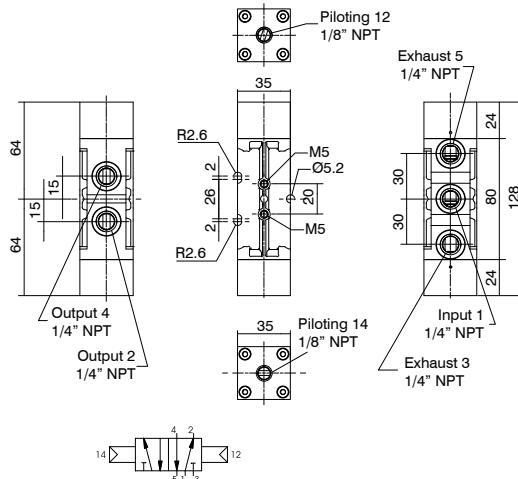


Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	820	1,02	15,15

Pneumatic-pneumatic closed centers valve

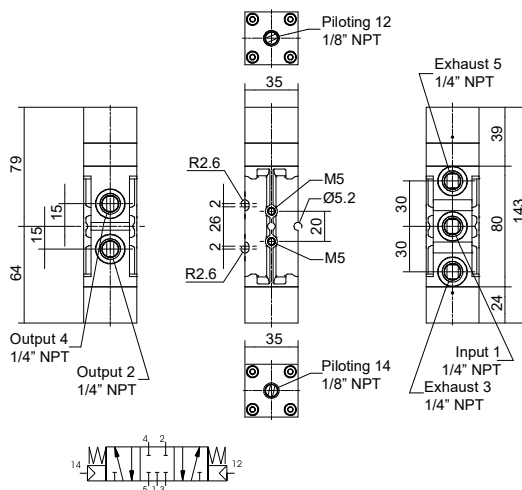

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	931	1,02	15,15

Ordering code

SS145201101

TYPE

T L = Low temperature version
H = High temperature version



Ordering code

SS145201111

TYPE

T L = Low temperature version
H = High temperature version



Ordering code

SS145311111

TYPE


T L = Low temperature version
H = High temperature version



2 position push-pull valve



Actuation force 55N.
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

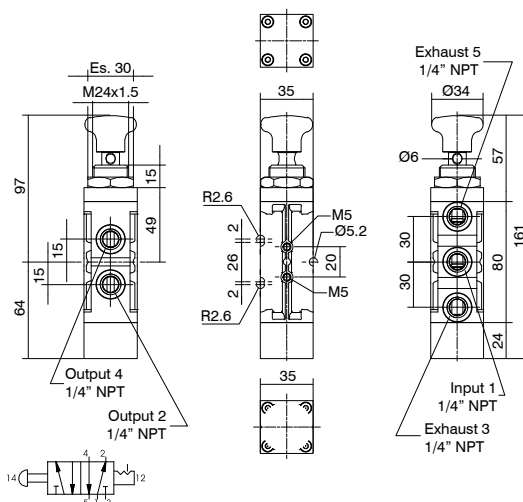

Ordering code

SS145200802T

TYPE

T L = Low temperature version
H = High temperature version




Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	770	1,02	15,15

Push button-spring valve



Actuation force 90N
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

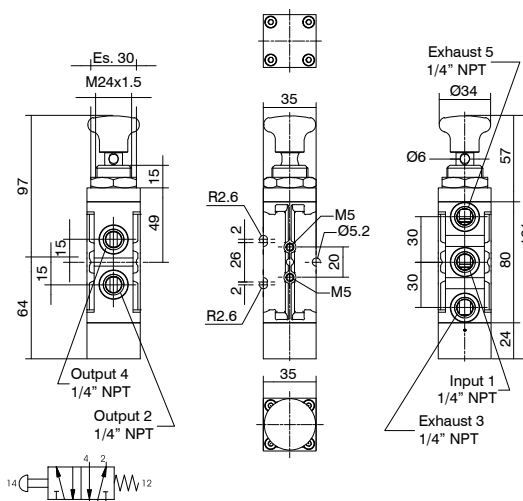

Ordering code

SS145200801T

TYPE

T L = Low temperature version
H = High temperature version




Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	780	1,02	15,15

Push button-pneumatic return valve



Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

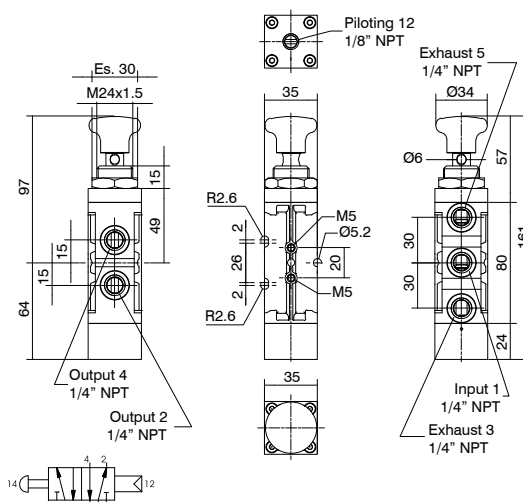

Ordering code

SS145200811T

TYPE


T L = Low temperature version
H = High temperature version




Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	780	1,02	15,15

Tappet-spring valve

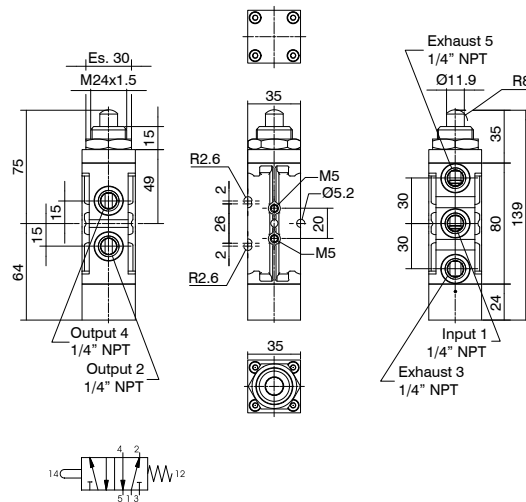

Actuation force 90N
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	770	1,02	15,15

Ordering code


SS145200001

TYPE


T L = Low temperature version
H = High temperature version



Roller lever-spring valve

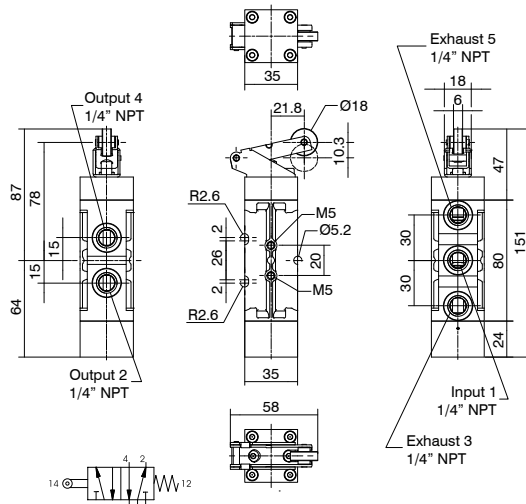

Actuation force 90N
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	800	1,02	15,15

Ordering code


SS145200401

TYPE


T L = Low temperature version
H = High temperature version



Roller lever-spring valve

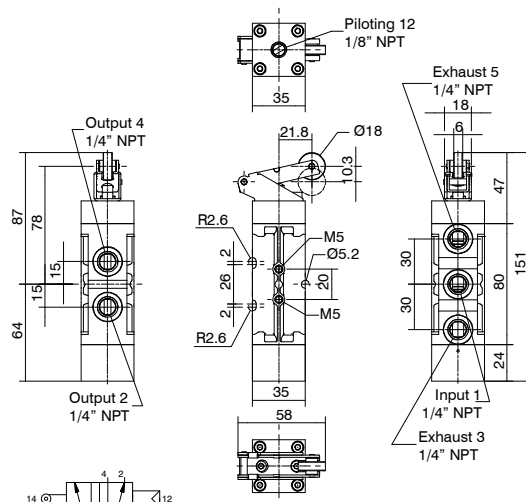

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	800	1,02	15,15

Ordering code

SS145200411

TYPE


T L = Low temperature version
H = High temperature version



Pneumatic valve with self-locking manual reset



Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

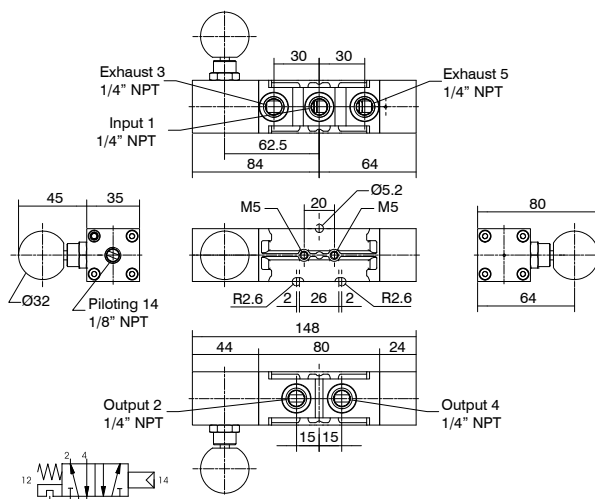

Ordering code

SS145201114T

TYPE

T L = Low temperature version
H = High temperature version




Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	1020	1,02	15,15

Pneumatic valve with self-locking manual reset inverted



Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

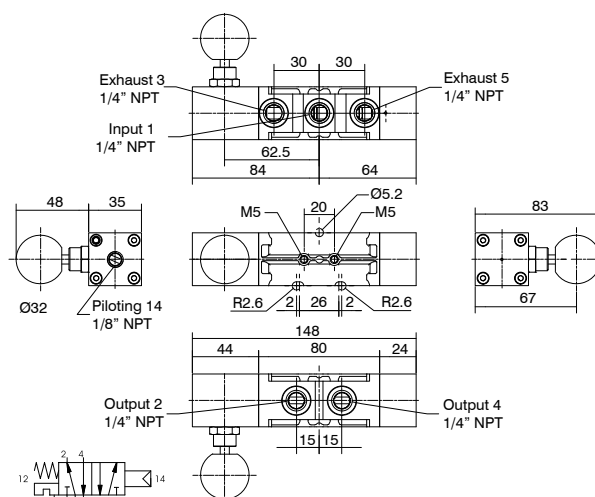

Ordering code

SS145201115T

TYPE


T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1/8" NPT	1020	1,02	15,15

Key-spring valve stable

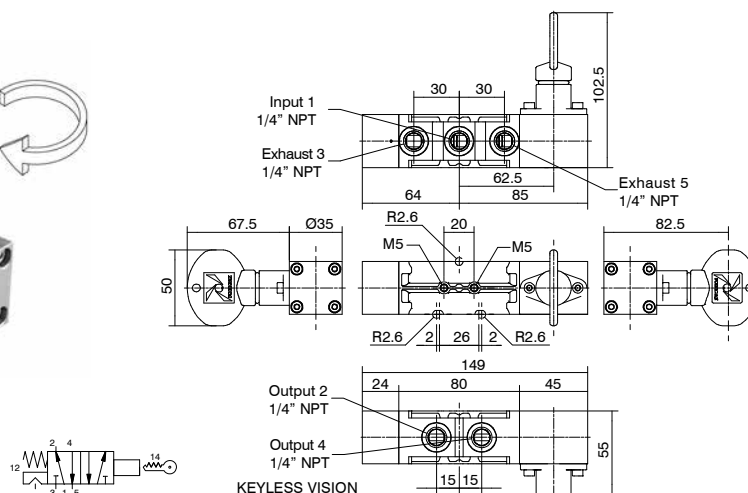

Ordering code

SS145201601T

TYPE



T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1180	1,02	15,15

Key-spring valve instable

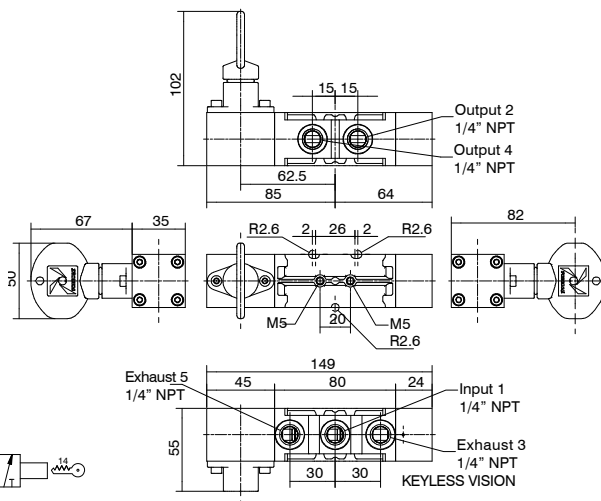

Ordering code

SS145202601T



TYPE

T L = Low temperature version
H = High temperature version


Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1180	1,02	15,15

Pneumatic-key valve stable

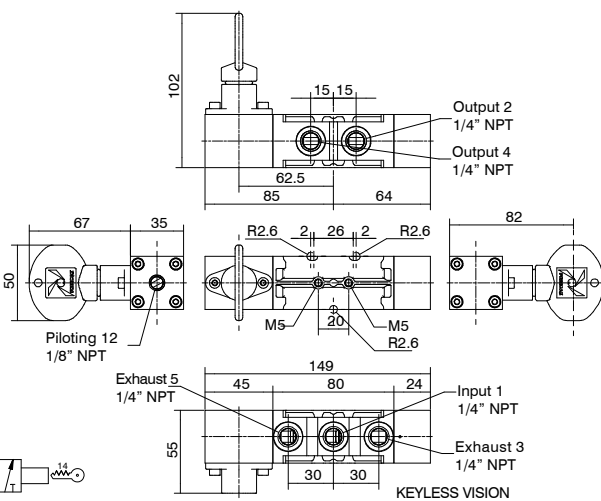

Ordering code

SS145201611T



TYPE

T L = Low temperature version
H = High temperature version


Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1180	1,02	15,15

Pneumatic-key valve instable

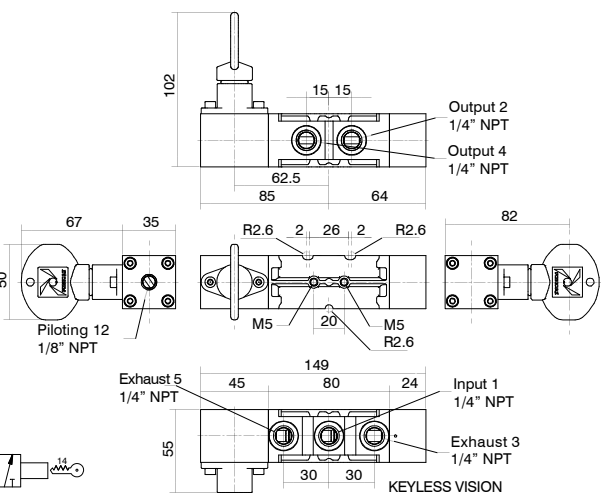

Ordering code

SS145202611T

TYPE

T L = Low temperature version
H = High temperature version


Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	1180	1,02	15,15



Solenoid valves 1/4" NPT series Steel line

Stainless steel solenoid valves, complete with 30mm solenoid coil and **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve

Pneumax solenoid valves have 1/4" NPT connections with 1000NI/min maximum flowrate.

Pneumax solenoid valve utmost adaptability represent one of the main features to provide customized solution and module assembly solution, since both single mounting and integrated module design are available; thanks to distinctive Pneumax valve body design.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	FPM (Fluoroelastomer) NBR for low temperatures (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-10°C ... +130°C
Note: The suitable operating temperature is limited by the most restrictive component, which is the pilot, regardless of the type of seals used in the valve spool.	
Maximum operating pressure	10 bar

Electrical (Electropilot) construction characteristics

Cores	Ferromagnetic stainless steel
Guide tube	Stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer) NBR (available on request)
Incorporation	PA reinforced fibreglass
Wire insulation	F (Class H available on request)
Nominal voltage	24 V DC 24, 110, 220/230 V AC
Power consumption DC	10W
Power consumption AC	15VA
Electrical connection	According to DIN43650 A
IP Rating	IP65
Tolerance on voltage supply	±10%
ED continuous service	100%

Certifications available:


Non ATEX marked product




: Suitable up to SIL 3



Solenoid-spring valve

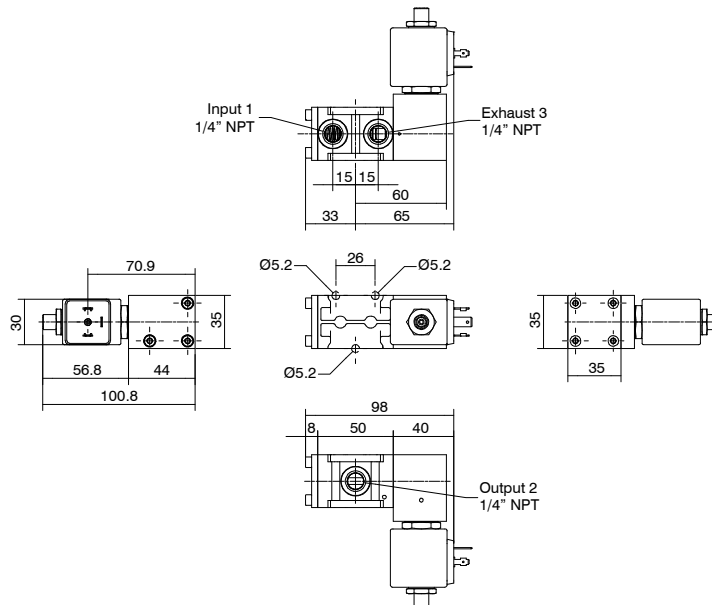

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	900	1,02	15,15

Ordering code


SS1432C2T01H

TENSION


0 = 12 V DC
1 = 24 V DC
B = 24 V AC (50/60 Hz)
E = 230 V AC (50/60 Hz)



Solenoid-solenoid valve

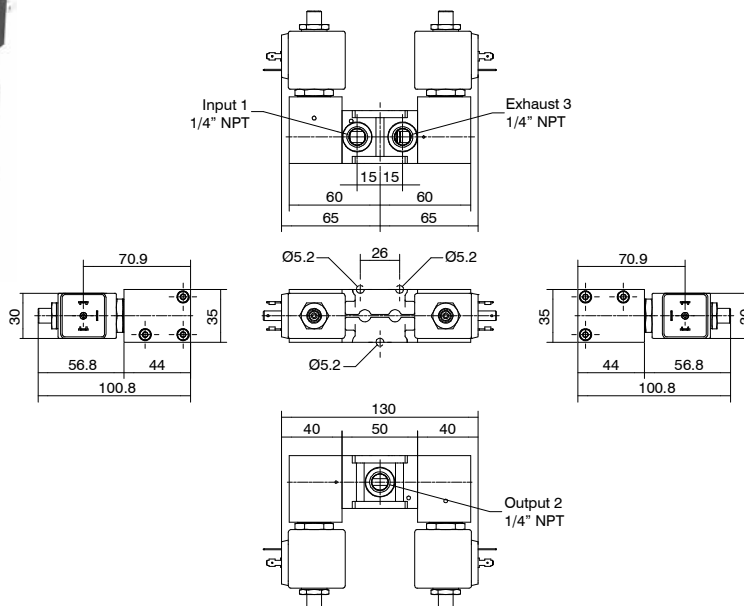

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1400	1,02	15,15

Ordering code


SS1432C2T20H

TENSION


0 = 12 V DC
1 = 24 V DC
B = 24 V AC (50/60 Hz)
E = 230 V AC (50/60 Hz)



Solenoid-spring valve

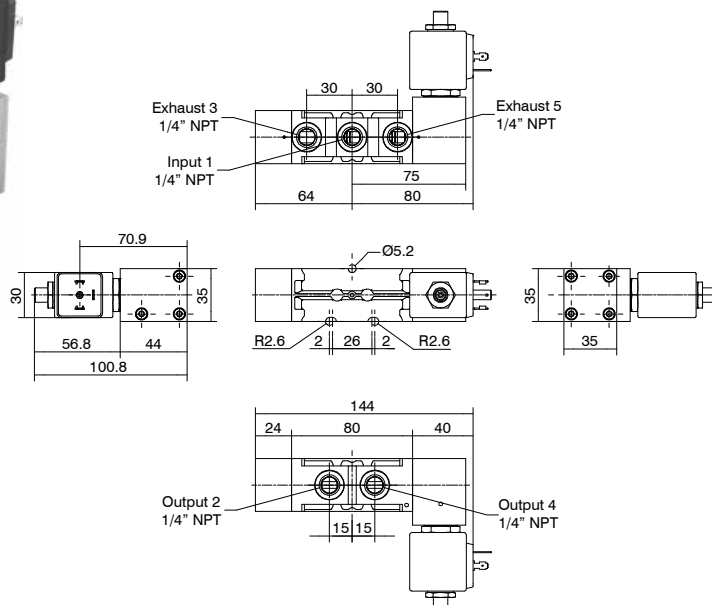

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1200	1,02	15,15


Ordering code

SS145202T01H


TENSION
0 = 12 V DC
1 = 24 V DC
B = 24 V AC (50/60 Hz)
E = 230 V AC (50/60 Hz)



Solenoid-solenoid valve

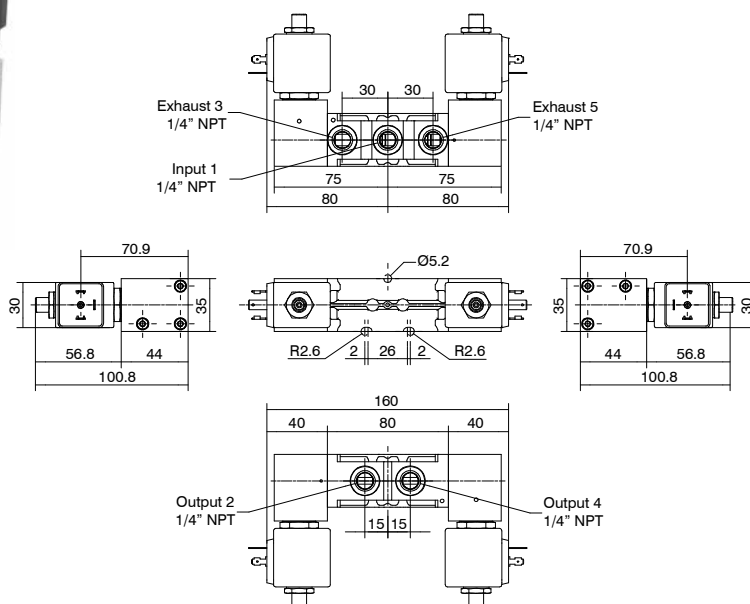

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1600	1,02	15,15

Ordering code

SS145202T02H

TENSION
0 = 12 V DC
1 = 24 V DC
B = 24 V AC (50/60 Hz)
E = 230 V AC (50/60 Hz)





Solenoid valves 1/4" NPT series Steel line - For safe area with IP66 stainless steel housing

Stainless steel solenoid valves, complete with IP66 rated solenoid coil in a stainless steel housing and **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve
- Solenoid valve with self-locking manual reset
- Solenoid valve with self-locking manual reset inverted.

Pneumax solenoid valves have 1/4" NPT connections with 1000NI/min maximum flow rate.

Pneumax solenoid valve utmost adaptability represent one of the main features to provide customized solution and module assembly solution, since both single mounting and integrated module design are available; thanks to distinctive Pneumax valve body design.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	NBR for low temperatures FPM (Fluoroelastomer) (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-20°C ... +70°C
Note: The suitable operating temperature is limited by the most restrictive component, which is the pilot, regardless of the type of seals used in the valve spool.	
Maximum operating pressure	10 bar

Electrical (Electropilot) construction characteristics

Housing	304 stainless steel with epoxy paint
Armour / Cores	Ferromagnetic stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer)
Incorporation	PTB 30% glass load
Wire insulation	H
Nominal voltage	24 V DC 24, 110, 220 V AC
Power consumption DC	2,4W
Power consumption AC	10VA (Inrush), 5VA (Running)
Connection for cable entry	M20x1.5 (1/2" NPT available on request)
Electrical connection	Screw terminals 2 Poles 2.5 mm
IP Rating	IP66
Tolerance on voltage supply	±10%
ED continuous service	100%

Certifications available:


Non ATEX marked product




: Suitable up to SIL 3



Solenoid-spring valve

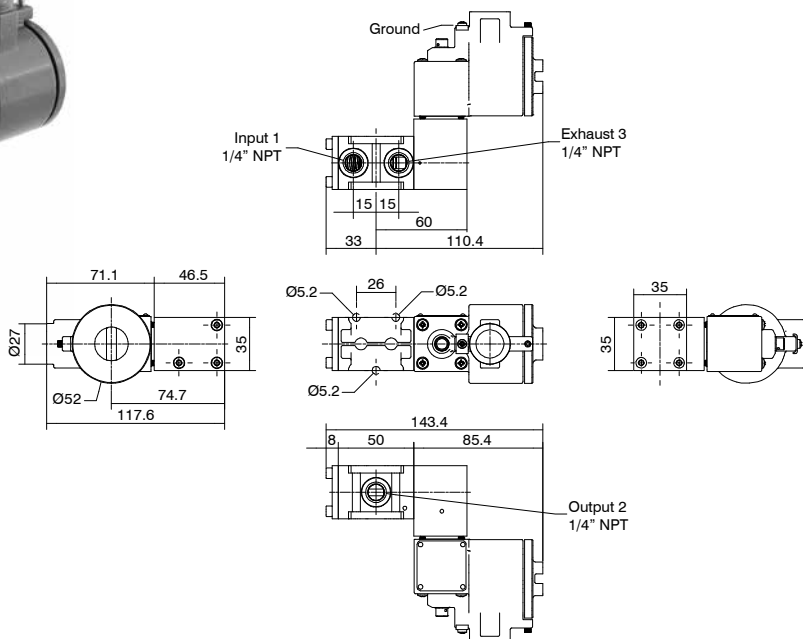

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1500	1,02	15,15

Ordering code


SS1432CA^T01L

TENSION


- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid-solenoid valve

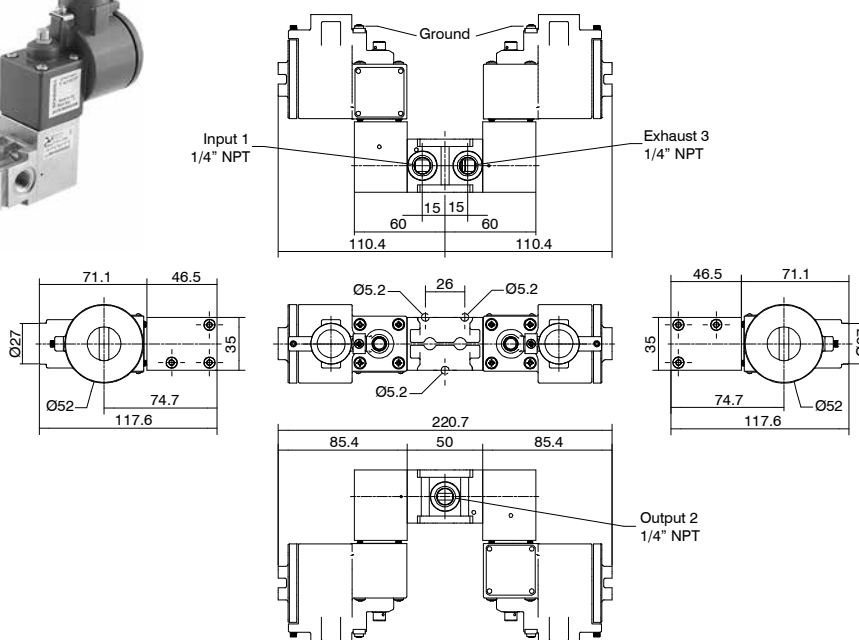

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2600	1,02	15,15

Ordering code


SS1432CA^TA^TL

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid-spring valve

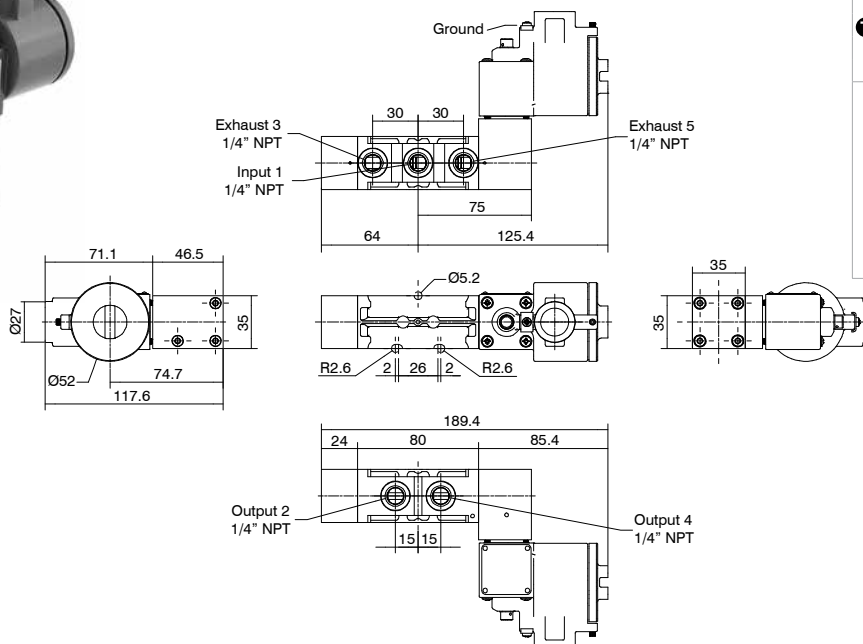


Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1800	1,02	15,15

Ordering code


SS14520A101L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)**
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid-solenoid valve

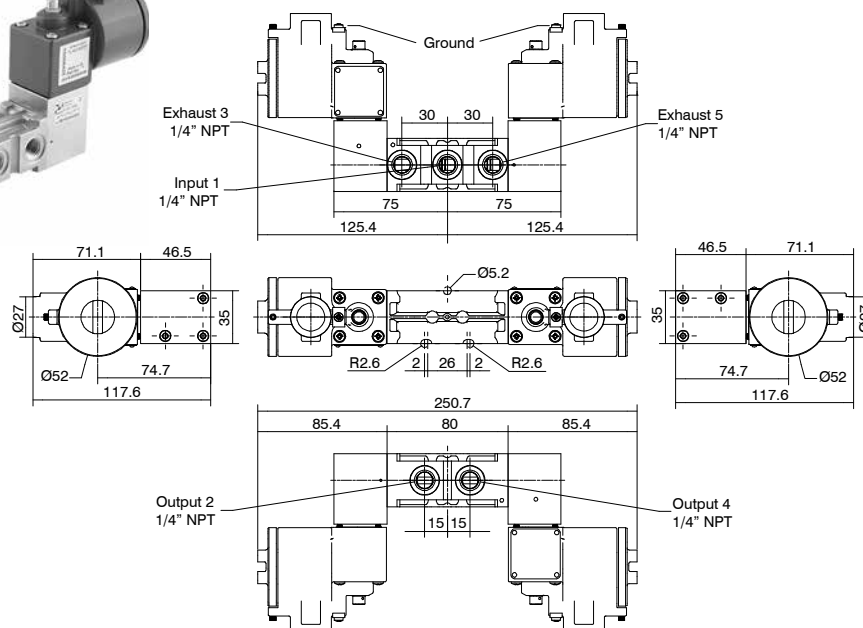


Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2750	1,02	15,15

Ordering code


SS14520A1A1L

TENSION


- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)**
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset

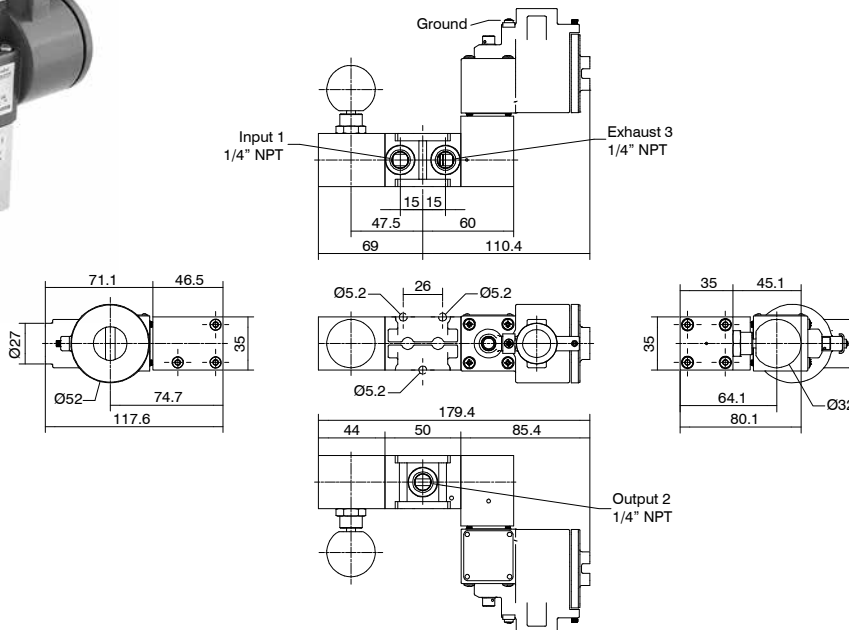

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1850	1,02	15,15


Ordering code

SS1432CA114L


TENSION
1 = 24 V DC
2 = 24 V AC (50/60 Hz)
3 = 110 V AC (50/60 Hz)
4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset inverted

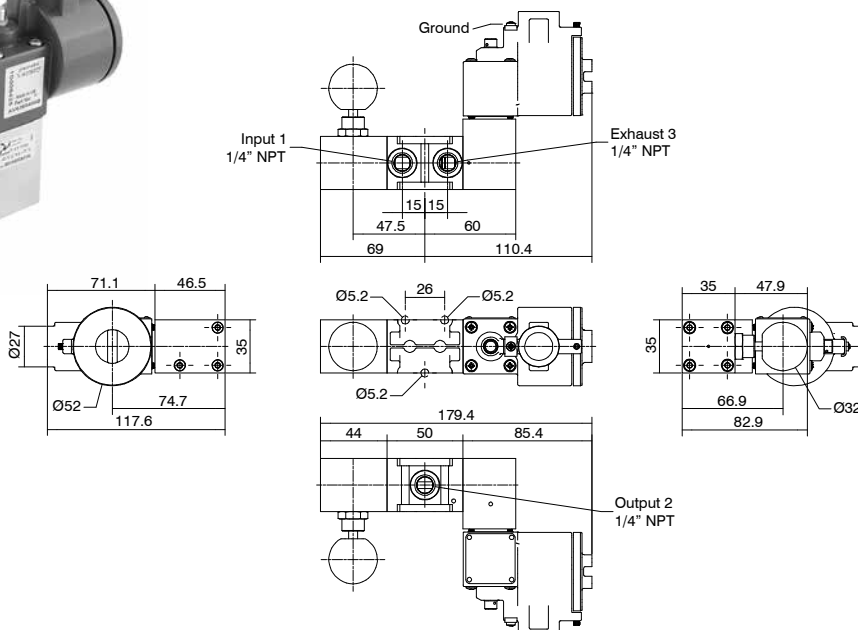

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1850	1,02	15,15

Ordering code



SS1432CA115L

TENSION
1 = 24 V DC
2 = 24 V AC (50/60 Hz)
3 = 110 V AC (50/60 Hz)
4 = 220 V AC (50/60 Hz)





Solenoid valve with self-locking manual reset

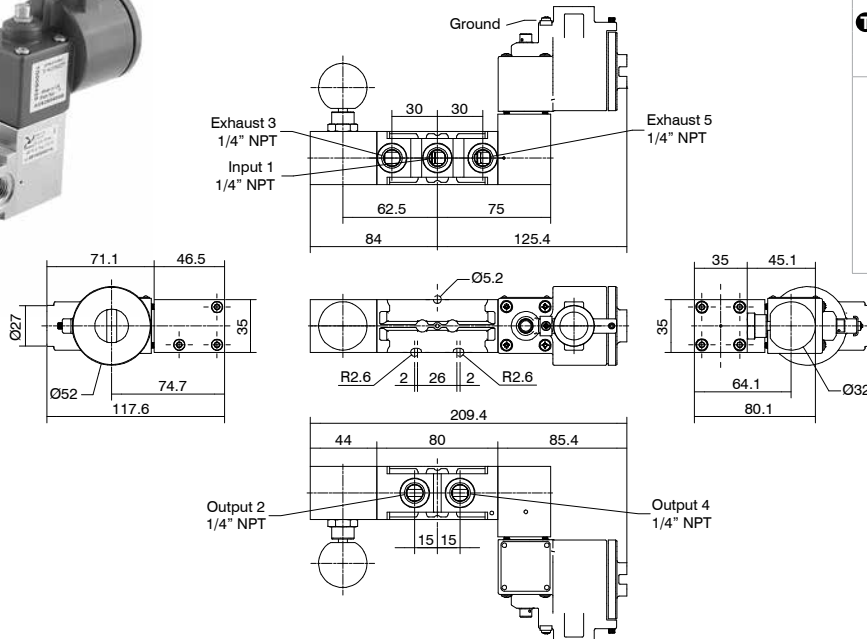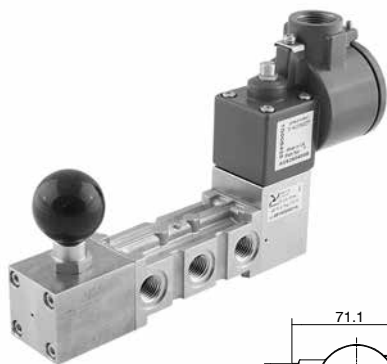

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2000	1,02	15,15

Ordering code


SS14520A14L

TENSION


- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)**
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset inverted

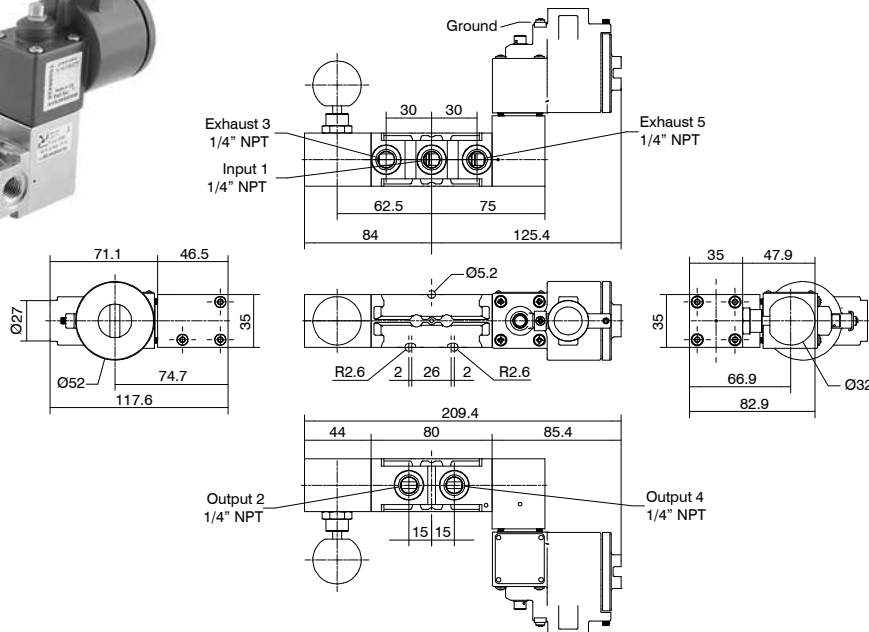

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2000	1,02	15,15

Ordering code

SS14520A15L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)**
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)





Solenoid valves 1/4" NPT series Steel line - IP66 Exd Explosion protection

Stainless steel solenoid valves, complete with IP66 Exd Explosion protection rated solenoid coil in a stainless steel housing and **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve
- Solenoid valve with self-locking manual reset
- Solenoid valve with self-locking manual reset inverted.

Pneumax solenoid valves have 1/4" NPT connections with 1000NI/min maximum flow rate.

Pneumax solenoid valve utmost adaptability represent one of the main features to provide customized solution and module assembly solution, since both single mounting and integrated module design are available; thanks to distinctive Pneumax valve body design.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	NBR for low temperatures FPM (Fluoroelastomer) (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature for DC version	-50°C ... +70°C
Operating temperature for AC version	-50°C ... +55°C
Maximum operating pressure	10 bar

Electrical (Electropilot) construction characteristics

Housing	304 stainless steel with epoxy paint
Armour / Cores	Ferromagnetic stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer)
Incorporation	PTB 30% glass load
Wire insulation	H
Nominal voltage	24 V DC 24, 110, 220/230 V AC
Power consumption DC	3W
Power consumption AC	10VA (Inrush), 5VA (Running)
Connection for cable entry	M20x1.5 (1/2" NPT available on request)
Electrical connection	Screw terminals 2 Poles 2.5 mm
IP Rating	IP66
Tolerance on voltage supply	±10%
ED continuous service	100%

Certifications available:



: International certification
for explosive atmospheres



: Suitable up to SIL 3



: Nepsy approval - China




: CU - TR 012

ATEX, SIL and EAC Ex: refer to products in the various sections to the catalogues.

IECEx and NEPSI: refer to Pneumatrol pilots installed upon each valve.

Solenoid-spring valve

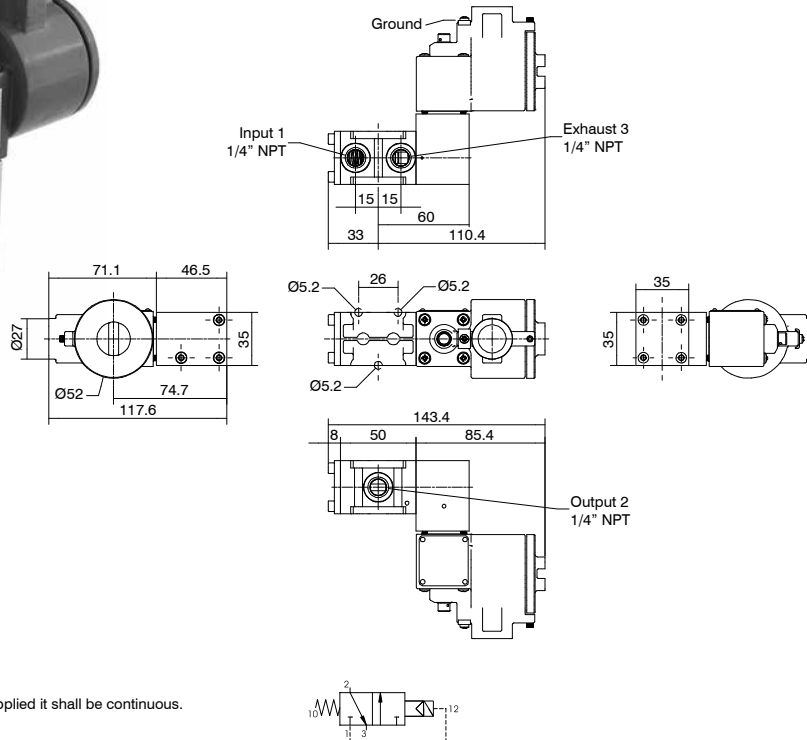

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1500	1,02	15,15

Ordering code


SS1432CB101L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)**
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid-solenoid valve

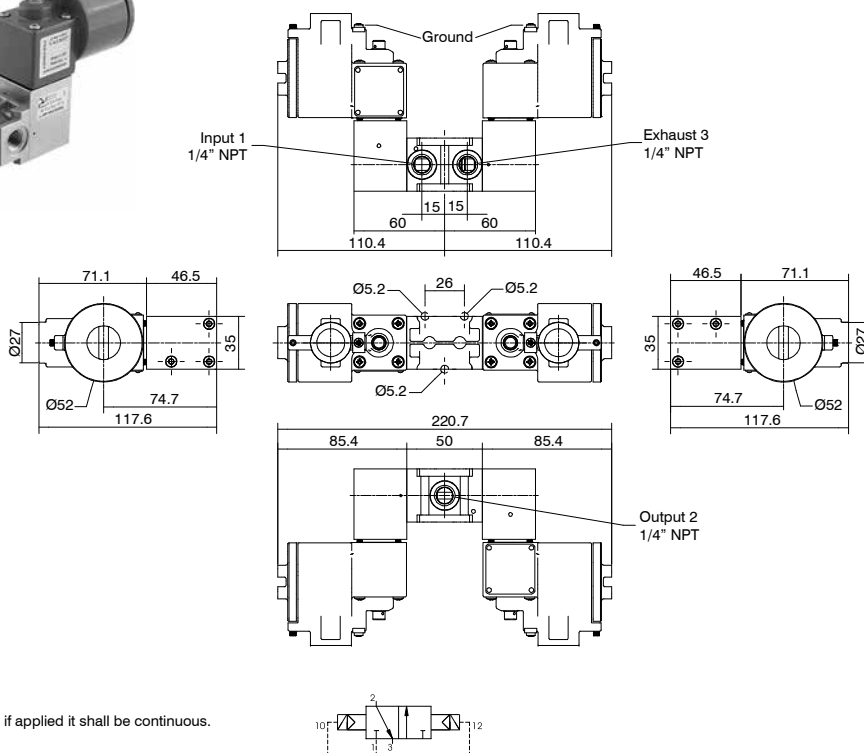

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2600	1,02	15,15

Ordering code


SS1432CB101L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)**
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid-spring valve

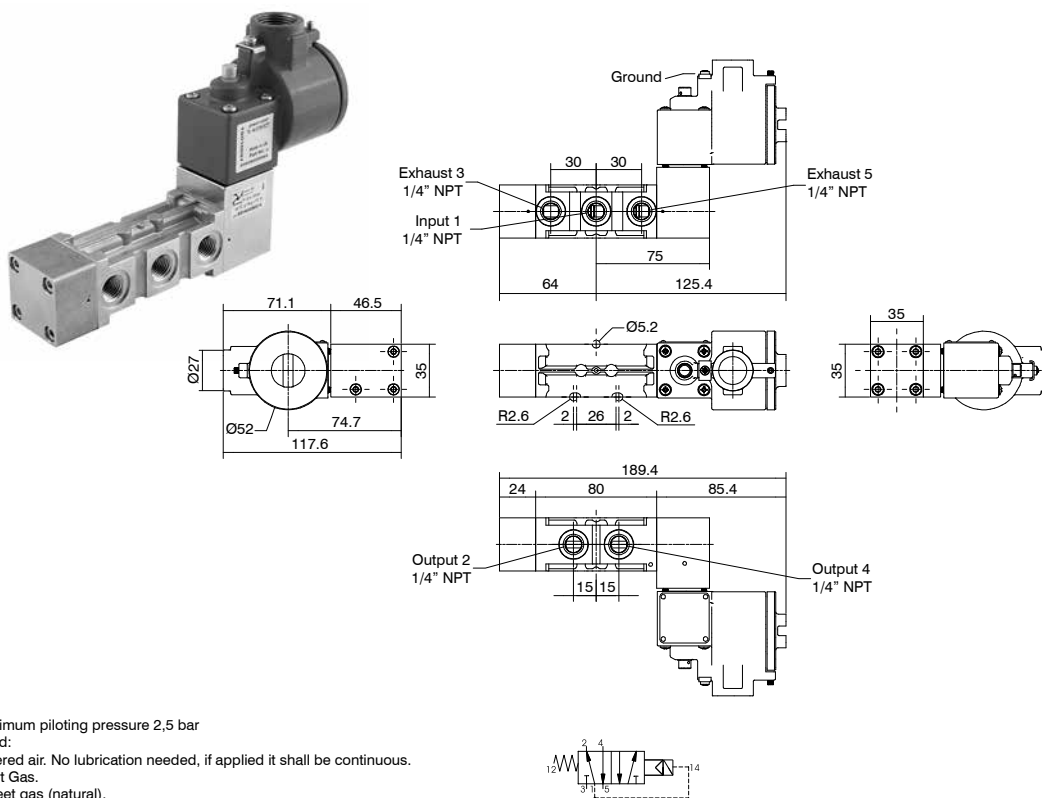


Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1800	1,02	15,15

Solenoid-solenoid valve

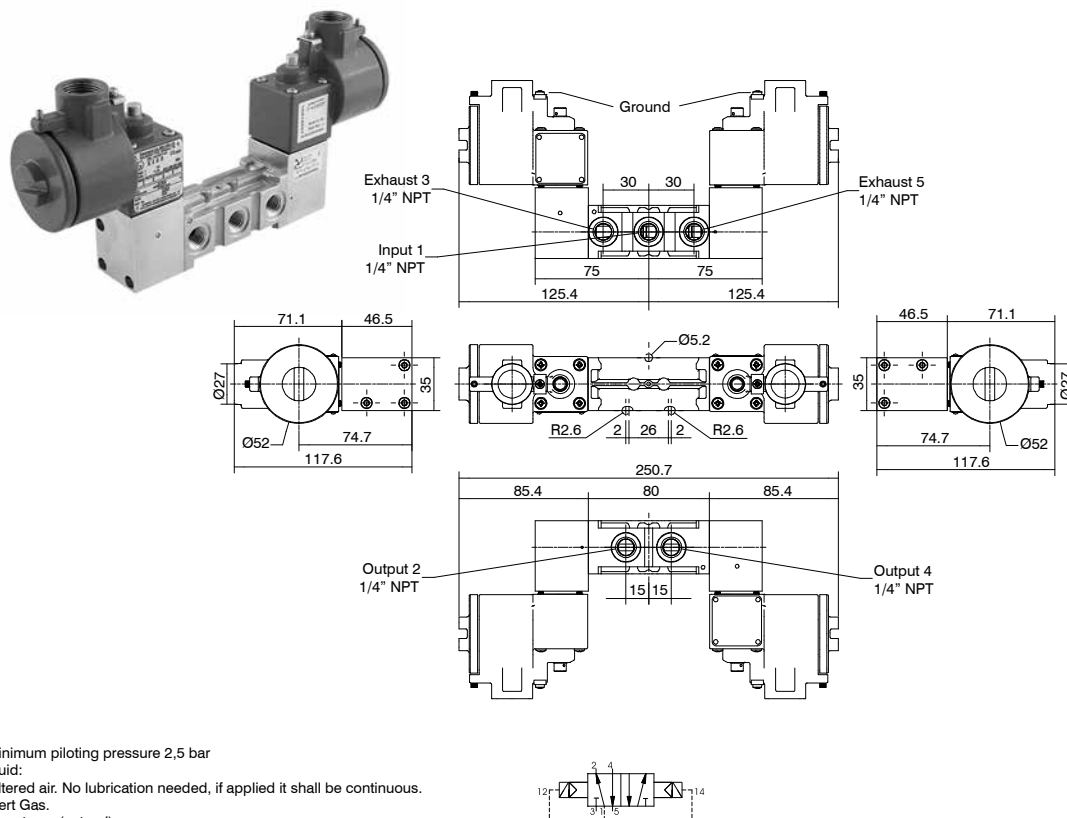

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2750	1,02	15,15

Ordering code

SS14520B01L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Ordering code


SS14520B01L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset

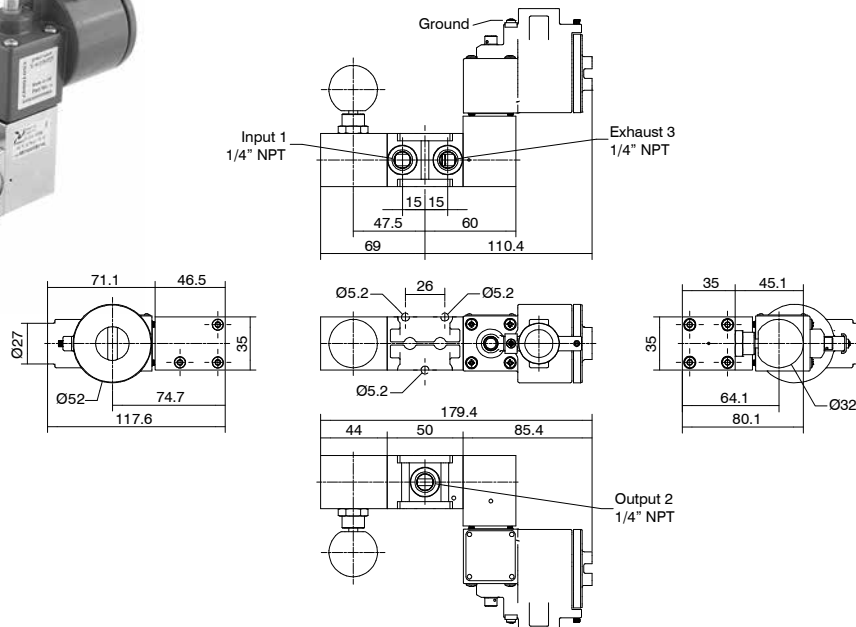

Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1850	1,02	15,15

Ordering code

SS1432CB14L

TENSION

1 = 24 V DC


2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset inverted

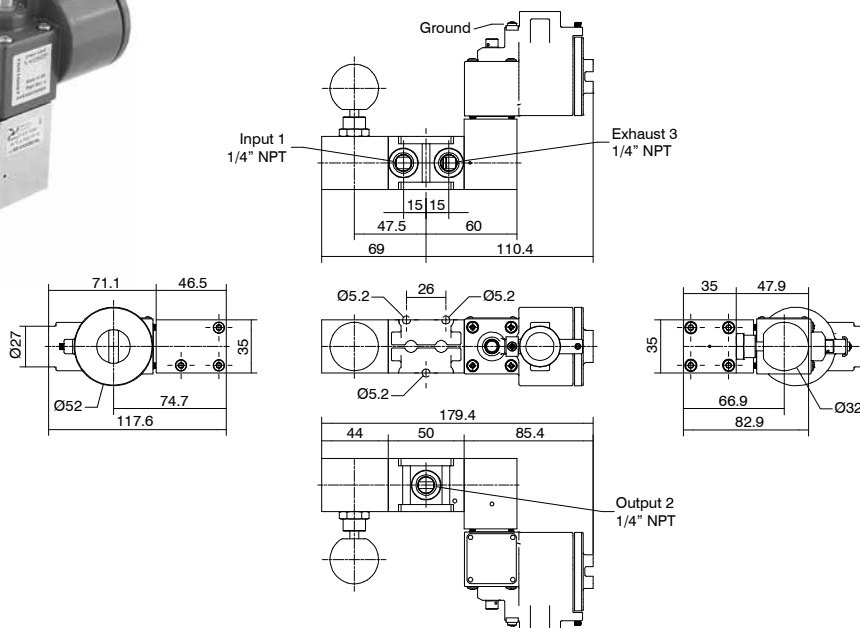

Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1850	1,02	15,15

Ordering code

SS1432CB15L

TENSION

1 = 24 V DC



2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset

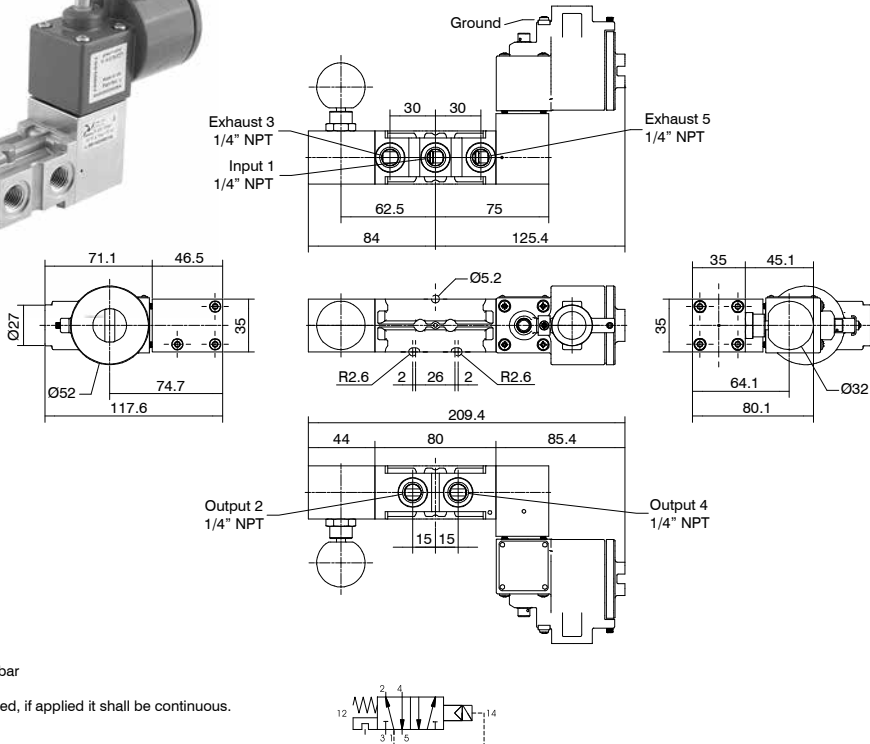
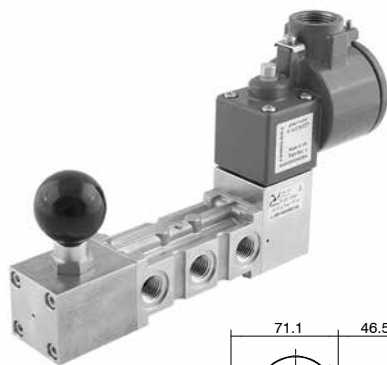


Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2000	1,02	15,15

Solenoid valve with self-locking manual reset inverted

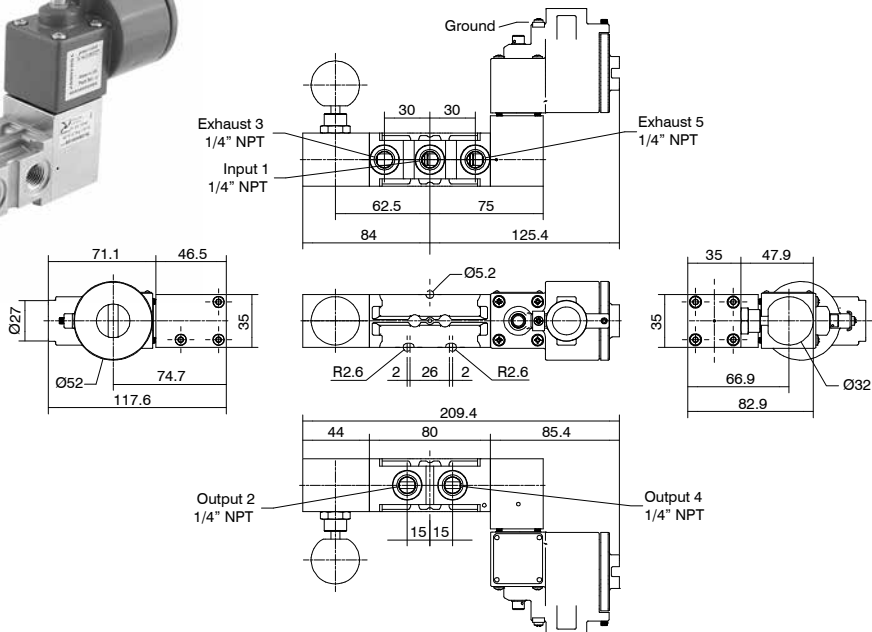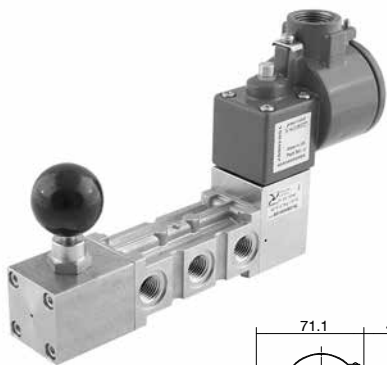

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2000	1,02	15,15

Ordering code

SS14520B114L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Ordering code

SS14520B115L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)





Solenoid valves 1/4" NPT series Steel line - Intrinsically safe Exia

Stainless steel solenoid valves, complete with intrinsically safe Exia rated solenoid coil in and **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve
- Solenoid valve with self-locking manual reset
- Solenoid valve with self-locking manual reset inverted.

Pneumax solenoid valves have 1/4" NPT connections with 1000NI/min maximum flow rate.

Pneumax solenoid valve utmost adaptability represent one of the main features to provide customized solution and module assembly solution, since both single mounting and integrated module design are available; thanks to distinctive Pneumax valve body design.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	NBR for low temperatures FPM (Fluoroelastomer) (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-40°C ... +65°C

Note: The suitable operating temperature is limited by the most restrictive component, which is the pilot, regardless of the type of seals used in the valve spool.

Maximum operating pressure	10 bar
----------------------------	--------

Electrical (Electropilot) construction characteristics

Housing	Zinc alloy with epoxy paint
Armour / Cores	Ferromagnetic stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer)
Incorporation	PTB 30% glass load
Wire insulation	H
Guide tube	Stainless steel
Resistance	370 Ohms
Nominal voltage	24 V DC
Power consumption DC	0,4 W (Running)
Connection for cable entry	M20x1.5
Electrical connection	Screw terminals 2 Poles 2.5 mm
IP Rating	IP66
Tolerance on voltage supply	± 10%
ED continuous service	100%

Electrical specifications for intrinsically safe

U _{max} : in	31 V DC
I _{max} :	0,67 A
W _{max} : in	2,98 W

Certifications available:



ATEX **CE** II 2 GD c IIC

: **CE** II 2G Ex h IIC Gb
CE II 2D Ex h IIC Db



: International certification
for explosive atmospheres



: Suitable up to SIL 3



: UL / CSA factory mutual approval




: CU - TR 012


ATEX, SIL and EAC Ex: refer to products in the various sections to the catalogues.

IECEx and FM: refer to Pneumatrol pilots installed upon each valve.

Solenoid-spring valve

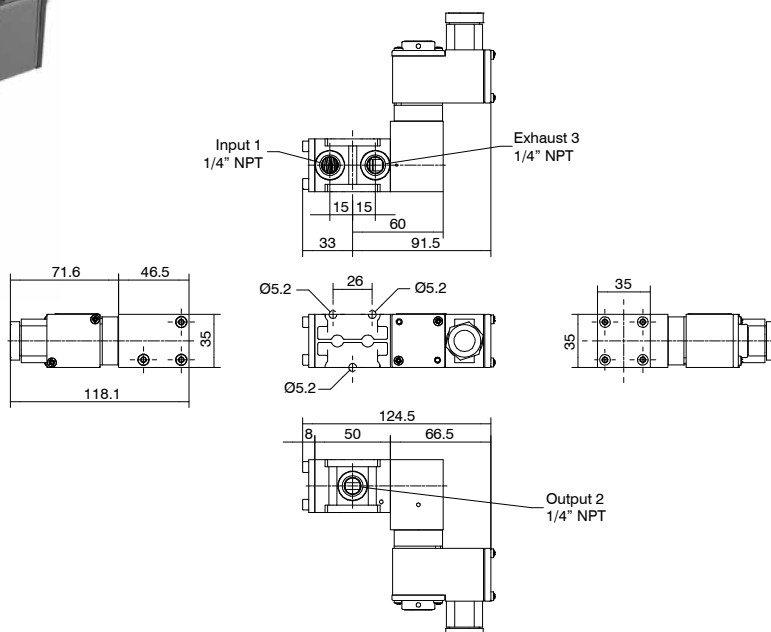


Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).




Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1200	1,02	15,15

Solenoid-solenoid valve

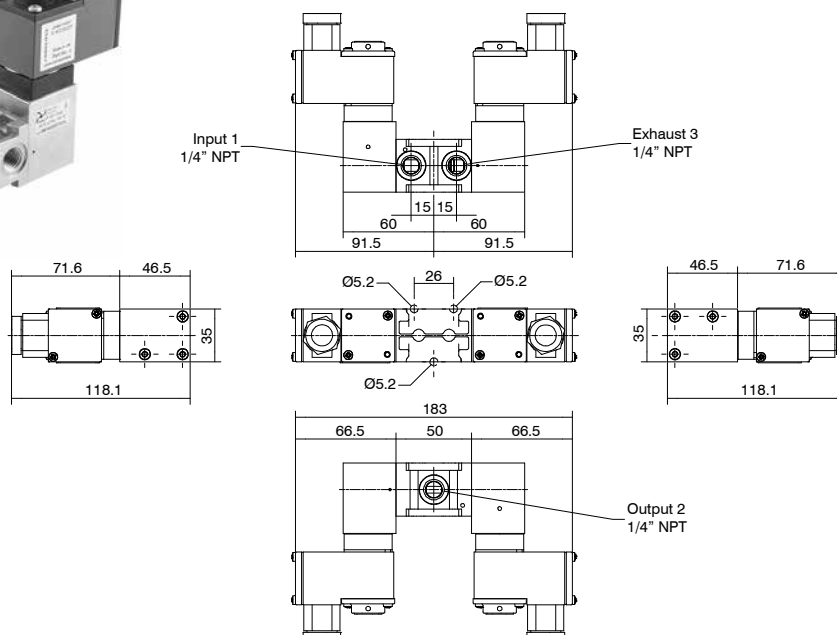

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2300	1,02	15,15

Ordering code

SS1432CC01L

TENSION
1 = 24 V DC 33 mA




Ordering code

SS1432CC01L

TENSION
1 = 24 V DC 33 mA



Solenoid-spring valve

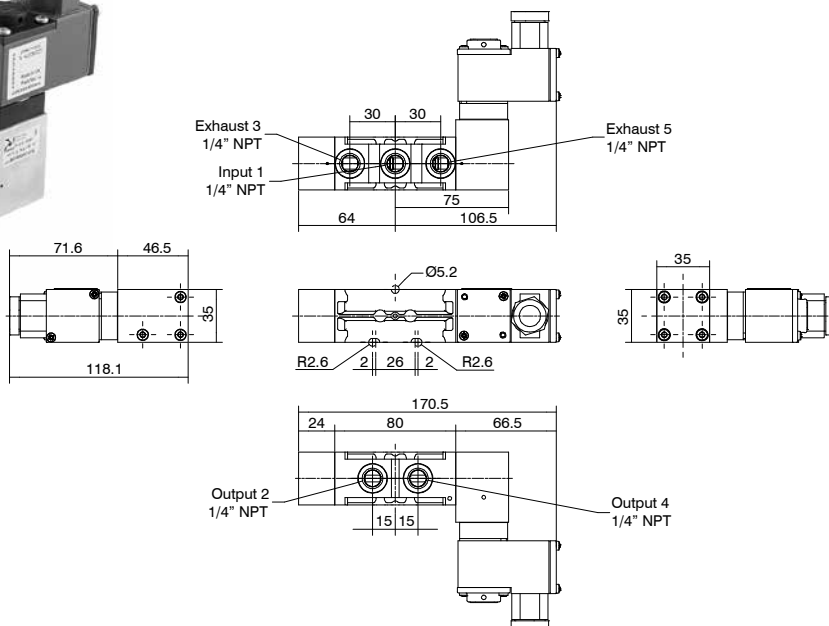


Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.


Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1500	1,02	15,15

Solenoid-solenoid valve

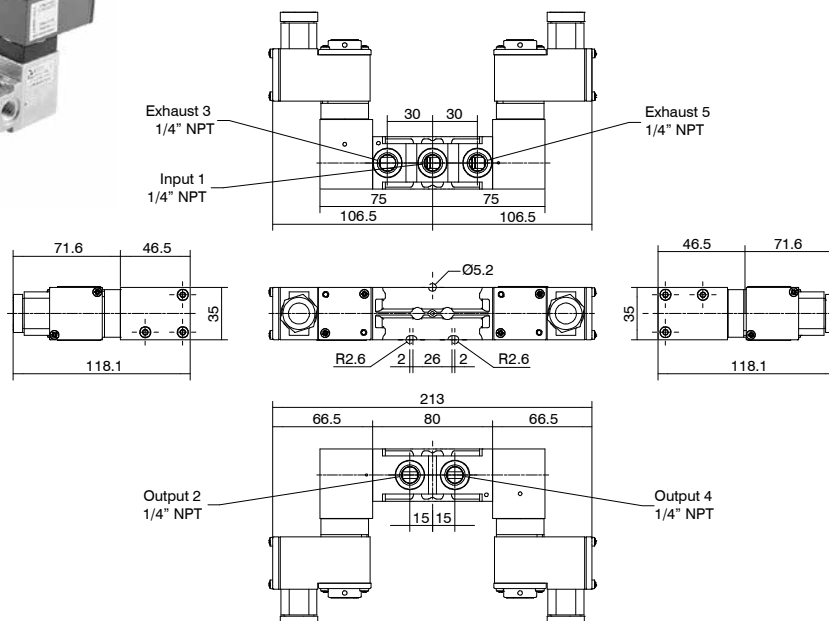


Minimum piloting pressure 2,5 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	2150	1,02	15,15

Ordering code

SS14520C**T**01L

TENSION

1 = 24 V DC 33 mA



Ordering code







SS14520C**T**C**T**L

TENSION

1 = 24 V DC 33 mA



Solenoid valve with self-locking manual reset


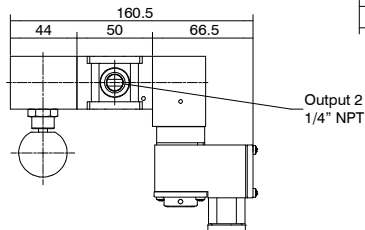


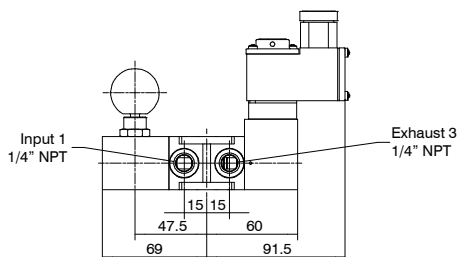



Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1550	1,02	15,15

Solenoid valve with self-locking manual reset inverted

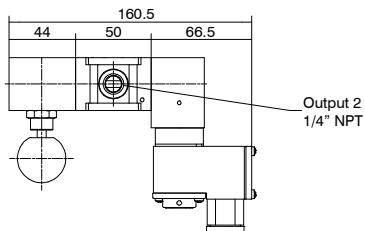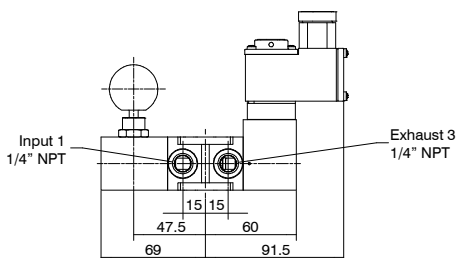

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1550	1,02	15,15

Ordering code

SS1432CC¹14L

TENSION

1 1 = 24 V DC 33 mA



Ordering code


SS1432CC¹15L

TENSION

1 1 = 24 V DC 33 mA



Solenoid valve with self-locking manual reset

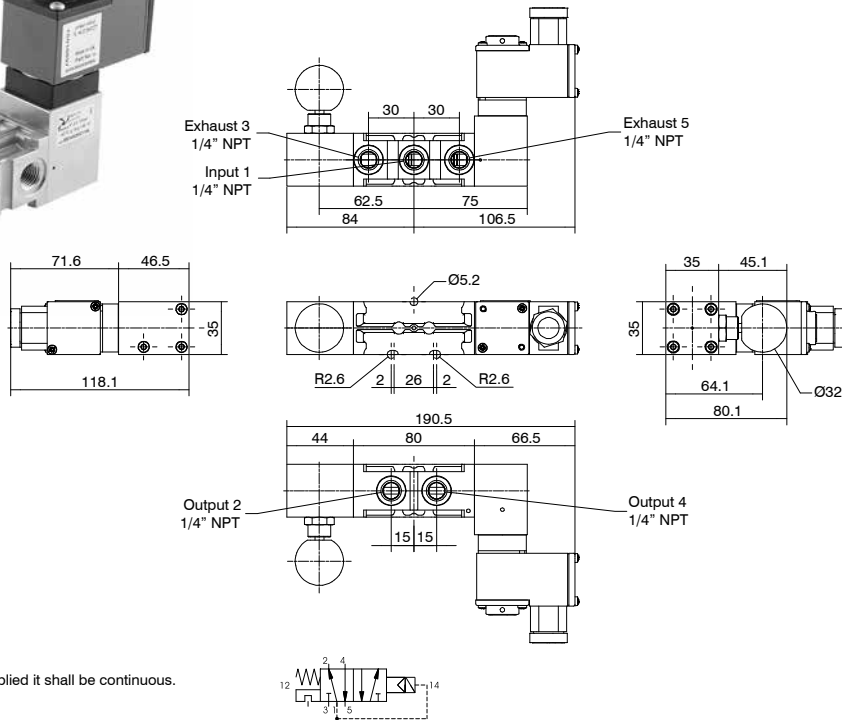


Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1700	1,02	15,15

Solenoid valve with self-locking manual reset inverted

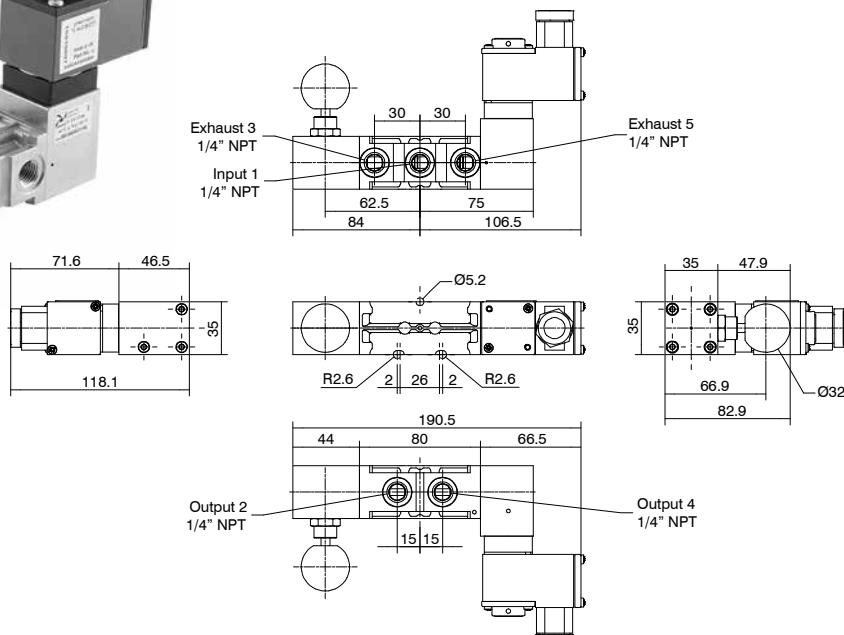

Minimum piloting pressure 2,5 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	1000	1/4" NPT	1700	1,02	15,15

Ordering code

SS14520C14L

TENSION

1 = 24 V DC 33 mA



Ordering code

SS14520C15L

TENSION


1 = 24 V DC 33 mA



Flow divider, 2 outputs



Different types of dividers
available on request.

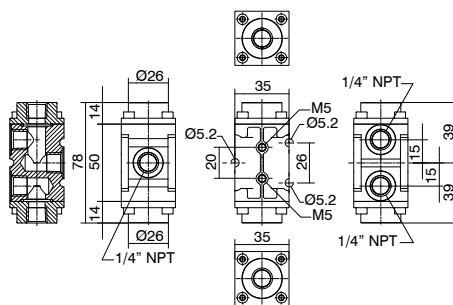

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1700	1/4" NPT	390	1,73	25,75

Ordering code



SS14T200T

TYPE

- T** L = Low temperature version
H = High temperature version



Flow regulator 1/4" NPT

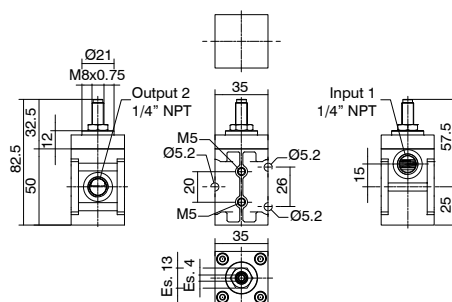

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1000	1/4" NPT	500	1,02	15,15

Ordering code

SS14RF6T

FUNCTION



- F** U = Unidirectional
B = Bidirectional

TYPE

- T** L = Low temperature version
H = High temperature version



Non return valve



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1400	1/4" NPT	220	1,42	21,21

Ordering code



SS14VUS1

TYPE

- T** L = Low temperature version
H = High temperature version



Non return valve for group



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	1400	1/4" NPT	150	1,42	21,21

Ordering code


SS14VUG1

TYPE

- T** L = Low temperature version
H = High temperature version



Adapter for 90°



Ordering code


SS1490

Operational characteristics

Weight (gr.)

45

Seal OR 2,62 x 13,95



Ordering code

SS14D^T

TYPE

^T L = Low temperature version
H = High temperature version



100-pieces pack.

Operational characteristics

Weight (gr.)

0,38

Mounting kit "A"

Kit includes:
Nr. 1 Front flange
Nr. 1 Thareaded rear flange
Nr. 2 Viti M5x35 AISI 316

Operational characteristics



Weight (gr.)

55

Ordering code

SS14A

Mounting kit "B"

Kit includes:
Nr. 1 Front flange
Nr. 1 Thareaded rear flange
Nr. 1 Screw M5x35 AISI 316

Operational characteristics

Weight (gr.)

48

Ordering code

SS14B

Single deployment flange



Kit includes:
Nr. 1 Single deployment flange
Nr. 3 Screws M5x40 AISI 316
Nr. 2 Screws M5x8 AISI 316

Operational characteristics

Weight (gr.)

55



Ordering code

SS14C

Fixing bracket




Kit includes:
Nr. 2 Screws M5x8 AISI 316
Nr. 1 Flange

Operational characteristics

Weight (gr.)


125

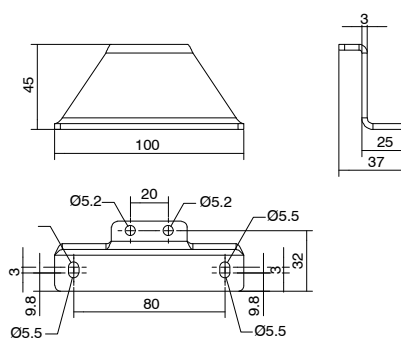


Ordering code

SS14M5

Example: manifold system

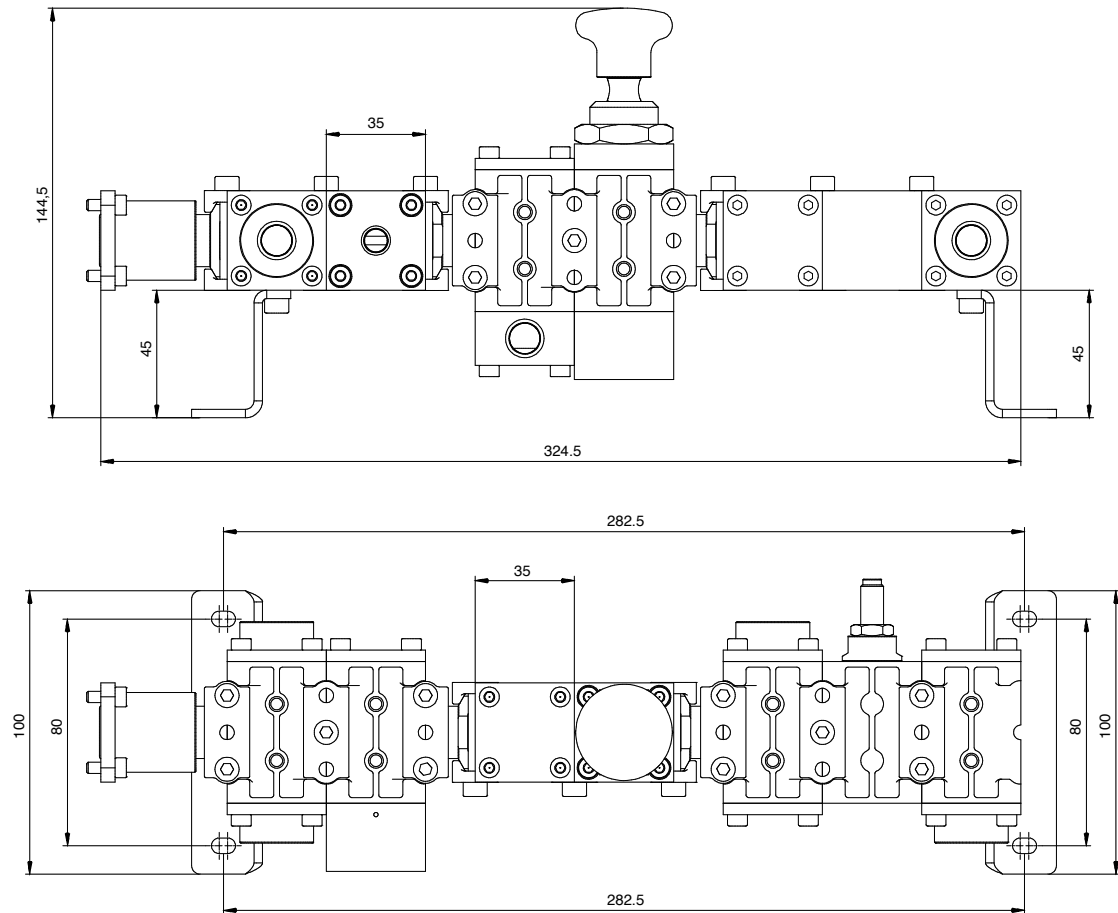

Example: group assembly scheme

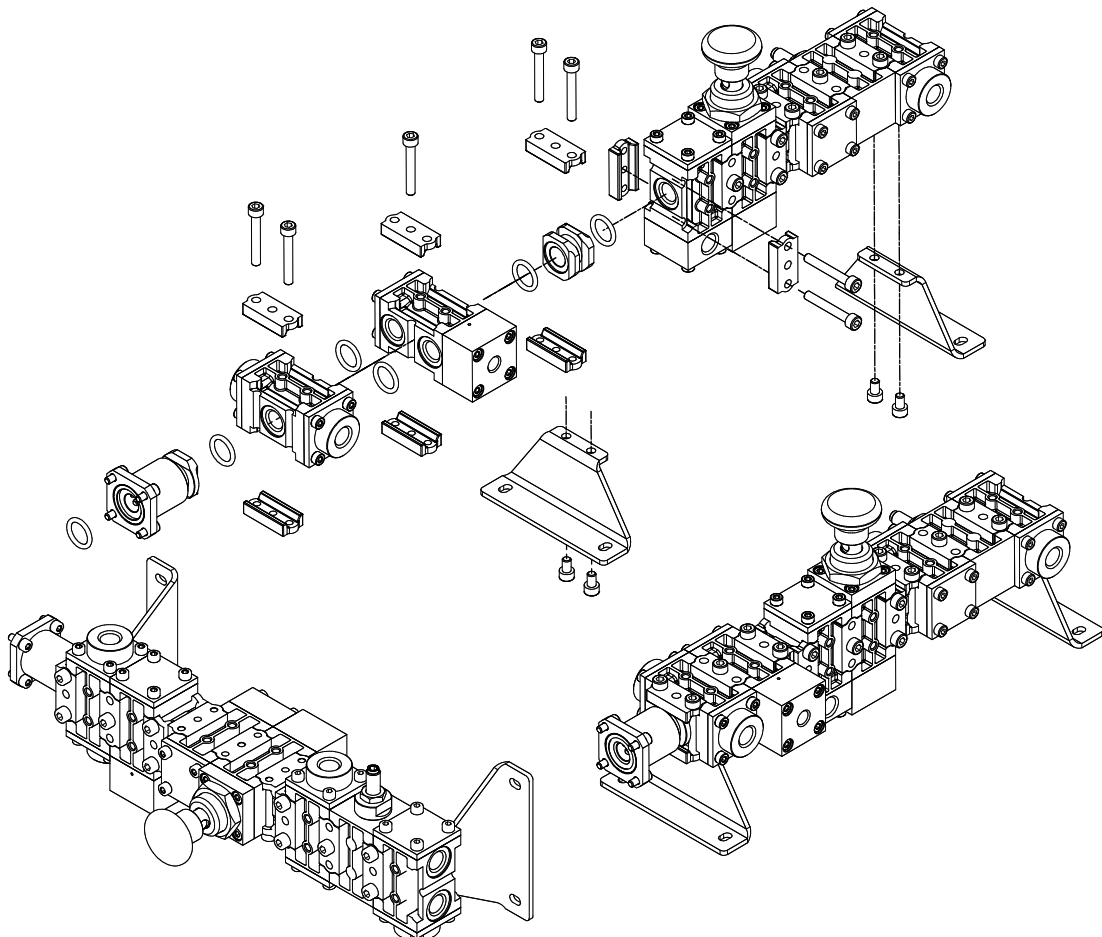



Valves 1/2" NPT series Steel line

Stainless steel brand series have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes 3 and 5 ways valves, designed according to the following configuration:

- Pneumatic-spring valve
- Solenoid-solenoid valve
- 2 position push-pull valve
- Push button-spring valve
- Push button-pneumatic return valve
- Pneumatic valve with self-locking manual reset **(only in a 3 way function)**
- Pneumatic valve with self-locking manual reset inverted **(only in a 3 way function)**
- Accessories: Non return valve, Uni/bidirectional flow regulator and Quick exhaust valve.

Pneumax valves have 1/2" NPT connections with 3500NI/min maximum flow rate.

This version only provides single mounting.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	FPM (Fluoroelastomer) NBR for low temperatures (-50°C) Standard

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature (for low temperature version L)	-50°C ... +70°C
Operating temperature (for low temperature version H)	-10°C ... +150°C
Maximum operating pressure	12 bar

Certifications available:



ATEX **CE** II 2 GD c IIC
: **CE** II 2G Ex h IIC Gb
: **CE** II 2D Ex h IIC Db



: Suitable up to SIL 3




: CU - TR 012

Pneumatic-spring valve



Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

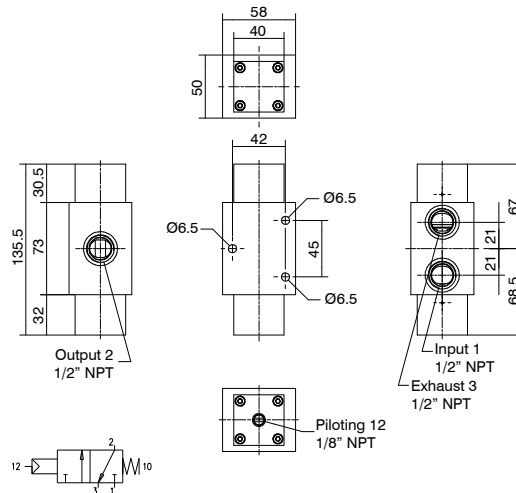

Ordering code

SS1232C1101

TYPE

T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	1992	3,55	53,03

Pneumatic-pneumatic valve



Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

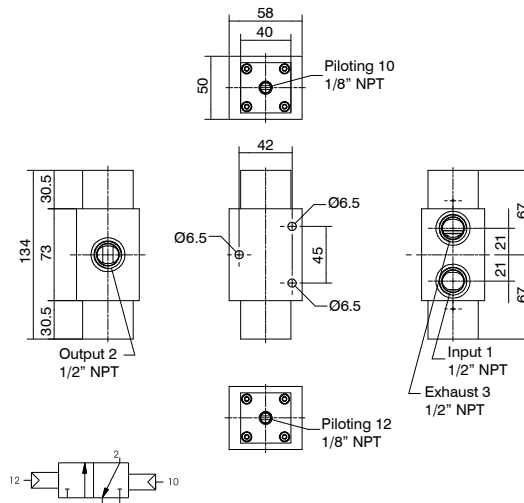

Ordering code

SS1232C1111

TYPE

T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	2001	3,55	53,03

2 position push-pull valve



Actuation force 55N.
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

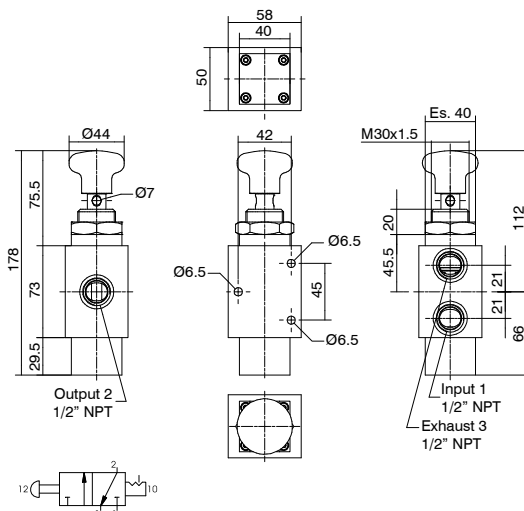

Ordering code

SS1232C0802

TYPE

T L = Low temperature version
H = High temperature version


Operational characteristics


Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	2027	3,55	53,03

Push button-spring valve



Actuation force 200N

Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

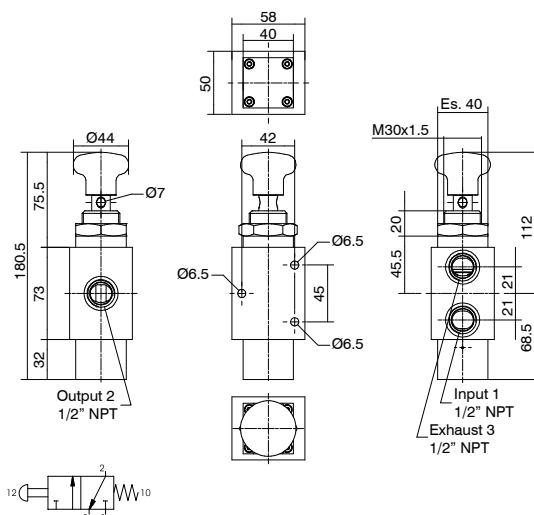

Operational characteristics

Operational characteristics					
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	2000	3,55	53,03

Ordering code

SS1232C0801T

TYPE


T L = Low temperature version
H = High temperature version



Push button-pneumatic return valve



Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

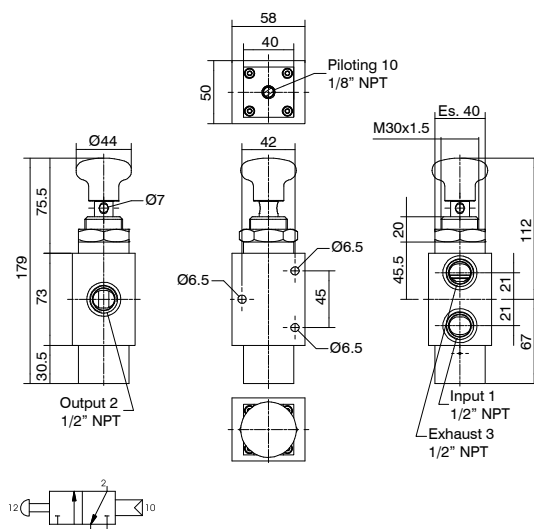

Operational characteristics

Operational characteristics						
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	2012	3,55	53,03

Ordering code

SS1232C1114T

TYPE

T L = Low temperature version
H = High temperature version




Pneumatic valve with self-locking manual reset



Minimum piloting pressure 3 bar


Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

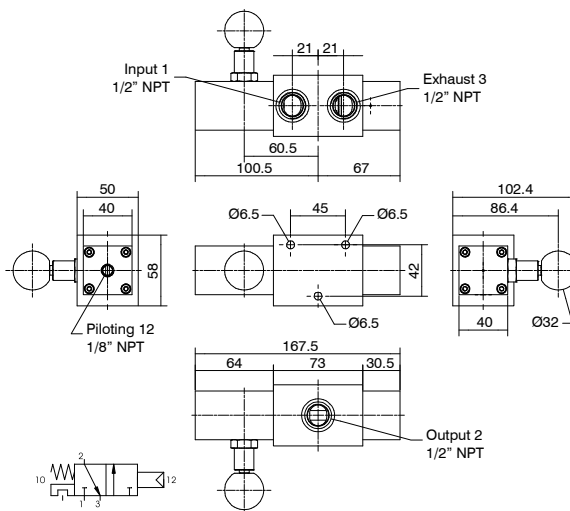

Operational characteristics

Operational characteristics						
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	2409	3,55	53,03

Pneumatic valve with self-locking manual reset inverted

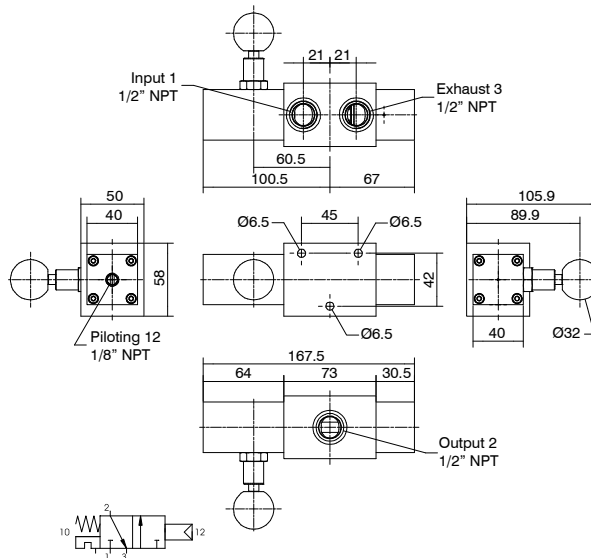


Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code
SS1232C1115
TYPE
T L = Low temperature version H = High temperature version

Operational characteristics						
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NL/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	2408	3,55	53,03

Pneumatic-spring valve

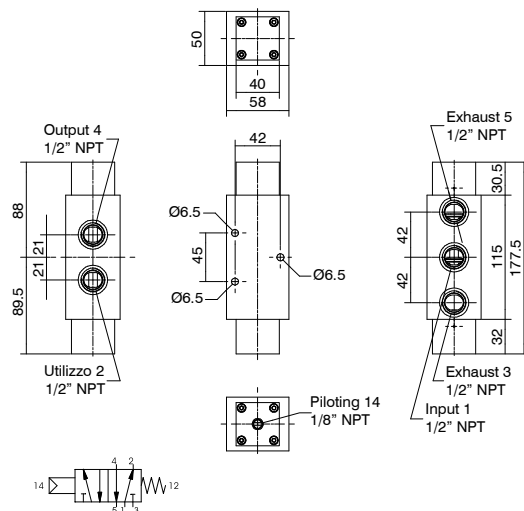

Minimum piloting pressure 3 bar
Fluid: Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS125201101T


TYPE

T L = Low temperature version
H = High temperature version

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	2744	3,55	53,03

Pneumatic-pneumatic valve

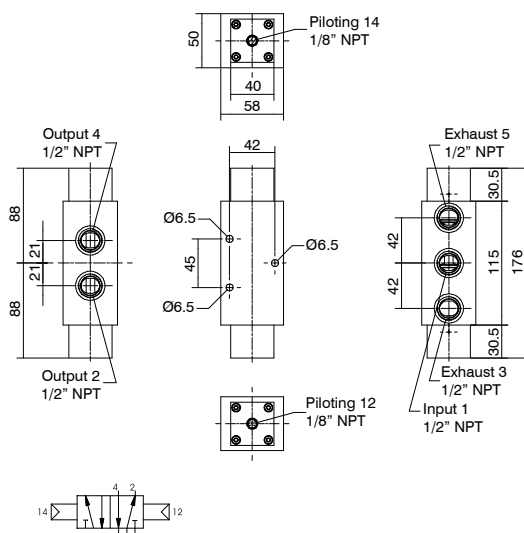

Minimum piloting pressure 3 bar
Fluid: Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS125201111T


TYPE

T L = Low temperature version
H = High temperature version

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	2790	3,55	53,03

Pneumatic-pneumatic closed centers valve

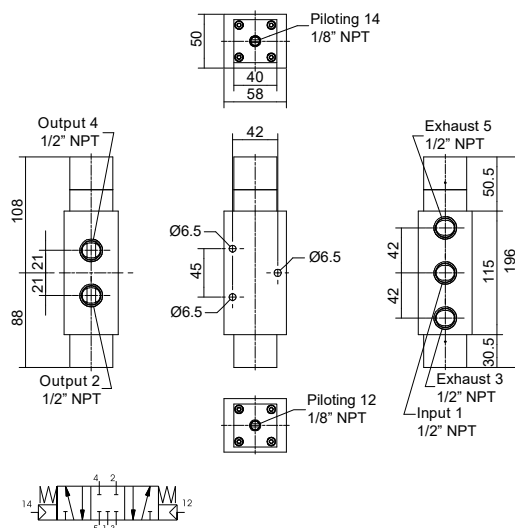

Minimum piloting pressure 3 bar
Fluid: Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

Ordering code

SS125311111T

TYPE

T L = Low temperature version
H = High temperature version


Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	3019	3,55	53,03

2 position push-pull valve



Actuation force 55N.
Fluid: Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

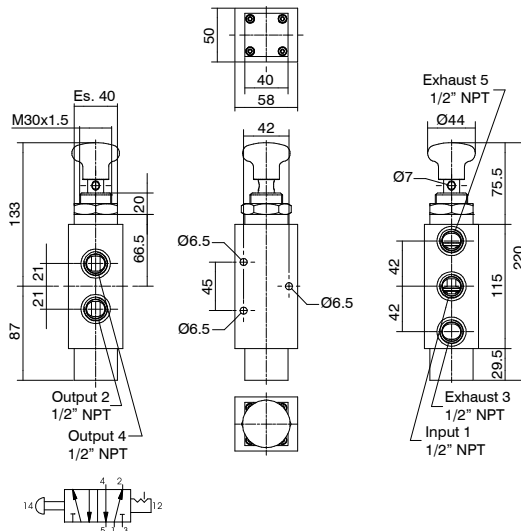

Operational characteristics					
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	2757	3,55	53,03

Ordering code

SS125200802T

TYPE	
------	--


T L = Low temperature version
H = High temperature version



Push button-spring valve



Actuation force 200N
Fluid: Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

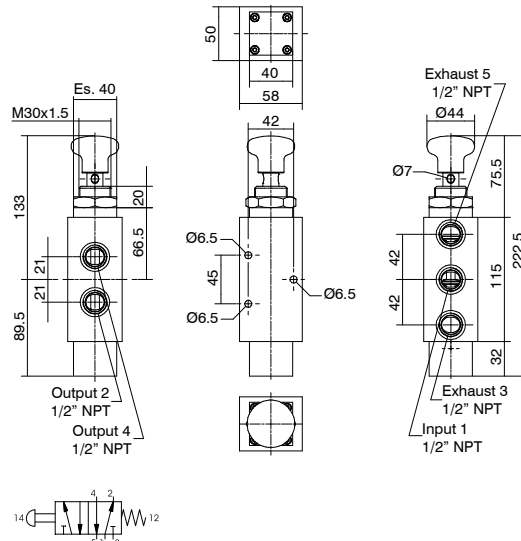

Operational characteristics					
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	2730	3,55	53,03

Ordering code

SS125200801T

TYPE	
------	--


T L = Low temperature version
H = High temperature version



Push button-pneumatic return valve



Minimum piloting pressure 3 bar
Fluid: Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).

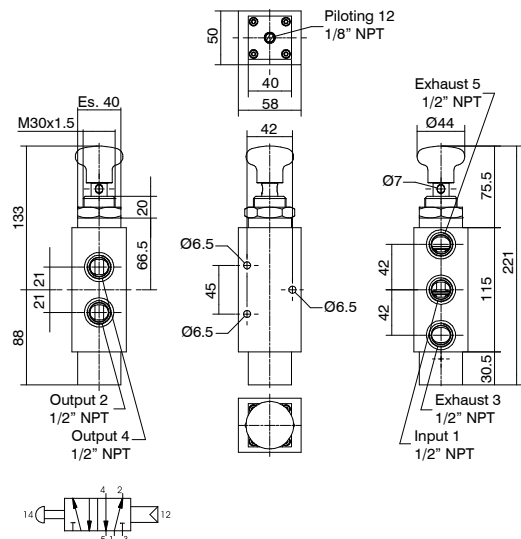

Operational characteristics						
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Pilot connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1/8" NPT	2780	3,55	53,03

Ordering code

SS125200811T

TYPE	
------	--

T L = Low temperature version
H = High temperature version





Solenoid valves 1/2" NPT series Steel line - For safe area with IP66 stainless steel housing

Stainless steel solenoid valves, complete with IP66 rated solenoid coil in a stainless steel housing and **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve
- Solenoid valve with self-locking manual reset **(only in a 3 way function)**.
- Solenoid valve with self-locking manual reset inverted **(only in a 3 way function)**.

Pneumax solenoid valves have 1/2" NPT connections with 3500NI/min maximum flow rate.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	NBR for low temperatures FPM (Fluoroelastomer) (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-20°C ... +70°C
Note: The suitable operating temperature is limited by the most restrictive component, which is the pilot, regardless of the type of seals used in the valve spool.	
Maximum operating pressure	10 bar

Electrical (Electropilot) construction characteristics

Housing	304 stainless steel with epoxy paint
Armour / Cores	Ferromagnetic stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer)
Incorporation	PTB 30% glass load
Wire insulation	H
Nominal voltage	24 V DC 24, 110, 220 V AC
Power consumption DC	2,4W
Power consumption AC	10VA (Inrush), 5VA (Running)
Connection for cable entry	M20x1.5 (1/2" NPT available on request)
Electrical connection	Screw terminals 2 Poles 2.5 mm
IP Rating	IP66
Tolerance on voltage supply	±10%
ED continuous service	100%

Certifications available:


Non ATEX marked product



: Suitable up to SIL 3



Solenoid-spring valve

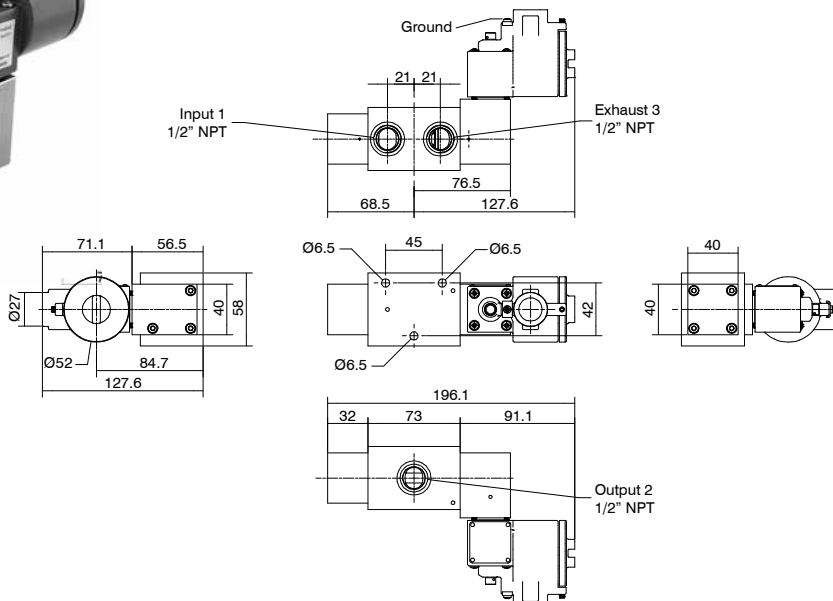


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	2776	3,55	53,03

Ordering code

SS1232CA101L

TENSION

1 = 24 V DC


2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid-solenoid valve

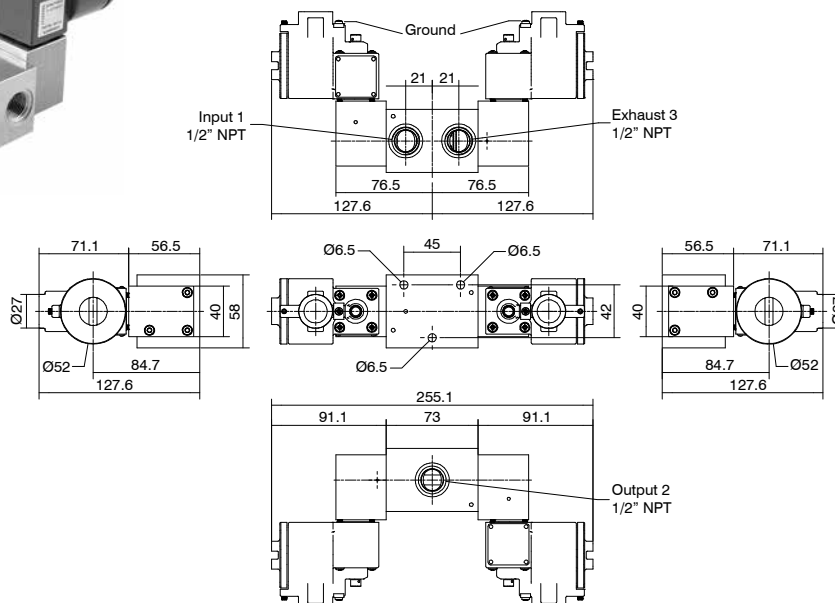


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3909	3,55	53,03

Ordering code

SS1232CA101L

TENSION

1 = 24 V DC



2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)


4 = 220 V AC (50/60 Hz)



Solenoid-spring valve

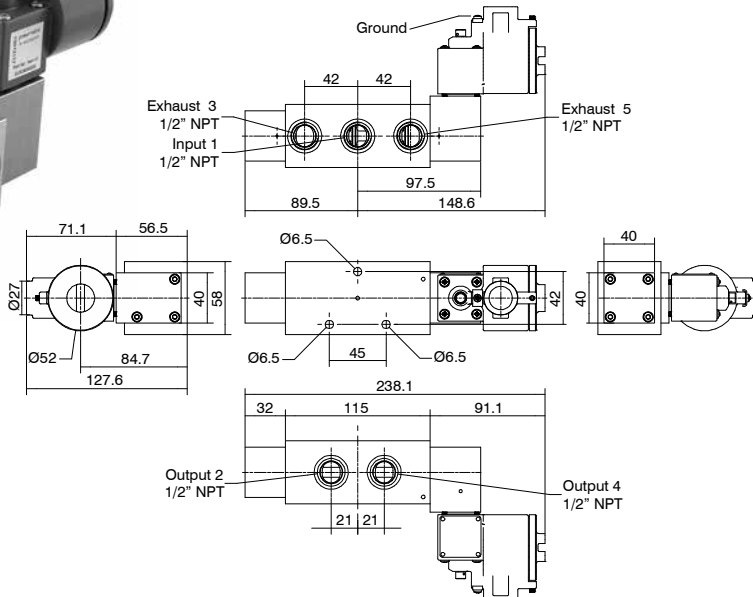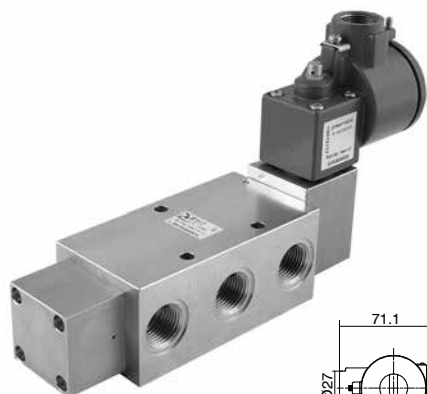

Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3679	3,55	53,03

Ordering code


SS12520A101L

TENSION


- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid-solenoid valve

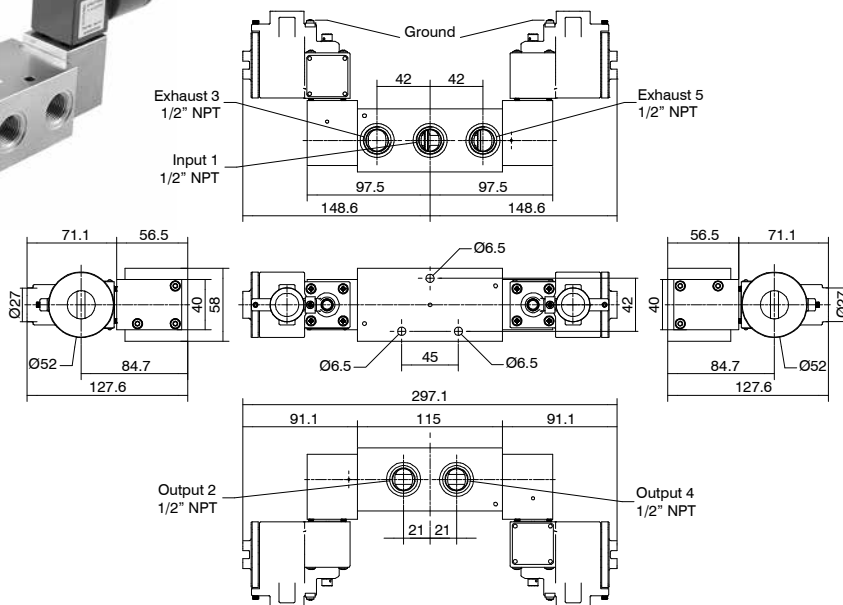

Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	4678	3,55	53,03

Ordering code


SS12520A101L

TENSION

- 1 = 24 V DC
- 2 = 24 V AC (50/60 Hz)
- 3 = 110 V AC (50/60 Hz)
- 4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset

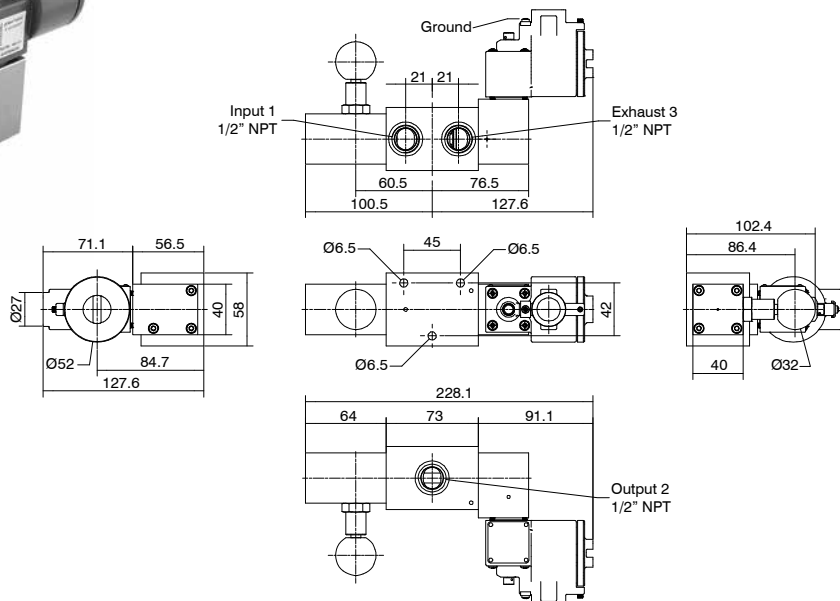

Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3358	3,55	53,03

Ordering code

SS1232CA14L

TENSION

1 = 24 V DC


2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset inverted

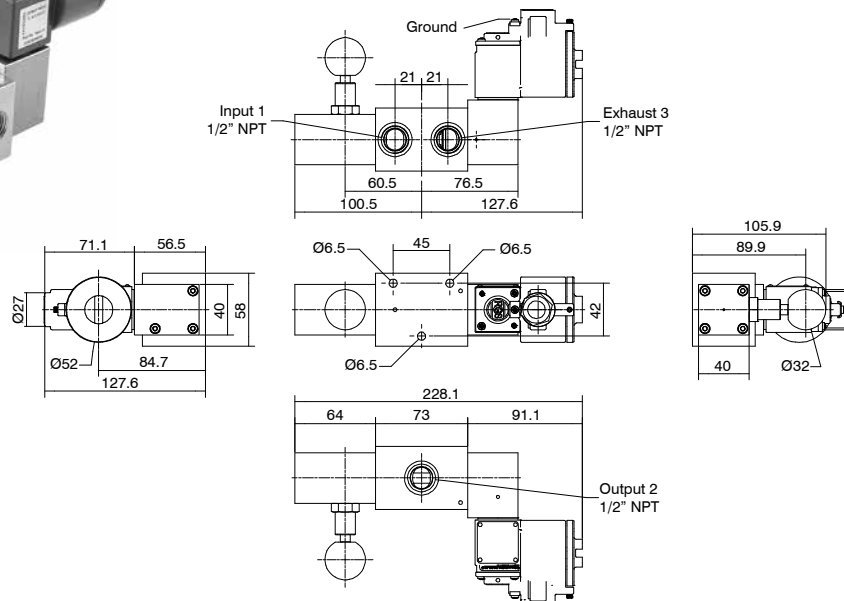

Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3360	3,55	53,03

Ordering code

SS1232CA15L

TENSION

1 = 24 V DC

2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)





Solenoid valves 1/2" NPT series Steel line - IP66 Exd Explosion protection

Stainless steel solenoid valves, complete with IP66 Exd Explosion protection rated solenoid coil in a stainless steel housing andz **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve
- Solenoid valve with self-locking manual reset **(only in a 3 way function)**.
- Solenoid valve with self-locking manual reset inverted **(only in a 3 way function)**.

Pneumax solenoid valves have 1/2" NPT connections with 3500NI/min maximum flow rate.

This version only provides single mounting.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	NBR for low temperatures FPM (Fluoroelastomer) (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature for DC version	-50°C ... +70°C
Operating temperature for AC version	-50°C ... +55°C
Maximum operating pressure	10 bar

Electrical (Electropilot) construction characteristics

Housing	304 stainless steel with epoxy paint
Armour / Cores	Ferromagnetic stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer)
Incorporation	PTB 30% glass load
Wire insulation	H
Nominal voltage	24 V DC 24, 110, 220/230 V AC
Power consumption DC	3W
Power consumption AC	10VA (Inrush), 5VA (Running)
Connection for cable entry	M20x1.5 (1/2" NPT available on request)
Electrical connection	Screw terminals 2 Poles 2.5 mm
IP Rating	IP66
Tolerance on voltage supply	±10%
ED continuous service	100%

Certifications available:



ATEX **CE** II 2 GD c IIC
CE II 2G Ex h IIC Gb
CE II 2D Ex h IIC Db



: International certification
for explosive atmospheres



: Suitable up to SIL 3



: Nepsy approval - China




: CU - TR 012

ATEX, SIL and EAC Ex: refer to products in the various sections to the catalogues.

IECEx and NEPSI: refer to Pneumatrol pilots installed upon each valve.

Solenoid-spring valve

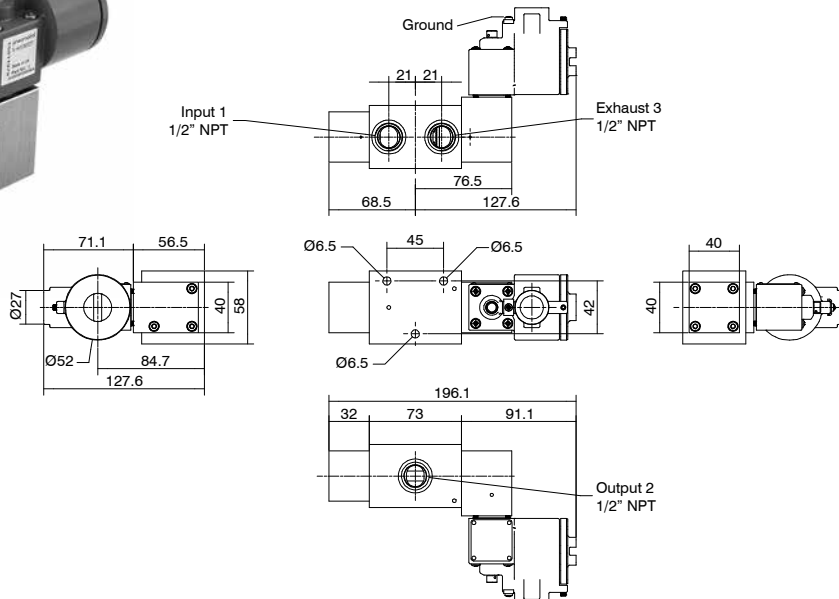


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	2776	3,55	53,03

Ordering code

SS1232CB101L

TENSION

1 = 24 V DC


T 2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid-solenoid valve

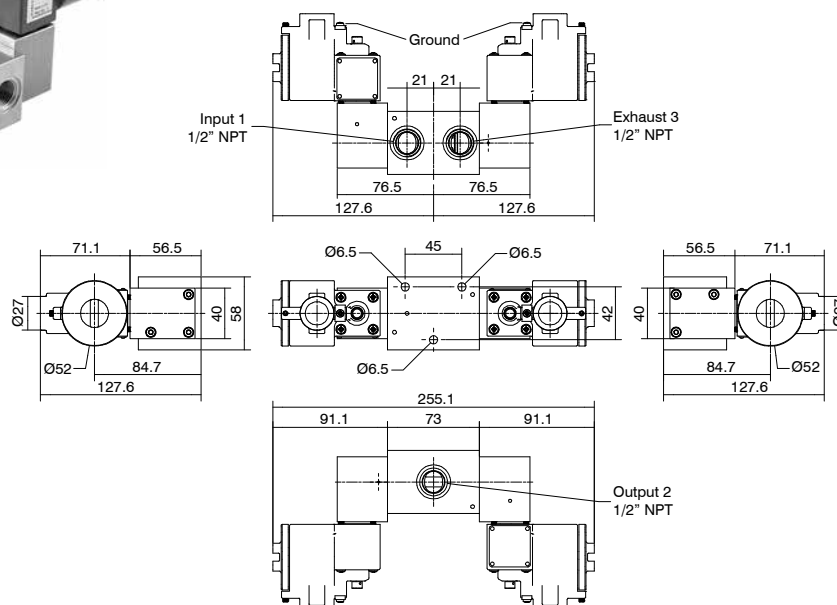


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3909	3,55	53,03

Ordering code

SS1232CB101L

TENSION

1 = 24 V DC


T 2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid-spring valve

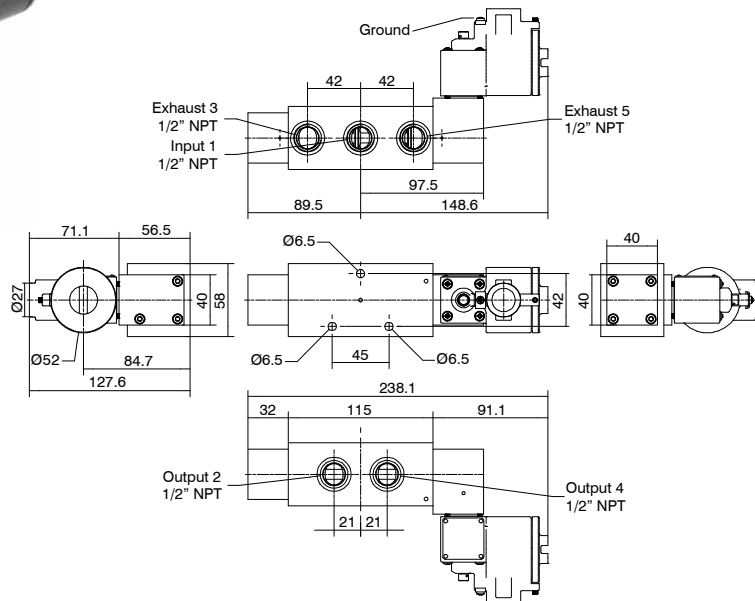


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.


Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3679	3,55	53,03

Solenoid-solenoid valve

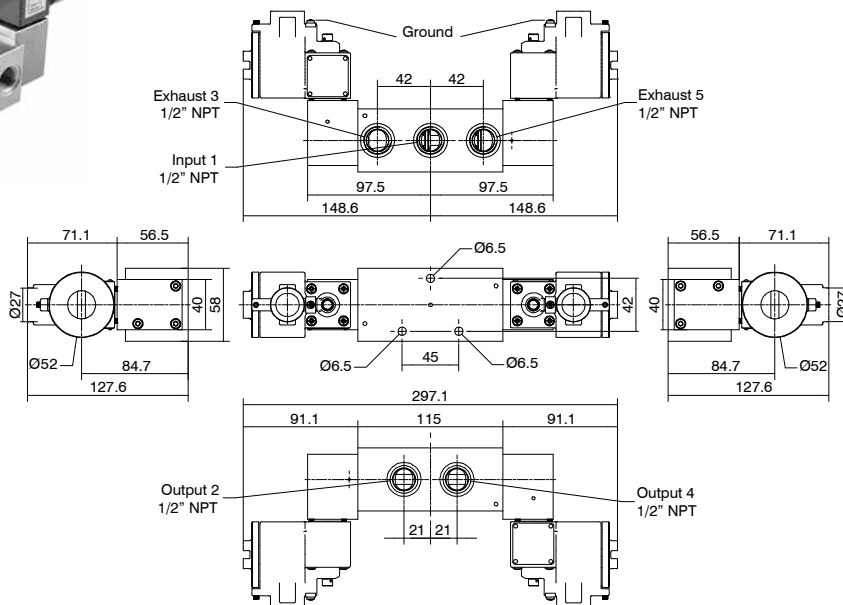


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Operational characteristics					
Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	4678	3,55	53,03

Ordering code

SS12520BT01L

TENSION

1 = 24 V DC

T 2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)

_____ (____/____/____)



Ordering code

SS12520BTBTL

TENSION

1 = 24 V DC

T 2 = 24 V AC (50/60 Hz)


3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)

123 7.12 (33/33.12)



Solenoid valve with self-locking manual reset

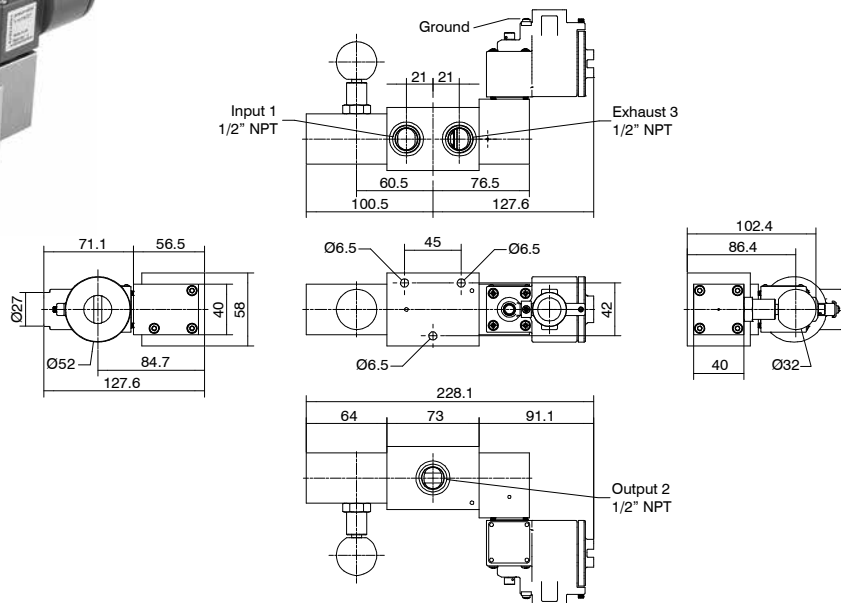


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3358	3,55	53,03

Ordering code

SS1232CBT14L

TENSION

1 = 24 V DC


T 2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)



Solenoid valve with self-locking manual reset inverted

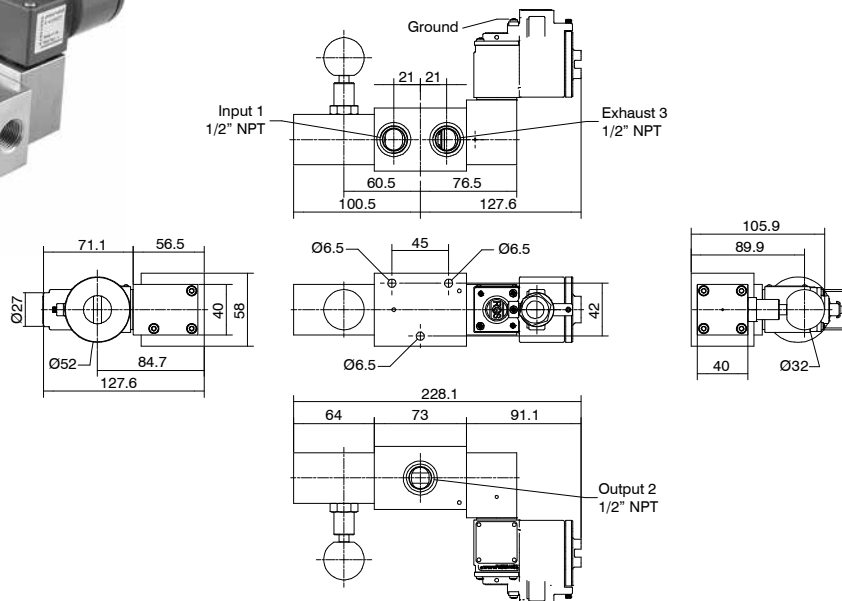


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3360	3,55	53,03

Ordering code

SS1232CBT15L

TENSION

1 = 24 V DC

T 2 = 24 V AC (50/60 Hz)

3 = 110 V AC (50/60 Hz)

4 = 220 V AC (50/60 Hz)





Solenoid valves 1/2" NPT series Steel line - Intrinsically safe Exia

Stainless steel solenoid valves, complete with intrinsically safe Exia rated solenoid coil in and **CE** marked have been engineered and developed to meet process automation and Oil & Gas severe service requirements, where material performances, product reliability and health and safety issues are critical elements. As a result, Pneumax products are perfectly suitable to work with sweet gas media and corrosive / aggressive gases.

All external and internal parts are AISI316L stainless steel material in compliance with NACE standard MR0175/ISO 15156-1.

The range includes solenoid valves with 3 and 5 ways functions, complete with self feeding solenoids, designed according to the following configuration:

- Solenoid-spring valve
- Solenoid-solenoid valve
- Solenoid valve with self-locking manual reset
- Solenoid valve with self-locking manual reset inverted.

Pneumax solenoid valves have 1/2" NPT connections with 3500NI/min maximum flow rate.

This version only provides single mounting.

Construction characteristics

Body	AISI 316L stainless steel
Operators	AISI 316L stainless steel
Spool	AISI 316L stainless steel
Spring	AISI 316 stainless steel
Screws	AISI 316 stainless steel (A4-70 stainless steel)
Seals	NBR for low temperatures FPM (Fluoroelastomer) (available on request)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-40°C ... +65°C

Note: The suitable operating temperature is limited by the most restrictive component, which is the pilot, regardless of the type of seals used in the valve spool.

Maximum operating pressure	10 bar
----------------------------	--------

Electrical (Electropilot) construction characteristics

Housing	Zinc alloy with epoxy paint
Armour / Cores	Ferromagnetic stainless steel
Springs	Stainless steel
Seals	FPM (Fluoroelastomer)
Incorporation	PTB 30% glass load
Wire insulation	H
Guide tube	Stainless steel
Resistance	370 Ohms
Nominal voltage	24 V DC
Power consumption DC	0,4 W (Running)
Connection for cable entry	M20x1.5
Electrical connection	Screw terminals 2 Poles 2.5 mm
IP Rating	IP66
Tolerance on voltage supply	± 10%
ED continuous service	100%

Electrical specifications for intrinsically safe

U _{max} : in	31 V DC
I _{max} :	0,67 A
W _{max} : in	2,98 W

Certifications available:



ATEX **CE** II 2 GD c IIC

CE II 2G Ex h IIC Gb
CE II 2D Ex h IIC Db



: International certification
for explosive atmospheres



: Suitable up to SIL 3



: UL / CSA factory mutual approval




: CU - TR 012

ATEX, SIL and EAC Ex: refer to products in the various sections to the catalogues.

IECEx and FM: refer to Pneumatrol pilots installed upon each valve.

Solenoid-spring valve

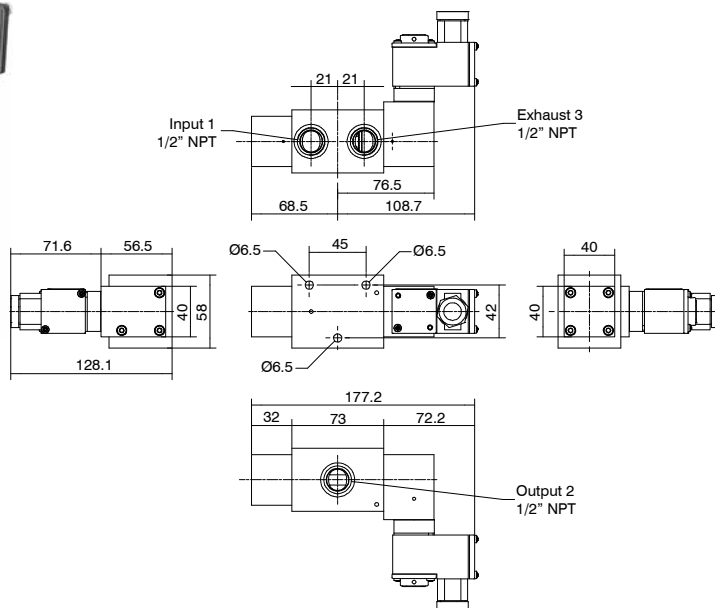


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.


Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	2437	3,55	53,03

Solenoid-solenoid valve

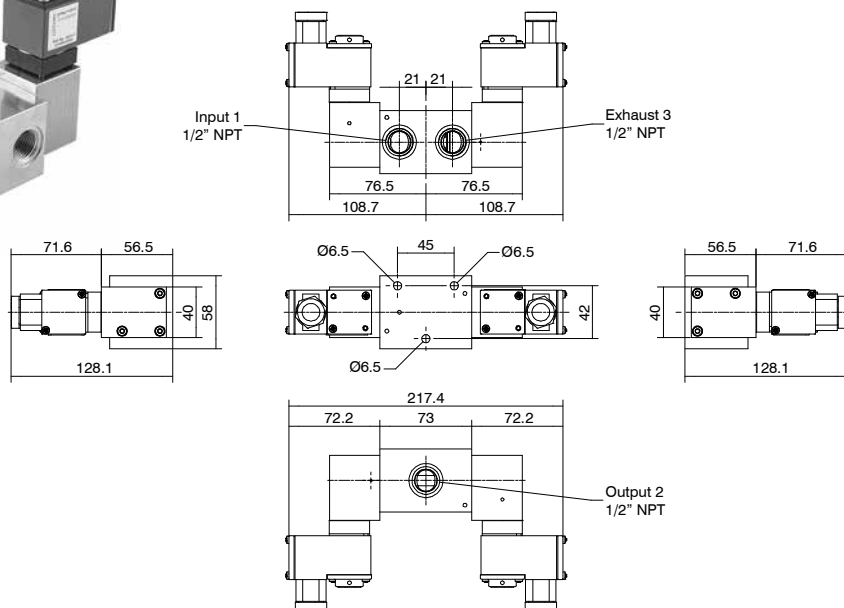


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3228	3,55	53,03

Ordering code

SS1232CC^T01L

TENSION

1 = 24 V DC 33 mA



Ordering code


SS1232CC^T01L

TENSION


1 = 24 V DC 33 mA



Solenoid-spring valve

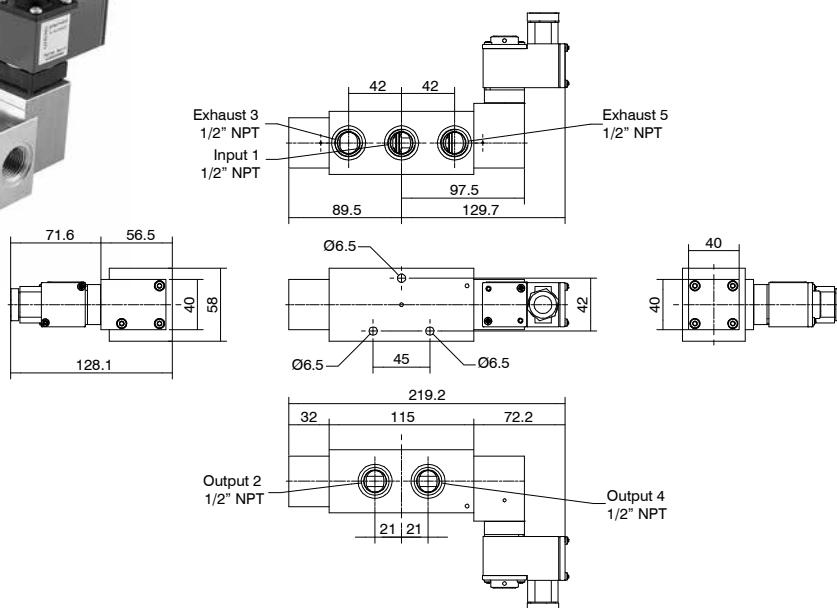


Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).




Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3349	3,55	53,03

Solenoid-solenoid valve

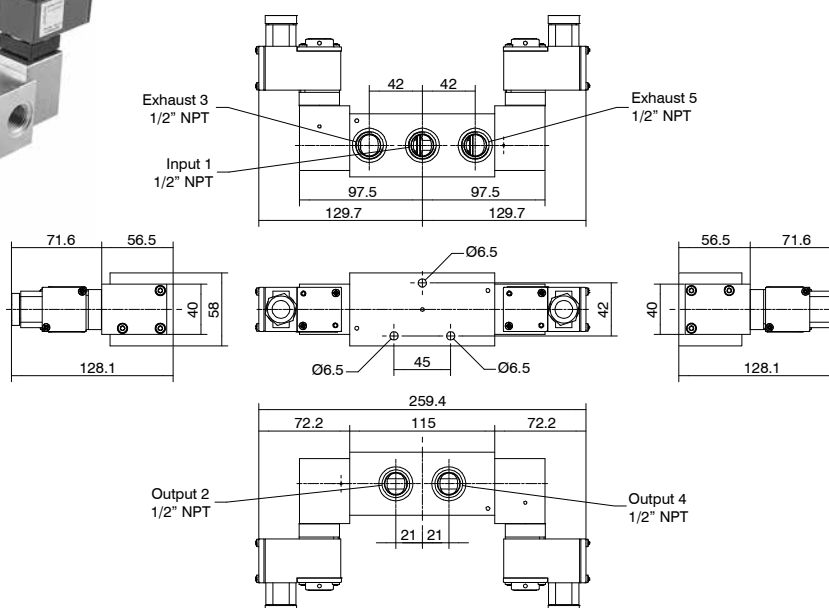

Minimum piloting pressure 3 bar
Fluid:
Filtered air. No lubrication needed, if applied it shall be continuous.
Inert Gas.
Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3749	3,55	53,03

Ordering code

SS12520C01L

TENSION

1 = 24 V DC 33 mA



Ordering code


SS12520C01L

TENSION

1 = 24 V DC 33 mA



Solenoid valve with self-locking manual reset

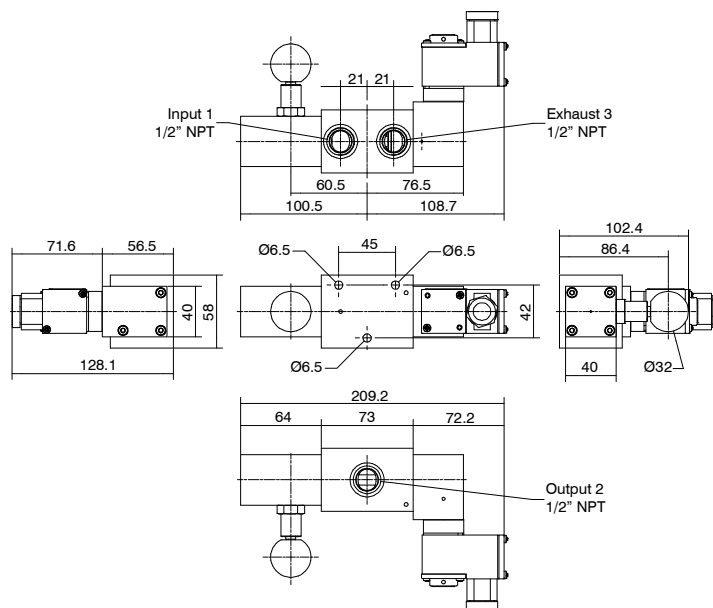


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3020	3,55	53,03

Ordering code


SS1232CC14L

TENSION

1 = 24 V DC 33 mA



Solenoid valve with self-locking manual reset inverted

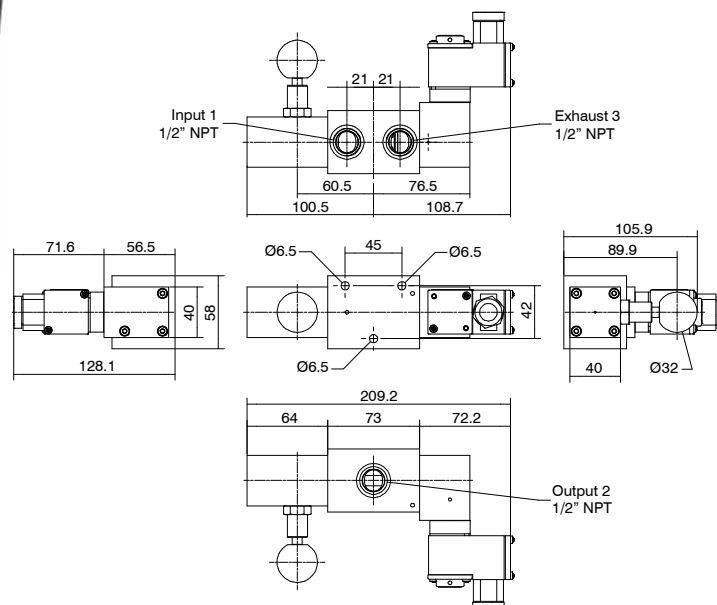


Minimum piloting pressure 3 bar

Fluid:

Filtered air. No lubrication needed, if applied it shall be continuous.

Inert Gas.

Sweet gas (natural).



Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Connections	Weight (gr.)	Cv	kv
10	3500	1/2" NPT	3015	3,55	53,03

Ordering code



SS1232CC15L

TENSION

1 = 24 V DC 33 mA



Flow regulator 1/2" NPT

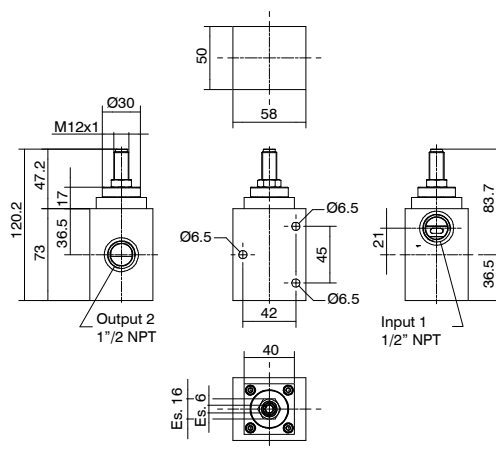

Fluid: Air, Inert Gas, Sweet gas (natural) - Filtered air.
No lubrication needed, if applied it shall be continuous.

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p = 1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	1641	3,55	53,03

Ordering code

SS12RF**F****T**

FUNCTION



F U = Unidirectional
B = Bidirectional

TYPE

T L = Low temperature version
H = High temperature version



Non return valve



Fluid: Air, Inert Gas, Sweet gas (natural) - Filtered air.
No lubrication needed, if applied it shall be continuous.

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p = 1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	444	3,55	53,03

Ordering code



SS12VUS**T**

TYPE

T L = Low temperature version
H = High temperature version



Non return valve for group



Fluid: Air, Inert Gas, Sweet gas (natural) - Filtered air.
No lubrication needed, if applied it shall be continuous.

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p = 1$ (Nl/min)	Connections	Weight (gr.)	Cv	kv
12	3500	1/2" NPT	296	3,55	53,03

Ordering code

SS12VUG**T**



TYPE

T L = Low temperature version
H = High temperature version





Non return valve 1/4" NPT-F/F AISI 316L HT



Ordering code

SS14VU03SV4N



On request are available versions with
temperature range: -55°C ... +150°C

Weight gr. 107

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Minimum operating pressure differential (bar)	Leak-tight with pressure differential (bar)	Temperature °C	Cv	kv
210	680	0,2	0,2	-25 ... +205	0,69	10,30

Non return valve 3/8" NPT-F/F AISI 316L HT



Ordering code

SS38VU03SV6N



On request are available versions with
temperature range: -55°C ... +150°C

Weight gr. 253

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Minimum operating pressure differential (bar)	Leak-tight with pressure differential (bar)	Temperature °C	Cv	kv
210	2020	0,2	0,2	-25 ... +205	2,05	30,60

Non return valve 1/2" NPT-F/F AISI 316L HT



Ordering code

SS12VU03SV8N



On request are available versions with
temperature range: -55°C ... +150°C

Weight gr. 380

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Minimum operating pressure differential (bar)	Leak-tight with pressure differential (bar)	Temperature °C	Cv	kv
210	2650	0,2	0,2	-25 ... +205	2,69	40,15

► **Non return valve 3/4" NPT-F/F AISI 316L HT**



Weight gr. 577

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Minimum operating pressure differential (bar)	Leak-tight with pressure differential (bar)	Temperature °C	Cv	kv
210	4030	0,2	0,2	-25 ... +205	4,09	61,06



Ordering code

SS34VU03SV12N



On request are available versions with temperature range: -55°C ... +150°C

► **Non return valve 1" NPT-F/F AISI 316L HT**



Weight gr. 774

Operational characteristics

Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Minimum operating pressure differential (bar)	Leak-tight with pressure differential (bar)	Temperature °C	Cv	kv
210	5500	0,2	0,2	-25 ... +205	5,59	83,33

Ordering code

SS11VU03SV16N




On request are available versions with temperature range: -55°C ... +150°C

Flow regulator system 1/4" NPT tamper-proof system

Ordering code

SS14RFK




Note: Available for 1/4" NPT flow regulator
We suggest using a long shackle padlock: Shackle diameter ≤ 4 mm
The padlock is not supplied with the product.
Weight gr. 40

Flow regulator system 1/2" NPT tamper-proof system



Ordering code

SS12RFK



Note: Available for 1/2" NPT flow regulator
We suggest using a long shackle padlock: Shackle diameter ≤ 5 mm
The padlock is not supplied with the product.
Weight gr. 75

Quick exhaust valve 1/4" NPT

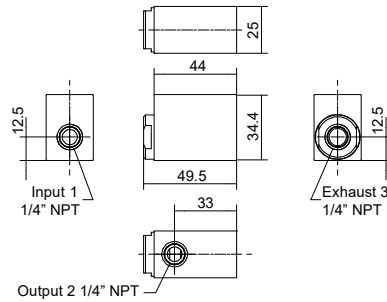

Ordering code

SS1402SR1

TYPE



T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Inlet flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (Nl/min)	Cv	kv	Connections	Temperature °C		Weight (gr.)
12	700	0,71	10,60	2700	2,74	40,9	1/4" NPT	-50 ... +70 (version L)	-10 +150 (version H)	250

Quick exhaust valve 1/2" NPT

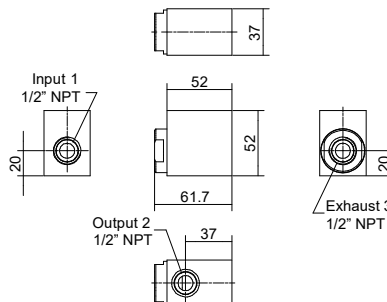

Ordering code

SS1202SR1

TYPE



T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Inlet flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (Nl/min)	Cv	kv	Connections	Temperature °C		Weight (gr.)
12	2000	2,03	30,30	7150	7,26	108,33	1/2" NPT	-50 ... +70 (version L)	-10 +150 (version H)	617,5

Quick exhaust valve 3/4" NPT

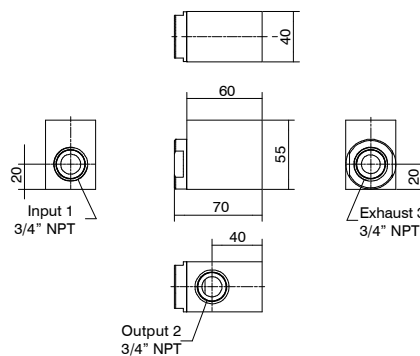

Ordering code

SS3402SR1

TYPE



T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Inlet flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (Nl/min)	Cv	kv	Connections	Temperature °C		Weight (gr.)
12	3000	3,04	45,45	10000	10,16	151,51	3/4" NPT	-50 ... +70 (version L)	-10 +150 (version H)	745

Quick exhaust valve 1" NPT

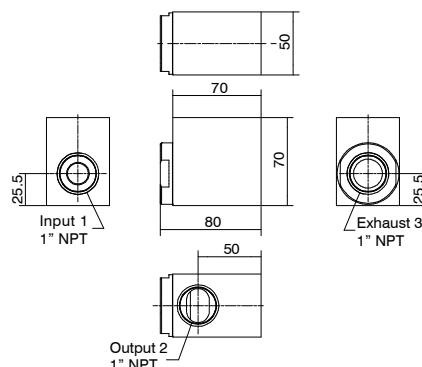

Ordering code

SS1102SR1

TYPE

T L = Low temperature version
H = High temperature version



Operational characteristics

Maximum working pressure (bar)	Inlet flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (Nl/min)	Cv	kv	Connections	Temperature °C		Weight (gr.)
12	5000	5,08	75,75	18000	18,29	272,72	1" NPT	-50 ... +70 (version L)	-10 +150 (version H)	1365



Pneumatic actuated valves series SA - aluminium

PNEUMAX, worldwide recognized leader in industrial automation, provide a wide range of solutions and components for the process automation industry. Application oriented production and long-term experience in wide range applications makes Pneumax a reliable partner capable to assist the customers since the very beginning of project execution.

General

Brand aluminum valve series has been developed in compliance with the latest and most technologically advance testing and prototyping methodologies, to secure top performances and reliability. The widest product selection and configuration makes Pneumax aluminum valve a proper selection for both Grass Roots Plants execution and Plant retrofitting / upgrading.

Main industries served are Chemical, Petrochemical, Power Generation and Oil & Gas.

All external and internal parts are aluminum material.

The range includes balanced spool valves with 3 and 5 way function valves, with the following functions available:

- Pneumatic-spring valve
- Pneumatic-pneumatic valve
- 2 position push-pull valve (**only for 1/4" NPT version**)
- Push button-spring valve (**only for 1/4" NPT version**)
- Push button-pneumatic return valve (**only for 1/4" NPT version**)
- Accessories which include: Non return valve, Uni/bidirectional flow regulator and Quick exhaust valve
- 1/8" NPT pilot connection

Working port size

Flow at 6 bar with $\Delta p=1$ (l/min)

1/4" NPT	1360
1/2" NPT	2500
1" NPT	6500

Construction characteristics

Body	Aluminium
Operators	Aluminium
Spacers	Aluminium
Spool	AISI 303 stainless steel
Spring	AISI 302 stainless steel
Screws	Stainless steel
Seals	NBR for low temperature (-30°C)

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-30°C ... +70°C
Maximum operating pressure	12 bar

Certifications available:



ATEX CE II 2 GD c IIC T5 T100°C


: [CE II 2G Ex h IIC Gb
CE II 2D Ex h IIC T100°C Db]




: Suitable up to SIL 3



Pneumatic-Pneumatic

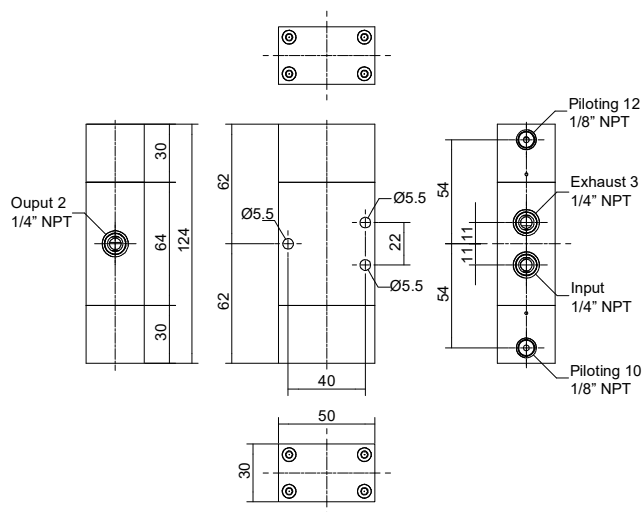


Weight gr. 470
Minimum piloting pressure 2 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1/8" NPT	1,38	20,60

Pneumatic-Pneumatic

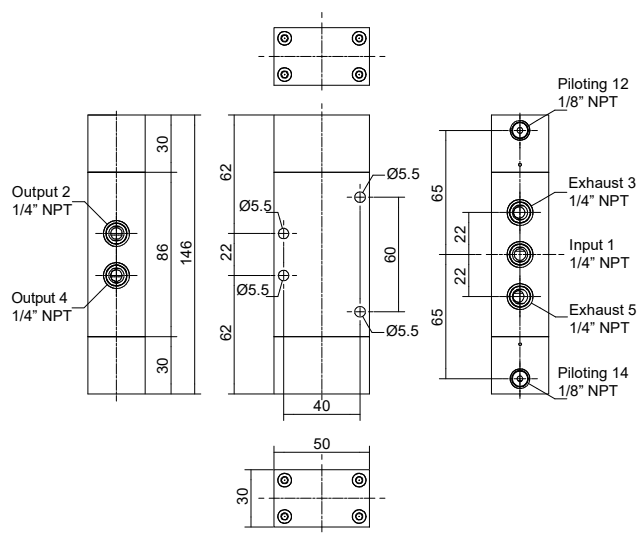

Weight gr. 550
Minimum piloting pressure 2 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1/8" NPT	1,38	20,60

Ordering code

SA1432C1111L




Ordering code


SA145201111L



Pneumatic-Spring

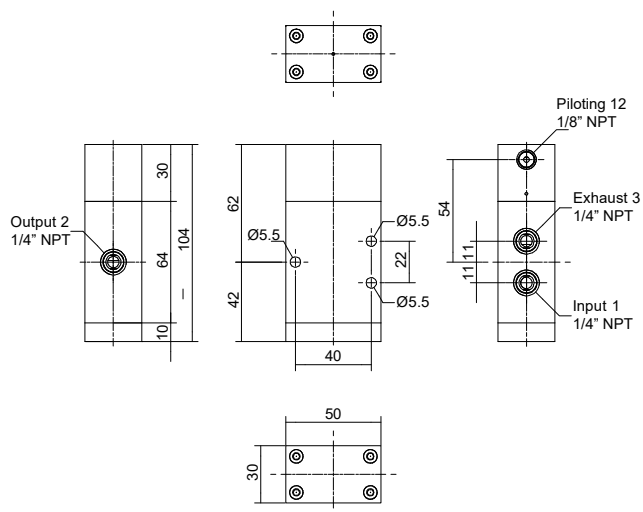


Weight gr. 394
Minimum piloting pressure 2,5 bar




Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1/8" NPT	1,38	20,60

Pneumatic-Spring

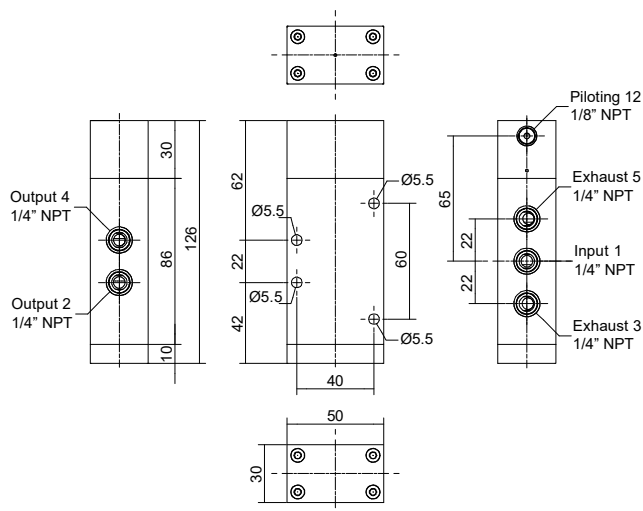

Weight gr. 475
Minimum piloting pressure 2,5 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1/8" NPT	1,38	20,60

Ordering code

SA1432C1101L




Ordering code

SA145201101L



Push button-pneumatic valve

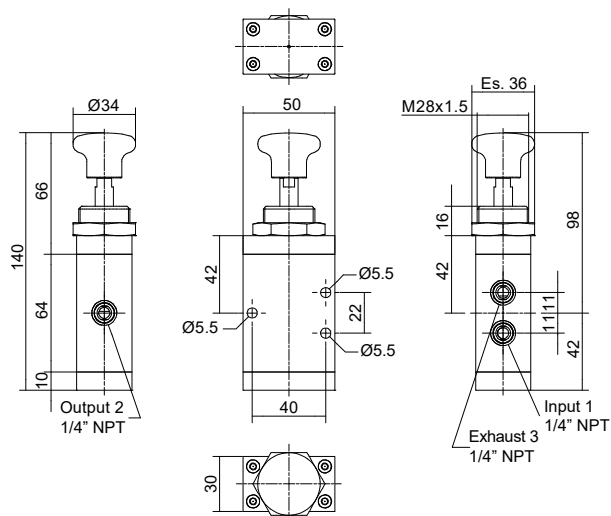


Ordering code

SA1432C0801L




Weight gr. 405
Actuation force 71,5N



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working port size	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1,38	20,60

Push button-pneumatic valve

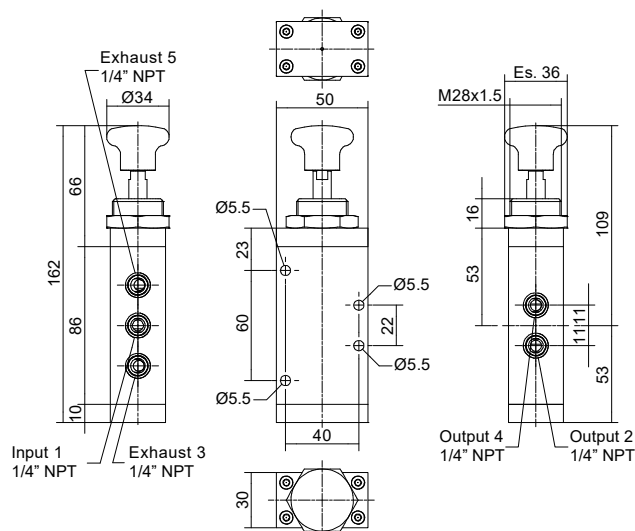


Ordering code

SA1452C0801L




Weight gr. 487
Actuation force 71,5N




Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working port size	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1,38	20,60

Bistable push button valve

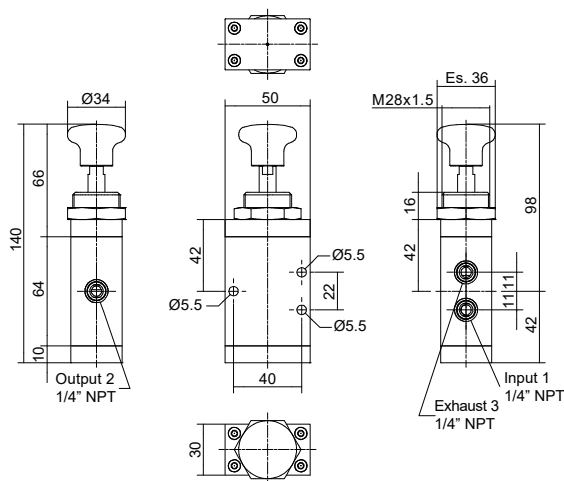


Weight gr. 395
Actuation force 105N




Operational characteristics

Operational characteristics							
Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1,38	20,60

Bistable push button valve

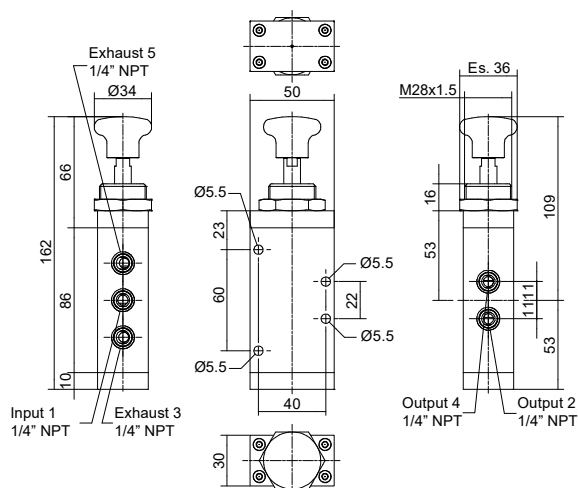

Weight gr. 483
Actuation force 105N



Operational characteristics

Operational characteristics							
Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1,38	20,60

Ordering code

SA1432C0803L




Ordering code


SA145200803L



Push button-pneumatic valve

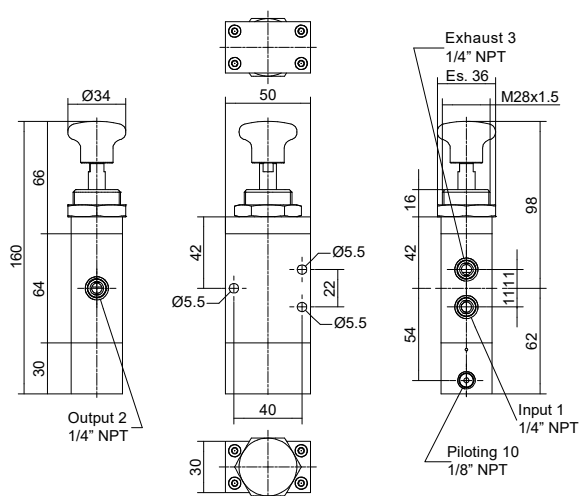


Weight gr. 481
Minimum piloting pressure 2 bar



Operational characteristics								
Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1/8" NPT	2,54	37,88

Push button-pneumatic valve

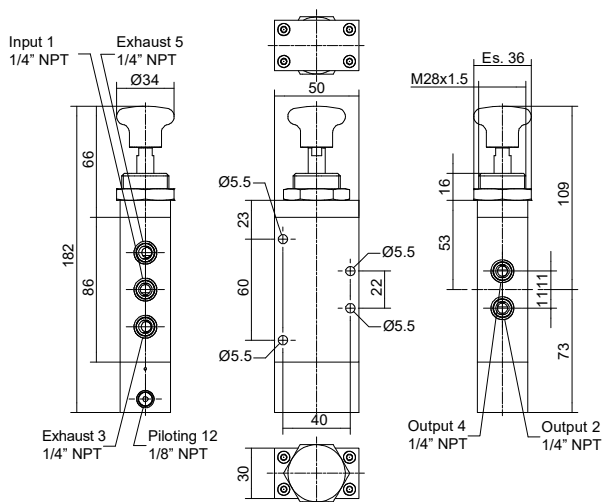


Weight gr. 561
Minimum piloting pressure 2 bar




Operational characteristics								
Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	1360	8	1/4" NPT	1/8" NPT	2,54	37,88



Pneumatic-Pneumatic

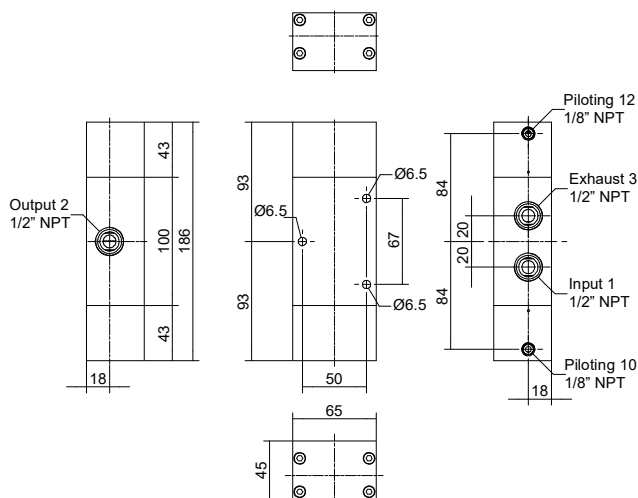


Weight gr. 1360
Minimum piloting pressure 2 bar




Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	2500	15	1/2" NPT	1/8" NPT	2,54	37,88

Pneumatic-Pneumatic

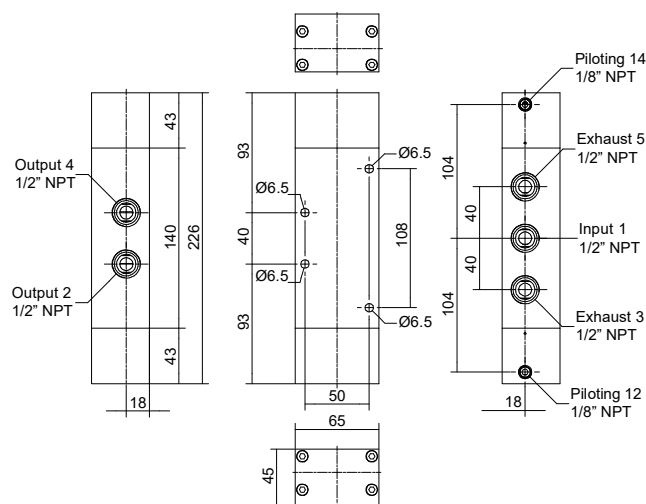

Weight gr. 1660
Minimum piloting pressure 2 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	2500	15	1/2" NPT	1/8" NPT	2,54	37,88

Ordering code

SA1232C1111L




Ordering code


SA125201111L



Pneumatic-Spring

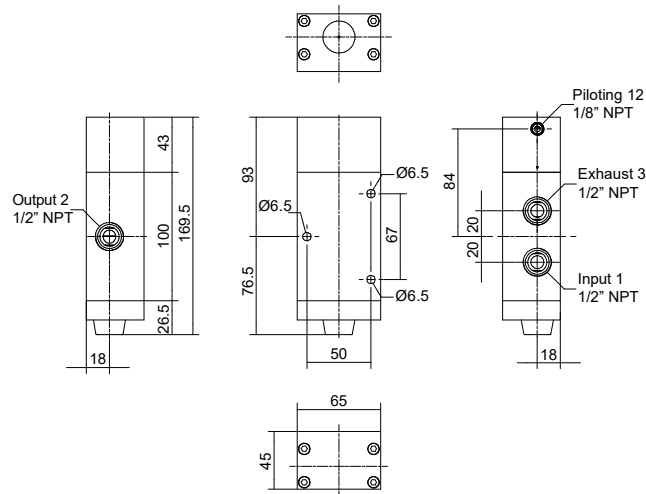


Weight gr. 1135
Minimum piloting pressure 2,5 bar




Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	2500	15	1/2" NPT	1/8" NPT	2,54	37,88

Pneumatic-Spring

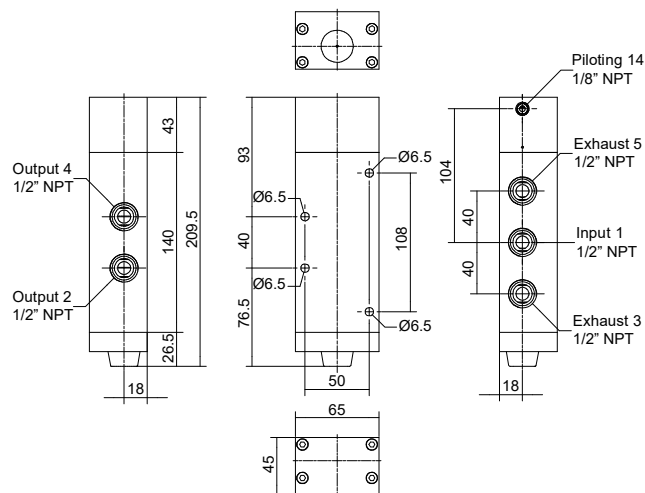

Weight gr. 1430
Minimum piloting pressure 2,5 bar




Operational characteristics


Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	2500	15	1/2" NPT	1/8" NPT	2,54	37,88



Pneumatic-Pneumatic

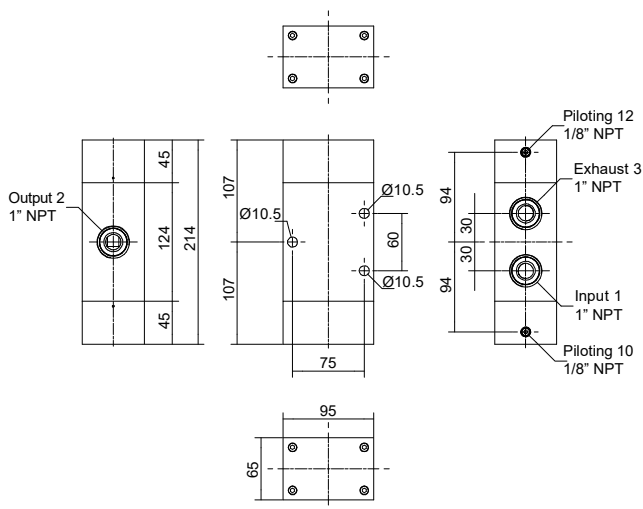


Weight gr. 3315
Minimum piloting pressure 2 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	6500	20	1" NPT	1/8" NPT	6,60	98,48

Pneumatic-Pneumatic

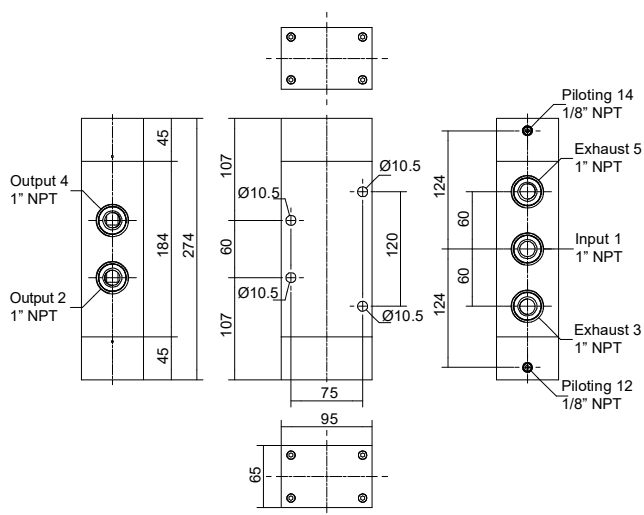

Weight gr. 4220
Minimum piloting pressure 2 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	6500	20	1" NPT	1/8" NPT	6,60	98,48

Ordering code

SA1132C11111L




Ordering code


SA1152011111L



Pneumatic-Spring

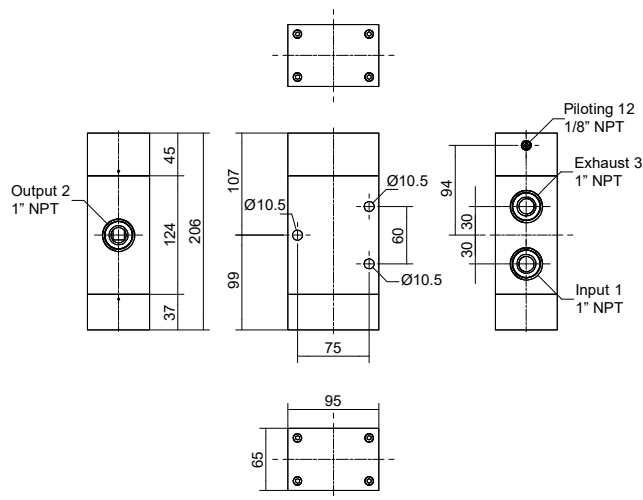


Weight gr. 3225
Minimum piloting pressure 2,5 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	6500	20	1" NPT	1/8" NPT	6,60	98,48

Pneumatic-Spring

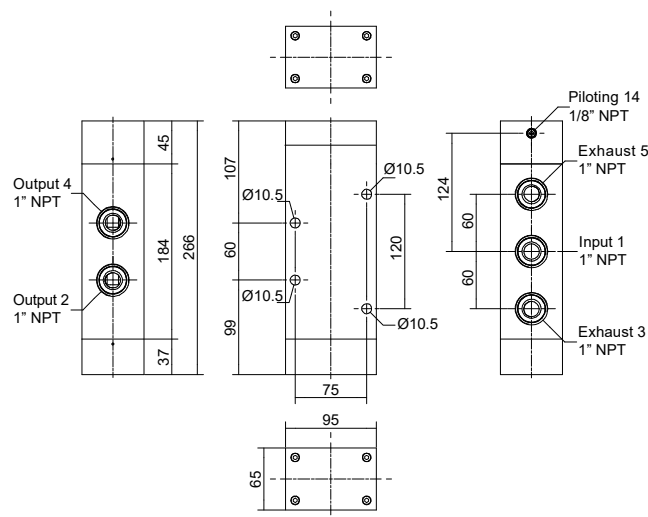



Weight gr. 4130
Minimum piloting pressure 2,5 bar





Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with Δp=1 (l/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	6500	20	1" NPT	1/8" NPT	6,60	98,48

Flow regulator 1/4" NPT



Weight gr. 102



Ordering code


A6.01.F

FUNCTION



F 14N=Unidirectional
14/1N=Bidirectional



Flow regulator 1/2" NPT



Weight gr. 276



Ordering code

A6.01.F

FUNCTION



F 12N=Unidirectional
12/1N=Bidirectional



Flow regulator 3/4" NPT - Unidirectional



Weight gr. 482



Ordering code



A6.01.34



Flow regulator 1" NPT - Unidirectional



Weight gr. 874



Ordering code

A6.01.11



Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Temperature °C	Cv	kv
Filtered air	12	900	7	-30 ... +70	0,91	13,63

Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Temperature °C	Cv	kv
Filtered air	12	2000	12	-30 ... +70	2,03	30,30

Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Temperature °C	Cv	kv
Filtered air	12	2800	12	-30 ... +70	2,84	42,42



Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Temperature °C	Cv	kv
Filtered air	12	3300	14	-30 ... +70	3,35	50

Quick exhaust valve 1/4" NPT



Weight gr. 112

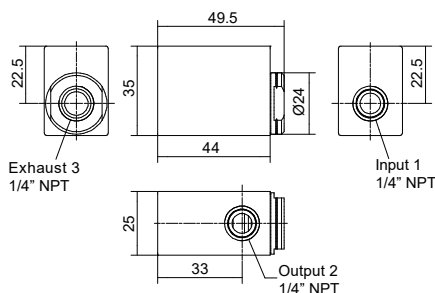

Ordering code



A6.02.14



Quick exhaust valve 1/2" NPT



Weight gr. 310

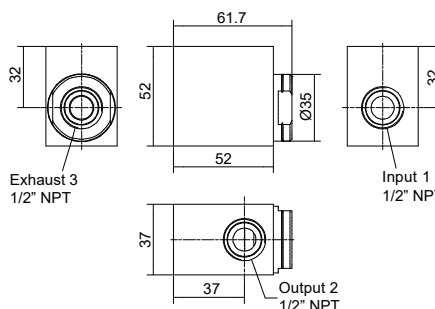

Ordering code



A6.02.12



Quick exhaust valve 3/4" NPT



Weight gr. 400

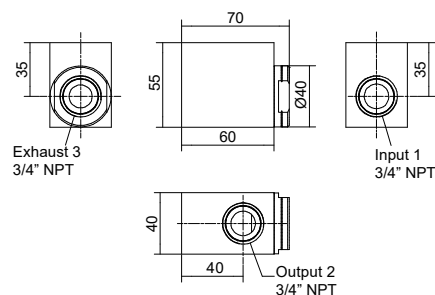

Ordering code



A6.02.34



Quick exhaust valve 1" NPT



Weight gr. 670

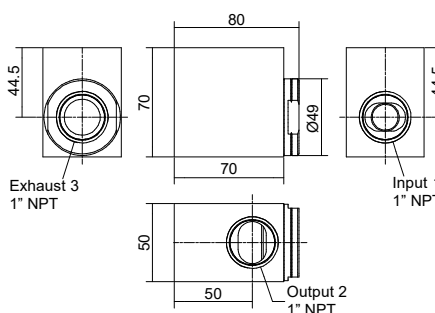

Ordering code

A6.02.11




Operational characteristics								
Fluid	Working pressure (bar)	Flow rate from 1 to 2 at 6 bar with $\Delta p=1$ (NI/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (NI/min)	Cv	kv	Temperature °C
Filtered air	0,5 ... 10	500	0,50	0,75	2500	2,54	37,87	-30 ... +70

Operational characteristics								
Fluid	Working pressure (bar)	Flow rate from 1 to 2 at 6 bar with $\Delta p=1$ (NI/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (NI/min)	Cv	kv	Temperature °C
Filtered air	0,5 ... 10	1500	1,52	22,72	6000	6,10	90,90	-30 ... +70

Operational characteristics								
Fluid	Working pressure (bar)	Flow rate from 1 to 2 at 6 bar with $\Delta p=1$ (NI/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (NI/min)	Cv	kv	Temperature °C
Filtered air	0,5 ... 10	3000	3,04	45,45	10000	10,16	151,51	-30 ... +70

Operational characteristics								
Fluid	Working pressure (bar)	Flow rate from 1 to 2 at 6 bar with $\Delta p=1$ (NI/min)	Cv	kv	Flow rate from 2 to 3 at 6 bar on free exhaust (NI/min)	Cv	kv	Temperature °C
Filtered air	0,5 ... 10	5000	5,08	75,75	18000	18,29	272,72	-30 ... +70

► **Non return valve 1/4" NPT**

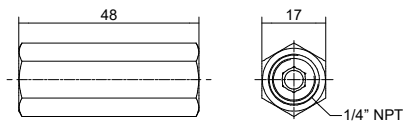

Ordering code


A6.07.14



Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Temperature °C	Weight (gr.)	Cv	kv
Filtered and lubricated air	12	1450	-30 ... +70	59	1,47	21,97

► **Non return valve 1/2" NPT**

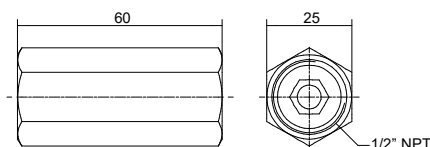

Ordering code


A6.07.12



Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Temperature °C	Weight (gr.)	Cv	kv
Filtered and lubricated air	12	3500	-30 ... +70	139	3,55	53,03

► **Non return valve 3/4" NPT**

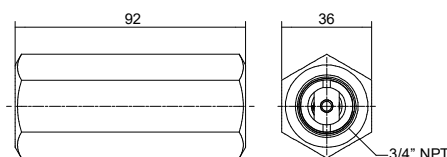

Ordering code



A6.07.34



Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Temperature °C	Weight (gr.)	Cv	kv
Filtered and lubricated air	12	6250	-30 ... +70	564	6,35	94,69

► **Non return valve 1" NPT**

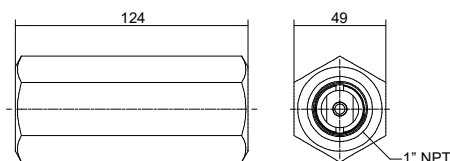

Ordering code

A6.07.11



Operational characteristics

Fluid	Maximum working pressure (bar)	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Temperature °C	Weight (gr.)	Cv	kv
Filtered and lubricated air	12	9500	-30 ... +70	1502	9,65	143,94



Valves and Solenoid valves poppet system 1/2" NPT - 3/4" NPT - 1" NPT series SA - aluminium

Pneumax poppet valves are excellent solution for application that requires high flow rates figures. Engineered and designed 3/2 configuration, normally closed, pneumatic-spring return execution. When used for compressed air, functionality is similar to spool valves.

Construction characteristics

	1/2" NPT - 3/4" NPT	1" NPT
Body	Die casting zinc alloy	Aluminium
End covers		Aluminium
Actuators		NBR
Pistons		Aluminium
Actuator rod		Stainless steel
Springs		Stainless steel
Seals		NBR

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-30°C ... +70°C
Maximum operating pressure	12 bar

Certifications available:


ATEX CE Ex II 2 GD c IIB T5 T100°C

: [CE Ex II 2G Ex h IIB T5 Gb
CE Ex II 2D Ex h IIIC T100°C Db]


: Suitable up to SIL 3



Pneumatic-Spring - 1/2" NPT

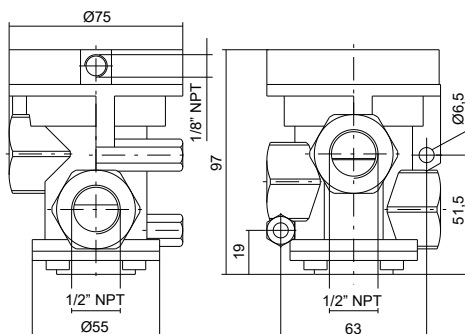

Weight gr. 1058
Normally closed
Minimum piloting pressure 2,5 bar



Operational characteristics


Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	4800	15	1/2" NPT	1/8" NPT	4,88	72,72

Ordering code


SA772321101C



Pneumatic-Spring - 3/4" NPT

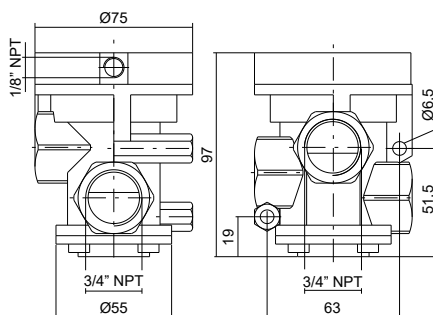

Weight gr. 973
Normally closed
Minimum piloting pressure 2,5 bar



Operational characteristics


Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	6100	20	3/4" NPT	1/8" NPT	6,20	92,42

Ordering code


SA773321101C



Pneumatic-Spring - 1" NPT

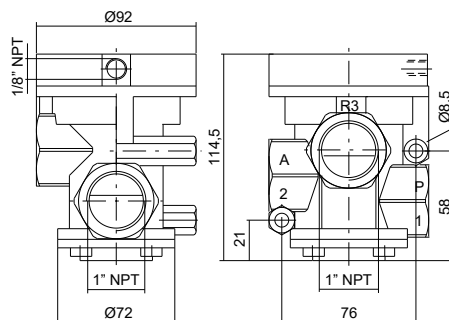

Weight gr. 1016
Normally closed
Minimum piloting pressure 2,5 bar



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (NI/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	12000	25	1" NPT	1/8" NPT	12,19	181,81

Ordering code

SA771321101C





Valves and Solenoid valves poppet system 1 1/2" NPT series SA - aluminium

Brand SAN776 (1 1/2" NPT) valve series have been upgraded replacing the traditional piston with a rolling diaphragm. This solution minimize friction with overall benefit on the valve seat wearing.


Construction characteristics

Body, operator and end cover	Die casting aluminium
Seals and poppet	NBR oil resistant rubber
Piston	Aluminium
Pin guide	Stainless steel
Springs	Stainless steel
Diaphragm	NBR oil resistant rubber

Operating range

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous. Inert Gas. Sweet gas (natural).
Operating temperature	-30°C ... +70°C
Maximum operating pressure	12 bar

Minimum working pressure diagram for external pilot versions N.C.

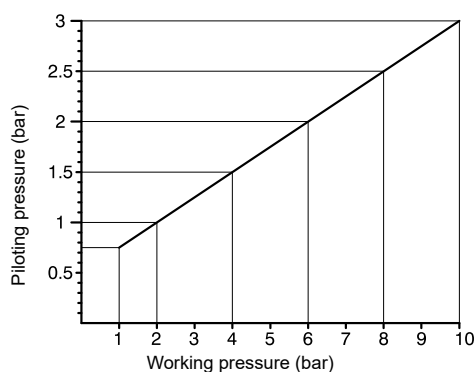

Certifications available:




ATEX CE Ex II 2 GD c IIB T5 T100°C

: $\left[\begin{array}{l} \text{CE} \text{ } \text{Ex} \text{ II 2G Ex h IIB T5 Gb} \\ \text{CE} \text{ } \text{Ex} \text{ II 2D Ex h IIIC T100°C Db} \end{array} \right]$



: Suitable up to SIL 3

Pneumatic-Spring - 1 1/2" NPT

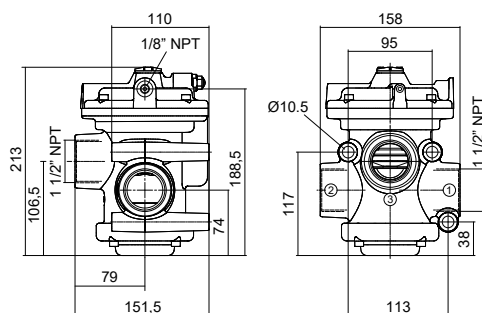


Ordering code

SAN776321101



Weight gr. 3514
Normally closed
Minimum piloting pressure "Vedi grafico nelle Generalità"



Operational characteristics

Fluid	Maximum working pressure (bar)	Temperature °C	Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	Orifice size (mm)	Working port size	Pilot connections	Cv	kv
Filtered and lubricated air	12	-30 ... +70	33500	38	1 1/2" NPT	1/8" NPT	34,04	507,57

Valves and Solenoid valves with “NAMUR” interface series 514

General

The valves 514 series are designed with interface connections in compliance with **NAMUR** standards.

The range includes 5/2 and 4/2 versions with pneumatic or electric actuation and with NPT or BSPT connections.

This series is classified for use in potentially explosive atmospheres (Directive 2014/34/EU).

NAMUR valves have been designed to guarantee flexibility and an increased flow rate capacity exceeding that of traditional spool valves.

Innovative materials guarantee high performances also in critical environment conditions.


The solenoid valves are available with protection classes for zones 2-22, 1-21 solenoids Ex nA, Ex mb, Ex Ia, international approvals IECEx, FM and CSA.

Note:

"Although accurately described, the 4/2 valve actually functions as a 3/2 normally closed valve and should be used as such."

NAMUR interface dimensions:

according to standard (VDI/VDE 3847 July 2003)

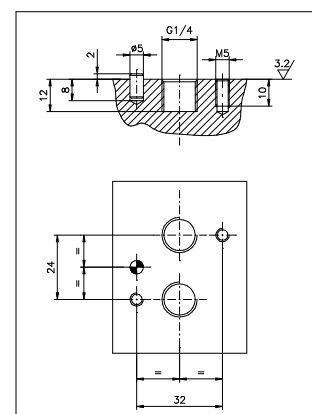

Construction characteristics

Body	Aluminium
Spacers	Technopolymer
Seals	Nitrile rubber
Springs	Stainless steel
Operators	Technopolymer
Spools	Steel
Screws	Zinc coated steel / Stainless steel



Order codes

51 4 52.00.39 B04

Model

: Standard valve

X : ATEX valve

Connections

4 : G1/4" - supplied with plate

6 : 1/4" NPT - supplied with plate

Function and version

42.00.16: 4 ways - Pneumatic-Differential

42.00.18: 4 ways - Pneumatic-Pneumatic

42.00.19: 4 ways - Pneumatic-Spring

42.00.35: 4 ways - Solenoid-Solenoid

42.00.36: 4 ways - Solenoid-Differential

42.00.39: 4 ways - Solenoid-Spring

52.00.16: 5 ways - Pneumatic-Differential

52.00.18: 5 ways - Pneumatic-Pneumatic

52.00.19: 5 ways - Pneumatic-Spring

52.00.35: 5 ways - Solenoid-Solenoid

52.00.36: 5 ways - Solenoid-Differential

52.00.39: 5 ways - Solenoid-Spring

92.00.16: Universal kit - Pneumatic-Differential

92.00.18: Universal kit - Pneumatic-Pneumatic

92.00.19: Universal kit - Pneumatic-Spring

92.00.35: Universal kit - Solenoid-Solenoid

92.00.36: Universal kit - Solenoid-Differential

92.00.39: Universal kit - Solenoid-Spring

Voltages

B00: Ø10 stem without solenoid coil
to be used with the following solenoid coils

Valve marking with ATEX solenoid coil
Ex : CE II 2G Ex h IIC T5 Gb X
CE II 2D Ex h IIIC T96°C Db X

B04: 12 VDC - for all models

B05: 24 VDC - for all models

B09: 24 VDC (2W) - only for standard model

B56: 24 VAC (50-60 Hz) - for all models

B57: 110 VAC (50-60 Hz) - for all models

B58: 230 VAC (50-60 Hz) - for all models

C04: 12 VDC - for all models

C05: 24 VDC - for all models

C09: 24 VDC (2W) - only for standard model

C56: 24 VAC (50-60 Hz) - for all models

C57: 110 VAC (50-60 Hz) - for all models

C58: 230 VAC (50-60 Hz) - for all models

Ex : CE II 3G Ex h IIC T4 Gc X
CE II 3D Ex h IIIC T120°C Dc X IP65

F00: Ø9 stem without solenoid coil
to be used with the following solenoid coils

Ex : CE II 2G Ex h IIC T5 Gb X
CE II 2D Ex h IIIC T96°C Db X

X05: 24 VDC - only for ATEX model

X56: 24 VAC (50-60 Hz) - only for ATEX model

X57: 110 VAC (50-60 Hz) - only for ATEX model

X58: 230 VAC (50-60 Hz) - only for ATEX model

MHC: 32 VDC T6 - only for ATEX model
complete with connector

Ex : CE II 2G Ex h IIB/IIC T4 Gb X
CE II 2D Ex h IIIC T130°C Db X IP65

MH4: 32 VDC T4 - only for ATEX model

MH6: 32 VDC T6 - only for ATEX model

Ex : CE II 2G Ex h IIB/IIC T4 Gb X

Voltages

Valve marking with FM solenoid coil

L04: 12 VDC - only for FM APPROVED model

L05: 24 VDC - only for FM APPROVED model

L39: 120 VAC - only for FM APPROVED model

L41: 240 VAC - only for FM APPROVED model



Temperature options

: Standard valve (-10°C ... +50°C)

X : ATEX valve

(-20°C ... +40°C) - only with solenoid coils "B##", "C##" e "X##"

(-30°C ... +50°C) - only with solenoid coils "MHC", "MH#"

: FM APPROVED valve (-20°C ... +50°C) - only with solenoid coils "L##"



LT : Low temperature (-30°C ... +50°C)

Example : 514.52.00.39.B04 : Standard valve, G1/4" connections supplied with plate, solenoid-spring 5 ways, 12 VDC solenoid coil

Pneumatic-Differential

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

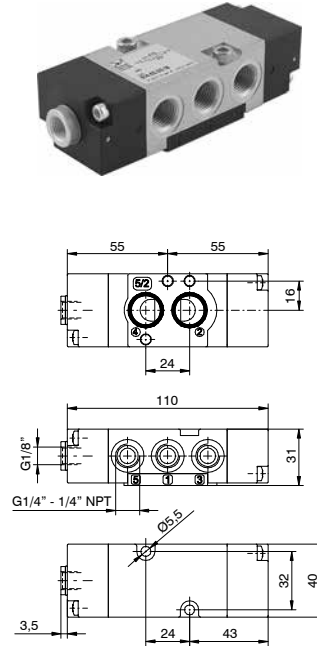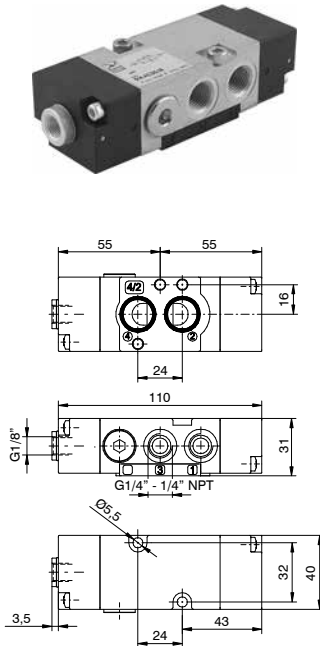


Ordering code: **M51C.F.00.1600**


MODEL	
M	= Standard valves
X	= ATEX valves
CONNECTIONS	
C	4 = G1/4"
6	= 1/4" NPT
FUNCTION	
F	42 = 4 ways
52	= 5 ways
TEMPERATURE OPTION	
0	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.42.00.1600 Weight 240 g





M51C.52.00.1600 Weight 235 g



Pneumatic-Pneumatic

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

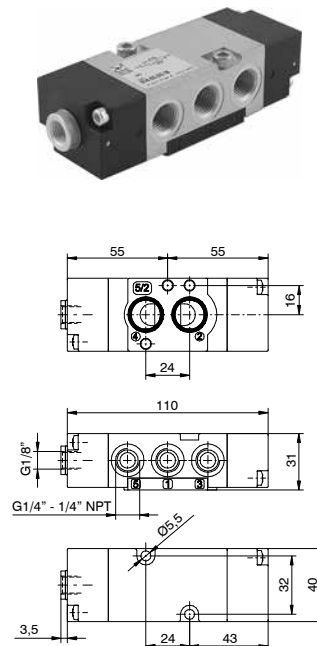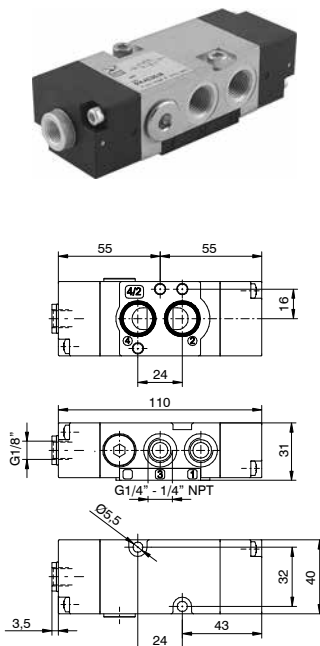


Ordering code: **M51C.F.00.1800**


MODEL	
M	= Standard valves
X	= ATEX valves
CONNECTIONS	
C	4 = G1/4"
6	= 1/4" NPT
FUNCTION	
F	42 = 4 ways
52	= 5 ways
TEMPERATURE OPTION	
0	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.42.00.1800 Weight 240 g





M51C.52.00.1800 Weight 235 g



Pneumatic-Spring

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

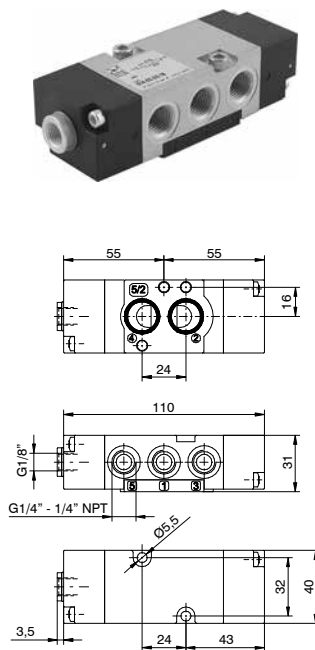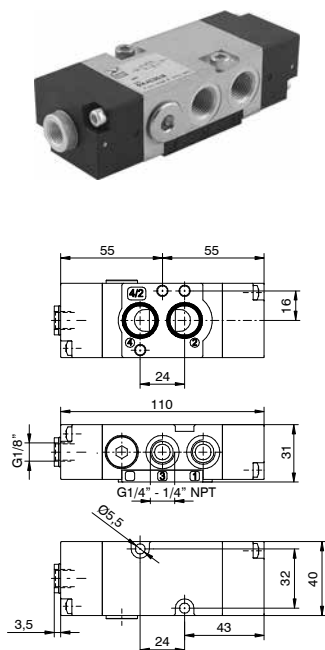


Ordering code: **M51C.F.00.19**


M	MODEL
X	= Standard valves
X	= ATEX valves
C	CONNECTIONS
4	= G1/4"
6	= 1/4" NPT
F	FUNCTION
42	= 4 ways
52	= 5 ways
O	TEMPERATURE OPTION
	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.42.00.19 Weight 240 g





M51C.52.00.19 Weight 235 g



Solenoid-Solenoid

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (l/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

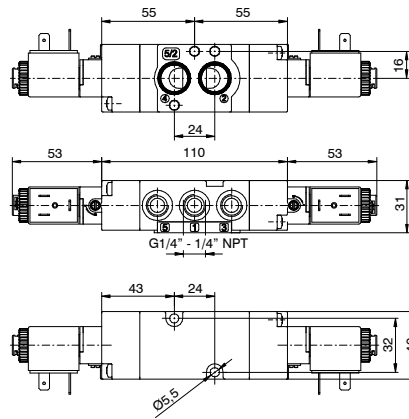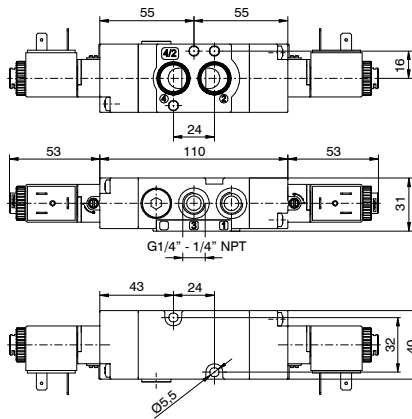


Ordering code: M51C.F.00.35.T.O


MODEL	
M	= Standard valves
X	= ATEX valves
CONNECTIONS	
C	4 = G1/4"
6	= 1/4" NPT
FUNCTION	
F	42 = 4 ways
52	= 5 ways
VOLTAGE	
T	See order codes page
TEMPERATURE OPTION	
O	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.42.00.35.10 Weight 410 g









M51C.52.00.35.10 Weight 405 g



Solenoid-Differential

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

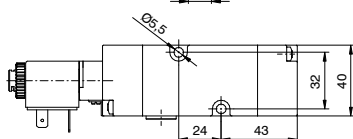


Ordering code: M51C.F.00.36.T.O


MODEL	
M	= Standard valves
X	= ATEX valves
CONNECTIONS	
C	4 = G1/4"
6	= 1/4" NPT
FUNCTION	
F	42 = 4 ways
52	= 5 ways
VOLTAGE	
T	See order codes page
TEMPERATURE OPTION	
O	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.42.00.36.T.O Weight 330 g





M51C.52.00.36.T.O Weight 325 g



Solenoid-Spring

Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

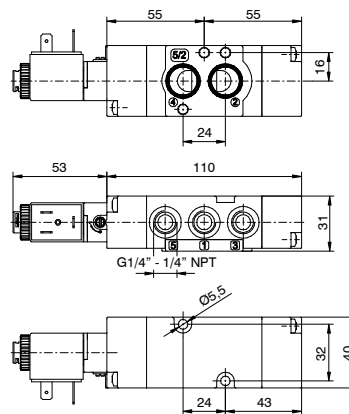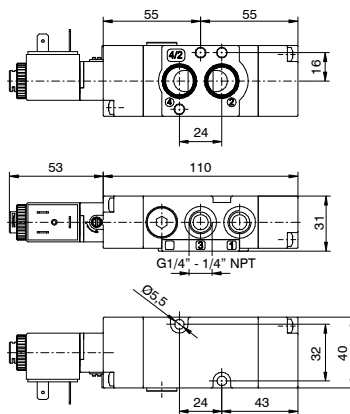


Ordering code: M51C.F.00.39.T.O


MODEL	= Standard valves
X	= ATEX valves
CONNECTIONS	
C	4 = G1/4"
6	= 1/4" NPT
FUNCTION	
F	42 = 4 ways
52	= 5 ways
VOLTAGE	
T	See order codes page
TEMPERATURE OPTION	
O	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.42.00.39.T.O Weight 330 g




M51C.52.00.39.T.O Weight 325 g



Universal kit

Operational characteristics

Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

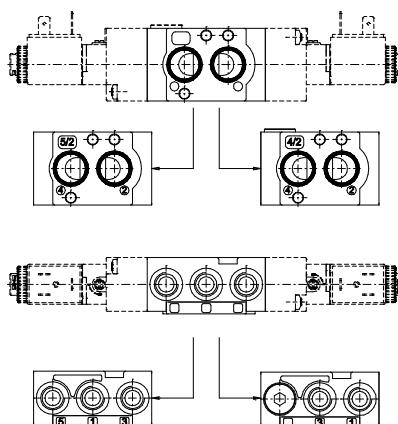


Ordering code: **M51C.92.00.V.T.O**

M	MODEL
	= Standard valves
X	= ATEX valves
C	CONNECTIONS
4	= G1/4"
6	= 1/4" NPT
V	VERSION
16	= Pneumatic - Differential
18	= Pneumatic - Pneumatic
19	= Pneumatic - Spring
35	= Solenoid - Solenoid
36	= Solenoid - Differential
39	= Solenoid - Spring
T	VOLTAGE
	See order codes page
O	TEMPERATURE OPTION
	See order codes page

Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

To change a 5/2 valve into a 4/2:
Simply replace the bottom plate with the one included in the universal kit (cod. 514.92...) and by plugging port 5

M51C.92.00.V.T.O Weight 405 g



Valves and Solenoid valves with “Namur” interface series 515

General

The valves 515 series are designed with interface connections in compliance with **NAMUR** standards.

The range includes 5/2 version with pneumatic or electric actuation and with NPT or BSPT connections.

This series is classified for use in potentially explosive atmospheres (Directive 2014/34/EU).

NAMUR valves have been designed to guarantee flexibility and an increased flow rate capacity exceeding that of traditional spool valves.


Innovative materials guarantee high performances also in critical environment conditions.

The solenoid valves are available with protection classes for zones 2-22, 1-21 solenoids Ex nA, Ex mb, Ex la, international approvals IECEx, FM and CSA.

ATTENTION:

It differs from version 514 because it is supplied without plate.

**NAMUR interface dimensions:
according to standard (VDI/VDE 3847 July 2003)**

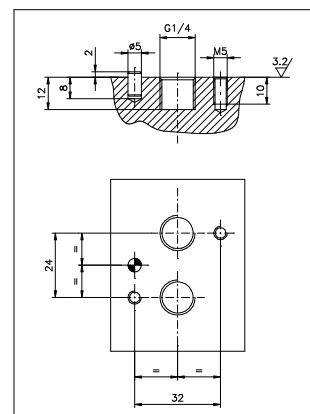

Construction characteristics

Body	Aluminium
Spacers	Technopolymer
Seals	Nitrile rubber
Springs	Stainless steel
Operators	Technopolymer
Spools	Steel
Screws	Zinc coated steel / Stainless steel



Order codes

51 5 52.00.39 B04

Model
: Standard valve
X : ATEX valve

Connections
5 : G1/4" - supplied without plate
7 : 1/4" NPT - supplied without plate

Function and version
52.00.16: 5 ways - Pneumatic-Differential
52.00.18: 5 ways - Pneumatic-Pneumatic
52.00.19: 5 ways - Pneumatic-Spring
52.00.35: 5 ways - Solenoid-Solenoid
52.00.36: 5 ways - Solenoid-Differential
52.00.39: 5 ways - Solenoid-Spring

Voltages	Valve marking with ATEX solenoid coil
B00: Ø10 stem without solenoid coil to be used with the following solenoid coils	 : CE II 2G Ex h IIC T5 Gb X CE II 2D Ex h IIIC T96°C Db X
B04: 12 VDC - for all models B05: 24 VDC - for all models B09: 24 VDC (2W) - only for standard model B56: 24 VAC (50-60 Hz) - for all models B57: 110 VAC (50-60 Hz) - for all models B58: 230 VAC (50-60 Hz) - for all models C04: 12 VDC - for all models C05: 24 VDC - for all models C09: 24 VDC (2W) - only for standard model C56: 24 VAC (50-60 Hz) - for all models C57: 110 VAC (50-60 Hz) - for all models C58: 230 VAC (50-60 Hz) - for all models	 : CE II 3G Ex h IIC T4 Gc X CE II 3D Ex h IIIC T120°C Dc X IP65
F00: Ø9 stem without solenoid coil to be used with the following solenoid coils	 : CE II 2G Ex h IIC T5 Gb X CE II 2D Ex h IIIC T96°C Db X
X05: 24 VDC - only for ATEX model X56: 24 VAC (50-60 Hz) - only for ATEX model X57: 110 VAC (50-60 Hz) - only for ATEX model X58: 230 VAC (50-60 Hz) - only for ATEX model	 : CE II 2G Ex h IIC T4 Gb X CE II 2D Ex h IIIC T135°C Db X IP65
MHC: 32 VDC T6 - only for ATEX model complete with connector	 : CE II 2G Ex h IIB/IIC T4 Gb X CE II 2D Ex h IIIC T130°C Db X IP65
MH4: 32 VDC T4 - only for ATEX model MH6: 32 VDC T6 - only for ATEX model	 : CE II 2G Ex h IIB/IIC T4 Gb X
Voltages	Valve marking with FM solenoid coil
L04: 12 VDC - only for FM APPROVED model L05: 24 VDC - only for FM APPROVED model L39: 120 VAC - only for FM APPROVED model L41: 240 VAC - only for FM APPROVED model	

Temperature options
: Standard valve (-10°C ... +50°C)
X : ATEX valve
(-20°C ... +40°C) - only with solenoid coils "B##", "C##" e "X##"
(-30°C ... +50°C) - only with solenoid coils "MHC", "MH#"
: FM APPROVED valve (-20°C ... +50°C) - only with solenoid coils "L##"
LT : Low temperature (-30°C ... +50°C)

Example : 515.52.00.39.B04 : Standard valve, G1/4" connections supplied without plate, solenoid-spring 5 ways, 12 VDC solenoid coil

Pneumatic-Differential

Ordering code: **M51C.52.00.16C**



Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (NI/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

M	MODEL	C	TEMPERATURE OPTION
	= Standard valves		See order codes page
C	X = ATEX valves		
	CONNECTIONS		
5	= G1/4"		
	7 = 1/4" NPT		



Weight 245 g
Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.52.00.16C

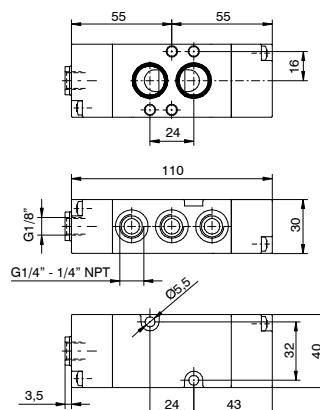

Pneumatic-Pneumatic

Ordering code: **M51C.52.00.18C**



Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (NI/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

M	MODEL	C	TEMPERATURE OPTION
	= Standard valves		See order codes page
C	X = ATEX valves		
	CONNECTIONS		
5	= G1/4"		
	7 = 1/4" NPT		



Weight 245 g
Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.52.00.18C

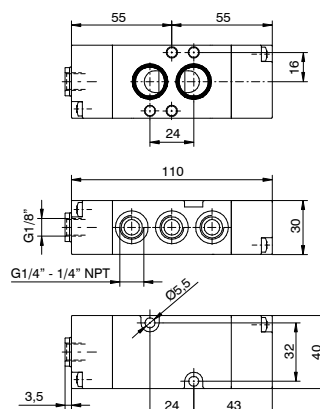

Pneumatic-Spring

Ordering code: **M51C.52.00.19C**

Operational characteristics



Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

M	MODEL	C	TEMPERATURE OPTION
	= Standard valves		See order codes page
	X = ATEX valves		
C	CONNECTIONS		
	5 = G1/4"		
	7 = 1/4" NPT		



Weight 245 g
Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.52.00.19C

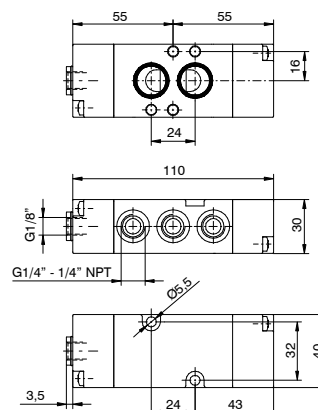

Solenoid-Solenoid

Ordering code: **M51C.52.00.35.TC**

Operational characteristics


Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

M	MODEL	C	TEMPERATURE OPTION
	= Standard valves		See order codes page
	X = ATEX valves		
C	CONNECTIONS		
	5 = G1/4"		
	7 = 1/4" NPT		
T	VOLTAGE		
	See order codes page		



Weight 415 g
Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.52.00.35.TC

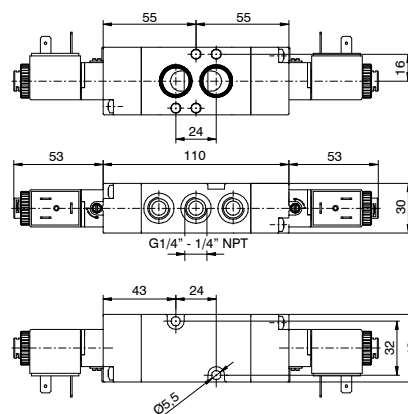

Solenoid-Differential

Ordering code: **M51C.52.00.36.10**



Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

M	MODEL	0	TEMPERATURE OPTION
	= Standard valves		See order codes page
C	X = ATEX valves		
	CONNECTIONS		
1	5 = G1/4"		
	7 = 1/4" NPT		
T	VOLTAGE		
	See order codes page		



Weight 330 g
Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.52.00.36.10

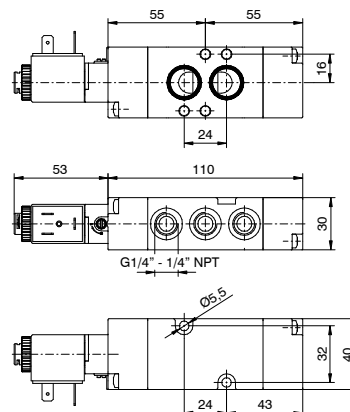

Solenoid-Spring

Ordering code: **M51C.52.00.39.10**



Operational characteristics	
Fluid	Filtered air. No lubrication needed, if applied it shall be continuous.
Maximum working pressure (bar)	10
Temperature °C	See order codes page
Flow rate at 6 bar with $\Delta p=1$ (Nl/min)	1100
Orifice size (mm)	8
Working port size	G 1/4" - 1/4" NPT
Cv	1,11
kv	16,66

M	MODEL	0	TEMPERATURE OPTION
	= Standard valves		See order codes page
C	X = ATEX valves		
	CONNECTIONS		
1	5 = G1/4"		
	7 = 1/4" NPT		
T	VOLTAGE		
	See order codes page		




Weight 330 g
Minimum pilot pressure 2,5 bar
Maximum fittings torque 9 N/m

M51C.52.00.39.10

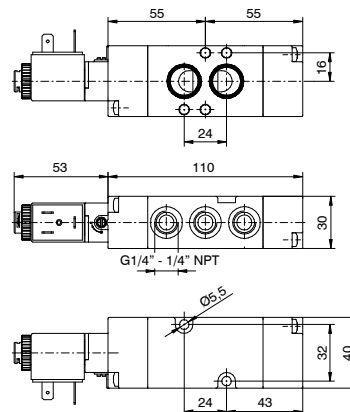

Solenoid coil 22 mm Ø10, type MB

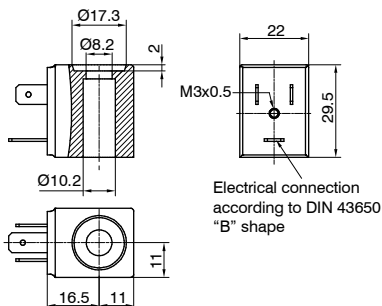

Ordering code

MBT

VOLTAGE

4: 12 VDC

5: 24 VDC

9: 24 VDC (2W)

56: 24 VAC (50-60 Hz)

57: 110 VAC (50-60 Hz)

58: 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection	Weight (gr.)
F	±10%	IP65	DIN43650 B industrial	53

Solenoid coil 22 mm Ø10, type XMB



CE II 3GD Ex nA IIC T5, T4 Gc
CE II 3GD Ex tc IIIC T85°C, T120°C Dc IP65

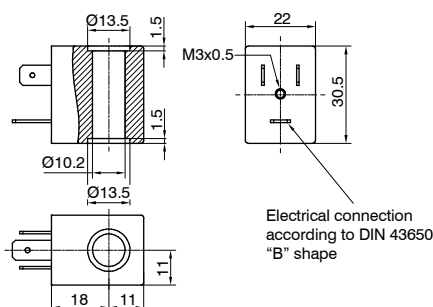

Ordering code

XMBT

VOLTAGE

4: 12 VDC

5: 24 VDC

56: 24 VAC (50-60 Hz)

57: 110 VAC (50-60 Hz)


58: 230 VAC (50-60 Hz)



Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection	Weight (gr.)
F	±10%	IP65	DIN43650 B industrial	54

Solenoid coil 30 mm Ø10, type MC

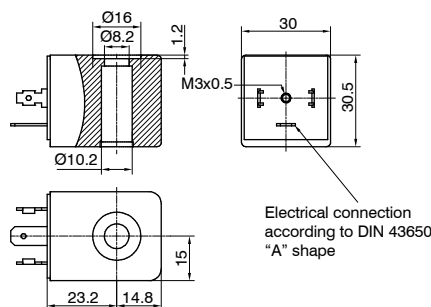

Ordering code

MCT

VOLTAGE

4: 12 VDC

5: 24 VDC

9: 24 VDC (2W)

56: 24 VAC (50-60 Hz)

57: 110 VAC (50-60 Hz)

58: 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection	Weight (gr.)
F	±10%	IP65	DIN43650 A	113

Solenoid coil 30 mm Ø10, type XMC



CE II 3GD Ex nA IIC T5, T4 Gc
CE II 3GD Ex tc IIIC T85°C, T120°C Dc IP65

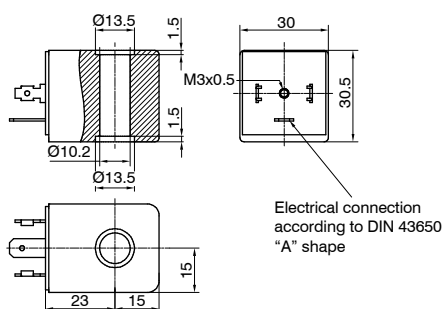

Ordering code

XMCT

VOLTAGE

4: 12 VDC

5: 24 VDC

56: 24 VAC (50-60 Hz)

57: 110 VAC (50-60 Hz)

58: 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection	Weight (gr.)
F	±10%	IP65	DIN43650 A	117

Solenoid coil 30 mm Ø10, type XME



CE II 2GD Ex mb IIC T6, T5, T4 Gb
CE II 2GD Ex mb IIIC T85°C, T100°C, T135°C Db IP65

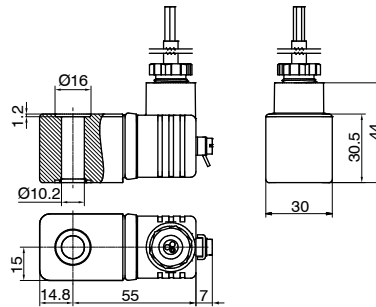

Ordering code

XME^T

VOLTAGE

5: 24 VDC

^T 56: 24 VAC (50-60 Hz)

57: 110 VAC (50-60 Hz)

58: 230 VAC (50-60 Hz)




Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection	Weight (gr.)
H	±10%	IP65	Cavo 3 mt.	325

Solenoid coil 30 mm Ø9, type XMHB EX ia



CE II 3G Ex nA IIC T5 Gc
CE II 3D Ex tc IIIC T95°C Dc IP65

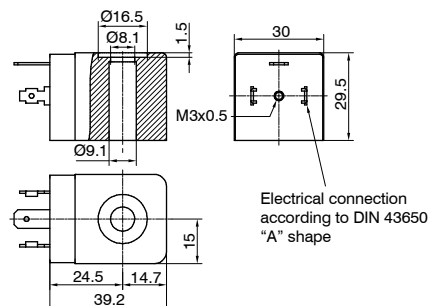

Ordering code

XMHB^T

VOLTAGE

^T 4: 32 VDC T4

6: 32 VDC T6




Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection	Weight (gr.)
F	±10%	IP65	DIN43650 A	111

Solenoid coil 30 mm Ø9, type XMHC EX ia 32 VDC T6



CE II 2G Ex ia IIB/IIC T6, T4 Ga
CE II 2D Ex t IIIC T80°C, T130°C Db IP65

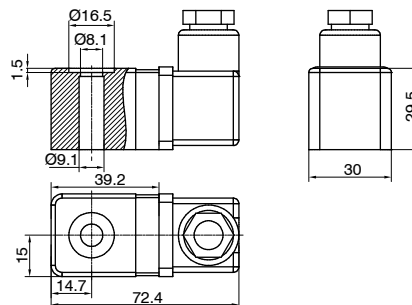

Ordering code

XMHC




Operational characteristics

Class of insulation	Tolerance on voltage	Grado di protezione	Weight (gr.)
F	±10%	IP65	136

Solenoid coil 36 mm Ø9, type ML FM APPROVED



Class I, Division 2, Groups A, B, C, D, T4, Ta=60°C
Suitable for Class II, III, Division 2, Groups E, F, G, T4, Ta=60°C
hazardous (classified) locations.

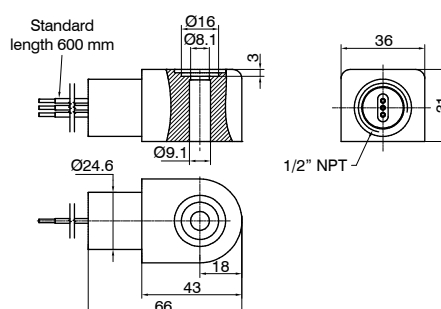

Ordering code

ML^T

VOLTAGE

4: 12 VDC

^T 5: 24 VDC

39: 120 VAC


41: 240 VAC



Operational characteristics

Class of insulation	Tolerance on voltage	IP Rating with connector fitted	Electrical connection (mm)	Weight (gr.)
H	±10%	IP65	600	150

Connector 22 mm ATEX DIN43650 B industrial




Ordering code

X305.11.00



Weight gr. 21

Connector 30 mm ATEX DIN43650 A

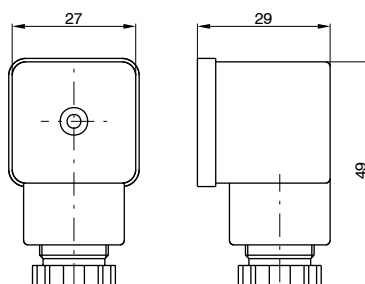


Ordering code

X300.11.00



Weight gr. 25

30 mm solenoid base adaptor

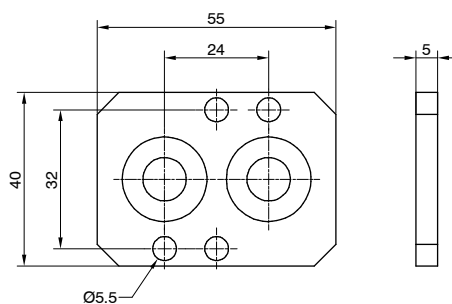

Ordering code

514.05

Weight gr. 25



HEADQUARTERS



PNEUMAX

PNEUMAX S.P.A.

Via Cascina Barbellina, 10
24050 Lurano (BG) - Italia
Tel. 035/4192777
Fax 035/4192740 - 035/4192741
info@pneumaxspa.com
www.pneumaxspa.com

WORLDWIDE NETWORK

EUROPE

ALBANIA

Industrial Air Solution shpk
Rruga industriale Tirane Vore, km 11,
1032 Vore Tirane
Tel. +355 69 40 80 349
info@iasolution.al
www.iasolution.al

AUSTRIA AND SWITZERLAND

Managed by Pneumax GmbH (Germany)

BELGIUM

Pneuvano BV
Koralenhoeve 4
2160, Wommelgem
Tel. +32 3 355 32 20
info@pneuvano.com
www.pneuvano.com

BULGARIA

Ulmer DM OOD
Adam Mizkevich Str. 4a, 1360, Sofia
Tel. +359 (2) 9259951
office@ulmer.bg
www.ulmer.bg

CYPRUS

G C V Spare Parts & Services Ltd
Industrial Area, Anatoniko 8086
P.O. Box 62731, Paphos
Tel. +357 26812444
gcv.cy@cytanet.com.cy
www.gcv-parts.com

CROATIA

ProElektronika d.o.o. - Zagabria
Stefanovecka 10, 10040, Zagabria
Tel. +385 (0)1 5588 988
info@proelektronika.hr
www.proelektronika.hr

ESTONIA

Alas-Kuul AS
Loomäe tee 1, Lehmja küla
75306, Rae vald Harjumaa
Tel. +372 6593 218
info@alas-kuul.ee
www.alas-kuul.ee

FRANCE

Pneumax France SAS
Z.I. NORD PARADIES 7
Rue de Waldkirch - BP 42
67601, Selestat CEDEX
Tel. +33 (3) 88580450
commercial@pneumax-france.fr
www.pneumax-france.fr

GERMANY

Pneumax GmbH
Tantalstraße 4
63571, Gelnhausen
Tel. +49 (0) 6051 9777 0
info@pneumax-gmbh.de
www.pneumax.de

GREECE

Hydropneumatic Hellas S.A.
69, Spirou Patsi Str. T.K., 118 55, Atene
Tel. +30 (210) 3474181-2-3
info@mitsis.com.gr
www.mitsis.com.gr

UNITED KINGDOM

Pneumax UK Ltd.
110 Vista Park,
Mauretania Road
SO16 0YS, Nursling
Tel. +44 2380 740412
sales@pneumax.co.uk
www.pneumax.co.uk

ICELAND

Barki E.H.F. Ltd
Nybylavegi 22, 200, Kópavogur
Tel. +354 554 6499
barkiea@islandia.is

LITHUANIA

UAB "Domingos prekyba"
Savanoriu PR 187-4 Korp, 2053, Vilnius
Tel. +370 5 2322231
info@dominga.lt
www.dominga.lt

NORTHERN MACEDONIA

DIL KOM DOOEL
St. Joska Jordanoski No 657500, Prilep
Tel. +389 78244177
export.dilkom@gmail.com
www.dilkom.mk

MALTA

iAutomate Limited
San Bernard, Marsa MRS 1332, Malta
Tel. +356 2786 3996
matthew@iautomate.mt
www.iautomate.mt

NETHERLANDS

Pneu/Tec B.V.
Dirk Storklaan 75, 2132 PX, Hoofddorp
Tel. +31 (0) 235699090
sales@pneutech.nl
www.pneutech.nl

POLAND

Rectus Polska SP. Z.O.O.
Gumna 96, 43-426, Debowiec
Tel. +48 (33) 857 98 00
pneumax@pneumax.pl
www.pneumax.pl

PORTUGAL

Portugal Pneumax Lda
Complexo Industrial da
Granja Fracção H-Casarias
2625-607, Vialonga
Tel. +351 (219) 737390
geral@pneumax.pt
www.pneumax.pt

CZECH REPUBLIC

Pneumax Automation s.r.o.
U Panského mlýna 240/9,
747 06, Opava
Tel. +420 553 760 953
pneumax@pneumaxsro.cz
www.pneumaxsro.cz

ROMANIA

Gica Import Export
Zona Industrială de Vest str. II nr. 5,
310491, Arad
Tel. +40 257 259816
comercial@gica.ro
www.gica.ro

RUSSIA / CIS

Pneumax Ltd. Moscow
Kommunalniy proezd, 30
141400, Khimki
Tel. +7 495 7393999
mail@pneumax.ru
www.pneumax.ru





**DENMARK - FINLAND
NORWAY - SWEDEN
(SCANDINAVIA)**

Pneumax Scandinavia AB
Strandvägen 101, SE-234 31, Lomma
Tel. +46 (40) 617 40 40
info@pneumax.se
www.pneumax.se

SERBIA

Hidraulika DOO
Cirila i Metodija 15, 15000, Šabac
Tel. +381 15 360 090
info@hidraulika.rs
www.hidraulika.rs

SLOVENIA

Hidravlika d.o.o.
Medlog, 16, 3000, Celje
Tel. +386 (3) 5453610
info@hidravlika.si
www.hidravlika.si

SPAIN

Pneumax S.A.
Olaso Kalea, 54, 20870, Elgoibar
Tel. +34 943 744144
pneumax@pneumax.es
www.pneumax.es

Pneumax Catalunya S.A.
C/Riera de Vallvidrera,
Parc. 2N. 1 Pl. Riera del Moli
8750, Molins de Rei
Tel. +34 (93) 680 25 30
pneumax@pneumaxcat.com
www.pneumax.es

TURKEY

Eteknik Otomasyon Tic. Ltd. Sti
Perpa Ticaret Merkezi B Blok Kat:11 No:1636 Ok-
meydanı Sisli (Istanbul)
Tel. +90 212 320 81 10
recepakar@eteknik.com
www.eteknik.com

UKRAINE

UKRTECHTRONIC LLC.
st. Nyzhnyurkivska, 9, 04080, Kiev
Tel. +38 044 500 98 48
sales@techtronic.com.ua
www.techtronic.com.ua

HUNGARY

Szele-Tech Bt.
Gvadányi u. 33-39. I. em. 108., 1141, Budapest
Tel. +36 1 401 0023
info@szele-tech.hu
www.szele-tech.hu



NORTH AMERICA

CANADA

Manufacture Scorpion Inc.
561, rue Edouard, J2G 3Z5, Granby
Tel. +1 (450) 378-3595
contact@mscorpion.com
www.manufacturescorpion.com

USA

Pneumax Automation LLC
128 Durkee Lane, Dallas
NC 28034 - USA
Tel.: +1 704 215 6991
Fax: +1 888 613 6529
info@pneumax.us
www.pneumax.us



MEXICO

Pneumatec S.A. DE C.V. - Zapopan
Calle Volcán Popocatepetl 1844, Colli Urbano
45070, Zapopan, Jalisco
Tel. +52 33 31255978
pneumatec@yahoo.com.mx
www.pneumatec.com.mx

CENTRAL AMERICA

COSTA RICA

PYASA Proyectos y Automatización S.A.
Oficentro Santa María Oficina 1A,
50 metros Norte
Del Hampton Inn & Suites, Alajuela
Tel. +506 2441-5129 / 2441-5130
info@pyasa.net
<https://pyasa.net>

EL SALVADOR

Tecni Equipos S.A. de C.V.
Av. Sierra Nevada, 704 Edificio CC, 2
Colonia Miramonte, San Salvador
Tel. (503) 2260-8293
Tel. (503) 2261-1497
tecniequipos.com.sv

GUATEMALA

PYASA Proyectos y Automatización S.A.
Avenida 3era 13-30 El Rosario Ofibodegas
San Javier zona 3 de Mixco bodega 7
Ciudad del Guatemala
Tel. +502 24911414
info@pyasa.net
<https://pyasa.net>

NICARAGUA

PYASA Proyectos y Automatización S.A.
Plaza Maranhao, local 7, Reparto Los Robles, o
bien, del Hotel Seminole 100 m sur,
1/2 m al oeste
Managua
Tel. +505-2255-6840
info@pyasa.net
<https://pyasa.net>

SOUTH AMERICA

ARGENTINA

Figli Daniele S.r.l.
PTE PERON 3234
San Justo - Pcia De Bs As.
Tel. +54 11 4484-2074
Fax +54 11 4651-6721
bruno@dinautomacion.com.ar

BRAZIL

Pneumax Brasil
Rua Apucarana 211
8301050, São José dos Pinhais
Tel. +55 41 33987262
diretoria@pneumaxbr.com.br
www.pneumaxbr.com.br



CHILE

Schultz Automatización e Ingeniería Ltda
El Retiro 1247 - Enea - Pudahuel, Santiago
Tel. +56 (2) 4951400
jschultz@schultzautomatizacion.cl
www.schultzautomatizacion.cl

COLOMBIA

Soluciones Neumaticas S.A.S.
Calle. 21 #1-21, Barrio San Nicolas, Cali
Tel. +57 (2) 4897647
ingenieria@solucionesneumaticas.com
www.solucionesneumaticas.com

ECUADOR

AINSA S.A. Guayaquil City
Av. Juan Tanco Marengo
Km 2,5 y Agustín Freire
EC090509, Guayaquil City
Tel. +593-4 3712670
info@ainsa.com.ec
www.ainsa.com.ec

PERU

Neumatec Perú S.A.C.
Calle General Suárez 1023,
Miraflores, Lima 18
Tel. +51 (1) 4442499
ventas@neumatecperu.com
www.neumatecperu.com

WEF Perú S.A.C.

Jr. Dinamarca 1427,
LIMA 01, Cercado de Lima
Tel. +511 4255740
oficinacentral@wefperu.com
www.wefperu.com

URUGUAY

Secoin S.A.
General Aguilar 1270 bis,
Gral. Fausto Aguilar 1270,
11800 Departamento de Montevideo
Tel. +598 2209 3815
ventas@secoin.com.uy
www.secoin.com.uy

VENEZUELA

Sinteco Barquisimeto
AV.Las Industrias Km2,
Edif. Centro de servicios
mercantiles local 2, Barquisimeto
Tel. +58 251 4432555
sintecobarqto@gmail.com
www.sintecobarqto.com.ve

WORLDWIDE NETWORK

AFRICA

ALGERIA

C.M.P.R. Sarl
23 Rue Lalla Fatma N'Soumeur Hassen
Badi El-Harrach, Algeri
Tel. +213 21 82 70 69

EGYPT

Egyptian Engineering
Shop 6 building no 1 Jordan co.
10th Of Ramadan City, Egitto
Tel. +20554368385
Fax: +20554368385
Email: info@eefhydropneu.com
www.eefhydropneu.com

GHANA

Cemix Limited
34 SPINTEX ROAD-ACCRA-GHANA-WEST
Tel. +233 0302 817030
sales@cemixghana.com
www.cemixghana.com

MOROCCO

R2i TFZ
Ilot 87, 1er étage, Bureau 20,
zone franche d'Exportation Tanger
Tel. +212 539 39 10 17
r2itfz@r2imaroc.ma
www.r2itfz.com

TUNISIA

L'Equipement moderne
86, Av. de Carthage, 1000, Tunisi
Tel. +216 71 343844
equipement.moderne@planet.tn
www.lequipementmoderne.com

ASIA

SAUDI ARABIA

Arabian Universal Establishment for Trading
Southern Shopping Center, P.O. BOX 3105
21471, Jeddah
Tel. +966 26 477159
www.arabianuniversal.com

CHINA

Pneumax Pneumatic Equipments Co., Ltd.
No. 76, Jinma Rd., Jiufu Economic Development Zone, Jiuting Town
201615, PRC, Shanghai
Tel. +86 (21) 57763100
sales@pneumaxchina.com
www.pneumaxchina.com

UNITED ARAB EMIRATES

Fine Industrial & Agri ENG. Services
P. O. BOX 5763, Sharja UAE
Tel. +971 (6) 5335434
fineinds@emirates.net.ae

PHILIPPINES

Integrated Hydro-Pneumatic SYSTEMS, INC.
N°4 St. Thomas Avenue,
Lopez Commercial Area
Sucat, Parañaque City
Tel. +632 02 820-0569
integhps@iconex.net

JORDAN

Al Sultan Company
for Industrial Equipment
P.O. Box 620996
11162, Amman
Tel: + 962 6 4753764
omar@alsultanco.com
www.alsultanco.com

INDIA

Pneumax Pneumatic
India Pvt. Ltd.
D-82, Hosier Complex, Phase-II extrn.
201305, Noida, UP
Tel. +91 (120) 4352560 / 61 / 62
info@pneumax-india.com
www.pneumax-india.com

INDONESIA

Managed by Pneumax Singapore Pte Ltd

PT. Mutiara Citramulia Teknindo
Ruko Karawaci Residence Blok A1,
No. 17 Jl. Raya
Legok. Bojong Nangka Kelapa Dua
Serpong-Tangerang 15810, Banten, 15810,
Giacarta
Tel. +62 21 29324792
pneumaxmct@cbn.net.id
www.pneumaxspa.com/ENG

IRAN

Ital Electro Pneumatic
NO. 204-2ND FLOOR-TAGHINIA
BLDG-SOUTH SA'ADI STREET
114715719, Teheran
Tel. +98 (21) 33919177
info@italpneum.com

ISRAEL

Ilan & Gavish
Yokneam Ilit 20692
POB 335, Soltam Site
Tel. +972 3 9221824
mail@ilan-gavish.com
www.ilan-gavish.co.il

LEBANON

Yammine Trading Company SARL
Boushrieh, Industrial City, P.O. Box 90 684
Jdeideh, El Metn 1202
2060, Beirut
Tel. +961 1 885520
info@yamminetrading.com
www.yamminetrading.com

MALAYSIA

Managed by Pneumax Singapore Pte Ltd
PSI Pneumatic Control Sdn Bhd
4M (1) Desa Universiti Commercial Complex,
Jalan Sungai Dua
11700, Penang
Tel. +60 4 6592627
sales-psi@airdynamics.com.sg

OMAN

Muscat Pneumatic System & Project LLC
Shop # 1484, Building # 1450B,
P.O. Box 105 PC: 120,
Muscat, Sultanate Of Oman
Tel. +968 24137684
sales@muscat-pneumatic.com

PAKISTAN

Fluid Tekhnik
Suite 101-104 Industrial Town Plaza, Opp. Sind
Madressah, Shahrah-e-Liaquat
74000, Karachi
Tel. +92 (21) 2410335
info@fluid-technik.com.pk
www.fluid-technik.com.pk

SINGAPORE

Pneumax Singapore Pte Ltd
51, Ubi Avenue 1/ 01-16,
Paya Ubi Industrial Park
408933, Singapore
Tel. +65 6392 0581
sales@pneumax.com.sg
www.pneumax.com.sg

SYRIA

Al Rowad Trading
P.O. BOX. 12806
Damasco
Tel: +963 944 228 955
alrowadtrading01@hotmail.com

THAILAND

Thai Agency Engineering Co. LTD
9 Soi Yasooop 2, 2nd-3rd Floor, Vorasin
building, Vipavadirangsit Road, Ladyao
10900, Chumphon
Tel: +66 (2) 6915900
taec@bkk.foxinfo.co.th
www.thai-a.com

OCEANIA

AUSTRALIA

Air & Automation Equipment Ltd.
3-9 Herbert Street
2137 N.S.W., Mortlake
Tel. +61 (2) 9743 1271
airauto@ihug.com.au
www.airautomation.com.au

NEW ZEALAND

Automation Equipment Ltd
26 Tawn Place
P. O. BOX 5656, Hamilton (Pukete)
Tel. +64 7 8490281
sales@autoequip.co.nz
www.autoequip.co.nz





PNEUMAX

PNEUMAX S.p.A.

Via Cascina Barbellina, 10
24050 Lurano (BG) - Italy
P. +39 035 41 92 777
process@pneumaxspa.com
www.pneumaxspa.com