

SHAMAL

COMPRESSORS YOU CAN TRUST.



MADE IN ITALY

MiniWINDY-E WINDY-E

2.2-7.5 kW

The smallest direct driven
rotary screw compressors



NEW
2026 RANGE


FNA COMPRESSORS

80 years of compressed air.

FNA COMPRESSORS is a Multinational company with 80 years of experience in the compressed air sector, founded from the merger of three long-established Italian compressor companies, which has developed an industrial synergy capable of competing on the world market without fear of comparison. Thanks to the consolidated experience and leadership of a family that has been operating exclusively in the compressed air sector for two generations, FNA COMPRESSORS is one of the leading manufacturers of air compressors for industrial, professional and consumer use.

SHAMAL, an integral part of the FNA COMPRESSORS family, is the industrial trademark, an undisputed leader in the design, development, production and distribution of high-tech solutions for compressing air with the greatest possible energy savings, serving every sector, from large industry to small business.

SHAMAL's screw compressors, in the 2.2 to 75 kW power range, are manufactured entirely in Italy in the province of Bologna, an area renowned for its excellence in precision engineering, where the most modern design, construction, assembly and testing technologies are applied to ensure customers reliable compressors with first-class performance.

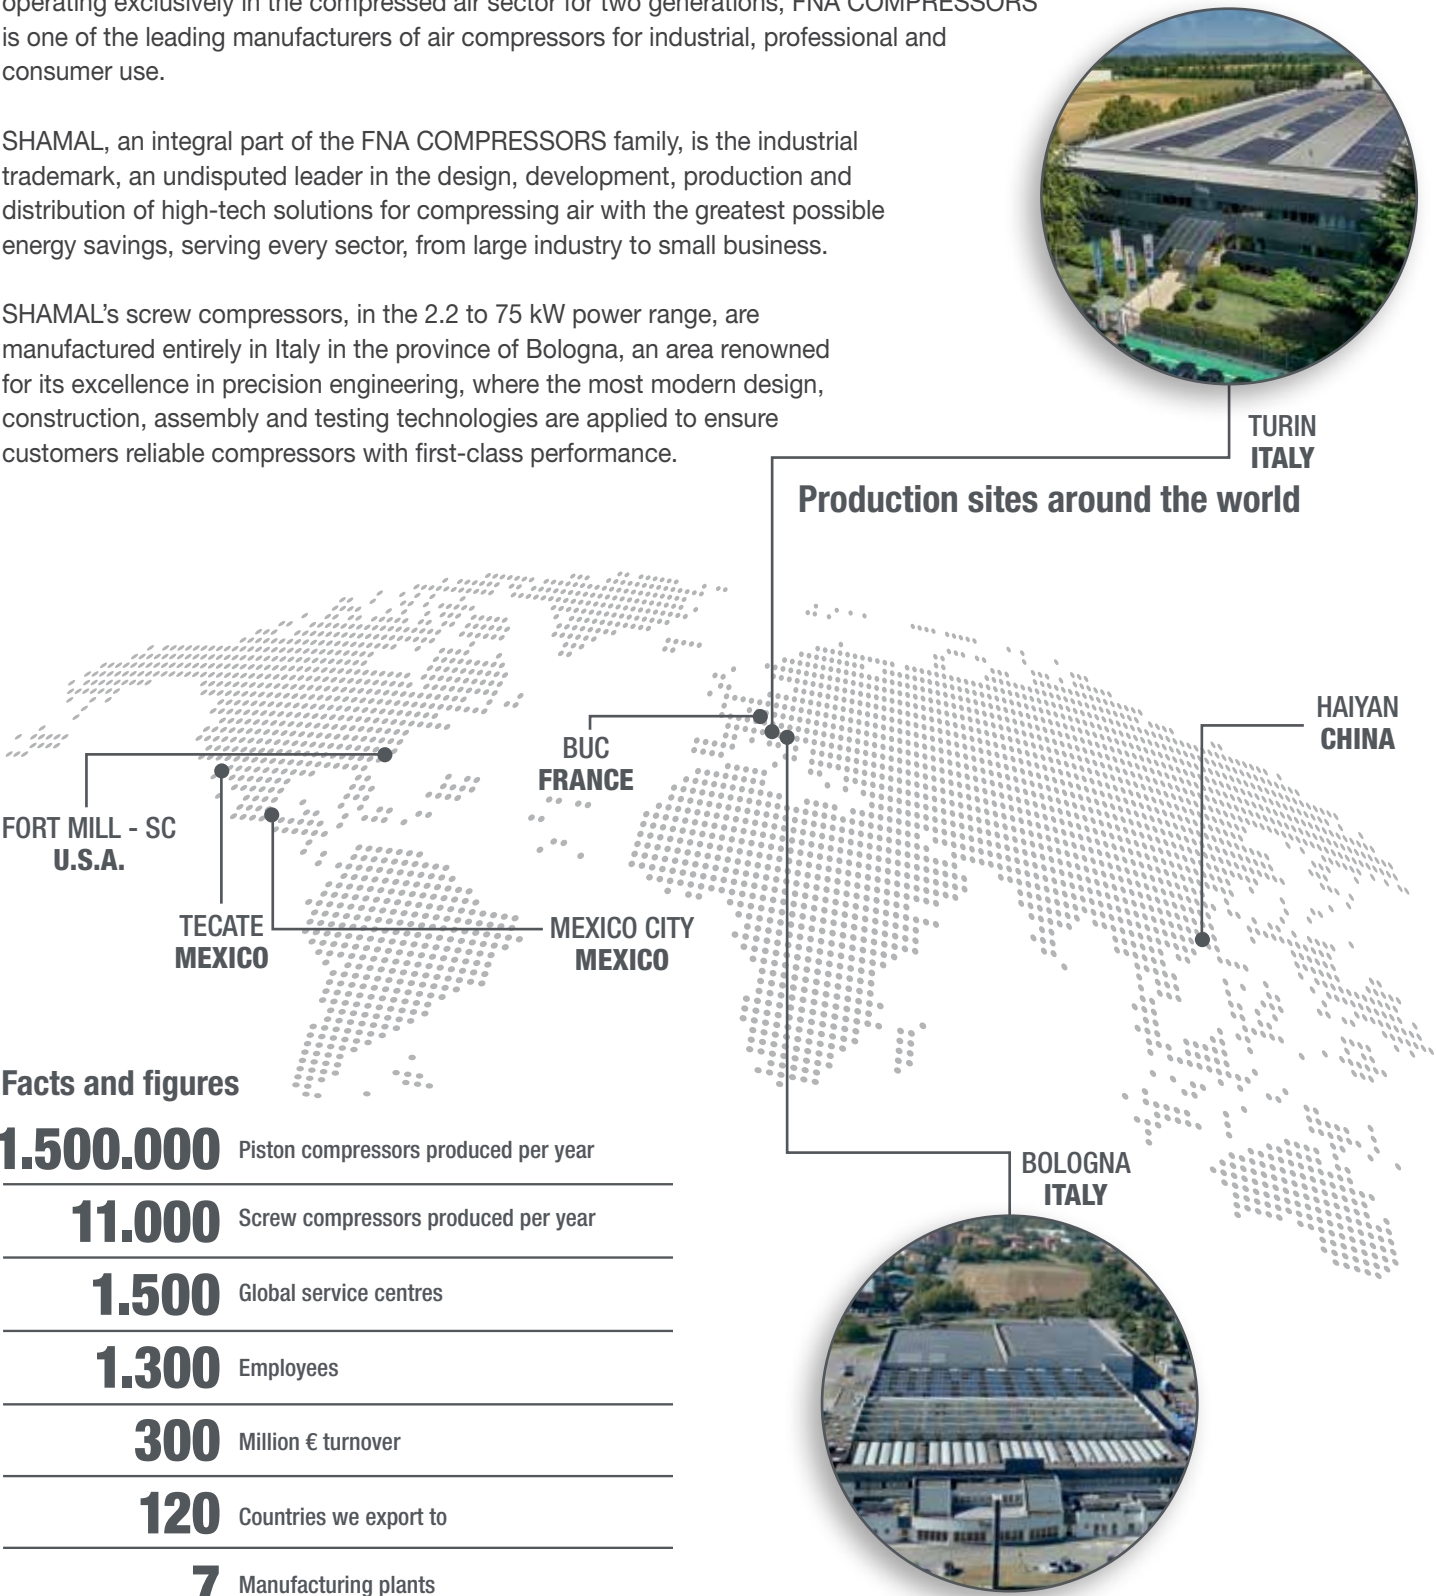

Facts and figures

1.500.000	Piston compressors produced per year
11.000	Screw compressors produced per year
1.500	Global service centres
1.300	Employees
300	Million € turnover
120	Countries we export to
7	Manufacturing plants

The SHAMAL brand

Manufacturers of air-ends for over 30 years.

SHAMAL is the leading Italian company, that has been able to combine craftsmanship passion with the most modern industrial technologies, integrating highly specialised labour with last-generation automatic machinery. The Made in Italy trademark is the expression of typical Italian quality and creativity, recognised and appreciated around the world, and which is now one of the distinguishing elements of our industrial production.

What makes SHAMAL screw compressors unique is the guarantee of a product that is made entirely in Italy: from design to packaging, each stage of production is carefully overseen by our engineers and aimed at developing a machine that exceeds the most demanding requirements in terms of reliability, energy saving, performance, quiet and safe operation.

SHAMAL air-ends, the true heart of our compressors, feature rotors with an optimised profile and outstanding performance. Their production process is completely integrated thanks to robotic machine tools and sophisticated control instrumentation that guarantees the highest level of quality. Each single rotor is machined in four very specific stages to achieve high precision and repeatability.

Before reaching the customer, every individual compressor is fully tested before completing final checks that ensure total compliance with over fifty stringent technical requirements.

Since 1996, the company's Quality System has been certified according to UNI EN ISO 9001:2015.



MiniWINDY-E 2.2 kW

Compact and smart!

Performant and user friendly

MiniWINDY-E is the new oil-lubricated coaxial compressor with direct starter, the smallest of the entire SHAMAL screw range.

The small size of the air-end / motor connection system allows the machine to maintain an extremely small footprint.

MiniWINDY-E is available in the floor mounted version or on a painted or galvanized 90-litre tank.

Silent

Thanks to its extreme quietness, only 65 dB(A), MiniWINDY-E can be placed near any operating environment.

Efficient and cost-effective

MiniWINDY-E is designed for continuous operation in industrial applications. The coaxial transmission, with the air-end directly connected to the electric motor without any flexible coupling, ensures the best transmission efficiency.

The three-phase versions are equipped with an IE3 energy efficiency class motor.

The FS14 air-end ensures minimum pressure losses, providing considerable energy savings and low operating and maintenance costs.

Easy to move

MiniWINDY-E is handy and easy to move, thanks to the 2 sides handles (only floor mounted version) and the forklift or pallet truck pre-arrangement at the bottom of the tank.

Simplified maintenance



All the internal components are easily accessible, making routine maintenance fast and simple to perform.

Plug&Play

MiniWINDY-E is ready for use: it is supplied already equipped with RotarECOFLUID mineral oil.

Optional heater

Prevents the formation of condensate, maintaining an adequate oil temperature during the standby phase of the compressor, useful when operating in cold ambient conditions.

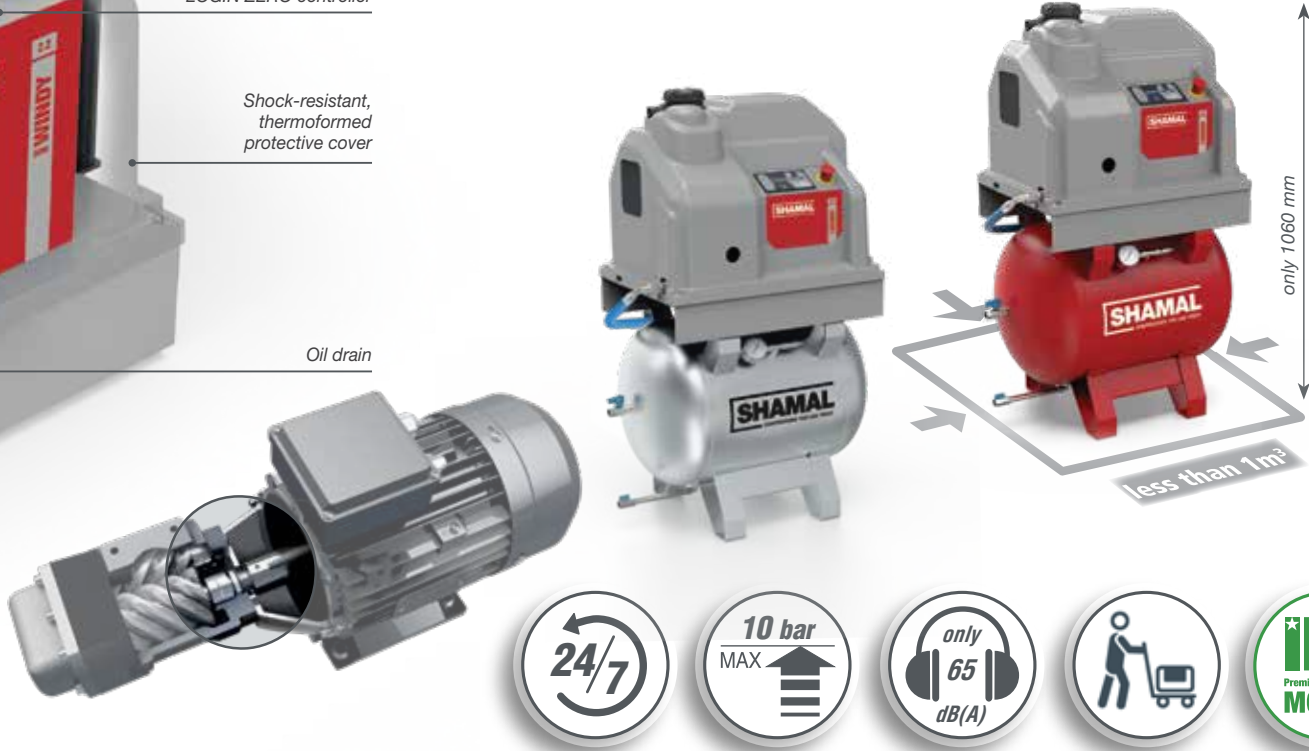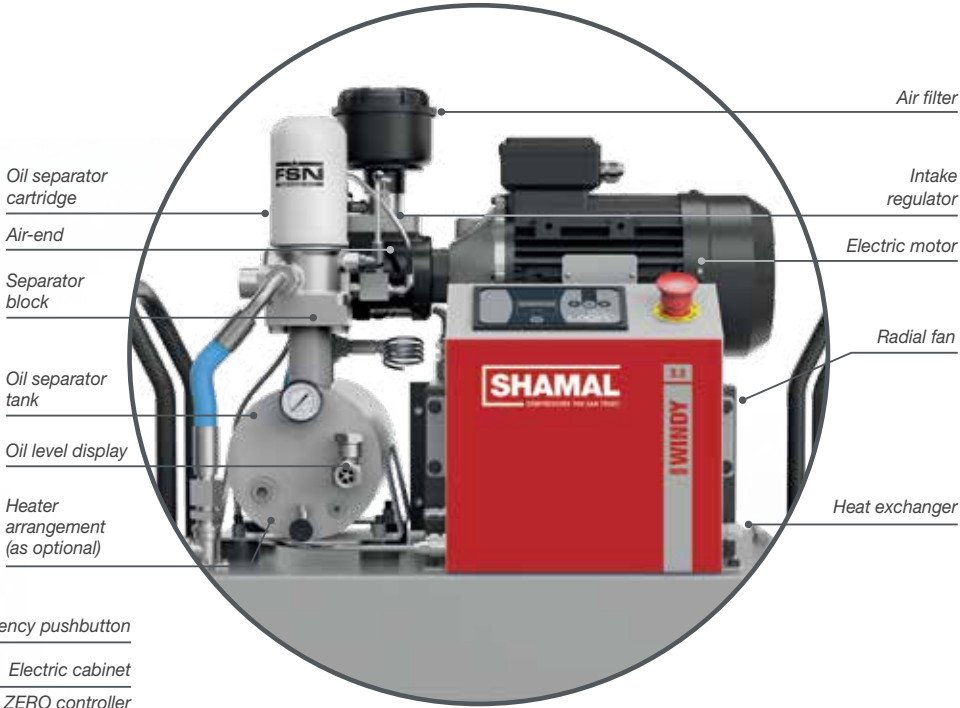

LOGIN ZERO
Multi-function controller with 5-digit LED display.

- Measures and displays:**
- Compressor status (stand-by, idle, load, off).
 - Operating temperature.
 - Operating pressure.
 - Total working hours and load hours.
 - Remaining hours to maintenance.
 - Alarm management (motor thermal overload, fan thermal overload, oil temperature values) with dedicated LED signalling.
 - Auto-restart after power failure.
 - Integrated digital phase sequence control.

MiniWINDY-E 2.2 kW

MiniWINDY-E 2.2 kW	P/N	Tank	Power		Power supply	Air outflow rate			Max. pressure		Sound level	Connec-tion	Net weight	Net dimensions	Gross weight	Gross dimensions
		ℓ	kW	HP	V/Ph/Hz	l/min	m³/min	cfm	bar	psi	dB(A)	G	kg	L x W x H (mm)	kg	L x W x H (mm)
FLOOR MOUNTED																
MiniWINDY-E 2.2-10	V51PK72SHAA80	–	2.2	3	400/3/50	261	0.26	9.2	10	145	65	1/2"	68	765x465x600	79	840x540x790
MiniWINDY-E 2.2-10 M	V51PK60SHAA80	–	2.2	3	230/1/50	261	0.26	9.2	10	145	65	1/2"	68	765x465x600	79	840x540x790
PAINTED TANK																
MiniWINDY-E 2.2-10-90	V72PK72SHAA72	90	2.2	3	400/3/50	261	0.26	9.2	10	145	65	1/2"	98	750x465x1144	110	840x540x1340
MiniWINDY-E 2.2-10-90 M	V72PK60SHAA72	90	2.2	3	230/1/50	261	0.26	9.2	10	145	65	1/2"	98	750x465x1144	110	840x540x1340
GALVANIZED TANK																
MiniWINDY-E 2.2-10-90z	V72PK72SHAA00	90	2.2	3	400/3/50	261	0.26	9.2	10	145	65	1/2"	98	750x465x1144	110	840x540x1340
MiniWINDY-E 2.2-10-90z M	V72PK60SHAA00	90	2.2	3	230/1/50	261	0.26	9.2	10	145	65	1/2"	98	750x465x1144	110	840x540x1340

M = Single-phase Z = Galvanized tank
Reference conditions: air intake temperature 20°C (68°F) – atmospheric pressure 1 bar (14.5 p.s.i.).
Air flow was measured in the following operative pressures: 7.5 bar for models at 8 bar - 9.5 bar for models at 10 bar.
The data and results were measured in accordance with standard ISO 1217.
The sound level was measured in accordance with standard ISO 2151, with a tolerance of ±3 dB(A).

WINDY-E 4-7.5 kW

The direct drive screw compressor
compact, reliable, silent.



Excellent performance

The WINDY-E range represents a point of reference in the world of industrial compressed air. As a result of the gearless coaxial drive system, all the power of the electric motor is transferred to the air-end without losing efficiency and ensuring top operating reliability. WINDY-E compressors are designed to run continuously under the most severe conditions of use, with special attention to energy consumption, quiet operation, reduced operating and maintenance costs, and ease of installation and use.

Air dryer included

The “ES” version has the refrigerated dryer entirely enclosed within the main cabinet while maintaining the same shape and dimensions of the machine. It is immediately ready for operation, without any additional installation costs. The dryer ensures the production of dry air, which is essential for preserving the systems and the quality of the end product. It enables excellent performance, even in unfavourable environmental conditions and high inlet temperatures.


Simplified maintenance

Routine maintenance parts are easily accessible and simple to replace, ensuring long service intervals and keeping maintenance costs low.

WINDY-E is ready for use: it is supplied already equipped with RotarECOFLUID mineral oil.



FS26 air-end

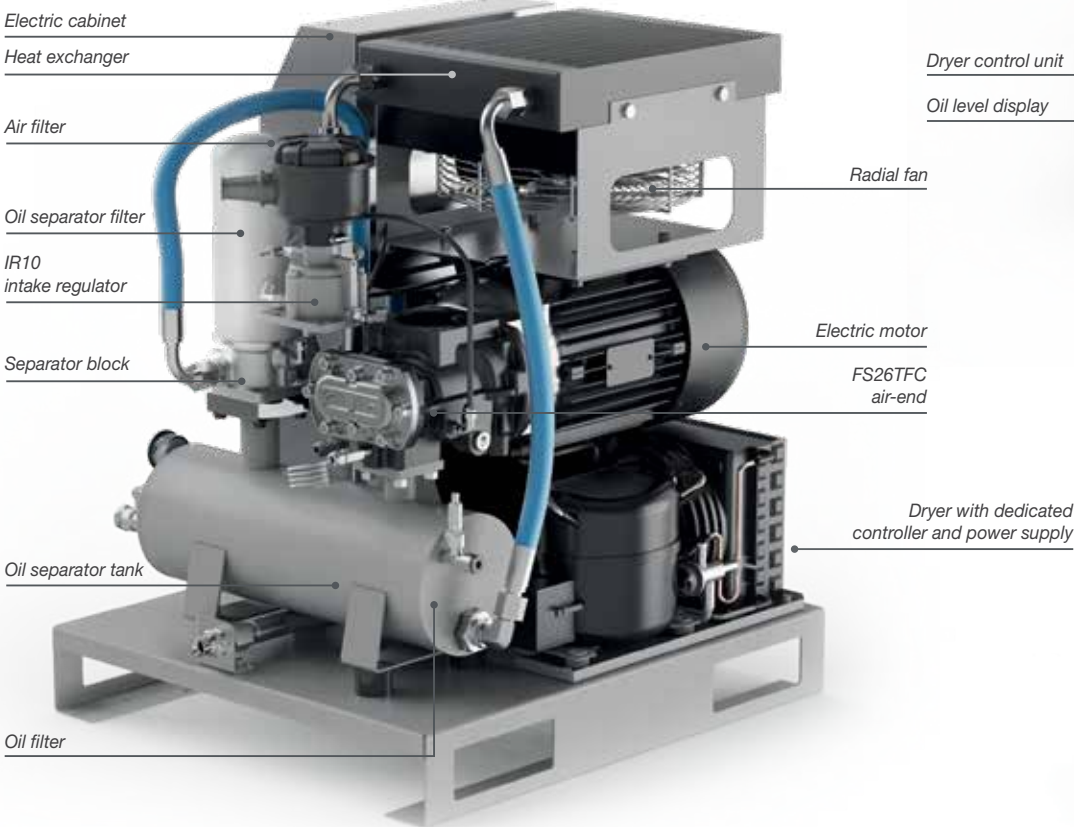

WINDY-E is also available with 270-lt galvanized tank.

500-lt air receiver



ETMII

Electronic controller with backlit multi-function display; the menu is alphanumeric.


Measures and displays:

- Operating pressure (load / no-load);
- Oil temperature;
- Total operation hours;
- Load operation hours;
- Four maintenance timers (air filter, oil, oil filter, separator filter);
- Auto-restart after power failure.
- Programmable cooling fan temperature.
- Programmable remote control starting of the compressor.
- Integrated phase sequence relay.

WINDY-E 4-7.5 kW

WINDY-E 4-7.5 kW	P/N	Air receiver	Power		Power supply	Air outflow rate			Max. pressure		Sound level	Con-nection	Net weight	Net dimensions	Gross weight	Gross dimensions
		ℓ	kW	HP	V/Ph/Hz	l/min	m³/min	cfm	bar	psi	dB(A)	G	kg	L x W x H (mm)	kg	L x W x H (mm)
4 kW																
WINDY-E 4.0-10	V51PD92SHAA80	–	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	104	670x570x805	115	720x670x970
WINDY-E 4.0-10-200	V77PD92SHAA72	200	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	163	1270x570x1410	190	1320x850x1720
WINDY-E 4.0-10-200 ES	V77PD92SHAB72	200	4	5.5	400/3/50	460	0.46	16.2	10	145	63	1/2"	183	1270x570x1410	210	1320x850x1720
5.5 kW																
WINDY-E 5.5-10	V51PE92SHAA80	–	5.5	7.5	400/3/50	705	0.70	24.9	10	145	67	1/2"	107	670x570x805	118	720x670x970
WINDY-E 5.5-10-200	V77PE92SHAA72	200	5.5	7.5	400/3/50	705	0.70	24.9	10	145	67	1/2"	163	1270x570x1410	190	1320x850x1720
WINDY-E 5.5-10-200 ES	V77PE92SHAB72	200	5.5	7.5	400/3/50	705	0.70	24.9	10	145	67	1/2"	183	1270x570x1410	210	1320x850x1720
7.5 kW																
WINDY-E 7.5-10	V51PO92SHAA80	–	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	112	670x570x805	123	720x670x970
WINDY-E 7.5-10 ES	V51PO92SHAB80	–	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	132	670x570x805	143	720x670x970
WINDY-E 7.5-10-270	V91PO92SHAA72	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	188	1200x600x1500	215	1320x850x1720
WINDY-E 7.5-10-270z	V91PO92SHAA00	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	188	1200x600x1500	215	1320x850x1720
WINDY-E 7.5-10-270 ES	V91PO92SHAB72	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	208	1200x600x1500	235	1320x850x1720
WINDY-E 7.5-10-270z ES	V91PO92SHAB00	270	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	208	1200x600x1500	235	1320x850x1720
WINDY-E 7.5-10-500	V83PO92SHAA72	500	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	240	2000x600x1500	280	2070x800x1690
WINDY-E 7.5-10-500 ES	V83PO92SHAB72	500	7.5	10	400/3/50	1050	1.05	37.1	10	145	67	1/2"	260	2000x600x1500	300	2070x800x1690

D = with refrigerated dryer, Z = with galvanized tank
Reference conditions: air intake temperature 20°C (68°F) – atmospheric pressure 1 bar (14.5 p.s.i.).
Air flow was measured at 9.5 bar operating pressure. The data and results were measured in accordance with standard ISO 1217.
The sound level was measured in accordance with standard ISO 2151, with a tolerance of ±3 dB(A).

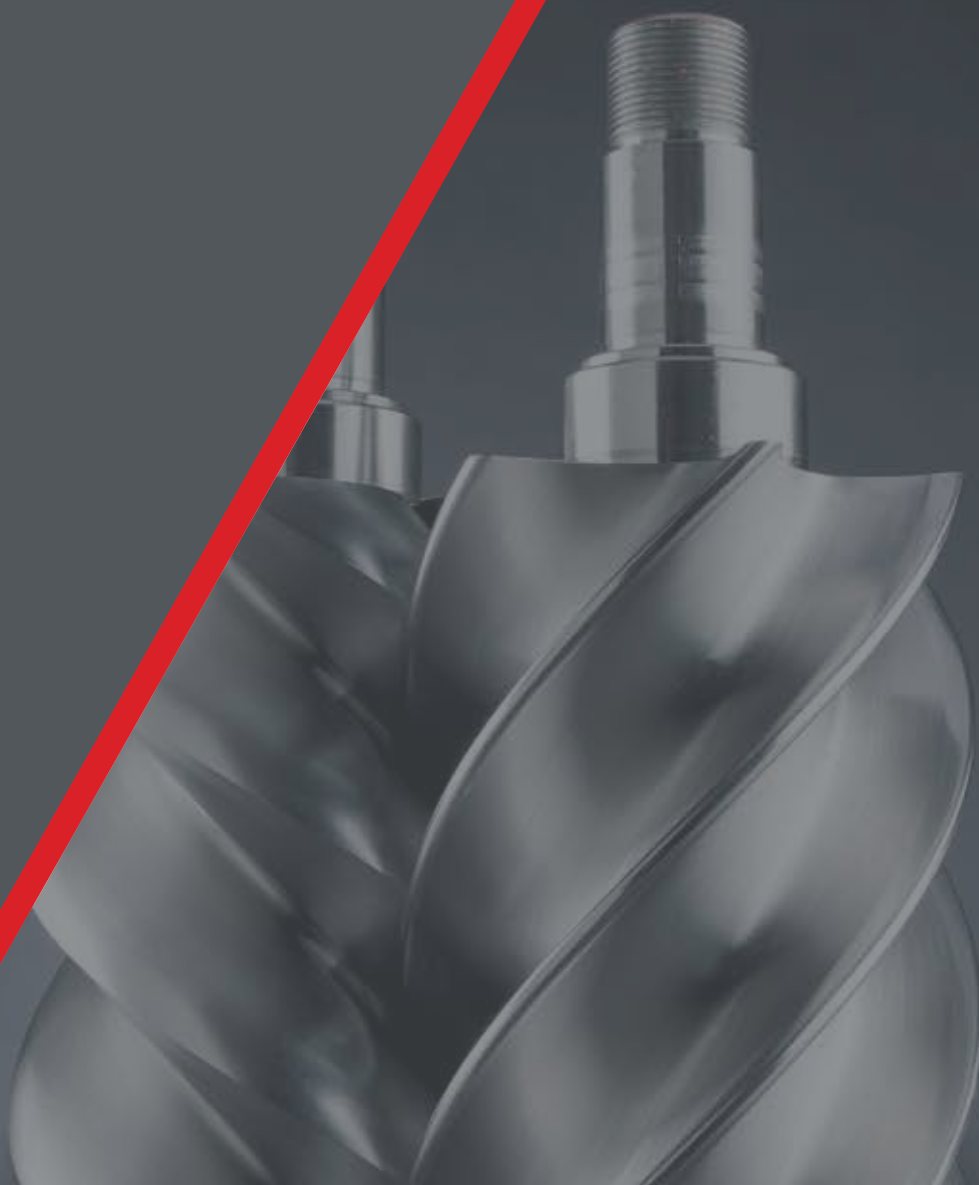

AUTHORISED DISTRIBUTOR:

FNA S.p.A. L. Via Einaudi, 6
10070 Robassomero Torino ITALY
T: +39 011 92 33 000 F: +39 011 92 41 138
BOLOGNA PLANT:
Via Toscana, 21 40069 Zola Predosa Bologna ITALY
T: +39 051 61 68 111 F: +39 051 75 24 08
info@fnacompressors.com
www.fnacompressors.com



Follow us on: [LinkedIn](#)



shamalcompressors.com



a brand of

