




The choice of perfection



Katalog

Catalog

Catalogue


Catálogo

Каталог

2026–27

Kompetenz kraft Konzentration

Expertise powered by concentration

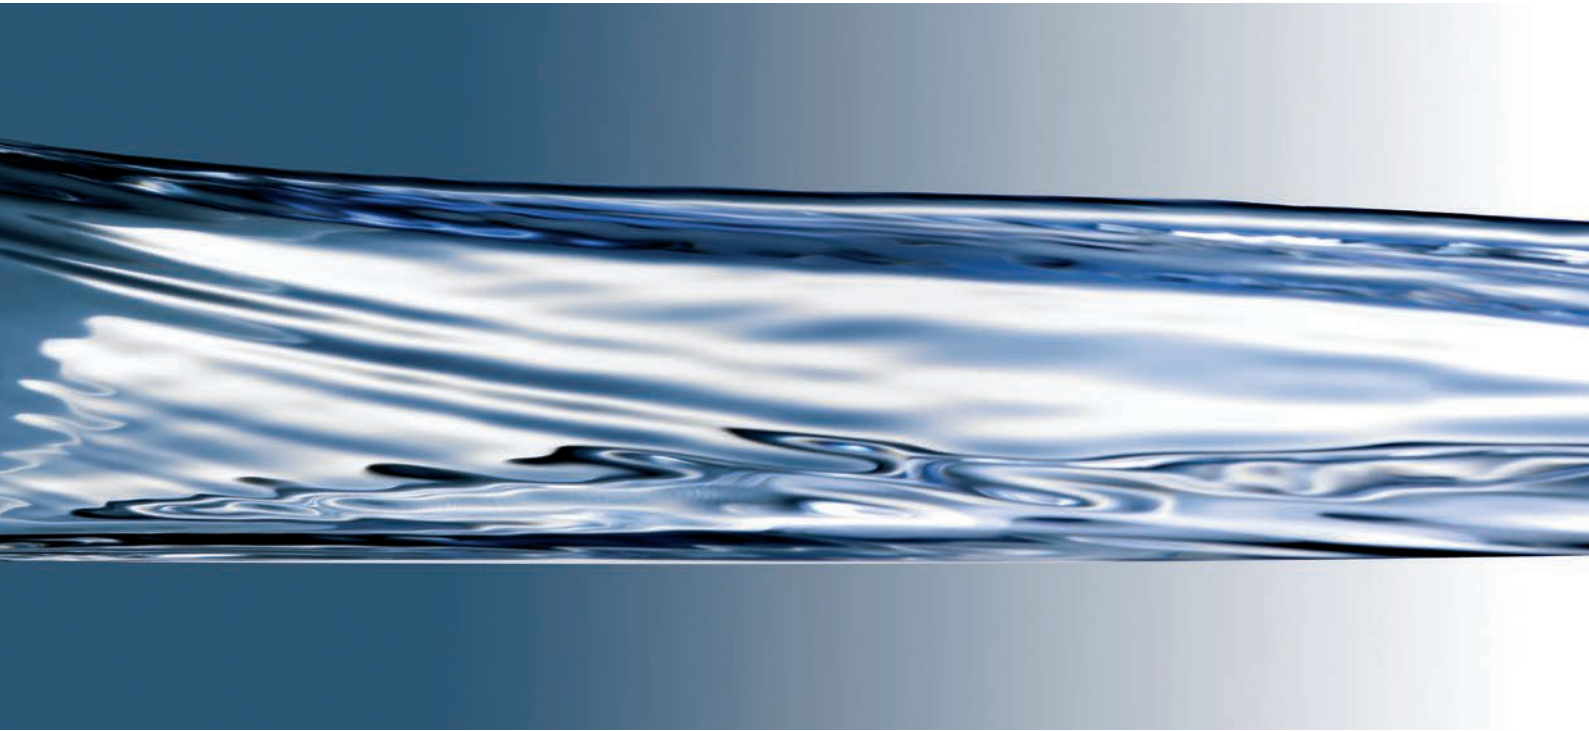

Systemlösungen für die professionelle Reinigungstechnik

System solutions for professional cleaning technology



General information

General information

First order

First orders have to be placed with us in written form. Exclusively specialist dealers are served by us.

Ordering by phone / fax / Email / Online-Shop

The simplest and safest way of ordering from R+M is via our Online-Shop.

Subsequent incoming orders are entered as new ones and are separately processed. Unfortunately, we cannot agree with amending an order that has already been confirmed.

Online-Shop: shop.rm-suttner.com

Phone: +49 (0) 20 56 / 1 63 33-0

Fax: +49 (0) 20 56 / 1 63 33-3400

Email: info@rm-suttner.com

Business hours

Monday to Thursday 8 a.m. – 5 p.m.

On Fridays 8 a.m. – 3.45 p.m.

Address

R+M de Wit GmbH

Bertha-Benz-Allee 7–11

42579 Heiligenhaus

Germany

Special requests

Products that are obtained specially for you or parts that are not included in our catalogue cannot be returned.

Online-shop

The very latest information about new products are also provided on our web site shop.rm-suttner.com.

If you subscribe to our newsletter you are regularly and automatically informed about any news.


Catalogue

Please order the „neutral“ catalogue for your customers! R+M Nr. 980 005 for 6.00 € per piece.

Despatch

Despatch is effected by parcel service. Single products which are heavier than 30 kg as well as bulky goods are despatched by forwarding companies. These items are marked with the  symbol.

On request we can also despatch consignments by express carriage forward. As smaller quantities cause extremely high costs please note our minimum order value of € 100,-.



<https://shop.rm-suttner.com/en/shipping-costs.htm>

You can find our current freight costs in our shop, under shipping costs.

Return consignments

As a matter of principle unused goods or goods that you complain about have to be returned carriage paid after having applied for. In this case, please ask for our application form for return consignments. Please note that consignments sent to us carriage forward are not accepted.

Additional deliveries

Due to our wide range of products it may happen that products are not obtainable for a short time. These products are then sent to you together with one of your next orders.

www.rm-suttner.com

shop.rm-suttner.com




R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it cannot be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.


Summary

	General map	4
01	New products	6
02	Low pressure equipment	11
03	High pressure equipment	41
04	Electrical equipment	89
05	Burner equipment & coils	93
06	Nipples & couplings	103
07	High pressure hoses & hose fittings	135
08	Sewer cleaning & sewer cleaning nozzles	193
09	Spray guns	217
10	Lances	259
11	Nozzles & washing accessories	299
12	Floor cleaner	333
13	Foam equipment & accessories	347
14	Ultra high pressure equipment	401
15	Site cleaning equipment	421
16	Car Wash	451
17	Special applications	519
18	Spares & accessories for vacuum cleaner	537
19	Protective clothing and workwear	579
	Reference list manufacturer number to R+M number	585
	Index	605

General map

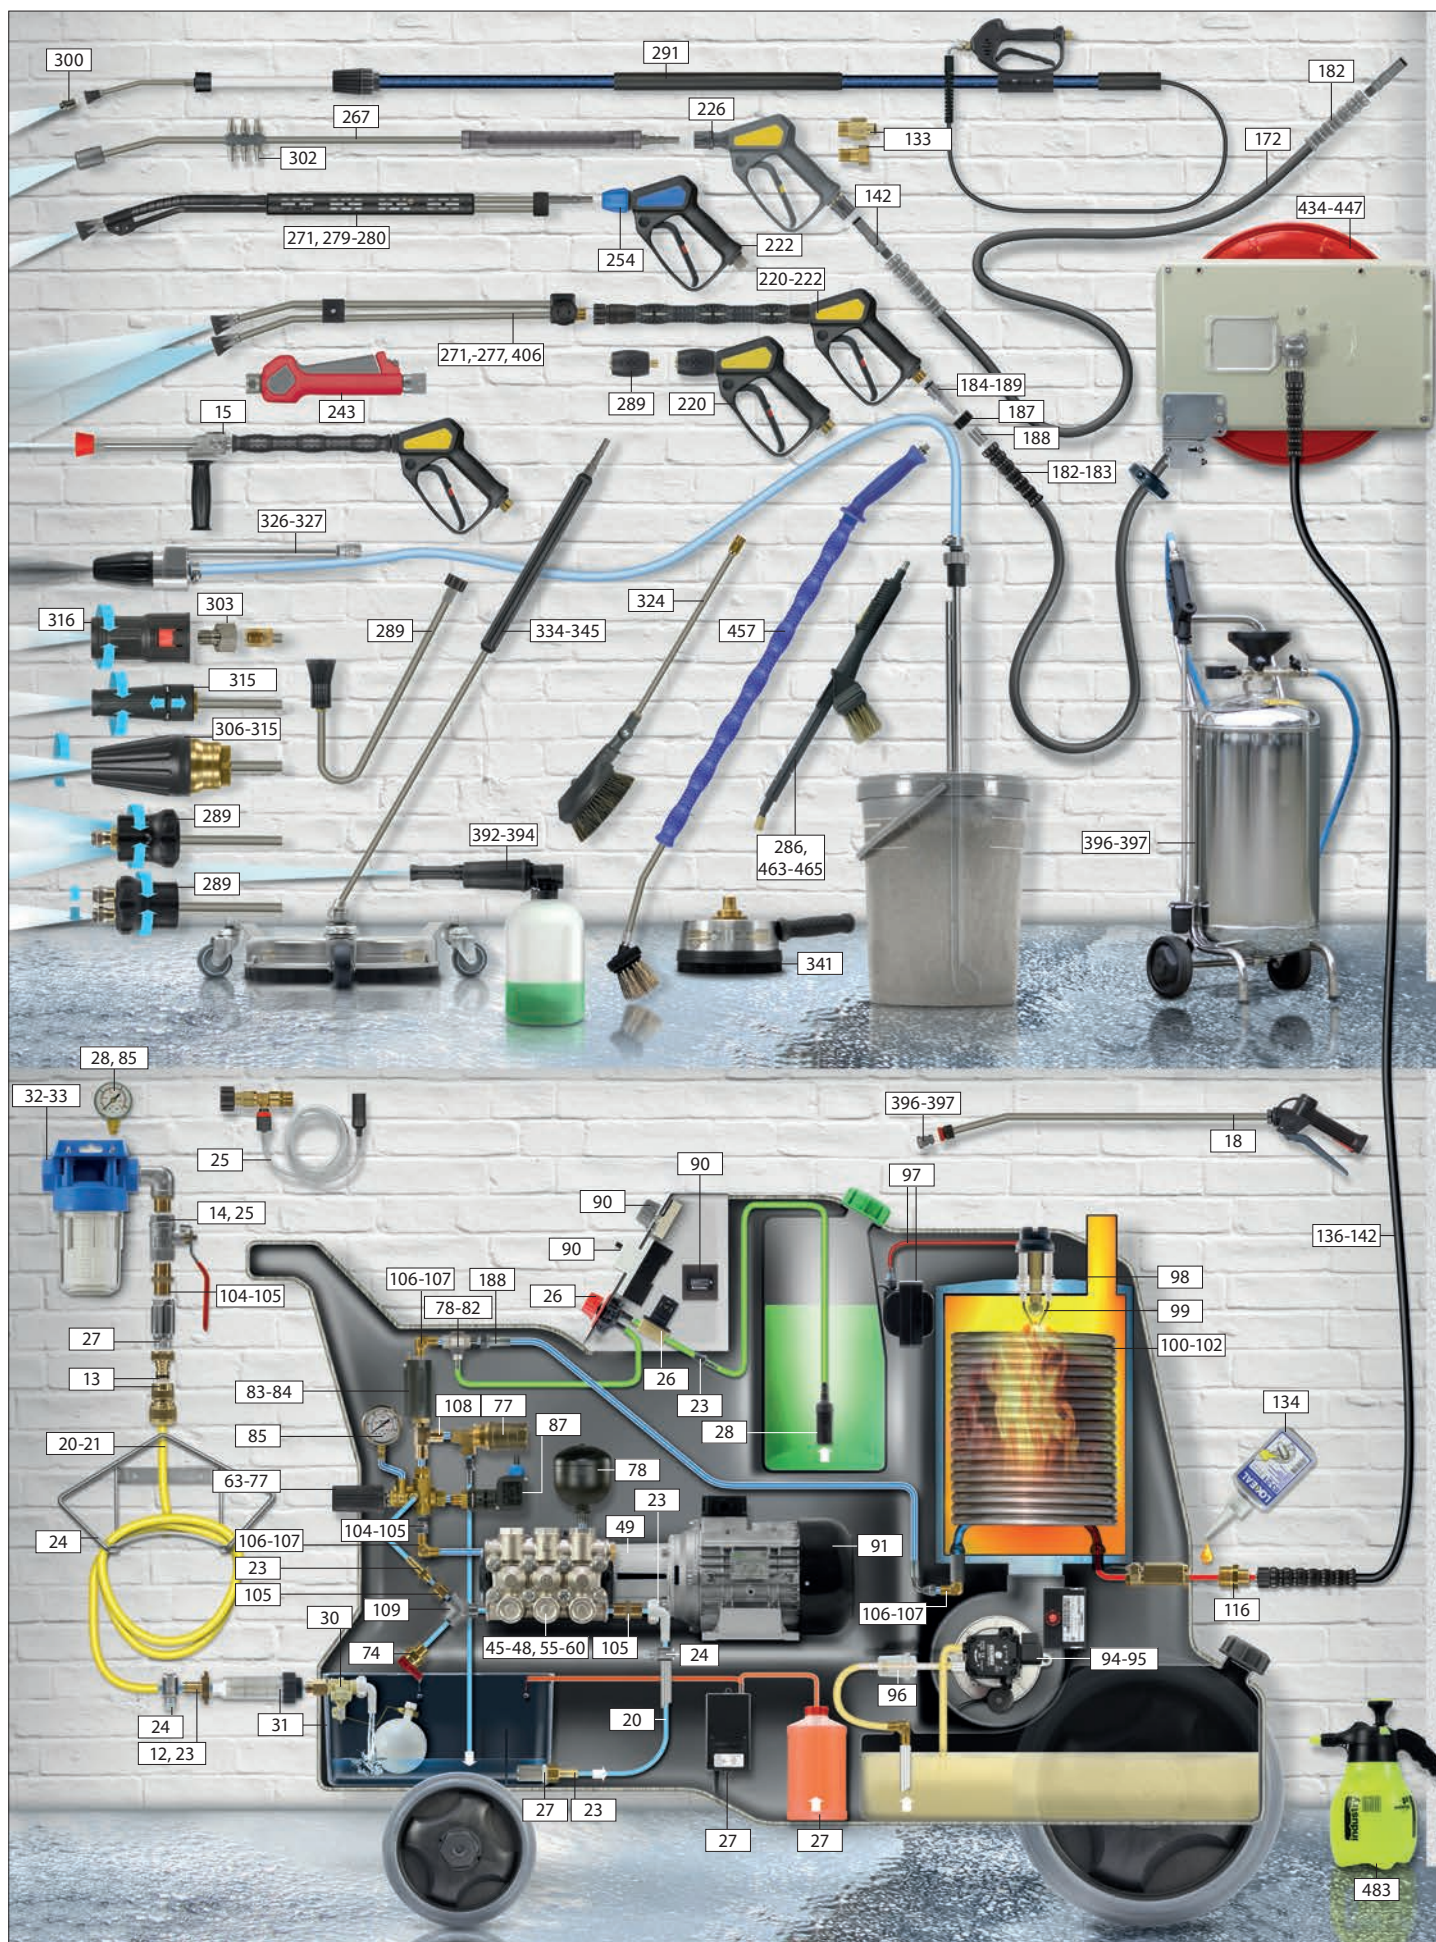

5

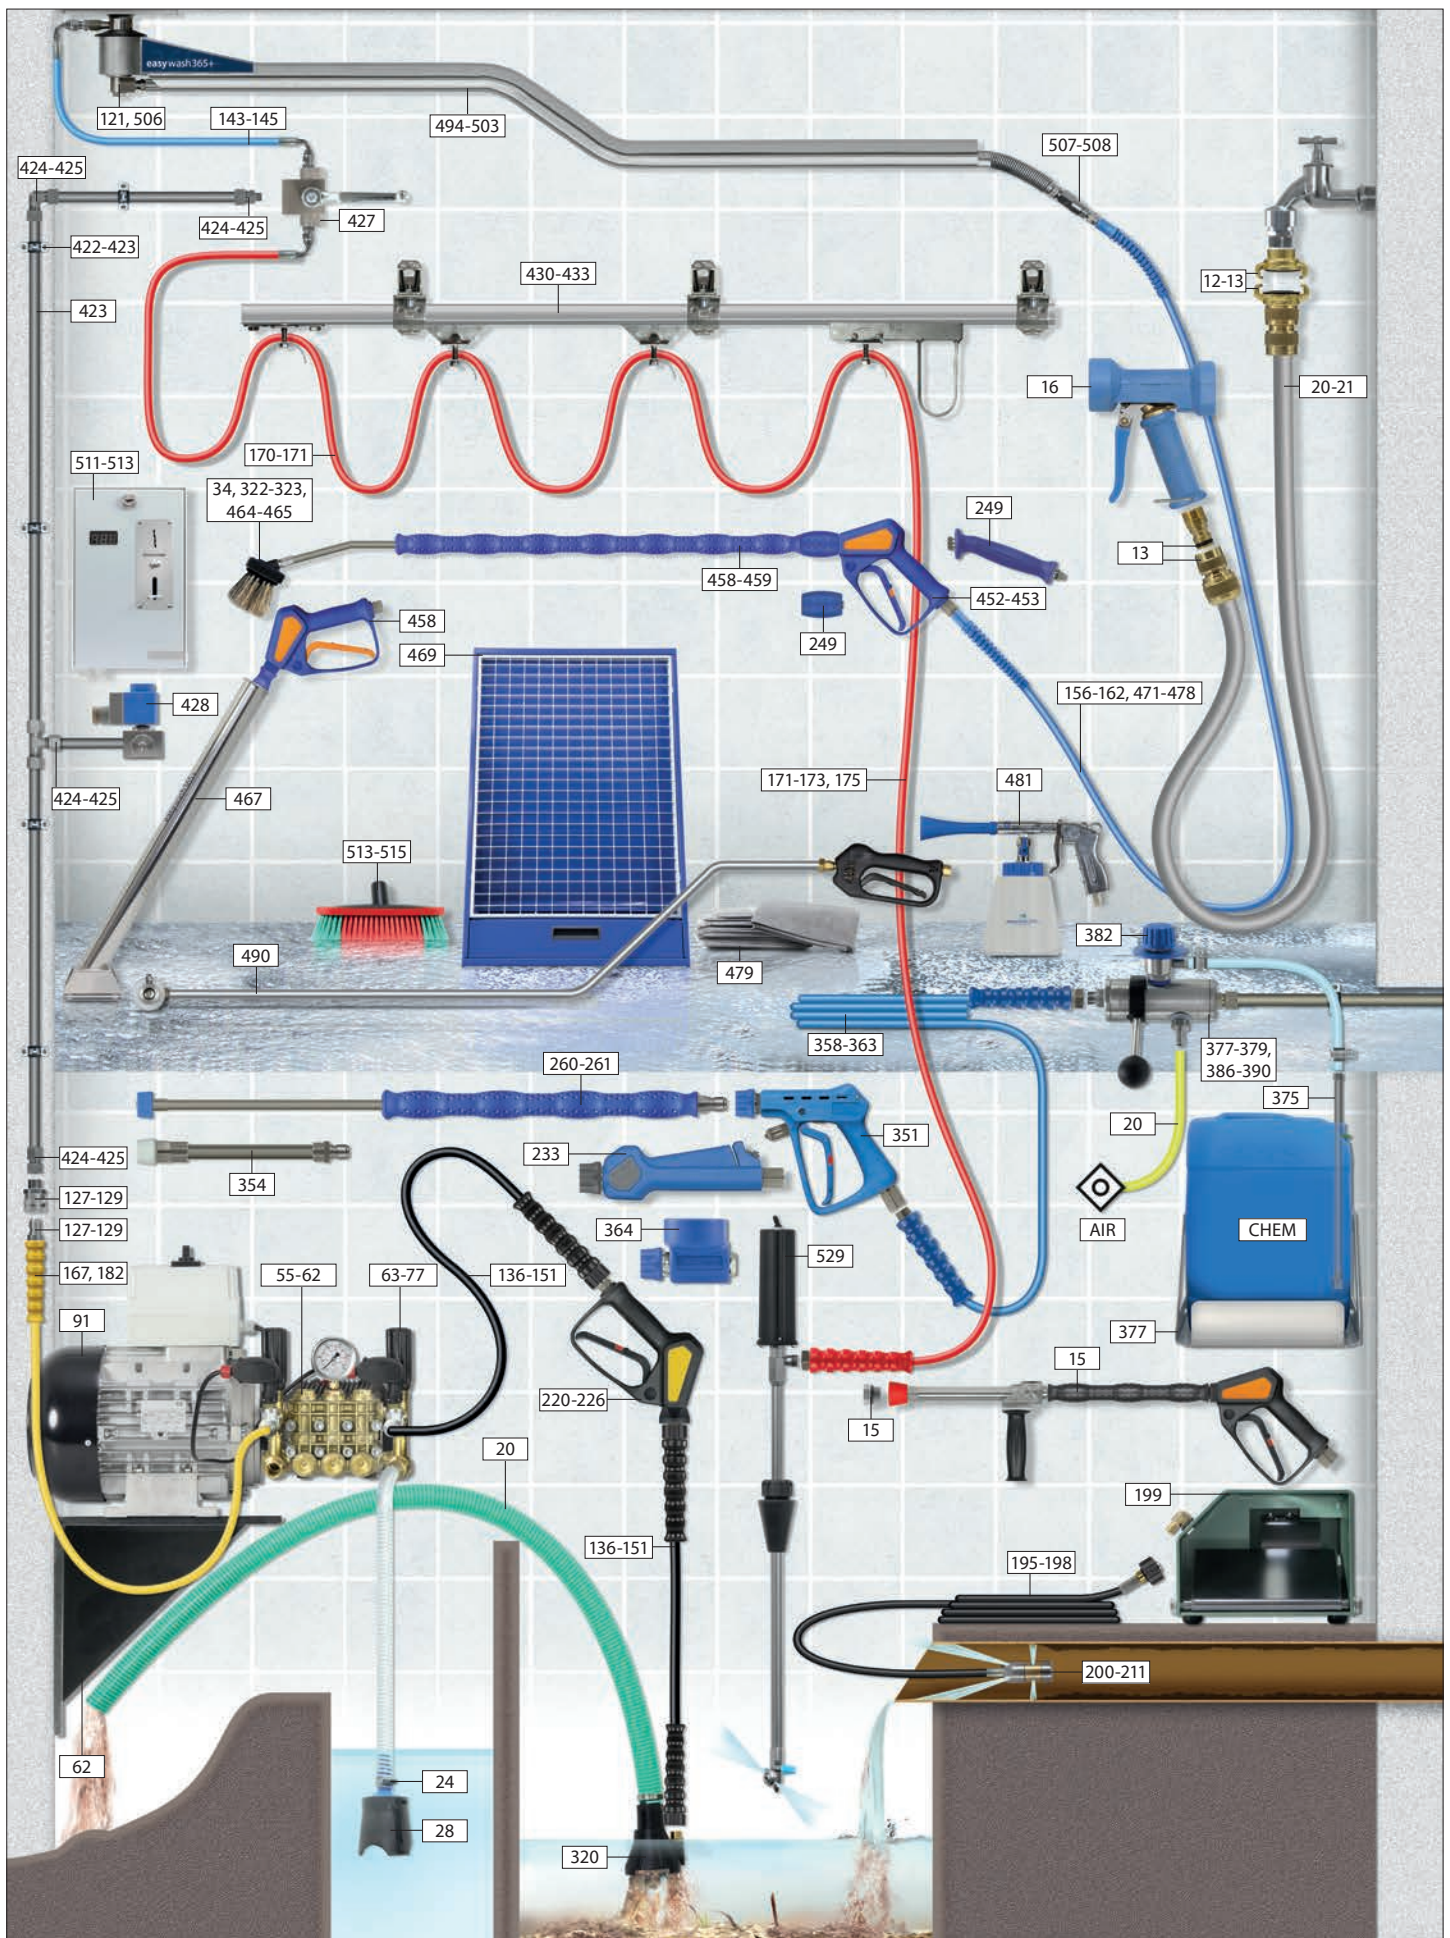

New products

High-pressure telescopic lances made of carbon, page 292



Chemical spray gun ST-515, page 18 / 398 / 480



Compressed air guns, page 482



Foam injector lances TR20 F, page 392



Suttner high pressure spray guns ST-1700, page 225



Low pressure foam head ST-75.3, page 367



Coupling TR22 : Variopress, page 289



Spray guns ST-1200, page 16




ST-456, page 307



Spray guns K-Lock ST-2600, page 131 / 226



Lance K-Lock, page 268

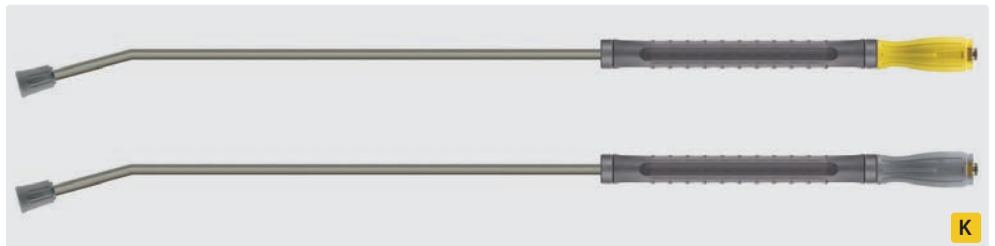

U-lance, page 263



Suttner steam gun ST-4000, page 19



New products

ST-220, page 76



ST-230, page 77



ST-265, page 65



CARWASH COMFORT PREMIUM, page 156–158



ST-261.2, page 64



ST-275, page 66



Dynaflex365+, page 150–153




foodjet365+, page 166

ST-265 AIR, page 429



ST-285 AIR, page 429



Trolley with foot brake, page 449




Blasting material barrel, page 327



ST-550, page 429



Slot Drain Cleaner, page 215



Floor cleaner heart shape 500 bar, page 338



Driver 520, page 339



Rotating PV / solar system cleaner, page 532



Wall bracket

Order form

Order from

Order number

Customer number

Contact

Telefon

E-Mail

» Only the sales conditions and terms of delivery of the supplier are relevant.

» If you have any questions please do not hesitate to contact us.

» You can also send us a fax.

- ☐ Despatch by parcel service
- ☐ Despatch by forwarding companies
- ☐ Despatch by express
- ☐ Collection

Delivery address

Date _____

Signature

Order form

Order from

Order number

Customer number

Contact

Phone

Email

» Only the sales conditions and terms of delivery of the supplier are relevant.

» If you have any questions please do not hesitate to contact us.

» You can also send us a fax.

- ☐ Despatch by parcel service
- ☐ Despatch by forwarding companies
- ☐ Despatch by express
- ☐ Collection

Delivery address

Date _____

Signature



Backflow preventers.....	27
Ball valves	25
Bayonet quick couplings.....	12
blufood® - food hose	21
Brush holder	36
Cartridge filter	33
Chemical spray guns ST-510 & lances	18
Descaling pumps and softening agents.....	27
Distributor connector block.....	26
easywash365+® brush holder	36
easywash365+® wash brushes - large areas are completely clean from now on!	34
Filter housings without cartridge filter.....	32
Float tanks.....	29
Float valves	30
Foam gun.....	40
foodjet365+® - HP hose.....	21
foodjet365+® 1500 - HP hose.....	21
Handles with water flow	37
Handles without water flow.....	37
Hose clamps	24
Hose reel trolley.....	22
Hose scissors.....	22
Hose tails	23
Intake filter for chemicals	28
Longcast lances	15
Low pressure guns	17
Low pressure hoses.....	20
Low pressure valves	27
Metering valves	26
Micro Droplets Nozzle Holder	14
Pre-spraying kits	25
Pressure gauges.....	28
PURClean365+® 65 - food hose.....	21
Quick couplings suitable for Nito system	38
Solar cleaning.....	39
Solenoid valves Bürkert normally closed NC	26
Spray guns.....	14
Spray nozzles	14
Suttner intake filter & suction sets.....	28
Suttner low pressure guns	17, 16
Suttner steam guns.....	19
Telescopic lances and wash brushes easyclean365+®	35
Vorwerk lances and wash brushes.....	36
Wall brackets.....	24
Wash brushes	34
Wash brushes with water flow.....	38
Water inlet quick couplings "universal"	13
Water intake filters	31

Bayonet quick couplings

Couplings with tail



Straight. Brass

Swivel straight.
Brass. RotatableSuction coupling *.
Brass

Couplings with male and female thread



M thread. Brass

F thread. Flat seal.
Brass

DN
10 mm (3/8")
13 mm (1/2")
16 mm (5/8")
19 mm (3/4")
25 mm (1")
32 mm (1.1/4")
38 mm (1.1/2")

R+M Nr.	ⓘ
720 05	45
720 10	45
720 15	45
720 20	45
720 30	51
720 40	62
720 50	68

R+M Nr.	ⓘ
720 104	60
720 204	55
720 304	67
720 404	75

R+M Nr.	ⓘ
724 30	79
724 15	74
724 25	78

⊙
1/4"
3/8"
1/2"
3/4"
1"
1.1/4"
1.1/2"

R+M Nr.	ⓘ
723 05	23
723 10	24
723 20	24
723 30	22
723 40	23
723 50	26
723 60	35

R+M Nr.	ⓘ
722 10	23
722 20	23
722 30	23
722 40	23
723 00	28
723 01	30

* Leak proof. Twist on sleeve locks in place

Spare washer



Flat seal. For F thread

R+M Nr.	⊙
725 23	3/8"
725 24	1/2"
725 25	3/4"
725 26	1"
725 27	1.1/4"
725 28	1.1/2"



Gasket

R+M Nr.
725 20


Accessories

100 meshes/cm².
Brass. Strainer
insert. ⊙ 33 mm

R+M Nr.
725 30

Bayonet blank
coupling with
gasket. Brass

R+M Nr.
725 10

3-way distributor
3/4" F : 3/4" M :
3/4" M. Brass

R+M Nr.
725 05

3-way bayonet
coupling.
Brass

R+M Nr.
725 00


Low pressure quick coupling ST-45

ST-45.
Nickel-plated brass.
Quick Coupling :
3/4" F.
25 bar / 90 °C


R+M Nr.
200 045 210

ST-45.
Nickel-plated brass.
Quick Coupling :
1" F.
25 bar / 90 °C

R+M Nr.
200 045 230

ST-45.
Nickel-plated brass.
Plug nipple with
hose barb
13-19 mm.
25 bar / 90 °C

R+M Nr.
010 000 455

ST-45.
Nickel-plated brass.
Plug nipple with
hose barb
19-25 mm.
25 bar / 90 °C


R+M Nr.
010 000 456

KTW approved bayonet quick couplings are available on request!


Symbols ⊙ thread ⓘ height DN nominal diameter ⊘ diameter

Water inlet quick couplings "universal"

Coupler plugs "universal"



F thread.
Brass.
With flat seal



M thread.
Brass



F thread.
Brass + rubber.
Double exit



F thread. Brass.
Elbow swivel.
With flat seal



F thread.
Plastic.
With flat seal

DN
1/2"
3/4"
1"

R+M Nr.	1
728 310	37
728 311	37
728 312	40

R+M Nr.	1
728 320	39
728 321	37

R+M Nr.	1
728 465 4	72

R+M Nr.	1
728 313	45

R+M Nr.	1
727 00	46
727 10	39
727 13	39

Hose couplings "universal" - premium quality

Couplings "universal"

Accessories


Premium quality.
Hose couplings with
6 stainless steel balls.



Brass.
With tension screw



Brass.
With tension screw
+ water stop



3/4" F thread.
Brass.
With flat seal



3/4" M thread.
Brass



Filter.
Seal for 3/4" F

R+M Nr.
728 250



O-ring

DN
12 - 15 mm (1/2")
16 - 19 mm (3/4")

R+M Nr.	1
728 330 5	51
728 331 5	54

R+M Nr.	1
728 335	52
728 336	56

R+M Nr.	1
728 334	44

R+M Nr.	1
728 333	40

R+M Nr.
727 000

Hose couplings "universal"




Plastic.
With tension screw



Plastic.
With tension screw
+ water stop



Plastic.
With tension screw
+ stop valve



Brass.
With tension screw



Brass.
With tension screw
+ water stop

DN
12 - 15 mm (1/2")
16 - 19 mm (3/4")

R+M Nr.	1
727 01	62
727 03	66

R+M Nr.	1
727 41	66
727 43	70

R+M Nr.	1
727 45	101

R+M Nr.	1
728 330	51
728 331	56

R+M Nr.	1
728 741	55

Hose connector



Brass

DN
16 mm (1/2")

R+M Nr.	1
728 340	45

These brazen and plastic water inlet quick couplings
"universal" are mutually compatible.

Spray guns

Shower head



Stainless steel. Housing plastic. Inlet 1/2" F.
Max. 8 bar / 60 °C

R+M Nr.
500 101

Gun with seven jet adjustments



Plug 16 mm (universal) and 3/4" F.
Max. 8 bar / 20 °C

R+M Nr.
726 419

Gun with infinitely variable jet adjustment



Plug 16 mm (universal) and 3/4" F.
Max. 8 bar / 20 °C

R+M Nr.
726 416

Spray nozzles

Spray nozzles



Adjustable with bayonet coupling

R+M Nr.
726 81



Adjustable with hose tail. Brass

R+M Nr. DN
726 811 13 mm (1/2")

Ball valves



3/4" F : 3/4" M. Brass. Max. 8 bar / 50 °C

R+M Nr.
726 420

Micro Droplets Nozzle Holder

Fields of application:


Disinfection, humidification, cooling, dust suppression, decontamination, odor control in agricultural, food and construction industry, defence and firefighting technology, car washing and detailing



ST-78. Stainless steel

R+M Nr. C
200 078 830 1/4" F

functioning of Micro Droplets Nozzle Holder

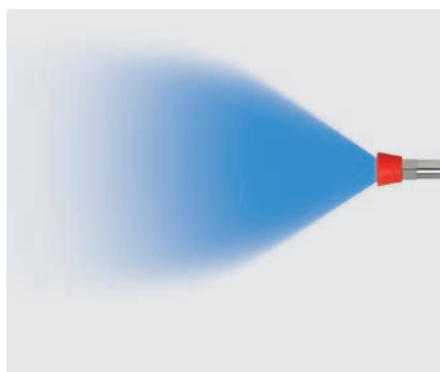

progressive, conical spray jet

Nozzles for Micro Droplets Nozzle Holder



M15x1 M. Stainless steel

R+M Nr.	D
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 418	1.8 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm

Symbols D nozzle Ø diameter C inlet O outlet DN nominal diameter

Longcast lances



3/8" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2300, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 45 l/min / 100 °C

R+M Nr.		
200 078 510	nozzle protector without nozzle	3/8" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2320, grip aside and nozzle protector made out of plastic without nozzle.
Max. 150 bar / 80 l/min / 100 °C

R+M Nr.		
200 078 520	nozzle protector without nozzle	1/2" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun easyfarm365+, grip aside and nozzle protector made out of plastic without nozzle.
Max. 250 bar / 60 l/min / 100 °C

R+M Nr.		
200 078 530	nozzle protector without nozzle	1/2" F swivel



1/4" M. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 130 l/min / 100 °C

R+M Nr.		
200 078 500	nozzle protector without nozzle	1/4" M


The longcast lance can be connected to a low pressure pump, to a high pressure pump, to the public water system or to the extinguishing water network.

The lance works in the medium pressure range. By means of its very good solidity, good handling and compactness the lance is especially suitable for the intensive use.

The lateral hand grip makes a stepless adjustment of the water jet during the operation possible. A long casting point jet or a progressive, conical spray jet can be set.

In order to realize ideal cleaning results the nozzle size needs to be adapted to the pump performance (pressure and flow rate).


Nozzles for longcast lances



M15x1 M. Stainless steel

R+M Nr.	D
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 418	1.8 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm
200 078 440	4.0 mm
200 078 445	4.5 mm
200 078 450	5.0 mm
200 078 470	7.0 mm

functioning of longcast lance

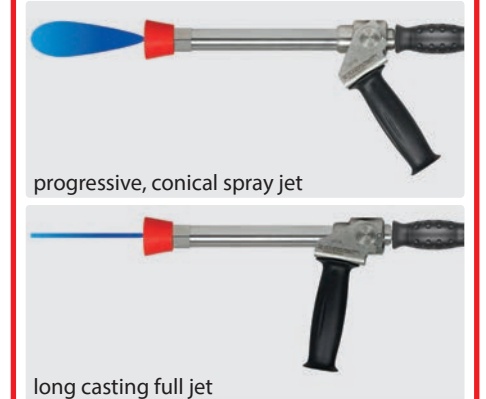

Suttner low pressure guns

ST-1200 spray guns



Spray gun with adjustable spray angle.
Max. 24 bar / 100 l/min / 50 °C

R+M Nr.	(M)	(C)
201 200 500	brass	1/2" F
201 200 500 1	brass	1/2" F swivel



Spray gun with adjustable spray angle.
Max. 24 bar / 100 l/min / 50 °C

R+M Nr.	(M)	(C)
201 200 520	stainless steel	1/2" F



Spray gun with adjustable spray angle.
Trigger guard. Max. 24 bar / 100 l/min / 95 °C

R+M Nr.	(M)	(C)
201 200 550	brass / stainless steel	1/2" F



Spray gun with adjustable spray angle.
Trigger guard. Max. 24 bar / 100 l/min / 50 °C

R+M Nr.	(M)	(C)
201 200 540	brass / stainless steel	1/2" F

Repair kits ST-1200



R+M Nr.	(M)
201 200 420	stainless steel



R+M Nr.	(M)
201 200 430	brass

Rubber casing ST-1200



R+M Nr.
201 200 495

Handle ST-1200



R+M Nr.
201 200 497

functioning of low pressure guns



long casting full jet



conical spray jet

Further models of the spray guns ST-1200 are available on request.

Low pressure guns

RB35



Max. 12 bar / 50 l/min / 50 °C

R+M Nr.	(M)	(C)
500 535 500	brass	1/2" F swivel



Max. 12 bar / 50 l/min / 80 °C

R+M Nr.	(M)	(C)
500 535 510	stainless steel	1/2" F swivel

functioning of low pressure guns



long casting full jet



conical spray jet

RB65



Max. 24 bar / 60 l/min / 90 °C

R+M Nr.	(M)	(C)
500 565 00	brass	1/2" F swivel



Max. 24 bar / 100 l/min / 90 °C

R+M Nr.	(M)	(C)
500 565 10	brass	1/2" F swivel

Suttner low pressure guns

ST-860 low pressure



Spray gun with PA sealing seat and **PEEK valve body**. Resistant to chemicals.
Max. 210 bar / 30 l/min / 100 °C

R+M Nr.	(S)	(C)
200 860 500	1/4" F	1/4" F

ST-810 low pressure



Spray gun with **POM seat**. Resistant to chemicals.
Max. 140 bar / 30 l/min / 100 °C

R+M Nr.	(S)	(C)
200 810 520	1/4" F	3/8" F

Symbols (M) material (C) inlet (S) outlet

Chemical spray guns ST-510 & lances

Chemical spray gun ST-515



Gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals.
Max. 24 bar / 70 l/min / 50 °C

R+M Nr.	☺	☺
200 515 500	1/2" F	1/2" F

Chemical spray gun ST-515 with trigger guard



Gun with trigger guard and stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 70 l/min / 50 °C

R+M Nr.	☺	☺
200 515 510	1/2" F	1/2" F


Trigger guard for chemical spray gun ST-515



Trigger guard for retrofitting.

R+M Nr.
200 515 480

Filter for chemical spray gun ST-515



Plastic. Max. 50 °C

R+M Nr.
500 04


Chemical spray gun ST-515 with foam nozzle



Gun with foam nozzle and stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals.
Max. 24 bar / 70 l/min / 50 °C / nozzle 50° 200


R+M Nr.	☺	☺
200 515 503	foam nozzle	1/2" F

Chemical spray guns ST-515 with lances

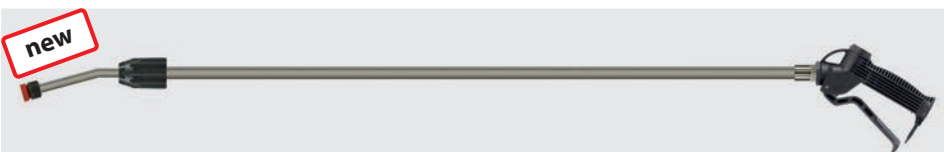

1,000 - 2,000 mm. Spray gun with telescopic lance made out of stainless steel and nozzle holder without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	☺	☺
200 515 600	nozzle holder	1/2" F

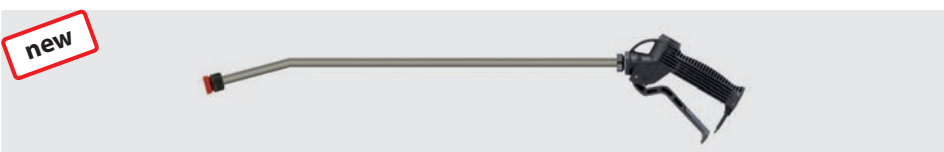

600 mm. Spray gun with lance made out of stainless steel and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	☺	☺
200 515 550	nozzle holder	1/2" F




300 mm. Spray gun with lance made out of stainless steel and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	☺	☺
200 515 560	nozzle holder	1/2" F




210 mm. Spray gun with plastic lance and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	☺	☺
200 515 710	nozzle holder	1/2" F

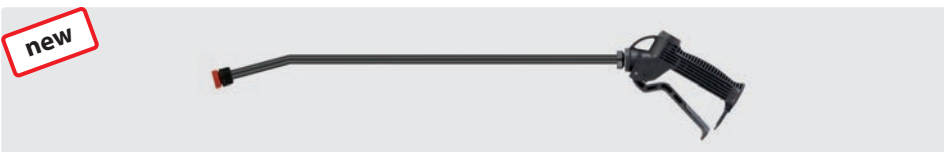

600 mm. Spray gun with lance made out of plastic and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	☺	☺
200 515 700	nozzle holder	1/2" F

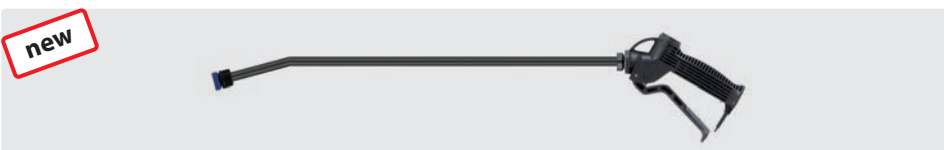

600 mm. Spray gun with lance made out of plastic and nozzle nut without nozzle. Spray gun with acid-resistant ball. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	☺	☺
200 515 705	nozzle holder	1/2" F

Suttner steam guns

The steam guns of the series ST-4000 and ST-860D are the ideal solution for cleaning tasks with steam. Both series are designed for a medium temperature of up to 200 °C and for a working pressure of max. 20 bar. By means of a specifically produced valve housing with 3/4" F made out of aluminium the ST-4000 is suitable for extremely high flow rates. The ST-860D is unbeatable in case of small and medium flow rates.

Apart from being enormously resistant to high temperatures the sealing copolymer is suitable for all liquids based on mineral oil as well as for inorganic acids, alkaline solutions, alcohol and anti-corrosion liquids based on amines and seawater or on their mixtures.

The fact that the hose connection is positioned in the front of the gun positively effects the professional handling with the gun as well as the heat radiation close to hand and body.

ST-860D steam gun



Professional steam gun ST-860D. Brass.
Max. 20 bar / 200 °C

R+M Nr.		
200 860 550	1/4" F	1/4" F

ST-860D steam gun with lance



Professional steam gun ST-860D with lance 400 mm stainless steel, vented handle ST-9.1 220 mm and nozzle protector ST-12 without nozzle. Max. 20 bar / 200 °C

R+M Nr.		
200 860 555	1/4" F NPT	1/4" F

ST-4000 steam gun with lance



Professional steam gun ST-4000 with lance 500 mm stainless steel with vented handle ST-9 380 mm and steam low pressure nozzle made out of stainless steel. Max. 20 bar / 200 °C

R+M Nr.		
204 000 500	steam low pressure nozzle	3/4" F



Professional steam gun ST-4000 with lance 1,000 mm stainless steel with vented handle ST-9 380 mm and steam low pressure nozzle made out of stainless steel. Max. 20 bar / 200 °C

R+M Nr.		
204 000 520	steam low pressure nozzle	3/4" F

Symbols  inlet  outlet

Low pressure hoses

Rubber hoses black



Black surface and interior. Industrial version for water and compressed air. Abrasion- and ozone-resistant.

Max. 20 bar. -10 °C - +60 °C

Per metre

R+M Nr.	DN		
305 10	13 (1/2")		4
305 20	19 (3/4")		5
305 30	25 (1")		5

Complete rolls

R+M Nr.	DN		
305 101 00	13 (1/2")	100 m	4
305 201 00	19 (3/4")	100 m	5
305 301 00	25 (1")	100 m	5

Reinforced PVC hoses clear



Clear. Max. 60 °C.

Other dimensions are available on request

Per metre

R+M Nr.	DN		
306 40	6		3.0
306 50	8		3.0
306 55	9		3.0
306 60	10		3.0
307 10	12		3.0
306 70	13		3.0
306 80	16		3.0
306 90	19		3.5

Complete rolls

R+M Nr.	DN		
306 401 00	6	100 m	3.0
306 501 00	8	100 m	3.0
306 550 50	9	50 m	3.0
306 600 50	10	50 m	3.0
307 100 50	12	50 m	3.0
306 700 50	13	50 m	3.0
306 800 50	16	50 m	3.0
306 900 50	19	50 m	3.5

Industrial water hose "WATER", per metre



Blue rubber cover. Smooth, FDA-compliant inner tube. Suitable for hot and cold liquids in food-processing environments. Resistant to abrasion, oil, ozone, and weather conditions.

1/2" = max. 58 bar. 3/4" = max. 45 bar.

-40 °C - +100 °C.

R+M Nr.	DN		
305 721 201	12 (1/2")	100 m	3.5
305 723 401	19 (3/4")	100 m	4.0

Spiral line hoses



Especially for suction. Suitable for vacuum. -10 °C - +50 °C


Per metre

R+M Nr.	DN		
307 519	19 (3/4")		2.6
307 525	25 (1")		2.7
307 532	32 (1.1/4")		2.7
307 538	38 (1.1/2")		2.7
307 550	50 (2")		4.0

Complete rolls

R+M Nr.	DN		
307 519 025	19 (3/4")	25 m	2.6
307 525 025	25 (1")	25 m	2.7
307 532 025	32 (1.1/4")	25 m	2.7
307 538 025	38 (1.1/2")	25 m	2.7
307 550 025	50 (2")	25 m	4.0

Reinforced PVC hoses blue

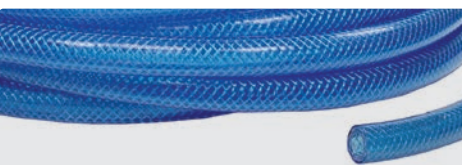

Max. 60 °C. Other dimensions are available on request

Per metre

R+M Nr.	DN		
080 000 310	9		3
306 71	13		3

Complete rolls

R+M Nr.	DN		
306 560 50	9	50 m	3
306 710 50	13	50 m	3

Plastic hoses yellow



NTS yellow. Soft and handy garden hose in yellow. CONSTRUCTION: 6 layers with yellow inner layer, black anti-algae protective layer, yellow intermediate layer, NTS fabric reinforcement, transparent outer jacket and SKY TECH coating with special UV protection against hose aging that gives the hose surface a matte finish.

-20 °C - +60 °C

Complete rolls

R+M Nr.	DN		
305 112 25	12 (1/2")	25 m	2.30
305 112 50	12 (1/2")	50 m	2.30
305 134 25	19 (3/4")	25 m	2.85
305 134 50	19 (3/4")	50 m	2.85

Clear PVC hoses



Especially for suction of chemicals. Max. 60 °C. Other dimensions are available on request

Per metre

R+M Nr.	DN		
306 10	4		1.0
306 20	6		1.5
306 30	8		2.0

Complete rolls

R+M Nr.	DN		
306 101 00	4	100 m	1.0
306 201 00	6	100 m	1.5
306 301 00	8	100 m	2.0

Reinforced PVC hoses yellow



Max. 60 °C. Other dimensions are available on request

Per metre

R+M Nr.	DN		
080 000 300	6		3
080 000 320	9		3

Complete rolls

R+M Nr.	DN		
306 410 50	6	50 m	3
306 570 50	9	50 m	3

foodjet365+® - HP hose



foodjet365+® - High pressure hoses according to EN 854, FDA compliant. Particularly resistant to animal fats

- » Field of application: foam hose and pre-spraying hose in the food industry.
- » Suitable for oil, water, water-in-oil emulsions and water mixes with up to 50 % detergent.
- » Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and weatherproof.
- » Interior synthetic, oil-resistant rubber. 2 high-tensile textile braids.
- » -40 °C - +150 °C

R+M Nr.	DN	↔	⌘	P	BP	Ⓢ
303 601	12	10 - 100 m	4.5	125 bar	≥ 375 bar	0.3 kg

foodjet365+® 1500 - HP hose



foodjet365+® 1500- High pressure hoses according to EN 854. Particularly resistant to animal and **poultry fats**.

- » Field of application: poultry processing industry.
- » Suitable for oil, water, water-in-oil emulsions and water mixes with up to 50 % detergent.
- » Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and weatherproof.
- » Interior synthetic, oil-resistant rubber. Tight textile meshwork.
- » -40 °C - +150 °C

R+M Nr.	DN	↔	⌘	P	BP	Ⓢ
303 601 500	12	70- 100 m	4.5	125 bar	≥ 375 bar	0,3 kg

blufood® - food hose




blufood® - Food hose according to 2007/19/EC, 2002/72/EC, Regulation 10/2011. Designed for industrial foam applications.

- » Field of application: foam hose and pre-spraying hose in the food industry.
- » Suitable for contact with liquid food products.
- » Suitable for water and water mixes of usual cleaning detergents.
- » PVC hose with five layers and a smooth cover.
- » Reinforcing twofold textile meshwork.
- » -20 °C - +80 °C

R+M Nr.	DN	↔	⌘	P 23 °C	P 80 °C	BP 20 °C	Ⓢ
303 70	12	10 -100 m	5	80 bar	50 bar	≥ 240 bar	0.32 kg
303 700 019	19	10 - 60 m	6	50 bar	12 bar	≥ 200 bar	0.61 kg

PURClean365+® 65 - food hose

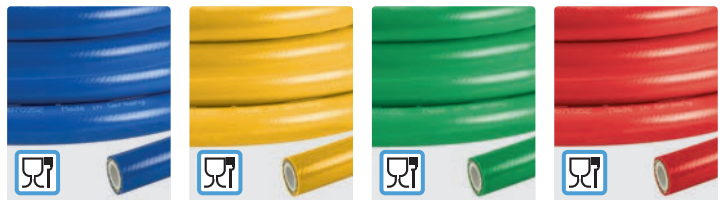

PURClean365+® 65 - Food hose according to (EC) 2002/72, (EC) 10/2011, (EC) 1935/2004 and (EC) 2023/2006. Designed for industrial foam applications.

- » Field of application: foam hose and pre-spraying hose in the food industry.
- » Suitable for contact with liquid food products.
- » Suitable for water and water mixes of usual cleaning detergents.
- » Increased 1-layer rot-proof textile mesh.
- » -20 °C - +70 °C

R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
303 660 401	303 660 411	303 660 421	303 660 431

DN	↔	⌘	P 100 °C	P 70 °C	BP 20 °C	Ⓢ
12	10 - 100 m	4	40 bar	65 bar	300 bar	0.25 kg

Symbols DN nominal diameter mm ⌘ wall thickness mm ↔ length P pressure BP burst pressure Ⓢ weight

Hose reel trolley

new



Epoxy powder coated drum and frame. Brass quick coupling.
Suitable for 60 meters of hose with a diameter of 3/4" (DN 19) or
30 meters of hose with a diameter of 1" (DN 25).
Weight: 11.4 kg

R+M Nr.		
762 080 450	3/4" M	1/2" m

Hose scissors



Hose scissors for plastic hoses. Suitable for an
outer hose diameter of up to 28 mm

R+M Nr.
955 00



Spare blade

R+M Nr.
955 01

Hose tails

Male thread



Brass.
Max. 150 °C



Stainless steel.
Max. 150 °C



Plastic.
Max. 60 °C



Plastic.
Max. 60 °C

DN	⊙
4 mm	1/8"
6 mm	1/8"
6 mm	1/4"
6 mm	3/8"
6 mm	1/2"
7 mm	1/8"
8 mm	1/4"
8 mm	3/8"
8 mm	1/2"
9 mm	3/8"
9 mm	1/2"
10 mm	1/4"
10 mm	3/8"
12 mm	1/4"
12 mm	3/8"
12 mm	1/2"
12 mm	3/4"
16 mm	1/2"
16 mm	3/4"
19 mm	1/2"
19 mm	3/4"
19 mm	1"
25 mm	3/4"
25 mm	1"

R+M Nr.	ⓘ
710 00	31
710 10	35
710 40	36
710 65	40
710 05	31
710 20	34
710 50	38
710 70	49
710 25	34
710 55	35
710 30	35
710 60	38
710 80	50
710 90	47
710 85	40
710 95	49
711 21	63
711 00	47
711 20	49
711 10	55

R+M Nr.	ⓘ
710 009	33
710 19	49
710 559	36
710 79	49
710 29	48
710 89	49
711 219 9	53
711 09	51
711 259	70

R+M Nr.	ⓘ
712 05	27
712 10	33
712 20	38
712 40	39
712 30	41
712 50	41
712 70	49
712 55	44
712 60	46
712 80	54
712 90	58

R+M Nr.	ⓘ
713 10	21
713 20	26
713 40	26
713 30	28
713 50	33
713 70	37
713 32	30
713 60	32
713 80	36

Female thread



Brass.
Max. 150 °C

DN	⊙
6 mm	1/4"
8 mm	1/4"
8 mm	3/8"
8 mm	1/2"
12 mm	3/8"
12 mm	1/2"

R+M Nr.	ⓘ
710 104	33
710 204	33
710 504	33
710 704	36
710 604	40
710 804	38

2/3 hose tails

Filter



Flat seal

R+M Nr.	⊙
725 40	3/4"

DN	⊙
10 mm	1/2"
10 mm	3/4"
13 mm	1/2"
13 mm	3/4"
13 mm	1"
19 mm	3/4"
19 mm	1"
25 mm	1"



Brass.
Max. 150 °C



Plastic.
Max. 60 °C



Brass.
Max. 150 °C

R+M Nr.	ⓘ
711 52	34
711 50	36
711 51	41
711 55	39
711 56	38
711 57	40

R+M Nr.	ⓘ
711 60	49

R+M Nr.	ⓘ
711 68	41
711 75	41
711 70	42
711 77	46

Hose connectors



Plastic.
Max. 60 °C



Plastic.
Max. 60 °C



Plastic.
Max. 60 °C

DN	⊙
6 mm	
8 mm	
12 mm	

R+M Nr.	ⓘ
715 10	49
715 20	56
715 30	73

R+M Nr.	↔	ⓘ
717 10	50	26
717 20	58	30
717 30	68	36

R+M Nr.	ⓘ
716 10	46
716 20	53
716 30	68

Hose clamps

1.4016 stainless steel housing and band.
Hexagon screw zinc-plated. Worm gear high tension.
Flat tape inner sides with turned up rims.
According to DIN 3017, W2



**W4 and W5 completely
rust-free, is available
on request**

Clamps with hexagon screw. I 9 mm, *12 mm

R+M Nr.	VPE	Ø
735 10	1	8 - 12 mm
735 20	1	10 - 16 mm
735 30	1	12 - 20 mm
735 40	1	16 - 25 mm
735 50	1	20 - 32 mm
735 60	1	25 - 40 mm
735 70	1	32 - 50 mm
735 80*	1	50 - 70 mm

R+M Nr.	VPE	Ø
735 101 00	100	8 - 12 mm
735 201 00	100	10 - 16 mm
735 301 00	100	12 - 20 mm
735 401 00	100	16 - 25 mm
735 501 00	100	20 - 32 mm
735 601 00	100	25 - 40 mm
735 701 00	100	32 - 50 mm
735 801 00*	100	50 - 70 mm

Heavy duty clamp

Heavy duty clamp completely stainless steel X5CrNi1810. According to DIN 1.4301/AISI 304



Clamp with hexagon bolt. W4. I 20 mm

R+M Nr.	VPE	Ø
736 029 401	1	29 - 31 mm

R+M Nr.	VPE	Ø
736 032 401	1	32 - 35 mm


Wall brackets

Hose holders



Holding capacity 1/2" = 40 m - 3/4" = 30 m.
Hole spacing 140 mm.
W x H x D = 260 x 165 x 170 mm

R+M Nr.	(M)
110 00	plastic

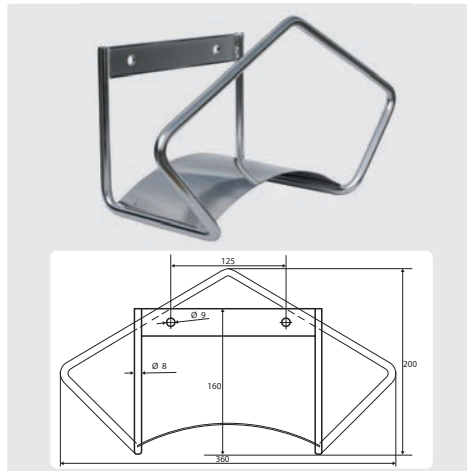

Holding capacity 1/2" = 40 m - 3/4" = 30 m.
Hole spacing 125 mm.
W x H x D = 360 x 200 x 170 mm

R+M Nr.	(M)
110 06	polished stainless steel 1.4301


Brush holder



Suitable for all brushes.
Hole spacing 202 mm.
W x H x D = 250 x 90 x 100 mm

R+M Nr.	(M)
108 290 30	stainless steel

Hose holder aluminium

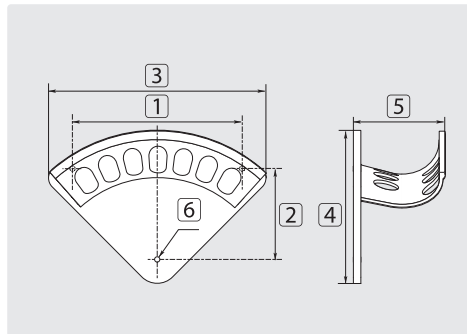

R+M Nr.	TYP	holding capacity	1	2	3	4	5	6
110 01	S	1/4" = 30 m - 3/8" = 20 m	152	108	190	140	69,5	Ø 8.5
110 02	M	3/8" = 30 m - 1/2" = 20 m	228	161	259	189	106	Ø 8.5
110 03	L	1/2" = 30 m - 3/4" = 20 m	305	215	339	247	136	Ø 8.5
110 031	XL	3/4" = 30 m - 1" = 20 m	381	242	412	300	189	Ø 8.5

Pre-spraying kits

Low pressure injectors



Injector with metering valve. Suction hose 1,000 mm. Suction filter ST-31. 2 bar - max. 10 bar

R+M Nr.		
545 101	3/4" F	3/8" F




Min. 2 bar - max. 10 bar. Output of approx. 150 l/h at 2 bar. Mixing of chemicals approx. 0 - 11.5 %

R+M Nr.	TYP	D		
200 060 700	1	ST-60.1	1.6	3/8" M 3/8" F
200 060 710	1	ST-60.1	1.8	3/8" M 3/8" F
050 000 370	2	o-ring		
200 061 500	3	metering valve hose tail $\varnothing$ 6 mm		

Ball valves


Standard

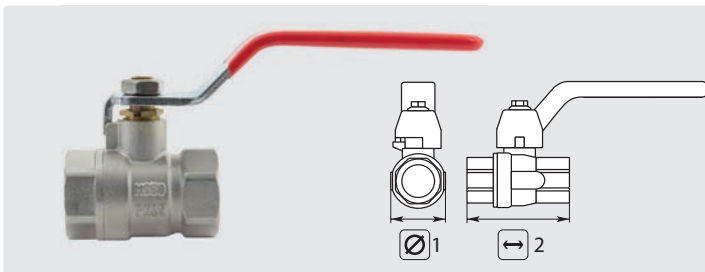

Nickel-plated brass. Ball chrome-plated. Max. 25 bar / 60 °C

R+M Nr.		$\varnothing$ 1	$\leftrightarrow$ 2	SW
705 10	1/4" F	23.5	40	19
705 20	3/8" F	23.5	40	19
705 30	1/2" F	28.0	46	24
705 40	3/4" F	34.7	53	30
705 50	1" F	42.5	64	37

Ball valves with butterfly handle

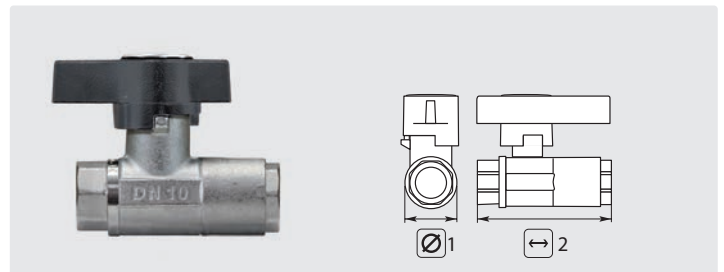


Nickel-plated brass. Ball chrome-plated. Max. 210 bar / 80 °C

R+M Nr.		$\varnothing$ 1	$\leftrightarrow$ 2
705 383 82	3/8" F	30 mm	75 mm
705 121 22	1/2" F	36 mm	85 mm
705 343 42	3/4" IG	45 mm	95 mm

Metering valves

ST-66 with check valve




S = barb to pump. S1 = input barb 1. S2 = input barb 2

R+M Nr.	TYP
200 066 500	knob black
200 066 501	knob red

ST-66 without check valve




F



S = barb to pump. S1 = input barb 1. S2 = input barb 2

R+M Nr.	TYP
200 066 515	without knob

Valves with spindle




Max. 250 bar / 80 °C

R+M Nr.	⊗ : ⊕	TYP
535 10	1/4" F	without knob
535 15	1/4" F	with knob (panel mounting)

Solenoid valves Bürkert normally closed NC

Type 6213 without connector



0 - 10 bar / -10 - +80 °C.
NBR seal (air, water)


R+M Nr.	⊗	DN	coil	↔	I
836 125 658	1/2"	13	24 V-50 Hz/8 W	59	99
836 125 660	1/2"	13	230 V-50 Hz/8 W	59	99
836 125 657	1/2"	13	24 V =	59	99
836 126 273	3/4"	13	24 V-50 Hz/8 W	59	99
836 126 275	3/4"	13	230 V-50 Hz/8 W	59	99
836 221 618	3/4"	13	24 V =	65	99
836 221 634	1"	20	24 V =	80	119
836 126 289	1"	20	24 V-50 Hz/8 W	80	119
836 126 291	1"	20	230 V-50 Hz/8 W	80	119

Coil type
5281-6213

50 Hz

R+M Nr.	V
836 126 436	24 V/8 W
836 126 430	230 V/8 W

Type 6013 without connector



0 - 25 bar / -10 - +120 °C. FKM seal (hot air, oxygen, chemicals)

R+M Nr.	⊗	DN	coil	↔	I
836 137 538	1/4"	2	24 V-50 Hz/8 W	49	72
836 137 540	1/4"	2	230 V-50 Hz/8 W	49	72
836 137 537	1/4"	2	24 V =	49	72

Coil type 6013



50 Hz

R+M Nr.	V
836 645 556	24 V/8 W
836 645 558	230 V/8 W

Connector



R+M Nr.
833 50

Further solenoid valves are on page 86 and 96. Other models are available on request.

Distributor connector block




Stainless steel. 2 x 3 connections.
H x W x D: 36 x 193 x 40 mm. 290 g.
Max. 10 bar. 150 °C

R+M Nr.	6 x ⊗	⊕	⊗
725 061 012	1/2" F	1" F	1" F





Stainless steel. 4 connections.
H x W x D: 36 x 243 x 40 mm. 390 g.
Max. 10 bar. 150 °C

R+M Nr.	4 x ⊗	⊕	⊗
725 041 012	1/2" F	1" F	1" F

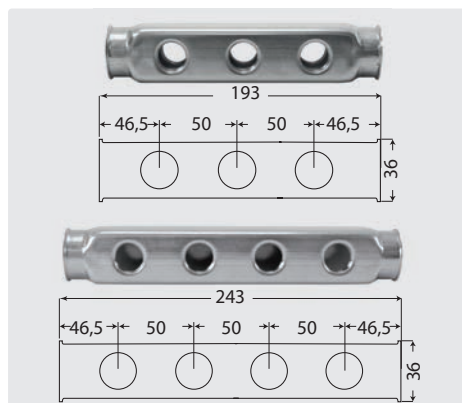

Descaling pumps and softening agents

ST-15 descaling softening pumps



Softening agents



This product bounds the minerals causing the hardness. The coil is protected against calcination.

Application:
4 ml / °dH / cbm water.
1 pallet = 84 cardboard boxes (6 x 1 l)

For trailer mounted pressure washers

R+M Nr.	hp cleaner	V	←
200 015 500	< 600 l/h	230 V - 50 Hz	35
200 015 510	< 600 l/h	24 V - 50 Hz	35
200 015 535	> 900 l/h	230 V - 50 Hz	140
200 015 525	> 900 l/h	24 V - 50 Hz	140

R+M Nr.	hp cleaner	V	←
200 015 526	> 900 l/h	12 V =	140

R+M Nr.	unit	⊞
950 10	box	6 x 1 l
950 40	container	10 l
950 50	container	20 l
950 20	drum	200 l

Low pressure valves

Check valves & intake filter



R+M check valve. Valve nylon with rubber seal. Stainless steel spring. Avoids backflow in any position



Intake filter. Nylon thread. Stainless steel mesh

⊙
3/8"
1/2"
3/4"
1"
1.1/4"

R+M Nr.	I	P
733 004	44 mm	16 bar
733 054	48 mm	16 bar
733 104	53 mm	16 bar
733 204	58 mm	16 bar
733 304	66 mm	10 bar

R+M Nr.	⊘	I
732 80	18 mm	42 mm
732 70	22 mm	38 mm
732 60	28 mm	50 mm
732 90	36 mm	57 mm
732 95	43 mm	65 mm

Backflow preventers



Chrome-plated brass. Backflow preventer according to DIN 19884 and DIN EN 1717. Avoids that cleaning agents come into the potable drink circuit in case of excess pressure in the water pipe. Required when direct connection to pump

R+M Nr.	⊙	DN	I
734 10	3/4"	20	61 mm

Endangerment of drinking water

It is a TYPE HD pipe aerator, which completely covers the risk in category 1 and 2, and only partially in category 3. **Not permitted for categories 4 and 5.**
Use is only intended for private use.

Type of hazard according to DIN EN 1717 (DIN 1988-4)


category 1	category 2	category 3	category 4	category 5
Industrial or drinking water, without any health risk or impairment (smell, taste, color)	Liquid without health risk, but with adverse effects (smell, taste, color, temperature)	Liquid, with a health hazard due to low toxic substances (glycol, caustic soda, copper sulfate solution ...)	Liquid with a strong health hazard . Toxic, carcinogenic, mutagenic or radioactive substances.	Liquid with a life-threatening risk from microbial or viral pathogens.

According to the EU directives EN 60335-2-79:2010 currently in force, the water that passes through a high pressure cleaner is no longer considered fit for drinking. This is why such a cleaner cannot be connected directly to the drinking water supply network unless a back flow preventer disconnecter has been fitted.

Symbols DN nominal diameter V voltage ← flow I height ⊘ diameter ⊙ thread TYP type ⊞ inlet ← width ⊞ volume 🚚 shipment by truck


Pressure gauges

Glycerin filled



Ø 63 mm. Housing stainl. steel.
1/4" M. Inlet at the bottom


R+M Nr.	pressure range
548 90	0 - 25 bar
549 00	0 - 40 bar



Ø 63 mm. Housing stainl. steel.
1/4" M. Inlet at the back: Type WIKA


R+M Nr.	pressure range
548 025	0 - 25 bar

Undamped



Ø 40 mm. Housing plastic. 1/8" M.
Inlet at the bottom

R+M Nr.	pressure range
547 10	0 - 16 bar

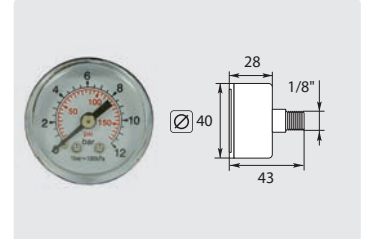

Ø 40 mm. Housing plastic.
1/8" M. Inlet at the back

R+M Nr.	pressure range
547 50	0 - 12 bar

Further pressure gauges are on page 85.

Suttner intake filter & suction sets

ST-35 intake filter for water

Heavy version made out of plastic.
Valve nylon with rubber seal.
Stainless steel spring and screen.
Max. 60 °C



Without check valve



With check valve



Without check valve

Suction sets with suction filter ST-35



DN	R+M Nr.	Ø	l	R+M Nr.	Ø	l	R+M Nr.	Ø	l	R+M Nr.	TYP	Ø	l
13 - 19 mm	200 035 500	80	147	200 035 510	80	147	200 035 600	86	225	731 12	without valve *	ÜM 3/4" F	3 m
19 - 25 mm	200 035 530	80	147				200 035 630	86	225	731 21	with valve *	ÜM 3/4" F	3 m


* check valve

Intake filter for chemicals



DN 6 mm. Fine filter.
Fine core stainless steel screen with brazen bottom

R+M Nr.	Ø	l
730 25	22	55



DN 6 mm. ST-32.
Brass

R+M Nr.	Ø	l
200 032 800	20	32



DN 6 - 8 mm. ST-32.
Stainless steel

R+M Nr.	Ø	l
200 032 600	19	39



DN 6 - 8 mm. ST-31
without check valve.
Plastic.
Brass weight

R+M Nr.	Ø	l
200 031 600	20	75



DN 6 - 8 mm. ST-31
without check valve.
Plastic. Stainless steel weight

R+M Nr.	Ø	l
200 031 615	20	75



DN 6 - 8 mm. ST-31R
with check valve. Plastic.
Brass weight

R+M Nr.	Ø	l
200 031 610	20	75



DN 6 - 8 mm. ST-31R
with check valve. Plastic.
Stainless steel weight


R+M Nr.	Ø	l
200 031 611	20	75

Float tanks

Suttner float tank



R+M Nr.	⊙	📦
020 000 780	3/4"	7 l

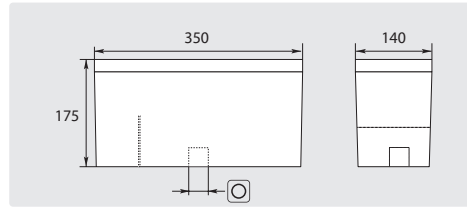

Float tank with intake spray wall.
Avoids air circulation

Cover Suttner float tank




R+M Nr.
020 000 800



Optional:
ST-8 float valve (200 008 520 + 200 008 526 Adapter). Assembly for Suttner float tank: Borehole Ø 20 mm.

ST-8 Adapter

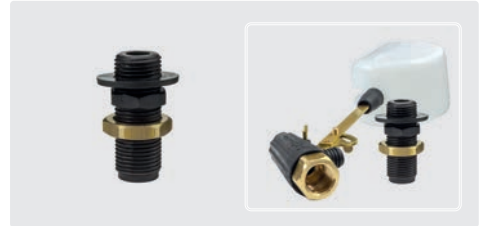

R+M Nr.	⊙	⊙
200 008 526	1/2" M	12 mm


Water tank for wall mounting, 60 liters

- » Material: Stainless steel
- » Well thought-out solution for simple wall mounting
- » Including cover, wall bracket and baffle, for calming water
- » Professionally processed stainless steel with integrated inlet and outlet openings (inlet: Ø 27 mm for 3/4" M and outlet: 3/4" F)
- » Tank capacity: 60 liters



Stainless steel. Incl. Wall bracket, baffle and cover.
21 kg


R+M Nr.	⊙	H x W x D mm
105 000 030	3/4" F	591.5 x 607 x 307

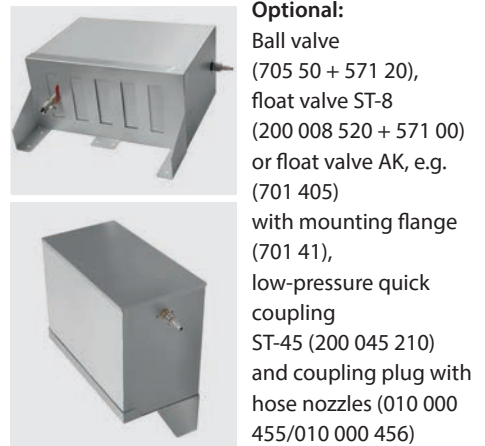

Optional:
Ball valve (705 50 + 571 20), float valve ST-8 (200 008 520 + 571 00) or float valve AK, e.g. (701 405) with mounting flange (701 41), low-pressure quick coupling ST-45 (200 045 210) and coupling plug with hose nozzles (010 000 455/010 000 456)


Float valves

AK with ball horizontal




Plastic. Pressure 0.3 - 10 bar.
Max. 22 l/min / 60 °C

AK with ball vertical




Plastic. Pressure 0.3 - 10 bar.
Max. 22 l/min / 60 °C

AK with PE float



PE float. Pressure 0.3 - 10 bar.
Max. 22 l/min / 60 °C

AK with PE float



PE float. Pressure 0.3 - 10 bar.
Max. 22 l/min / 60 °C


R+M Nr.			
701 402	3/4" M	3/4" M	10 mm

R+M Nr.			
701 404	3/8" M	3/4" M	10 mm

R+M Nr.			
701 405	3/4" M	3/4" M	10 mm

R+M Nr.			
701 408	3/4" M	3/4" M	10 mm

AK with ball



Plastic. Pressure 0.3 - 10 bar.
Max. 22 l/min / 60 °C

R+M Nr.			
701 403	3/4" M	3/4" M	10 mm

Accessories AK



Ball

R+M Nr.
701 43



Membrane

R+M Nr.
701 42

Accessories AK valves



Clamp


R+M Nr.
701 41



Hose tail D
N 13 mm

R+M Nr.	
711 60	3/4" F

ST-8 with ball



Brass / plastic.
Max. 10 bar / 22 l/min / 60 °C

R+M Nr.		
200 008 520	1/2" F	12 mm

Ball ST-8



R+M Nr.	TYP
030 000 180	swimmer
020 000 610	screw


Plastic



Plastic. 3/4" M.
DN 9.5. Max. 60 °C

R+M Nr.
701 500 100

PEKI without ball



3/8" M. Brass. Max. 10 bar / 85 °C

R+M Nr.		
701 00	16 l/min	8 mm
701 05	30 l/min	12 mm

Ball PEKI



Max. 60 °C

R+M Nr.
701 35



Stainless steel. 85 °C. For 701 05

R+M Nr.
701 39

Seal kit PEKI



R+M Nr.
701 001

Level sensor LS809-51



Plastic. Cable length 500 mm.
2-core cable. 250 V / 1 A / 70 W.
-30 °C - +105 °C

R+M Nr.
701 880 951

Water intake filters

R+M filter



Aluminium. Complete with screen (stainless steel). 300 microns. Max. 10 bar / 60 l/min / 80 °C

R+M Nr.	☐	☐	☐	☐
730 504	1/2" F	1/2" M	83	34

ST-33



Complete with screen (stainless steel). 400 micron. Max. 10 bar / 60 l/min / 60 °C

R+M Nr.	☐	☐	☐	☐
200 033 540	1/2" F	1/2" M	69	38



Screen. Stainless steel

R+M Nr.	microns
120 000 765	400

ST-33



Complete with filter fine core washable (stainless steel and plastic). 95 mm
112 mm. Max. 6 bar / 60 °C / 50 l/min

R+M Nr.	☐	☐	microns
200 033 700	3/4" F	3/4" M	50
200 033 705	1/2" F	1/2" M	125



Filter fine core washable. Stainless steel + plastic

R+M Nr.	microns
020 001 735	50
020 001 737	125



Complete with filter fine core washable (stainless steel and plastic). 50 microns. Max. 6 bar / 60 °C / 50 l/min

R+M Nr.	☐	☐	☐
200 033 900	3/4" F	3/4" M	141



Filter fine core washable. Stainless steel + plastic

R+M Nr.	microns
020 000 670	50

Water filter 3"



Complete with screen (plastic). 60 microns. Max. 10 bar / 50 l/min / 50 °C

R+M Nr.	☐	☐	☐
734 40	3/4" M	3/4" F	123



Screen. Plastic. 60 microns

R+M Nr.
734 703

Y-filter



Complete with screen (stainless steel). 500 microns. Max. 10 bar / 60 l/min / 60 °C


R+M Nr.	☐	☐	☐
732 038	3/8" F	3/8" F	58
732 012	1/2" F	1/2" F	58
732 034	3/4" F	3/4" F	70

Filter DN 17



Complete with screen. With integrated shut-off valve for the flow of water. *
250 microns. Max. 10 bar / 120 l/min / 90 °C

R+M Nr.	☐	☐	☐
732 923 00	3/4" M	3/4" F	123



Filter fine core washable. Stainless steel + plastic. 250 microns

R+M Nr.
732 005 945

* A pre-shut-off is not necessary.

The higher the number of microns the more coarsely meshed are the meshes: **500 microns = coarse** . **50 microns = fine**

Symbols ☐ marking ☐ thread ☐ length ☐ height TYP type ☐ inner diameter ☐ inlet ☐ outlet

Filter housings without cartridge filter

Plastic



2-pieces. With drain.
Female thread brass.
Max. 10 bar / 50 °C

R+M Nr.	★	○	fi	↓
734 50	■	3/4"	5"	188
734 60	■	1"	5"	188
734 81	■	1-1/4"	9.3/4"	310
734 70	■	3/4"	9.3/4"	310
734 80	■	1"	9.3/4"	310
734 820 034	■	3/4"	20"	583
734 820 001	■	1"	20"	583



3-pieces. With drain.
Female thread brass.
Max. 10 bar / 40 °C

R+M Nr.	★	○	fi	↓
734 290 03	■	3/4"	5"	207
734 290 11	■	1"	5"	207
734 290 04	■	3/4"	9.3/4"	337
734 290 05	■	1"	9.3/4"	337

Brass / plastic



3-pieces. With drain. Head nickel-plated brass. Filter cup plastic.
Max. 15 bar / 40 °C

R+M Nr.	★	○	fi	↓
734 330 2	■	1"	9.3/4"	315

Stainless steel



3-pieces. With drain, key for housing and mounting bracket.
Max. 20 bar / 120 °C

R+M Nr.	★	○	fi	↓
734 304 1	■	1"	9.3/4"	350

Screen housings



Filter 2-pieces. Plastic. Max. 50 °C

R+M Nr.	★	TYP
734 504	■	small*
734 704	■	big*



Filter 3-pieces. Plastic. Max. 40 °C

R+M Nr.	★	TYP
734 200 13	■	small**
734 200 14	■	big**
734 330 21	■	big**

O-ring



R+M Nr.	★
734 506	■
734 510	■
734 200 70	■
734 304 11	■

Centering unit



For assembly.
Centering aid

R+M Nr.	★
734 210 36	■

Mounting brackets



Single. Steel white powder coated

R+M Nr.	★
734 299 02	■



Single. Plastic

R+M Nr.	★
734 507	■



Double. Plastic

R+M Nr.	★
734 508	■

Keys for housing



For plastic head. For 2 pieces filter housing.

R+M Nr.	★
734 505	■



For brass head. For 3 pieces filter housing.

R+M Nr.	★
734 300 1	■
734 299 01	■

* with o-ring ** without o-ring

Cartridge filter



Plastic cleanable. Reinforced version.
Max. 40 °C

R+M Nr.	★	fi	microns	I
734 293 00	■ ■	5"	60	125
734 293 02	■ ■ ■ ■	9.3/4"	60	250
734 293 03	■ ■ ■ ■	9.3/4"	120	250



Plastic cleanable.
Max. 40 °C

R+M Nr.	★	fi	microns	I
734 55	■	5"	60	128
734 54	■	5"	150	128
734 75	■ ■ ■	9.3/4"	60	250
734 74	■ ■ ■	9.3/4"	150	250



Cotton.
Max. 40 °C

R+M Nr.	★	fi	microns	I
734 57	■	5"	5	128
734 56	■	5"	20	128
734 77	■ ■ ■ ■	9.3/4"	5	250
734 76	■ ■ ■ ■	9.3/4"	20	250



Iron remove filter

R+M Nr.	★	fi	←	I
734 709 060	■ ■ ■ ■	9.3/4"	0.85	250



Water softener. Polyphosphate

R+M Nr.	★	fi	I
734 58	■ ■	5"	125
734 820 035	■	20"	510

The filters
734 58, 734 820 035 and
734 709 060
are not suitable for the
water supply of pumps.



Polypropylene. Max. 40 °C

R+M Nr.	★	fi	microns	I
734 720 006	■	20"	5	510
734 720 050	■	20"	50	510



Stainless steel. Max. 120 °C

R+M Nr.	★	fi	microns	I
734 709 050	■ ■ ■ ■	9.3/4"	50	250

The higher the number of microns the more coarsely meshed are the meshes: 500 microns = coarse . 50 microns = fine

Symbols ★ marking fi filter ○ thread I height TYP type

easywash365+® wash brushes - large areas are completely clean from now on!


By means of a very wide work surface of approx. 260 x 80 mm the **easywash365+®** wash brush is especially designed for the efficient cleaning of large areas such as railway carriages, tramcars, omnibuses, caravans, trucks, boats and ships, facades, greenhouses as well as vehicles, motorcycles and many more.

Fine and extremely soft natural bristles with split ends ensure an especially gentle cleaning of sensitive surfaces such as windows and car finish. The solid body of the **easywash365+®** wash brush consists of 152 bristle bundles which are attached undetachably by means of multi-component synthetic resin.

Our **easywash365+®** wash brush convinces all users working in the self-service foam- and prewash of an ideal and very easy handling. The soft coating of the body made out of thermoplastic elastomer demonstrably protects sensitive surfaces from damages.

The inlet of the **easywash365+®** wash brush is equipped with a brass insert with 1/4" female thread which is fixed in the body. By means of an additional grub screw the high pressure lances available at self-service bays are safe from twisting and theft. Therefore, the grub screw needs to be screwed to the lance tube. **Further fastening plates or protection against theft are not required.**

13 outlet ports at the bottom of the **easywash365+®** wash brush enable the required water flow and guarantee a convincingly good foam quality at the same time.

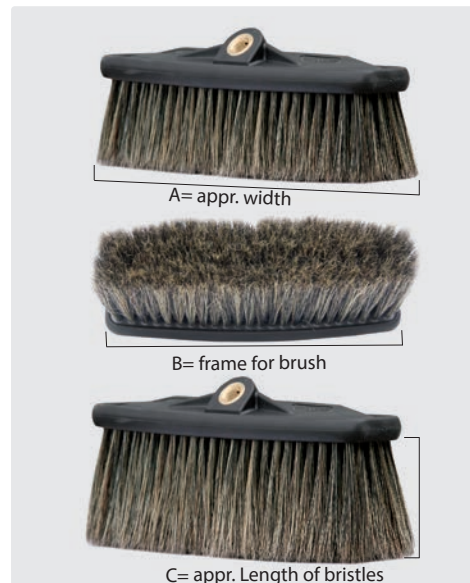

Wash brushes



A= 270. B= 260 x 80 mm. Hog hair.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓒ
200 023 550	60 mm	1/4" F



A= 270. B= 260 x 80 mm. Hog hair.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓒ
200 023 650	90 mm	1/4" F



A= 270. B= 260 x 80 mm. Hog hair / synthetic.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓒ
200 023 660	90 mm	1/4" F

Wash brushes

Wash brushes



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C
200 023 500	60 mm
200 023 600	90 mm

Wash brush with cover



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	Ⓒ
200 023 710	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
With stainless steel frame.
Max. 50 °C

R+M Nr.	C	Ⓒ
200 023 735	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
With stainless steel frame.
Max. 50 °C

R+M Nr.	C	Ⓒ
200 023 736	90 mm	1/4" F

Covers



Cover suitable as theft protection for wash brushes. Plastic.
Max. 50 °C

R+M Nr.	B ⇄
020 001 540	230 mm

Frames for wash brushes



Frame with fixing bolts. Stainless steel. Max. 60 °C

R+M Nr.	B ⇄	Ⓒ
200 023 560	230 mm	1/4" F




Frame. Stainless steel.
Max. 60 °C

R+M Nr.	B ⇄	Ⓒ
200 023 570	230 mm	1/4" F

Telescopic lances and wash brushes easyclean365+®

Fiberglass lances with coarse thread

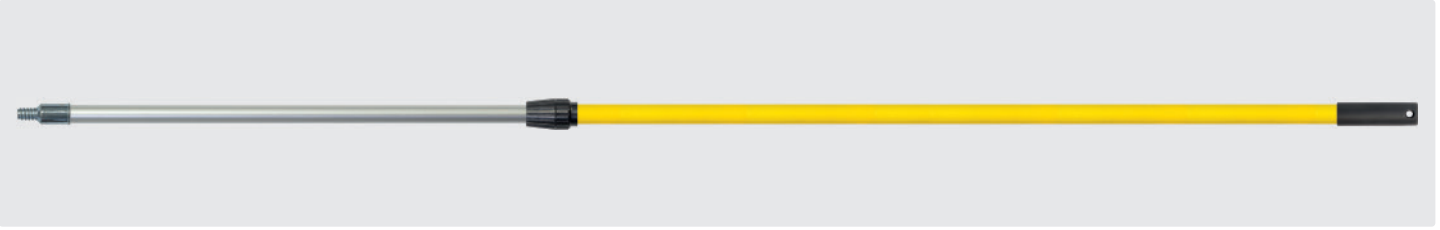

Telescopic lances made of fiberglass with coarse thread. Extendable without water flow

R+M Nr.		
525 050 10	1,020 - 1,800 mm	
525 070 10	1,920 - 3,600 mm	

Aluminum lances with coarse thread



Telescopic lance made of aluminum with cord thread.

Ergonomic handle with insulated grip area and ball valve. Extendable with water flow

R+M Nr.		
525 300 10	1,500 - 3,500 mm	coupler plug «universal»

easyclean365+® washing brushes with coarse thread and water passage



Bristles 60 mm. Soft. 250 x 80 mm

R+M Nr.	VPE
525 000 10	1



Bristles 60 mm. Hard. 250 x 80 mm

R+M Nr.	VPE
525 010 10	1


Accessories for telescopic lances with coarse thread

Angle adaptor



Cord thread F : cord thread M. Without water passage

R+M Nr.	
525 040 10	115 mm

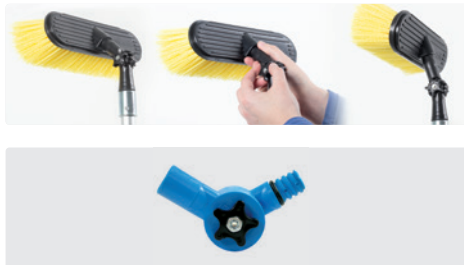

Cord thread F : cord thread M. With water passage

R+M Nr.	
525 040	400 mm

Ball valve



3/4" F : 3/4" M. Brass

R+M Nr.
726 420

Further telescopic lances are on page 291 and further wash brushes are on pages 322-323.

Symbols thread length VPE packing unit inlet inlet

Vorwerk lances and wash brushes

The original



Extension pipe with water flow

R+M Nr.	↔	↺	⊕
523 790 1	1,000 mm	1/4" M	1/4" F
523 790 2	1,500 mm	1/4" M	1/4" F
523 790 3	2,000 mm	1/4" M	1/4" F

Vorwerk wash brushes



A= 300. B= 300 x 100 mm. Nylon

R+M Nr.	C	⊕
523 780	60 mm	1/4" F



A= 240. B= 230 x 80 mm. Hog hair

R+M Nr.	C	⊕
523 70	60 mm	1/4" F
523 75	90 mm	1/4" F

Brush. A= 260. B= 230 x 80 mm.
Hog hair

R+M Nr.	C
523 72	60 mm
523 73	90 mm

Frame. 260 mm.
Aluminium

R+M Nr.	⊕
523 76	1/4" F

Adaptor

Adaptor for lances with coarse thread.
Coarse thread : 1/4" M


R+M Nr.
010 003 610

Air injector

1/4" M : 1/4" F.
Flow at 100 bar

R+M Nr.	↔	⊕
108 290 60	13 l/min	1.5
108 290 20	34 l/min	2.5

Brush holder

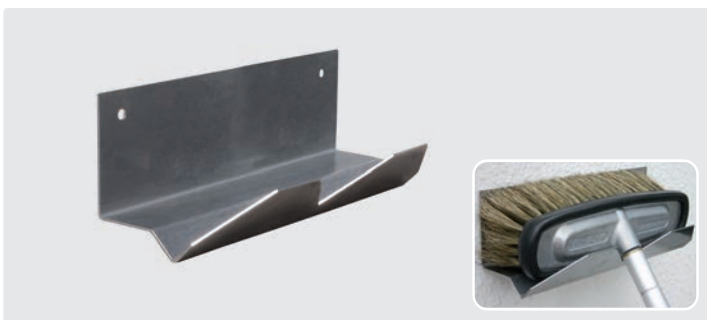Suitable for all brushes. Hole spacing 202 mm.
H x W x D = 90 x 250 x 100 mm

R+M Nr.	Ⓜ
108 290 30	stainless steel

easywash365+® brush holder



Container with overflow and lateral drain for cleaning. For wall and floor mounting. H x W x D = 670 x 340 x 143 mm

R+M Nr.	Ⓜ
105 810	stainless steel

Symbols ⊕ thread ↔ length VPE packing unit ⊕ inlet 🚚 shipment by truck ⊕ inlet ⊕ outlet ↔ flow Ⓜ material


Handles with water flow



Aluminium handle. Ergonomic handle with insulated grip. Connector suitable for Nito system

R+M Nr.	Ø	↔	M	°C
527 001 405	34 mm	1,010 mm	aluminium	max. 50 °C

Adaptor for wash brushes with coarse thread



Adaptor for lances without coarse thread.
Coarse thread M: thread F conical

R+M Nr.	↔
527 001 118	85 mm



Aluminium handle. Ergonomic handle with insulated grip and ball valve. Connector suitable for Nito system

R+M Nr.	Ø	↔	M	°C
527 001 406	34 mm	1,575 mm	aluminium	max. 50 °C



Aluminium handle. Ergonomic handle with insulated grip. Hose tail suitable for 1/2" and 3/4" hose

R+M Nr.	Ø	↔	M	°C
527 001 400	34 mm	1,575 mm	aluminium	max. 50 °C



Aluminium handle. Telescopic handle with insulated grip. Hose tail suitable for 1/2" and 3/4" hose


R+M Nr.	Ø	↔	M	°C
527 001 402	50 mm	1,600-2,780 mm	aluminium	max. 50 °C

Handles without water flow



Aluminium handle. Ergonomic handle with insulated grip

R+M Nr.	Ø	↔	M	°C
527 001 403	34 mm	1,505 mm	aluminium	max. 50 °C

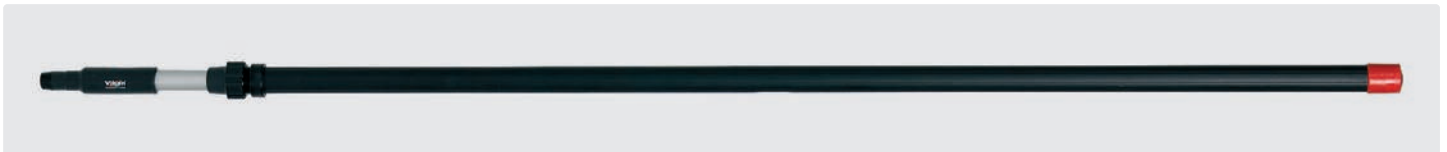

Aluminium handle. Telescopic handle with insulated grip

R+M Nr.	Ø	↔	M	°C
527 001 401	50 mm	1,575-2,780 mm	aluminium	max. 50 °C

Wash brushes with water flow

Hand wash brush



Brush with integrated water flow. Connection suitable for 16 mm (universal). Ideal for smaller cleaning applications. Bristles 50 mm

R+M Nr.			
527 001 103	350 mm	polyester	max. 50 °C

Rim brush for trucks / busses



Brush for the cleaning of rims of trucks and busses. Connection for aluminium handles. Bristles 50 mm

R+M Nr.			
527 001 102	230 mm	polyester	max. 50 °C

High-low wash brush



The form of the brush assures that the bristles are in constant contact with the surface. The brush is equipped with a rubber edge. Connection for aluminium handles. Bristles 50 mm

R+M Nr.			
527 001 104	250 mm	polyester	max. 50 °C

Wash brush swivelling



Brush with swivel. The inclined/slanted bristles ensure that all corners can be reached. The brush is equipped with a rubber edge. Connection for aluminium handles. Bristles 50 mm

R+M Nr.			
527 001 101	200 mm	polyester	max. 50 °C

Wash brush



Solid brush suitable for larger surfaces. Suitable for cleaning of upper areas. The brush is equipped with a rubber edge. Connection for aluminium handles. Bristles 50 mm

R+M Nr.			
527 001 109	260 mm	polyester	max. 50 °C



Solid brush suitable for larger surfaces. Suitable for cleaning of upper areas. The brush is equipped with a rubber edge. Connection for aluminium handles. Bristles 50 mm

R+M Nr.			
527 001 100	400 mm	polyester	max. 50 °C

Further brushes and brooms are presented in the chapter car wash.

Quick couplings suitable for Nito system



Hose tail for 1/2" hose

R+M Nr.	
527 003 001	nickel-plated brass



Plug 1/2" M

R+M Nr.	
527 003 003	nickel-plated brass



Coupling NITO 1/2" F : coupling "universal"

R+M Nr.	
527 003 010	nickel-plated brass

Symbols length material temperature marking filter height inlet outlet

Solar cleaning

In most cases, photovoltaic module surfaces cannot simply be cleaned with water and a sponge and it would simply be too dangerous, since the modules are often mounted on the roof at an angle of 30 to 45°. R+M / Suttner offers a solar cleaning set for this purpose: A generously dimensioned surface washing brush with double water flow on a telescopic lance enables you to effectively clean your solar modules and photovoltaic systems. No matter if industry, trade, agriculture or private buildings. The possible uses are unlimited, especially in locations that are exposed to heavy pollution. The solar cleaning set only needs to be connected to tap water.

- Safe and efficient cleaning of solar and photovoltaic systems
- Comfortable working in any position thanks to the stable, telescopic lance


Gentle cleaning of solar modules, since the washing brush works in the low-pressure range, damage to the modules is ruled out

- With the help of the telescopic rods, the brush can be guided easily and safely from the ground, roof or cherry picker
- The soft-grip handle with integrated ball valve enables the brush cleaning to be operated conveniently

Soiling of the surface means loss of performance and lower feed-in tariffs. The aluminum telescopic washing brush set pays for itself after a short time.

The mobile water softening unit prevents limescale residues on cleaned surfaces. In addition, special phosphates bind the lime components dissolved in the water.


Solar telescopic brush set for PV and solar systems

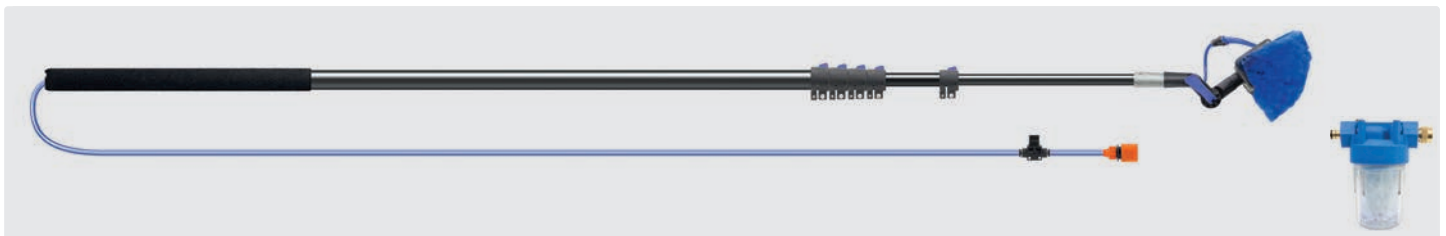

Aluminum telescopic wand with 4 or 5 clip fasteners and soft grip (570 mm). High-low shape washing brush with nylon hair on an adjustable angle joint, 8 or 12 m hose Ø 8 mm, ball valve and universal connection.

5" filter and filter insert polyphosphate with connection 3/4" coupling and tap connector.

R+M Nr.	Insulation	☞	↔	Ⓒ	fi
526 001 425	Soft grip 570 mm	High-low washing brush	1,9 - 10 m	Universal coupling	5"
526 001 435	Soft grip 570 mm	High-low washing brush	1,75 - 6 m	Universal coupling	5"
526 001 401	Soft grip 570 mm	High-low washing brush	1,9 - 10 m	Universal coupling	without filter
526 001 430	Soft grip 570 mm	High-low washing brush	1,75 - 6 m	Universal coupling	without filter

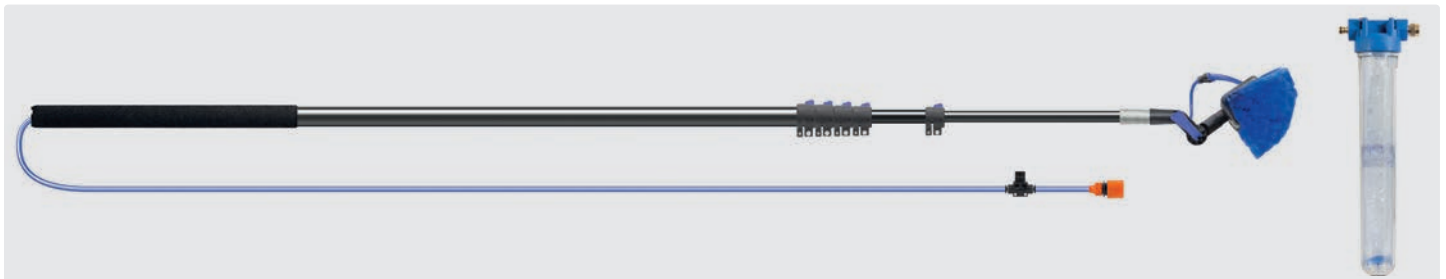


Aluminum telescopic wand with 4 or 5 clip fasteners and soft grip (570 mm). High-low shape washing brush with nylon hair on an adjustable angle joint, 8 or 12 m hose Ø 8 mm, ball valve and universal connection.

20" filter and filter insert polyphosphate with connection 3/4" coupling and tap connector.

R+M Nr.	Insulation	☞	↔	Ⓒ	fi
526 001 420	Soft grip 570 mm	High-low washing brush	1,9 - 10 m	Universal coupling	20"
526 001 440	Soft grip 570 mm	High-low washing brush	1,75 - 6 m	Universal coupling	20"

Spare parts filter inserts

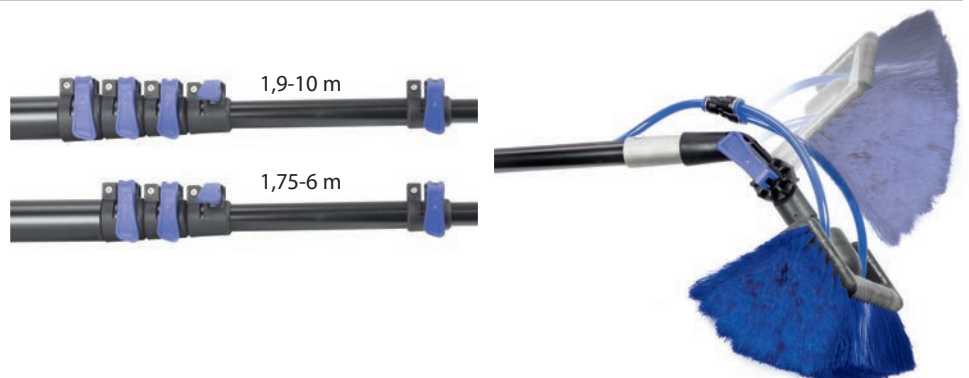

Water softener. Polyphosphate

R+M Nr.	★	fi	1
734 58	■	5"	125
734 820 035	■ ■	20"	510

Foam gun



Features

- » Exceptional chemical resistance to acidic and caustic cleaner.
- » Foam generating wand creates a thick clinging foam.
- » Automatic dosing of chemicals.
- » Durable polymer mixing head with stainless steel screws.
- » Multi-ratio dial has 5 mixing settings and off.
- » Gun is removable from quick coupling for clear rinsing with water.
- » Easy filling by means of wide mouth.
- » Only works with water pipe pressure.
- » Suitable for all customary water couplings.
- » Chemical container volume 1,000 ml

Applications

Designed for applications with acidic and caustic cleaner, soaps, disinfectants, degreasing and softening agents. The field of application is very versatile.

- » Food industry and canteen kitchen
- » Sanitary facilities and swimming baths
- » Cleaning of trucks, cars and other vehicles
- » Garages and petrol stations
- » Shops and workshops

The foam gun directly connected to the public water pipe produces a cleaning foam by means of foam injector. The water pressure sucks in the cleaning agent and air, both are being mixed to consistent foam, sprayed out via the spraying head and the foam wand. The cleaning agent can also purposely and automatically be diluted via a built-in proportioner so that the right mixture of chemical and water as foam can be chosen for the cleaning application.

Technical specifications

Water pressure 2.5 - 6 bar (for maximum accuracy 3 - 4 bar)

Output 5.5 l/min

Mixing Ratio

Multi-ratio dial has 5 mixing settings and off

A	B	C	D	E	0
1:128	1:64	1:32	1:20	1:10	off



R+M Nr.		
106 996 500	incl. coupler plugs "universal"	1 l

Please use the backflow preventer (R+M Nr. 734 10) on page 27.



Accumulator	78	Pump accessories	54, 62
Annovi Reverberi high pressure motor pump combinations		Pump allocation according to flow rate	43
Car Wash.....	59	Pump allocation according to pressure	42
Annovi Reverberi high pressure pumps.....	58	Pump feet	51
Annovi Reverberi high pressure pumps Car Wash	59	Pump unit with power take-off (p.t.o.) shaft gearbox	50
Annovi Reverberi high pressure pumps with hydraulic motor	57	Pump/motor assignment	44, 59
Annovi Reverberi motor pumps	55-56	Reference list manufacturer number to R+M number.....	82
BERTOLINI high pressure pumps	62	Regulation valves	69-71
CAT high pressure pumps.....	61	Relief valves / pressure regulation valves	75-77
Chemical injectors.....	79	Repair kits for CAT high pressure pumps.....	61
COMET high pressure pumps	60	Repair kits suitable for Kärcher high pressure pumps.....	52-53
COMET motor pumps.....	60	Repair kits suitable for Kränzle	50
easyfoam365+® injectors by Suttner.....	80-82	Repair kits suitable for Speck high pressure pumps	54
Gears for pumps	50	Repair kits suitable for WAP	51
Hawk high pressure pumps	62	Single seals suitable for Kärcher.....	51
High pressure check valves ST-264	74	Suttner chemical injectors	78
High pressure Filter ST-33.....	79	Suttner chemical suction sets	79
High pressure gauges glycerine filled.....	85	Suttner flow switches.....	83-84
High pressure solenoid valves closed in off-position.....	86	Suttner foam injectors.....	78
Hose clamps	79	Suttner regulation valve ST-261.2	64
INTERPUMP couplings and flanges	49	Suttner regulation valve ST-265	65
INTERPUMP high pressure pumps	45	Suttner regulation valve ST-265 with green spring	65
INTERPUMP high pressure pumps for petrol engines	47	Suttner regulation valve ST-285	67
INTERPUMP high pressure pumps with built-in valve	46	Suttner regulation valves	68
INTERPUMP motor pumps	47	Suttner regulation valves ST-261	63-64
INTERPUMP regulation valves.....	72-73	Suttner stainless steel regulation valve ST-275	66
INTERPUMP repair kits.....	48	Thermal relief valves	74
INTERPUMP special high pressure pumps.....	46	Throttle control	73
Pressure gauge fitting	86	UDOR high pressure pumps.....	48
Pressure switches	87	Ultra High Pressure Filter	79
Pressure switches ST-7.1	87	Valve "easystart"	73

Pump allocation according to pressure

[P]	☰	[U]	[KW]	[TYP]	Page	R+M Nr.	Brand
50	42	600	4	W4	45	000 040 01	Interpump
90	8	2,800	1.5	WW90	45	000 900 01	Interpump
90	8	2,800	1.5	WW90	45	000 900 04	Interpump
100	21	1,450	4	WS102	45	001 020 01	Interpump
100	30	1,450	5.5	WS104	45	001 040 01	Interpump
120	14	1,450	3	W124LX	45	001 240 02	Interpump
120	13	1,450	4	JK 13.12 N DX	59	170 278 64	Annovi
130	9.5	1,450	2.2	W130	45	001 300 01	Interpump
140	12	1,450	3	W140	45	001 400 01	Interpump
140	12	1,450	3	W140	45	001 400 04	Interpump
140	21	1,450	7.5	VHT4721	46	047 210 01	Interpump
140	42	1,450	11.1	CC 42/14S	48	171 042 140	Udor
140	11	1,450	3	XT11.14N	58	170 701 4	Annovi
150	8	1,450	2.2	JR8.15N TSS	59	170 268 73	Annovi
150	8	1,450	2.2	W150	45	001 500 01	Interpump
150	14	1,450	4	W154	45	001 540 01	Interpump
150	15	1,000	4	W151	45	001 510 02	Interpump
150	15	1,450	4	WS151	45	001 510 01	Interpump
150	15	1,450	4	WS151LX	45	001 510 11	Interpump
150	15	2,800	4	WW156	45	001 560 01	Interpump
150	21	1,450	5.5	WS152	45	001 520 01	Interpump
150	21	1,450	5.5	RK21.15HN	58	170 206 45	Annovi
150	30	1,450	7.4	WS153	45	001 530 01	Interpump
150	50	1,450	14.7	W1550	45	015 500 01	Interpump
150	15	1,450	4	XM15.15N	58	170 790 6	Annovi
150	30	1,450	7.5	XW30.15N	58	170 201 79	Annovi
150	42	1,450	11.8	XWL42.15N	58	170 210 60	Annovi
150	50	1,450	10.9	CC 50/15S	48	171 048 120	Udor
150	15	1,450	4	JK 15.15 N DX	59	170 278 65	Annovi
150	21	1,450	5.5	JK 21.15 N DX	59	170 278 66	Annovi
150	7.5	1,420	2.3	3CP1130	61	131 130	CAT
150	10	1,420	3	300	60	133 00	CAT
150	11	1,420	4.4	3CP1140	60	131 140	CAT
150	13	1,420	4.1	340	60	133 40	CAT
150	13	1,420	4.1	340F	60	133 401	CAT
150	15	1,420	4.6	350	60	133 50	CAT
150	15	950	4.6	310	60	133 10	CAT
160	18	1,450	5.5	WS162	45	001 620 01	Interpump
160	30	1,450	9.2	WS1630	45	016 300 01	Interpump
160	15	1,450	4.5	VHT4715	46	047 150 01	Interpump
160	18	1,450	5.5	VHT4718	46	047 180 01	Interpump
170	13	1,450	4	WS171	45	001 710 1	Interpump
170	17	2,800	5.5	WW176	45	001 760 01	Interpump
170	46	1,750	14.7	VHT6646	46	066 460 01	Interpump
170	35	1,450	11.2	XLT 3517IR	62	174 035 170	Hawk
172	38	1,450	12.5	TW 10025S	60	172 100 250	Comet
172	42.5	1,450	13.7	TW 11025S	60	172 110 250	Comet
175	19	1,100	6.9	530	61	135 30	CAT
175	13	1,420	4.7	5CP2140W	61	132 140	CAT
175	8.7	1,420	3.2	5CP2110W	61	132 110	CAT
175	15	1,420	5.5	5CP2150	61	132 150	CAT
175	15	950	5.5	5CP2120W	61	132 120	CAT
180	13	2,800	4	WW186	46	001 860 03*	Interpump
180	13	2,800	4	WW186	46	001 860 05**	Interpump
200	15	1,000	5.5	W201	45	002 010 02	Interpump
200	15	1,450	5.5	WS201	45	002 010 01	Interpump
200	15	1,450	5.5	WS201LX	45	002 010 11	Interpump
200	21	1,450	7.5	WS202	45	002 020 01	Interpump
200	30	1,450	11	W2030	45	020 300 01	Interpump
200	35	1,450	13.5	W2035	45	020 350 01	Interpump
200	41	1,450	16	W2141	45	021 410 01	Interpump
200	15	2,800	5.5	WW209	46	002 090 03	Interpump
200	39	1,750	14.7	VHT6639	46	066 390 01	Interpump
200	15	2,800	5.5	WW209	46	002 090 01	Interpump
200	21	1,450	7.9	CC21/20S	48	171 021 200	Udor
200	26	1,450	9.8	CC26/20S	48	171 026 200	Udor
200	30	1,450	11.3	CC 30/20S	48	171 030 200	Udor
200	15	1,450	5.5	RK15.20HN	58	170 206 38	Annovi
200	18	1,450	7.5	RK18.20HN	58	170 206 43	Annovi
200	26	1,450	9.2	XW26.20N	58	170 200 59	Annovi
200	30	1,450	10	XW30.20N	58	170 200 60	Annovi
200	15	1,450	5.7	NMT 1520R	62	174 015 200	Hawk
200	21	1,450	7.9	NMT 2120R	62	174 021 200	Hawk
207	15	1,450	5.5	FW 4030 S	60	172 040 300	Comet
207	18.8	1,450	6.4	FW 5030 S	60	172 050 300	Comet
207	21	1,450	7.1	FW 5530 S	60	172 055 300	Comet
210	19	1,420	8.3	5CP5120	61	135 120	CAT
210	15	1,450	6.1	TTL 1520	62	177 015 200	Bertolini
210	21	1,450	8.6	TTL 2120	62	177 021 200	Bertolini
240	30	1,450	14.2	XLT 3025IR	62	174 030 240	Hawk
248	27	1,450	16.5	TW 7036S	60	172 070 360	Comet
250	25	1,450	13.5	W2525	45	025 250 01	Interpump
250	30	1,450	14	XW30.25N	58	170 211 37	Annovi
275	15	1,450	8.2	RK15.28HN	58	170 206 40	Annovi
276	19	1,450	10	RW 5040S	60	172 050 400	Comet
300	13	1,450	7.6	TTL 1330	62	177 013 300	Bertolini
300	20	1,450	11.5	TTL 2030	62	177 020 300	Bertolini
300	24	1,450	14.1	XLT 2530IR	62	174 024 300	Hawk
345	18	1,450	15.5	TW 4550S	60	172 045 500	Comet
400	18	1,450	14.7	W4018	45	040 180 01	Interpump
500	15	1,450	14.7	W5015	45	050 150 01	Interpump

LX= shaft on the left

Symbols [P] pressure ☰ flow [U] revolutions [KW] kilowatt [TYP] type

Pump allocation according to flow rate

☐	P	U	KW	TYP	Page	R+M Nr.	Brand
42	50	600	4	W4	45	000 040 01	Interpump
7.5	150	1,420	2.3	3CP1130	61	131 130	CAT
8	90	2,800	1.5	WW90	45	000 900 01	Interpump
8	90	2,800	1.5	WW90	45	000 900 04	Interpump
8	150	1,450	2.2	JR8.15N TSS	59	170 268 73	Annovi
8	150	1,450	2.2	W150	45	001 500 01	Interpump
8.7	175	1,420	3.2	5CP2110W	61	132 110	CAT
9.5	130	1,450	2.2	W130	45	001 300 01	Interpump
10	150	1,420	3	300	60	133 00	CAT
11	140	1,450	3	XT11.14N	58	170 701 4	Annovi
11	150	1,420	4.4	3CP1140	60	131 140	CAT
12	140	1,450	3	W140	45	001 400 01	Interpump
12	140	1,450	3	W140	45	001 400 04	Interpump
13	120	1,450	4	JK 13.12 N DX	59	170 278 64	Annovi
13	150	1,420	4.1	340	60	133 40	CAT
13	150	1,420	4.1	340F	60	133 401	CAT
13	170	1,450	4	WS171	45	001 710 1	Interpump
13	175	1,420	4.7	5CP2140W	61	132 140	CAT
13	180	2,800	4	WW186	46	001 860 03*	Interpump
13	180	2,800	4	WW186	46	001 860 05**	Interpump
13	300	1,450	7.6	TTL 1330	62	177 013 300	Bertolini
14	120	1,450	3	W124LX	45	001 240 02	Interpump
14	150	1,450	4	W154	45	001 540 01	Interpump
15	150	1,000	4	W151	45	001 510 02	Interpump
15	150	1,450	4	WS151	45	001 510 01	Interpump
15	150	1,450	4	WS151LX	45	001 510 11	Interpump
15	150	2,800	4	WW156	45	001 560 01	Interpump
15	150	1,450	4	XM15.15N	58	170 790 6	Annovi
15	150	1,450	4	JK 15.15 N DX	59	170 278 65	Annovi
15	150	1,420	4.6	350	60	133 50	CAT
15	150	950	4.6	310	60	133 10	CAT
15	160	1,450	4.5	VHT4715	46	047 150 01	Interpump
15	175	1,420	5.5	5CP2150	61	132 150	CAT
15	175	950	5.5	5CP2120W	61	132 120	CAT
15	200	1,000	5.5	W201	45	002 010 02	Interpump
15	200	1,450	5.5	WS201	45	002 010 01	Interpump
15	200	1,450	5.5	WS201LX	45	002 010 11	Interpump
15	200	2,800	5.5	WW209	46	002 090 03	Interpump
15	200	2,800	5.5	WW209	46	002 090 01	Interpump
15	200	1,450	5.5	RK15.20HN	58	170 206 38	Annovi
15	200	1,450	5.7	NMT 1520R	62	174 015 200	Hawk
15	207	1,450	5.5	FW 4030 S	60	172 040 300	Comet
15	210	1,450	6.1	TTL 1520	62	177 015 200	Bertolini
15	275	1,450	8.2	RK15.28HN	58	170 206 40	Annovi
15	500	1,450	14.7	W5015	45	050 150 01	Interpump
17	170	2,800	5.5	WW176	45	001 760 01	Interpump

☐	P	U	KW	TYP	Page	R+M Nr.	Brand
18	160	1,450	5.5	WS162	45	001 620 01	Interpump
18	160	1,450	5.5	VHT4718	46	047 180 01	Interpump
18	200	1,450	7.5	RK18.20HN	58	170 206 43	Annovi
18	345	1,450	15.5	TW 4550S	60	172 045 500	Comet
18	400	1,450	14.7	W4018	45	040 180 01	Interpump
18.8	207	1,450	6.4	FW 5030 S	60	172 050 300	Comet
19	175	1,100	6.9	530	61	135 30	CAT
19	210	1,420	8.3	5CP5120	61	135 120	CAT
19	276	1,450	10	RW 5040S	60	172 050 400	Comet
20	300	1,450	11.5	TTL 2030	62	177 020 300	Bertolini
21	100	1,450	4	WS102	45	001 020 01	Interpump
21	140	1,450	7.5	VHT4721	46	047 210 01	Interpump
21	150	1,450	5.5	WS152	45	001 520 01	Interpump
21	150	1,450	5.5	RK21.15HN	58	170 206 45	Annovi
21	150	1,450	5.5	JK 21.15 N DX	59	170 278 66	Annovi
21	200	1,450	7.5	WS202	45	002 020 01	Interpump
21	200	1,450	7.9	CC21/20S	48	171 021 200	Udor
21	200	1,450	7.9	NMT 2120R	62	174 021 200	Hawk
21	207	1,450	7.1	FW 5530 S	60	172 055 300	Comet
21	210	1,450	8.6	TTL 2120	62	177 021 200	Bertolini
24	300	1,450	14.1	XLT 2530IR	62	174 024 300	Hawk
25	250	1,450	13.5	W2525	45	025 250 01	Interpump
26	200	1,450	9.8	CC26/20S	48	171 026 200	Udor
26	200	1,450	9.2	XW26.20N	58	170 200 59	Annovi
27	248	1,450	16.5	TW 7036S	60	172 070 360	Comet
30	100	1,450	5.5	WS104	45	001 040 01	Interpump
30	150	1,450	7.4	WS153	45	001 530 01	Interpump
30	150	1,450	7.5	XW30.15N	58	170 201 79	Annovi
30	160	1,450	9.2	WS1630	45	016 300 01	Interpump
30	200	1,450	11	W2030	45	020 300 01	Interpump
30	200	1,450	11.3	CC 30/20S	48	171 030 200	Udor
30	200	1,450	10	XW30.20N	58	170 200 60	Annovi
30	240	1,450	14.2	XLT 3025IR	62	174 030 240	Hawk
30	250	1,450	14	XW30.25N	58	170 211 37	Annovi
35	170	1,450	11.2	XLT 3517IR	62	174 035 170	Hawk
35	200	1,450	13.5	W2035	45	020 350 01	Interpump
38	172	1,450	12.5	TW 10025S	60	172 100 250	Comet
39	200	1,750	14.7	VHT6639	46	066 390 01	Interpump
41	200	1,450	16	W2141	45	021 410 01	Interpump
42	140	1,450	11.1	CC 42/14S	48	171 042 140	Udor
42	150	1,450	11.8	XWL42.15N	58	170 210 60	Annovi
42.5	172	1,450	13.7	TW 11025S	60	172 110 250	Comet
46	170	1,750	14.7	VHT6646	46	066 460 01	Interpump
50	150	1,450	14.7	W1550	45	015 500 01	Interpump
50	150	1,450	10.9	CC 50/15S	48	171 048 120	Udor

* Incl. ULH

** Version "BV"

Pump/motor assignment



Pump	TYP	coupling	flange	solid shaft	KW
Annovi Reverberi					
170 701 4	XT11.14N	100 004 41	100 004 40	175 002 004	2.2
170 790 6	XM15.15N	100 151 11	100 015 10	175 002 001	4.0
170 278 64	JK13.12NDX	100 151 11	100 015 10	175 002 001	4.0
170 278 65	JK15.15NDX	100 151 11	100 015 10	175 002 001	4.0
170 206 38	RH15.20HN	100 151 11	100 015 10	175 002 002	5.5
170 206 45	RK21.15HN	100 151 11	100 015 10	175 002 002	5.5
170 278 66	JK21.15NDX	100 151 11	100 015 10	175 002 002	5.5
170 201 79	XW30.15N	100 013 21	100 013 20	175 002 091	7.5
170 206 43	RK18.20HN	100 013 21	100 013 20	175 002 091	7.5
Bertolini					
177 015 200	TTL 1520	100 151 11	100 015 10	175 002 002	5.5
177 013 300	TTL 1330	100 013 21	100 013 20	175 002 091	7.5
Comet					
172 040 300	FW 4030 S	100 151 11	100 015 10	175 002 002	5.5
172 050 300	FW 5030 S	100 013 21	100 013 20	175 002 091	7.5
172 055 300	FW 5530 S	100 013 21	100 013 20	175 002 091	7.5
Hawk					
174 015 200	NMT 1520R	100 151 11	100 015 10	175 002 002	5.5
174 021 200	NMT 2120R	100 013 21	100 013 20	175 002 091	7.5
Interpump					
001 300 01	W130	100 004 41	100 004 40	175 002 004	2.2
001 500 01	W150	100 004 41	100 004 40	175 002 004	2.2
001 710 01	WS171	100 151 11	100 015 10	175 002 001	4.0
001 240 02	W124LX	100 004 41	100 004 40	175 002 001	4.0
001 020 01	WS102	100 151 11	100 015 10	175 002 001	4.0
001 400 01	W140	100 004 41	100 004 40	175 002 001	4.0
001 540 01	W154	100 004 41	100 004 40	175 002 001	4.0
001 510 01	WS151	100 151 11	100 015 10	175 002 001	4.0
001 510 11	WS151LX	100 151 11	100 015 10	175 002 001	4.0
047 150 01	VHT4715	100 151 11	100 015 10	175 002 001	4.0
001 520 01	WS152	100 151 11	100 015 10	175 002 002	5.5
001 620 01	WS162	100 151 11	100 015 10	175 002 002	5.5
002 010 01	WS201	100 151 11	100 015 10	175 002 002	5.5
002 010 11	WS201LX	100 151 11	100 015 10	175 002 002	5.5
047 180 01	VHT4718	100 151 11	100 015 10	175 002 002	5.5
002 020 01	WS202	100 013 21	100 013 20	175 002 091	7.5
047 210 01	VHT4721	100 013 21	100 013 20	175 002 091	7.5



CAT	TYP	KW	coupling	flange	solid shaft	KW
131 130	3CP1130	2.9	133 073 6	137 017 24	175 002 016	3.0
133 00	300	3.2	133 072 1	133 071 5	175 002 001	4.0
133 40	340	4.1	133 072 1	133 071 5	175 002 002	5.5
133 50	350	4.6	133 072 1	133 071 5	175 002 002	5.5
131 140	3CP1140	4.4	133 073 6	137 017 24	175 002 002	5.5
132 110	5CP2110W	3.2	133 072 1	137 017 30	175 002 001	4.0
132 140	5CP2140W	4.7	133 072 1	137 017 30	175 002 002	5.5
132 150	5CP2150W	5.5	133 072 1	137 017 30	175 002 002	5.5

Pump	TYP	flange	hollow shaft	KW
Annovi Reverberi				
170 268 73	JR8.15NTSS	–	175 001 055	3.0
170 701 4	XT11.14N	175 300 306 1	175 001 061	3.0
170 278 64	JK13.12NDX	–	175 001 081	4.0
170 278 65	JK15.15NDX	–	175 001 081	4.0
170 790 6	XM15.15N	–	175 001 081	4.0
170 206 38	RK15.20HN	–	175 001 090	5.5
170 278 66	JK21.15NDX	–	175 001 090	5.5
170 201 79	XW30.15N	–	175 001 120	7.5
170 206 43	RK18.20HN	–	175 001 120	7.5
Comet				
172 040 300	FW 4030 S	–	175 001 090	5.5
Hawk				
174 015 200	NMT 1520R	–	175 001 090	5.5
Interpump				
001 710 01	WS171	–	175 001 081	4.0
001 240 02	W124LX	175 300 306 1	175 001 061	3.0
001 400 01	W140	175 300 306 1	175 001 061	3.0
001 020 01	WS102	–	175 001 081	4.0
001 540 01	W154	175 300 307 4	175 001 081	4.0
001 510 01	WS151	–	175 001 081	4.0
001 510 11	WS151LX	–	175 001 081	4.0
047 150 01	VHT4715	–	175 001 081	4.0
001 620 01	WS162	–	175 001 090	5.5
047 180 01	VHT4718	–	175 001 090	5.5
002 010 01	WS201	–	175 001 090	5.5
002 010 11	WS210LX	–	175 001 090	5.5
047 210 01	VHT4721	–	175 001 120	7.5
002 020 01	WS202	–	175 001 120	7.5

INTERPUMP high pressure pumps

Standard



Version "B"



Repair kits

01	02	03	04
Valves 6 pieces	Seal kit for 1 piston	Sleeve kits for 3 pistons	Oil seal kits for 3 pistons
05	06	07	08
Ceramic socket for 1 piston	Tension screws for 3 pistons	Valve plugs	O-ring for valve plugs 1 piece

Standard							"B"	01	02	03	04	05	06	07	08
P	←	U	KW	TYP	serie	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
50	42	600	4.0	W4	69	000 040 01		340 062 01	340 039 01	340 040 01	340 037 01	690 400 09	340 074 01	692 180 22***	904 055 00
90	8	2,800	1.5	WW90	51	000 900 01	000 900 04	340 001 01	340 096 01	340 097 01	340 083 01	510 400 09		340 084 01*	903 847 00
100	21	1,450	4	WS102	47	001 020 01		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 004 01*	903 847 00
100	30	1,450	5.51	WS104	69	001 040 01		340 062 01	340 082 01	340 069 01	340 037 01	470 404 09	340 054 01	982 312 00	904 051 00
120	14	1,450	3	W124LX	44	001 240 02		340 123 01	340 131 01	340 127 01	340 023 01	440 401 09		340 124 01*	903 847 00
130	9.5	1,450	2.2	W130	44	001 300 01		340 123 01	340 130 01	340 088 01	340 023 01	520 400 09		340 124 01*	903 847 00
140	12	1,450	3	W140	44	001 400 01	001 400 04	340 123 01	340 131 01	340 127 01	340 023 01	440 401 09		340 124 01*	903 847 00
150	8	1,450	2.2	W150	44	001 500 01		340 123 01	340 130 01	340 088 01	340 023 01	520 400 09		340 124 01*	903 847 00
150	14	1,450	4	W154	44	001 540 01		340 123 01	340 131 01	340 127 01	340 023 01	440 401 09		340 124 01*	903 847 00
150	15	1,000	4	W151	47	001 510 02		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 004 01*	903 847 00
150	15	1,450	4	WS151	47	001 510 01		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 004 01*	903 847 00
150	15	2,800	4	WW156	44	001 560 01		340 123 01	340 130 01	340 088 01	340 023 01	520 400 09		340 124 01*	903 847 00
150	15	1,450	4	WS151LX	47	001 510 11		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 004 01*	903 847 00
150	21	1,450	5.5	WS152	47	001 520 01		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 005 01*	903 847 00
150	30	1,450	7.35	WS153	69	001 530 01		340 062 01	340 082 01	340 069 01	340 037 01	470 404 09	340 054 01	982 312 00	904 051 00
150	50	1,450	14.7	W1550	66	015 500 01		340 169 01	340 247 01	340 248 01	340 002 01	660 410 09		661 300 41	903 857 00**
160	18	1,450	5.5	WS162	47	001 620 01		340 001 01	340 029 01	340 148 01	340 002 01	470 405 09	340 006 01	340 005 01*	903 847 00
160	30	1,450	9.2	WS1630	47	016 300 01		340 169 01	340 029 01	340 148 01	340 002 01	470 405 09	340 006 01	982 300 00	903 864 00
170	17	2,800	5.5	WW176	44	001 760 01		340 123 01	340 130 01	340 088 01	340 023 01	520 400 09		340 124 01*	903 847 00
170	13	1,450	4.0	WS71	47	001 710 01		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 004 01*	903 847 00
200	15	1,000	5.5	W201	47	002 010 02		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 005 01*	903 847 00
200	15	1,450	5.5	WS201	47	002 010 01		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 005 01*	903 847 00
200	15	1,450	5.5	WS201LX	47	002 010 11		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 005 01*	903 847 00
200	21	1,450	7.5	WS202	47	002 020 01		340 001 01	340 028 01	340 069 01	340 002 01	470 404 09	340 006 01	340 005 01*	903 847 00
200	30	1,450	11	W2030	66	020 300 01		340 169 01	340 173 01	340 172 01	340 002 01	660 401 09		661 300 41	903 857 00**
200	35	1,450	13.5	W2035	66	020 350 01		340 169 01	340 173 01	340 172 01	340 002 01	660 401 09		661 300 41	903 857 00**
200	41	1,450	16	W2141	66	021 410 01		340 169 01	340 182 01	340 181 01	340 002 01	660 404 09		661 300 41	903 857 00**
200	15	2,800	5.5	WW209	44	002 090 01		340 123 01	340 130 01	340 088 01	340 023 01	520 400 09		340 124 01*	903 847 00
250	25	1,450	13.5	W2525	66	025 250 01		340 169 01	340 171 01	340 170 01	340 002 01	660 400 09		661 300 41	903 857 00**
400	18	1,450	14.7	W4018	66	040 180 01		340 150 01	340 175 01	340 174 01	340 002 01	660 402 09		661 301 41	903 857 00**
500	15	1,450	14.7	W5015	66	050 150 01		340 150 01	340 175 01	340 174 01	340 002 01	660 402 09		661 301 41	903 857 00**

* Kit with 6 valve plugs
LX = shaft on the left

** back ring 905 165 00 required
*** 2 valve plates are required (2 x 692 180 22)

Symbols P pressure ← flow U revolutions KW kilowatt TYP type

INTERPUMP high pressure pumps with built-in valve

Version "V"



Repair kits

01	02	03	04
Valves 6 pieces	Seal kit for 1 piston	Sleeve kits for 3 pistons	Oil seal kits for 3 pistons
05	06	07	08
Ceramic socket for 1 piston	Valve plugs. Kit with 6 plugs	O-ring for valve plugs 1 piece	

Version "BV"



	"V"	"BV"	01	02	03	04	05	06	07	08
	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
[P]	180	13	2.800	4	WW186	44	001 860 03	001 860 05		
[U]	200	15	2.800	5,5	WW209	44	002 090 03			
[KW]										
[TYP]										
serie										

■ Type "H" is equipped with an automatic pressure regulator that allows to zero the pump pressure.

INTERPUMP special high pressure pumps

Version "VHT"



Series "VHT". Made out of high quality components and materials. Especially designed for car wash and industrial applications of up to 85 °C

Repair kits

01	02	03	04
Valves 6 pieces	Seal kit for 1 piston	Sleeve kits for 3 pistons	Oil seal kits for 3 pistons
05	06	07	08
Ceramic socket for 1 piston	Tension screws for 3 pistons	Valve plugs	O-ring for valve plugs 1 piece

							"VHT"***	01	02	03	04	05	06	07	08
P	←	U	KW	TYP	Serie		R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
140	21	1,450	5.5	VHT4721	47.VHT		047 210 01	340 201 01	340 203 01	340 202 01	340 002 01	470 405 09	340 006 01	340 005 01*	903 847 00
160	15	1,450	4.5	VHT4715	47.VHT		047 150 01	340 201 01	340 203 01	340 202 01	340 002 01	470 405 09	340 006 01	340 005 01*	903 847 00
160	18	1,450	5.5	VHT4718	47.VHT		047 180 01	340 201 01	340 203 01	340 202 01	340 002 01	470 405 09	340 006 01	340 005 01*	903 847 00
170	46	1,750	14.7	VHT6646	66.VHT		066 460 01	340 169 01	340 211 01	340 210 01	340 002 01	660 404 09		661 303 41	903 857 00
200	39	1,750	14.7	VHT6639	66.VHT		066 390 01	340 169 01	340 209 01	340 208 01	340 002 01	660 401 09		661 303 41	903 857 00

* Kit with 6 valve plugs

** at least 2 bar inlet pressure required

The photos showing the pumps and repair kits are only for your information.
The products might differ from the photos regarding their dimension and design.

INTERPUMP motor pumps

Motor pump



Motor pump with switch and cable.
Dimensions: 455 x 320 x 258 mm.

Repair kits

01	02	03	04
Valves 6 pieces	Seal kit for 1 piston	Sleeve kits for 3 pistons	Oil seal kits for 3 pistons
05	06	07	08
Ceramic socket for 1 piston		Valve plugs. Kit with 6 plugs	O-ring for valve plugs 1 piece

Standard

Total stop

P	U	KW	TYP	V	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
120	14	1,450	3.8	M14-120	400	001 200 01	001 200 03	340 123 01	340 131 01	340 127 01	340 023 01	440 401 09	340 124 01	903 847 00

INTERPUMP high pressure pumps for petrol engines

Version "C"



Repair kits

01	02	03	04
Valves 6 pieces	Seal kit for 1 piston	Sleeve kits for 3 pistons	Oil seal kits for 3 pistons
05	06	07	08
Ceramic socket for 1 piston		Valve plugs. Kit with 6 plugs	O-ring for valve plugs 1 piece

Version "CV"



"C"

"CV"

P	U	KW	TYP	Serie	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
150	13	3,400	3.67	TT1513C	51	015 130 07	340 123 01	340 096 01	340 097 01	340 083 01	510 400 09	340 157 01	903 847 00	
170	15	3,400	4.77	WW961C	44	009 610 06	340 123 01	340 130 01	340 088 01	340 023 01	520 400 09	340 124 01	903 847 00	

Valves

■ Type "H" is equipped with an automatic pressure regulator that allows to zero the pump pressure.

■ Type "K" is equipped with an automatic pressure regulator that allows to zero the pressure in the entire system (pump and hose).

Shaft

■ 3/4" ■ 1"

Symbols P pressure → flow U revolutions KW kilowatt TYP type V voltage

INTERPUMP repair kits

Valves



6 pieces

R+M Nr.	TYP
340 001 01	Kit 1
340 043 01	Kit 43
340 062 01	Kit 62
340 123 01	Kit 123
340 169 01	Kit 169

Valve plugs



6 pieces

R+M Nr.	TYP	Ø
340 004 01	Kit 4	M24x2x16
340 005 01	Kit 5	M24x2x16 (NK)

Oil seal kits



For 3 pistons

R+M Nr.	TYP	Ø	Ø	l
340 002 01	Kit 2	22	32	5.5
340 023 01	Kit 23	20	30	5.0
340 024 01	Kit 24	22	35	8.0
340 037 01	Kit 37	32	42	7.0
340 083 01	Kit 83	15	24	5.0
340 159 01	Kit 159	18	26	6.0

Hot water kit



For 3 pistons with valves.
Suitable for hot water. For pumps series 47. Max. 85 °C

R+M Nr.	TYP	Ø
340 220 01	Kit 220	20 mm
340 222 01	Kit 222	22 mm

Valves



6 pieces. For hot water. Max. 85 °C

R+M Nr.	TYP
340 201 01	Kit 201

Special oil



R+M Nr.	VPE
150 000 1	1 x 1 l
150 000 2	24 x 1 l

Seal kits



For 1 piston

R+M Nr.	TYP	Ø
340 027 01	Kit 27	20 mm
340 028 01	Kit 28	20 mm
340 029 01	Kit 29	22 mm
340 080 01	Kit 80	45 mm
340 082 01	Kit 82	20 mm
340 092 01	Kit 92	15 mm
340 096 01	Kit 96	15 mm
340 130 01	Kit 130	15 mm
340 131 01	Kit 131	18 mm
340 167 01	Kit 167	18 mm
340 203 01	Kit 203	22 mm
340 205 01	Kit 205	18 mm

Tension screws



Screw with gasket seal

R+M Nr.	TYP
340 006 01	Kit 6
340 054 01	Kit 54

O-rings for valve plugs



R+M Nr.	TYP	l	Ø
903 847 00	M24	2.62	20.24
904 051 00	M32	3.53	26.58

Sleeve kits



For 3 pistons

R+M Nr.	TYP	Ø
340 019 01	Kit 19	20 mm
340 069 01	Kit 69	20 mm
340 088 01	Kit 88	15 mm
340 097 01	Kit 97	15 mm
340 127 01	Kit 127	18 mm
340 141 01	Kit 141	18 mm
340 148 01	Kit 148	22 mm
340 160 01	Kit 160	15 mm
340 161 01	Kit 161	18 mm
340 172 01	Kit 172	22 mm
340 174 01	Kit 174	16 mm
340 202 01	Kit 202	22 mm

Ceramic sockets



Ceramic

R+M Nr.	l	Ø
510 400 09	25.0 mm	15 mm
520 400 09	37.5 mm	15 mm
440 401 09	37.5 mm	18 mm
500 404 09	40.0 mm	20 mm
470 404 09	50.0 mm	20 mm
470 405 09	50.0 mm	22 mm
660 401 09	54.0 mm	22 mm

UDOR high pressure pumps

Pump



Pump

P	→	U	KW	TYP
150	50	1,450	10.9	CC50/15S
140	42	1,450	11.1	CC42/14S
200	21	1,450	7.9	CC21/20S
200	26	1,450	9.8	CC26/20S
200	30	1,450	11.3	CC30/20S

Repair kits



Valves 6 pieces



Seal kits for 3 pistons



Piston rings for 3 pistons



Oil seal kit for 1 piston



Ceramic socket for 1 piston



Fastening kit for 3 pistons

R+M Nr.
171 048 120
171 042 140
171 021 200
171 026 200
171 030 200

R+M Nr.
171 606 103
171 606 103
171 606 103
171 606 103
171 606 103

R+M Nr.
171 606 112
171 606 112
171 606 110
171 606 110
171 606 111

R+M Nr.
171 606 119
171 606 119
171 606 117
171 606 117
171 606 118

R+M Nr.
171 000 743
171 000 743
171 000 743
171 000 743
171 000 743


R+M Nr.
171 120 534
171 120 534
171 120 532
171 120 532
171 120 533

R+M Nr.
171 606 138
171 606 106
171 606 106
171 606 106
171 606 106

Symbols P pressure → flow U revolutions KW kilowatt TYP type Ø diameter ⌀ thread ⊙ internal diameter l height → length ⊙ diameter

INTERPUMP couplings and flanges

Flexible couplings

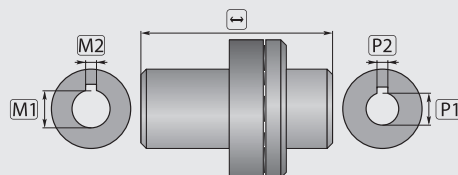


Rubber pads




R+M Nr.
100 090 47

R+M Nr.	TYP		M1	M2	P1	P2	pump series
100 019 11	ZG091	93	28	8	24	8	50
100 151 11	ZG151	105	28	8	24	8	47 - 47VHT - 47SS - 66 - 66VHT - 66SS - E3
100 015 21	ZG202	114	38	10	24	8	47 - 47VHT - 47SS - 66 - 66VHT - 66SS - E3
100 004 41	ZG044	102	28	8	24	8	44 - 60 - 60VHT - 63 - 63HTS - 63SS - E2
100 013 21	ZG132	121	38	10	24	8	47 - 47VHT - 47SS - 66 - 66VHT - 66SS - E3


Flange




R+M Nr.	TYP		X	Y	engine flange	pump series
100 009 10	ZF091	101	110	115-130	B3 - B14 (100)	50 - 51



R+M Nr.	TYP		X	Y	engine flange	pump series
100 015 10	ZF151	110	110	130	B3 - B14 (100-112)	47 - 47VHT - 47SS - 66 - 66VHT - 66SS - E3



R+M Nr.	TYP		X	Y	engine flange	pump series
100 004 40	ZF044	110	110	115-130	B3 - B14 (100-112)	44 - 60 - 60VHT - 63 - 63VHTS - 63SS - E2



R+M Nr.	TYP		X	Y	engine flange	pump series
100 013 20	ZF132	127	130	165	B3 - B14 (132)	47 - 47VHT - 47SS - 66 - 66VHT - 66SS - E3

Gears for pumps

Type RS 500 for petrol engines



Gear ratio 1 : 2.2
 Engine: up to 18.5 kW
 Motor shaft Ø 25.4 mm = 1"
 Pump shaft Ø 24 mm. Engines:
 Acme, Aspera Motors, Briggs & Stratton, Honda, CO.TI.EMME, Intermotor, Lombardini, Ruggerini. Pumps: Comet, LW, HW, RW, SW, TW. AR: serie 228, serie 194. IP: serie 47, serie 66



R+M Nr.
109 510 00

Type B 18 for petrol engines



Gear ratio 1 : 2.176.
 Engine: 8 - 13 KW.
 Motor shaft Ø 25.4 mm = 1"
 Pump shaft Ø 24 mm. Engines:
 Acme, Aspera Motors, Briggs & Stratton, Honda, CO.TI.EMME, Intermotor, Lombardini, Ruggerini. Pumps: AR, Bertolini, Comet, Interpump, Leuco, Hawk, Udor

R+M Nr.
176 000 000



Type M 261 for p. t. o. shafts



Gear ratio 2.61 : 1.
 Engine: 11.19 KW at 540 r.p.m.
 Motor shaft Ø 1" 3/8 Z 6. (P.T.O.)
 Pump shaft Ø 24 mm.
 Engines:
 Comet: LW, HW, RW, FW, TW.
 Other pump manufacturers are available on request

R+M Nr.
172 900 095

Pump unit with power take-off (p.t.o.) shaft gearbox



Ready to fit high pressure pump with regulation valve ST-280.
 Pressure gauge 0 - 250 bar. Bypass hose and water filter ST-33.
 Water inlet temperature max 30 °C

R+M Nr.	⊗	⊗	P	⊗
179 030 166 92	⊗	M22 M	3/4" F	160 bar 30 l/m

Repair kits suitable for Kränzle



Parbacks



R+M Nr.	⊗	VPE
155 900 0 *	6 mm	2 x 3
155 897 0 *	7 mm	2 x 3
155 898 0	8 mm	2 x 3
155 899 0	16 mm	2 x 3

Sleeve kits



For 3 pistons

R+M Nr.	TYP
155 894 0	14 mm AZ
155 890 0	18 mm AP
155 892 0	20 mm AQ

Oil seal kits



3 pieces

R+M Nr.	⊗	⊗	I
156 375 0	24	14	7
156 379 0	24	15	7

* limited stock

Symbols ⊗ inlet ⊗ outlet P pressure ⊗ flow ⊗ diameter ⊗ internal diameter I height VPE packing unit TYP type

Single seals suitable for Kärcher



Highest quality at favourable prices

Compact seals



K

R+M Nr.	VPE	Ø	Ø	l
161 271 0	30	20	14	4
161 270 0	60	20	14	4
161 275 0	30	28	18	6
161 274 0	60	28	18	6
161 281 0	30	30	20	6
161 280 0	60	30	20	6

U-rings



K

R+M Nr.	VPE	Ø	Ø	l
161 265 0	30	22	14	5.3
161 264 0	60	22	14	5.3
161 273 0	30	26	18	5.4
161 272 0	60	26	18	5.4
161 279 0	30	28	20	5.3
161 278 0	60	28	20	5.3
161 285 0	30	30	22	5
161 284 0	60	30	22	5
161 291 0	30	34	24	5.3
161 290 0	60	34	24	5.3

O-rings



K

R+M Nr.	VPE	Ø	l
161 277 0	30	33.05	1.78
161 276 0	60	33.05	1.78
161 283 0	30	34.65	1.78
161 289 0	30	36.00	2.00
161 282 0	60	34.65	1.78
161 288 0	60	36.00	2.00

Oil seals



K

R+M Nr.	VPE	Ø	Ø	l
157 465 0	3	30	20	7

Repair kits suitable for WAP

Sleeve kit



W

R+M Nr.	Ø	Ø
151 380 0	37	25

Pump feet

We offer you various mounting pump plates.


You can find the right size here:

a = total length

b = width with slot

c = total height

d = width of the sheet with the mounting holes

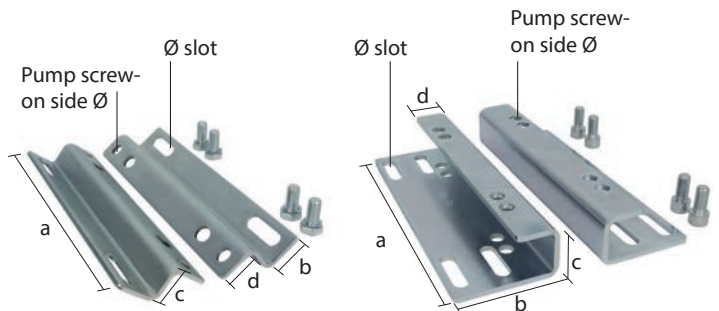

R+M Nr.	fig.	series	a	b	c	d	Ø	Ø slot
100 044 73	1	IP serie 47	175	27.0	30	25.0	10.5	10.5 x 40
100 044 76	2	IP serie 47	175	28.0	68	26.0	10.5	10.5 x 40
100 045 92	3	IP serie	145	21.5	22	22.5	9.0	9.0 x 40
100 045 96	4	IP serie	145	22.0	60	22.0	9.0	9.0 x 40
100 046 83	5	IP serie 68	265	38.0	33	35.0	12.5	12.5 x 45
100 047 04	6	IP serie 70	265	88.0	46	37.0	12.5	12.5 x 45
100 047 12	7	IP serie 71	290	65.0	26	40.0	17.0	13.0 x 45
170 272 9	8	XR-XM	165	25.0	15	20.0	8.8	11.2 x 40

Repair kits suitable for Kärcher high pressure pumps

Seal kits



3 x 4 pieces

R+M Nr.	sets
156 317 0	3
156 324 0	3
156 325 0	3
156 328 0	3
156 332 0	3
156 333 0	3

3 x 4 pieces

R+M Nr.	sets
156 336 0	3
156 343 0	3
156 346 0	3
156 347 0	3

Seal kits



3 x 2 pieces

R+M Nr.	sets
156 322 0	3
156 338 0	3
156 341 0	3
156 342 0	3

Seal kits



3 x 3 pieces

R+M Nr.	sets
156 326 0	3
156 337 0	3
156 345 0	3

Socket



R+M Nr.	piece
151 492 0	3

Valves



R+M Nr.	pieces
151 410 0	6
151 411 00	100
151 410 5	6



Seal kits

Socket

Valves

hp devices	KØ	R+M Nr.	R+M Nr.	R+M Nr.
Farmer C /2.1	18	156 317 0		
Farmer Super	20	156 347 0		
HD 1000 SEI /WS	20	156 343 0		
HD 1000 SEI-EEX	20	156 343 0		
HD 1000 SI /2.5	20	156 347 0		
HD 1020 B	18	156 317 0		151 410 0
HD 1050	20	156 347 0		
HD 1050 B	20	156 347 0		151 410 0
HD 1050 BX	20	156 347 0		
HD 1050 DE	20	156 347 0		151 410 0
HD 1050 I 400V	20	156 347 0		
HD 1090	20	156 345 0		151 410 5
HD 1090 Plus	20	156 345 0		
HD 1090 EUR	20	156 345 0		
HD 1090 I	20x35	156 345 0	151 492 0	151 410 5
HD 1090 SX	20	156 345 0		151 410 5
HD 1090 SX Plus	20	156 345 0		
HD 1094	20	156 345 0		
HD 1200 B	20	156 347 0		
HD 1200 BE	20	156 347 0		
HD 1290 S	22	156 333 0		151 410 5
HD 1290 S Plus/SX/SX Plus	22	156 333 0		
HD 1294	20	156 347 0		
HD 2000	22	156 332 0		151 410 5
HD 2000 C	22	156 332 0		
HD 2000 Super	22	156 333 0		151 410 5
HD 215	20	156 347 0		
HD 500 S Plus	12	156 342 0		
HD 525 S	12	156 342 0		
HD 575 /575 B	16	156 324 0		151 410 0
HD 575 S	16	156 324 0		
HD 585	14	156 325 0		
HD 600	14	156 325 0		
HD 600 /1000SI (10600)	22	156 333 0		
HD 600 /1000SI (10601)	22	156 333 0		
HD 625	14	156 325 0		
HD 640 S Plus	14	156 338 0		
HD 645	14	156 325 0		151 410 0
HD 650 /SX Euro /SXL	14	156 325 0		
HD 655 230V	16	156 324 0		
HD 655 Euro	16	156 324 0		151 410 0
HD 658	16	156 336 0		
HD 680 S	16	156 324 0		151 410 0
HD 700	16	156 324 0		151 410 0
HD 715 ST	14	156 325 0		
HD 750	20	156 347 0		
HD 755	18	156 317 0		
HD 755 S	16	156 324 0		151 410 0
HD 790	16	156 324 0		151 410 0

Seal kits

Socket

Valves

hp devices	KØ	R+M Nr.	R+M Nr.	R+M Nr.
HD 799 S	16	156 324 0		151 410 0
HD 800 B	14	156 325 0		
HD 850	20	156 347 0		
HD 850 WS	20	156 347 0		
HD 855	22	156 328 0		151 410 0
HD 855 S	18	156 317 0		151 410 0
HD 860 ST	20	156 347 0		
HD 890 /890 S	18	156 317 0		151 410 0
HD 895	16	156 324 0		
HD 895 S /S Plus /SX Plus	16	156 324 0		
HD 901 (Benzin)	14	156 325 0		
HDS 1000 BE /2.1	20	156 347 0		
HDS 1000 BE /2.2	16	156 324 0		
HDS 1000 BE	20	156 347 0		
HDS 1000 D /2.2	20	156 347 0		
HDS 1000 DE	20	156 347 0		
HDS 1000 DE /2.1	20	156 347 0		
HDS 1195 EUR /2.1	22	156 332 0		151 410 5
HDS 1195 EUR /2.2	22	156 332 0		151 410 5
HDS 1195 VEX	22	156 332 0		151 410 5
HDS 1295	22	156 332 0		151 410 5
HDS 1295 SX	22	156 328 0		151 410 5
HDS 1295 EUR	22	156 332 0		151 410 5
HDS 2000 Super	22	156 332 0		151 410 5
HDS 3000	22	156 332 0		151 410 5
HDS 400 C	14	156 325 0		
HDS 450 Ci	12	156 342 0		
HDS 450 CI-AL	12	156 342 0		
HDS 500 CI	14	156 325 0		
HDS 501 C	12	156 342 0		
HDS 550	16	156 324 0		
HDS 550 C	16	156 324 0		
HDS 555 C /CS	18	156 317 0		151 410 0
HDS 555 CI	16	156 336 0		151 410 0
HDS 557 CI	16	156 324 0		151 410 0
HDS 558 C	14	156 325 0		151 410 0
HDS 558 CSX	14	156 325 0		
HDS 580 /610	20	156 347 0		
HDS 590 C /2.0	16	156 324 0		
HDS 590 C /2.1	18	156 317 0		
HDS 600 C	18	156 317 0		151 410 0
HDS 650	20	156 347 0		

Repair kits suitable for Kärcher high pressure pumps

		Seal kits	Socket	Valves			Seal kits	Socket	Valves
hp devices	KØ	R+M Nr.	R+M Nr.	R+M Nr.	hp devices	KØ	R+M Nr.	R+M Nr.	R+M Nr.
HDS 655 Euro	20	156 346 0			K 300	12	156 326 0		
HDS 655 GB	18	156 317 0			K 302	12	156 326 0		
HDS 655 /745	20	156 347 0			K 310	12	156 326 0		
HDS 695	18	156 317 0		151 410 0	K 330	12	156 326 0		
HDS 697 CI	16	156 336 0		151 410 0	K 3300 GS	12	156 326 0		151 410 0
HDS 698 C	14	156 325 0		151 410 0	K 340	12	156 326 0		
HDS 698 CSX	14	156 325 0			K 355	14	156 337 0		
HDS 699	16	156 336 0		151 410 0	K 360 /360 M	12	156 326 0		
HDS 700 B	14	156 325 0			K 370	12	156 326 0		
HDS 750	20x35	156 347 0	151 492 0		K 3770 M	12	156 326 0		
HDS 755	20	156 346 0		151 410 5	K 3770 M- Plus	12	156 326 0		
HDS 755 /760	20x35	156 347 0	151 492 0		K 380 M /390 M	12	156 326 0		
HDS 790 C /CI	18	156 317 0		151 410 0	K 4.99 M	14	156 337 0		
HDS 790CS	18	156 317 0			K 400	14	156 337 0		
HDS 795	18	156 317 0		151 410 0	K 401	14	156 337 0		
HDS 797 CI	18	156 317 0		151 410 0	K 402	14	156 337 0		
HDS 798 C /CSX	16	156 324 0			K 410	14	156 337 0		
HDS 800 B	20	156 347 0			K 450 M	12	156 326 0		
HDS 800 E	20x35	156 347 0	151 492 0		K 460 /460 M	12	156 326 0		
HDS 800B-EL.-H. /2.1	20	156 347 0			K 470	12	156 326 0		
HDS 800B-EL.-H. /2.2	20	156 347 0			K 49xm	12	156 326 0		
HDS 801 B	14	156 325 0			K 5.80	12	156 326 0		
HDS 801 E12K w	20x35	156 347 0	151 492 0		K 5.80 M	14	156 337 0		
HDS 810 SE	20	156 347 0			K 5.85 M	14	156 337 0		
HDS 850	20x35	156 347 0	151 492 0		K 500 /510	14	156 337 0		
HDS 890 /2.1	20x35	156 347 0	151 492 0		K 502 M	12	156 342 0		
HDS 890 /2.2	20x35	156 347 0	151 492 0		K 502 MS	12	156 342 0		
HDS 890 C	18	156 317 0		151 410 0	K 510	14	156 337 0		
HDS 890 ST	20x35	156 347 0	151 492 0		K 520 M	12	156 342 0		
HDS 891 /1291ST	22	156 332 0			K 570	16	156 322 0		
HDS 895	18	156 317 0		151 410 0	K 580 G	14	156 337 0		
HDS 895 S	22	156 332 0		151 410 0	K 580 M	14	156 337 0		
HDS 895 S EUR	20	156 346 0		151 410 0	K 590 GM	14	156 337 0		
HDS 895 SX	22	156 328 0		151 410 0	K 595 /2.1	16	156 322 0		
HDS 900 B	18	156 317 0		151 410 0	K 595 V /2.3	14	156 337 0		
HDS 990	20x35	156 347 0	151 492 0		K 6.80	12	156 342 0		
HDS 995	22	156 332 0		151 410 5	K 610	14	156 337 0		
HDS 995 EUR	20	156 346 0		151 410 5	K 620 M	14	156 337 0		
HDS 995 S	20	156 346 0		151 410 5	K 650 M- Plus	12	156 342 0		
HDS 995 SX	22	156 328 0		151 410 5	K 670 M	12	156 342 0		
HDS SUPER EUR	16	156 324 0			K 695	14	156 337 0		
K 1750 G	14	156 337 0			K 720 /2.1	14	156 337 0		
K 2.06	12	156 326 0			K 720 /2.3	14	156 337 0		
K 2.40	12	156 326 0			K 720 M /2.1	14	156 337 0		
K 2.75	12	156 326 0			K 720 M /2.2	14	156 337 0		
K 200	12	156 326 0			K 720 MX /2.1	14	156 337 0		
K 201	12	156 326 0			K 720 MX /2.4	14	156 337 0		
K 202 plus	12	156 326 0			K 720 MXS	14	156 337 0		
K 203 plus	12	156 326 0			K 750 M	13	156 341 0		
K 205	18	156 317 0			K 770 MX	13	156 341 0		
K 205 VPS	12	156 326 0			K 855 HS	12	156 326 0		
K 209 Plus	12	156 326 0			K 856	12	156 326 0		
K 210	12	156 326 0			K racing	14	156 337 0		
K 215 Plus	12	156 326 0			K special /2.0	14	156 337 0		
K 220	12	156 326 0			K special /2.1	14	156 337 0		
K 230 D	12	156 326 0			K special /2.4	14	156 337 0		
K 235 D	12	156 326 0			SB-HDS 695	18	156 317 0		
K 240	12	156 326 0							
K 270	12	156 326 0							
K 29x /29xm	12	156 326 0							

Symbols KØ piston diameter

Repair kits suitable for Speck high pressure pumps



Valves



Valves 6 pieces

Seal kits



Seal kits for 3 pistons

Socket



Ceramic socket, set 3 pieces

Pump	R+M Nr.	R+M Nr.	R+M Nr.	KØ
NP10 / 10 - 140	160 079 201	158 211 0	160 068 702	18 x 32,5
NP10 / 13 - 140	160 079 201	158 211 0	160 068 702	18 x 32,5
NP10 / 15 - 140	160 079 201	158 211 0	160 068 702	18 x 32,5
NP16 / 14 - 210	160 079 201	158 212 0	160 068 702	18 x 32,5
NP16 / 15 - 210	160 079 201	158 212 0	160 068 702	18 x 32,5
NP25 / 70 - 100		155 875 0 **	160 068 702	18 x 32,5
P10 / 13 - 100	160 079 101	158 203 0		
P10 / 15 - 130	160 079 101	158 203 0		
P11 / 10 - 100	160 079 101	158 203 0	160 068 402	18 x 39,0
P11 / 10 - 100D		158 203 0	160 068 402	18 x 39,0
P11 / 13 - 100	160 079 101	158 203 0	160 068 402	18 x 39,0
P11 / 13 - 100D		158 203 0	160 068 402	18 x 39,0
P11 / 15 - 150	160 079 101	158 203 0	160 068 402	18 x 39,0
P11 / 15 - 150D		158 203 0	160 068 402	18 x 39,0
P21 / 15 - 160	160 079 101		160 068 402	18 x 39,0
P21 / 16 - 200	160 079 001	158 206 0	160 068 602	16 x 39,0
P21 / 18 - 130	160 079 101		160 068 502	20 x 39,0
P21 / 23 - 130	160 079 101		160 068 502	20 x 39,0
P21 / 5 - 450	160 079 201			
P21 / 7 - 400	160 079 201			

Pump accessories

Fitting grease



Synthetic valve grease for the food and pharmaceutical industries. NSF H1 registered.
FDA 21 CFR § 178.3570 compliant

R+M Nr.	volume
953 55	40 g

** limited stock

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are no original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Annovi Reverberi motor pumps

Motor pumps series 198

Repair kits



Pump with regulation valve* and injector. Voltage 400/50 Hz (170 204 20), Voltage 230/50 Hz (170 204 15)

P	☐	U	KW	TYP
120	8	2,800	1.8	HPJ8.12REG
140	11	2,800	3.0	HPJ11.14REG

R+M Nr.
170 204 15
170 204 20

Valves 6 pieces

R+M Nr.
170 286 9
170 286 9

Seal kits for 3 pistons

R+M Nr.
170 279 8
170 279 8

Oil seal kits (5 pieces)

R+M Nr.
170 251 1
170 251 1

Ceramic sockets for 3 pistons

R+M Nr.	KØ	I
170 279 6	15	40
170 279 6	15	40

Motor pumps series 228

Repair kits



Motor pump without regulation valve. Voltage 400/50 Hz

P	☐	U	KW	TYP
200	15	1,450	5.5	HRK15.20H
150	21	1,450	5.5	HRK21.15H

R+M Nr.
170 208 62
170 208 67

Valves 6 pieces

R+M Nr.
170 286 4
170 286 4

Seal kits for 3 pistons

R+M Nr.
170 185 7
170 188 8

Oil seal kits (7 pieces)

R+M Nr.
170 185 5
170 185 5

Ceramic sockets for 3 pistons

R+M Nr.	KØ	I
170 275 7	18	40
170 275 9	22	40

* Setting up of a regulation valve: page 68

Symbols P pressure ☐ flow U revolutions KW kilowatt TYP type KØ piston diameter I height

Annovi Reverberi motor pumps

Motor pump combinations



400 V. All models are equipped with a regulation valve*, delayed total stop control, pressure gauge, 5 m electric cable and an on-off switch. $\odot$ 1/2" M $\odot$ 3/8" M.

Max. 30 °C

P	U	KW	TYP
150	15	1,450	4 MTP HXM 15.15
150	21	1,450	5.5 MTP HRK 21.15
200	15	1,450	5.5 MTP HRK 15.20
150	26	1,450	7.5 MTP HXW 26.15
150	30	1,450	7.5 MTP HXW 30.15

R+M Nr.
170 208 711
170 257 56
170 238 68
170 260 58
170 260 60

Repair kits



Valves 6 pieces



Seal kits for 3 pistons



Oil seal kits



Ceramic socket for 3 pistons



Unloader Gymatic 3/B



400 V. All versions with regulation valve*, delayed total stop control, flow switch ST-7, pressure gauge, electric cable 5 m and on/off switch.

$\odot$ 1/2" M incl. quick coupling "Universal" plug $\odot$ 3/8" M.


Max. 30 °C

P	U	KW	TYP
150	15	1,450	4 MTP XM 15.15
170	14	1,450	4 MTP XM 17.14

R+M Nr.
170 294 33
170 294 32



Valves 6 pieces



Seal kits for 3 pistons



Oil seal kits



Ceramic socket for 3 pistons



Unloader Gymatic 3/B



400 V. All models are equipped with a regulation valve*, delayed total stop control, pressure gauge, 5 m electric cable and an on-off switch. $\odot$ 1/2" F $\odot$ 3/8" M.

Max. 85 °C at min. 2 bar inlet pressure

P	U	KW	TYP
150	15	1,450	4 MTP HRWH 15.15
150	21	1,450	5,5 MTP HRWH 21.15

R+M Nr.
170 269 18
170 269 11



Valves 6 pieces



Seal kits for 3 pistons



Oil seal kits (7 pieces)



Ceramic socket for 3 pistons



Unloader Gymatic 3/B

* Setting up of a regulation valve: page 68

Annovi Reverberi high pressure pumps with hydraulic motor

Pumps with hydraulic motor



R+M Nr.	TYP
170 216 03	HYD-XM 15.15
170 216 05	HYD-RK 15.20

Pumps



R+M Nr.	KØ	←	P
170 215 98	18	15 l/min	150 bar
170 216 00	18	15 l/min	200 bar

Hydraulic motors



R+M Nr.	TYP	U	P	⊘	cm ³ *
175 500 4	SNM 2/11 CI 06 LFU 1F	700-4,000	250 bar	3/4" F	10,8
175 500 5	SNM 2/19 CI 06 LFU 1F	500-3,500	210 bar	3/4" F	19,2

** cm³ / revolution

Symbols P pressure ← flow U revolutions KW kilowatt TYP type KØ piston diameter I height ⊘ thread ⊕ inlet ⊖ outlet 🚚 shipment by truck

Annovi Reverberi high pressure pumps


Pump series 132



Repair kits



Valves 6 pieces

Seal kits for
3 pistonsOil seal kits
(6 pieces)Ceramic socket for
3 pistons

P	←	U	KW	TYP
140	11	1,450	3.0	XT11.14N

R+M Nr.
170 701 4

R+M Nr.
170 186 4

R+M Nr.
170 424 79


R+M Nr.
170 278 6

R+M Nr.	KØ	I
170 262 9	18	30

Pump series 178



Repair kits



Valves 6 pieces

Seal kits for
3 pistonsOil seal kits
(6 pieces)Ceramic socket for
3 pistons

P	←	U	KW	TYP
150	15	1,450	4.0	XM15.15N

R+M Nr.
170 790 6

R+M Nr.
170 186 4

R+M Nr.
170 274 7


R+M Nr.
170 187 2

R+M Nr.	KØ	I
170 274 6	18	35


Pump series 194



Repair kits



Valves 6 pieces

Seal kits for
3 pistonsOil seal kits
(7 pieces)Ceramic sockets for
3 pistons

P	←	U	KW	TYP
200	26	1,450	9.2	XW26.20N
150	30	1,450	7.5	XW30.15N
200	30	1,450	10.0	XW30.20N
250	30	1,450	14.0	XW30.25N
150	42	1,450	11.8	XWL42.15N

R+M Nr.
170 200 59
170 201 79
170 200 60
170 211 37
170 210 60

R+M Nr.
170 278 0
170 278 0
170 278 0
170 278 0
170 278 0

R+M Nr.
170 278 2
170 278 3
170 278 3
170 278 3
170 278 3


R+M Nr.
170 287 3
170 287 3
170 287 3
170 287 3
170 287 3

R+M Nr.	KØ	I
170 265 0	20	45
170 189 1	22	45
170 189 1	22	45
170 189 1	22	45
170 184 9	28	45


Pump series 228, type "RK"



Repair kits



Valves 6 pieces

Seal kits for
3 pistonsOil seal kits
(7 pieces)Ceramic sockets for
3 pistons

P	←	U	KW	TYP
200	15	1,450	5.5	RK15.20HN
275	15	1,450	8.2	RK15.28HN
200	18	1,450	7.5	RK18.20HN
150	21	1,450	5.5	RK21.15HN

R+M Nr.
170 206 38
170 206 40
170 206 43
170 206 45

R+M Nr.
170 286 4
170 286 4
170 286 4
170 286 4

R+M Nr.
170 185 7
170 185 7
170 188 7
170 188 8

R+M Nr.
170 185 5
170 185 5
170 185 5
170 185 5

R+M Nr.	KØ	I
170 275 7	18	40
170 275 7	18	40
170 275 8	20	40
170 275 9	22	40

The photos showing the pumps and repair kits are only for your information.
The products might differ from the photos regarding their dimension and design.

Annovi Reverberi high pressure pumps Car Wash

Pump series 228, type "JK"

Repair kits



Car Wash pump max. 85 °C with at least 2 bar pre-pressure.
Ideal for the car wash sector due to its long service life



Valves 6 pieces



Seal kits for
3 pistons



Oil seal kits



Ceramic socket for
3 pistons

(P)	(-)	(U)	(KW)	(TYP)	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	(KØ)	(I)
120	13	1,450	4.0	JK 13.12 N DX	170 278 64	170 286 4	170 422 13	170 434 03	170 434 02 18	40	
150	15	1,450	4.0	JK 15.15 N DX	170 278 65	170 286 4	170 422 13	170 434 03	170 434 02 18	40	
150	21	1,450	5.5	JK 21.15 N DX	170 278 66	170 286 4	170 425 64	170 434 03	170 461 10 22	40	

Pump series 228, type "JR"

Repair kits




Car Wash pump max. 40 °C with at least 2 bar pre-pressure.



TSS box for HJR



Valves 6 pieces



Seal kits for
3 pistons



Oil seal kits

(P)	(-)	(U)	(KW)	(TYP)	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
150	8	1.450	2,2	JR 8.15 N TSS	170 268 73	170 478 44	170 434 78	170 438 96	170 438 95


Annovi Reverberi high pressure motor pump combinations Car Wash

Motor pump combinations


Repair kits



400 V. All models are equipped with a regulation valve*,
delayed total stop control, pressure gauge, 5 m electric cable
and an on-off switch. (C) 1/2" F (S) 3/8" M.
Max. 85 °C at min. 2 bar inlet pressure



Valves 6 pieces



Seal kits for
3 pistons



Oil seal kits



Ceramic socket for
3 pistons

(P)	(-)	(U)	(KW)	(TYP)	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	(KØ)	(I)
120	13	1,450	4.0	HJK 13.12 ET 4KW PTFE	170 278 70	170 286 4	170 422 13	170 434 03	170 434 02 18	40	
150	15	1,450	4.0	HJK 15.15 ET 4KW PTFE	170 278 71	170 286 4	170 422 13	170 434 03	170 434 02 18	40	
150	21	1,450	5.5	HJK 21.15 ET 5,5KW PTFE	170 278 72	170 286 4	170 425 64	170 434 03	170 461 10 22	40	

Pump/motor assignment



Pump	(TYP)	coupling	flange	solid shaft	(KW)	Pumpe	(TYP)	hollow shaft	(KW)
Annovi Reverberi for Car Wash						Annovi Reverberi für Car Wash			
170 278 64	JK 13.12 N DX	100 151 11	100 015 10	175 002 001	4.0	170 268 73	JR8.15NTSS	175 001 055	3.0
170 278 65	JK 15.15 N DX	100 151 11	100 015 10	175 002 001	4.0				
170 278 66	JK 21.12 N DX	100 151 11	100 015 10	175 002 002	5.5				

Symbols (P) pressure (-) flow (U) revolutions (KW) kilowatt (TYP) type (KØ) piston diameter (I) height (C) thread (G) inlet (S) outlet (truck) shipment by truck

COMET high pressure pumps

Premium

Repair kits



Max. 30 °C

[P]	[—]	[U]	[KW]	[TYP]
345	18.0	1,450	15,5	TW 4550S
172	38.0	1,450	12,5	TW 10025S
172	42.5	1,450	13,7	TW 11025S
248	27.0	1,450	16,5	TW 7036 S

R+M Nr.
172 045 500
172 100 250
172 110 250
172 070 360



Valves 6 pieces



Seal kits for 3 pistons



Oil seal kits



Ceramic socket kit for 3 pistons

[P]	[—]	[U]	[KW]	[TYP]
345	18.0	1,450	15,5	TW 4550S
172	38.0	1,450	12,5	TW 10025S
172	42.5	1,450	13,7	TW 11025S
248	27.0	1,450	16,5	TW 7036 S

R+M Nr.
172 045 500
172 100 250
172 110 250
172 070 360

R+M Nr.
172 900 003
172 900 005
172 900 005
172 900 005

R+M Nr.
172 900 027
172 900 020
172 900 020
172 900 028

R+M Nr.
172 900 018
172 900 210
172 900 210
172 900 210

R+M Nr.
172 900 012
172 900 014
172 900 014
172 900 013



Max. 30 °C

[P]	[—]	[U]	[KW]	[TYP]
276	19	1,450	10	RW 5040S


R+M Nr.
172 050 400



Valves 6 pieces



Seal kits for 3 pistons



Oil seal kits



Ceramic socket kit for 3 pistons

[P]	[—]	[U]	[KW]	[TYP]
276	19	1,450	10	RW 5040S

R+M Nr.
172 050 400

R+M Nr.
172 900 002

R+M Nr.
172 900 025

R+M Nr.
172 900 017

R+M Nr.
172 900 010

Standard

Repair kits



Max. 30 °C

[P]	[—]	[U]	[KW]	[TYP]
207	15.0	1,450	5,5	FW2 4030 S
207	18.8	1,450	6,4	FW2 5030 S
207	21.0	1,450	7,1	FW2 5530 S

R+M Nr.
172 040 300
172 050 300
172 055 300

Valves 6 pieces

Seal kits for 3 pistons

Oil seal kits

Ceramic socket kit for 3 pistons

[P]	[—]	[U]	[KW]	[TYP]
207	15.0	1,450	5,5	FW2 4030 S
207	18.8	1,450	6,4	FW2 5030 S
207	21.0	1,450	7,1	FW2 5530 S

R+M Nr.
172 040 300
172 050 300
172 055 300

R+M Nr.
172 900 001
172 900 002
172 900 002

R+M Nr.
172 900 185
172 900 024
172 900 024

R+M Nr.
172 900 186
172 900 186
172 900 186

R+M Nr.
172 900 008
172 900 009
172 900 009

COMET motor pumps

Motor pump combinations*

Repair kits



400 V. All models are equipped with a regulation valve**, delayed total stop control, pressure gauge, 6 m electric cable and an on-off switch. [G] 3/4" M [O] M22 M. Max. 30 °C

[P]	[—]	[U]	[KW]	[TYP]
150	15	1,450	4.0	FW2 4025 TS+VA
210	15	1,450	5.5	FW2 4030 TS+VA
160	21	1,450	5.5	FW2 5523 TS+VA
170	15	1,450	4.5	RW 6.15 TS+VA

R+M Nr.
172 040 255
172 040 305
172 055 225
172 006 155

Valves 6 pieces

Seal kits for 3 pistons

Oil seal kits (7 pieces)

Ceramic sockets for 3 pistons

[P]	[—]	[U]	[KW]	[TYP]
150	15	1,450	4.0	FW2 4025 TS+VA
210	15	1,450	5.5	FW2 4030 TS+VA
160	21	1,450	5.5	FW2 5523 TS+VA
170	15	1,450	4.5	RW 6.15 TS+VA

R+M Nr.
172 040 255
172 040 305
172 055 225
172 006 155

R+M Nr.
172 900 001
172 900 001
172 900 002
172 900 001

R+M Nr.
172 900 185
172 900 185
172 900 024
172 900 026

R+M Nr.
172 900 186
172 900 186
172 900 186
172 900 017

R+M Nr.	[KØ]
172 900 008	18
172 900 008	18
172 900 009	20
172 900 011	20

Hot water seal kits are available on request.

* with pump FW2 from 2013

** Setting up of a regulation valve: page 68

Symbols [P] pressure [—] flow [U] revolutions [KW] kilowatt [TYP] type [KØ] piston diameter [I] height [O] thread [G] inlet [O] outlet [TRUCK] shipment by truck

CAT high pressure pumps

Standard



Repair kits



Valves 3 pieces



Seal kits for 3 pistons



Ceramic socket 1 piece



Oil seal kit 1 piece

P	←	U	KW	TYP
150	10	1,420	3.2	300
150	15	950	4.6	310
150	13	1,420	4.1	340
150	15	1,420	4.6	350
150	13	1,420	4.1	340RS
150	7,5	1,420	3.9	3CP1130
150	11	1,420	4.4	3CP1140
175	8,7	1,420	3.2	5CP2110W
175	15	950	5.5	5CP2120W
175	13	1,420	4.7	5CP2140W
175	15	1,420	5.5	5CP2150W
175	19	1,100	6.9	530
210	19	1,420	8.3	5CP5120

R+M Nr.
133 00
133 10
133 40
133 50
133 401 ***
131 130
131 140
132 110
132 120
132 140
132 150
135 30
135 120

R+M Nr.
133 082 1
133 082 1
133 082 1
133 082 1
133 082 1
133 306 2
133 306 2
133 182 1
133 082 1
133 082 1
133 082 1
133 082 0
133 306 0

R+M Nr.
133 062 3
133 062 3
133 062 3
133 062 3
133 062 3
133 398 3
133 398 3
133 362 8
133 362 8
133 362 8
133 362 8
133 048 8
133 363 0

R+M Nr.	KØ
134 336 7	20
134 336 7	20
134 336 7	20
134 336 7	20
134 336 7	20
134 697 6	18
134 697 6	18
134 684 1	20
134 684 1	20
134 684 1	20
134 684 1	20
134 323 2	18
134 965 5	20

R+M Nr.
134 322 8
134 322 8
134 322 8
134 322 8
134 322 8
134 683 9
134 683 9
134 683 8
134 683 8
134 683 8
134 683 8
134 322 8
134 683 8

The photos showing the pumps and repair kits are only for your information.
The products might differ from the photos regarding their dimension and design.

Repair kits for CAT high pressure pumps

Valves



3 pieces

R+M Nr.	TYP
133 068 7	623 - 820 - 823 - 1010 - 1013
133 082 0	510 - 530 - 550 - 560 - 570 - 590 - 650 - 660
133 082 1	5CP - 300 - 310 - 340 - 350
133 091 5	230 - 240 - 270
133 306 2	3CP1120 - 3CP1130 - 3CP1130
133 401 7	3520 - 3527 - 3531 - 3537
133 405 2	2SF
133 423 5	3520 - 3535
133 492 0	1050

Seal kits



For 3 pistons

R+M Nr.	TYP
133 002 3	280 - 290 - 400 - 410 - 420 - 430 small
133 048 8	53 - 58 - 530 - 540
133 061 0	51 - 55 - 550
133 062 3	30 - 31 - 34 - 35 - 300 - 310 - 340 - 350
133 062 9	45
133 079 8	650 - 660
133 391 6	1050
133 091 4	230 - 240 - 270
133 095 2	2530 - 2537
133 104 0	3531 - 3535 - 3537
133 163 8	5CP hot water
133 198 3	3CP hot water
133 362 3	350 hot water
133 362 8	5CP2120W - 5CP2140W - 5CP2150W
133 398 3	3CP1120 - 3CP1130 - 3CP1130

Socket



1 piece

R+M Nr.	KØ	TYP
134 323 2	18	53 - 56 - 57 - 58 - 59 - 60 - 530 - 540 - 560 - 580 - 590 - 654
134 331 1	16	51 - 55 - 510 - 550
134 336 7	20	5FR - 300 - 310 - 340 - 350
134 390 1	18	3FR - 230 - 240 - 270
134 684 1	20	5CP2120W - 5CP2140W - 5CP2150W
134 697 6	18	3CP1120 - 3CP1130 - 3CP1130
134 355 2	24	1050

Double nipples


BSP-m: NPT-m.
Stainless steel

BSP-m : NPT-m.
Zinc-plated steel

R+M Nr.	Ø	P	I
570 892	3/8"	315 bar	38 mm
570 999 2	1/2"	200 bar	46 mm

R+M Nr.	Ø	P	I
570 782	3/8"	280 bar	34.5 mm
570 982	1/2"	200 bar	43.0 mm

*** shaft on the left

BERTOLINI high pressure pumps

Pump



Repair kits



Valves 6 pieces



Seal kit



Seal kits for 3 pistons



Oil seal kit for 1 piston



Ceramic socket for 1 piston



Fastening screw for 1 piston

P	—	U	KW	TYP
210	15	1,450	6.1	TTL 1520
210	21	1,450	8.6	TTL 2120
300	13	1,450	7.6	TTL 1330
300	20	1,450	11.5	TTL 2030

R+M Nr.
177 015 200
177 021 200
177 013 300
177 020 300

R+M Nr.
177 698 679 73
177 698 679 73
177 698 679 73
177 698 679 73

R+M Nr.
177 698 369 73
177 698 369 73
177 698 349 73
177 698 349 73

R+M Nr.
177 698 399 73
177 698 399 73
177 698 399 73
177 698 399 73

R+M Nr.
177 698 729 73
177 698 729 73
177 698 729 73
177 698 729 73

R+M Nr.
177 600 091 82
177 600 091 82
177 600 551 82
177 600 551 82

R+M Nr.
177 600 720 02
177 600 720 02
177 600 735 12
177 600 735 12

Hawk high pressure pumps

Pump



Repair kits



Valves 6 pieces



Seal kit for 3 pistons



Seal kits for 3 pistons



Oil seal kit for 3 pistons



Ceramic socket for 1 piston, complete

P	—	U	KW	TYP
200	15	1,450	5.7	NMT 1520R
200	21	1,450	7.9	NMT 2120R
300	24	1,450	14.1	XLT 2530IR
240	30	1,450	14.2	XLT 3025IR
170	35	1,450	11.2	XLT 3517IR

R+M Nr.
174 015 200
174 021 200
174 024 300
174 030 240
174 035 170

R+M Nr.
174 190 554 3
174 190 554 3
174 190 568 7
174 190 568 7
174 190 568 6

R+M Nr.
174 190 557 8
174 190 557 8
174 190 567 0
174 190 585 2
174 190 585 3

R+M Nr.
174 260 077
174 260 077
174 260 126
174 260 125
174 260 113

R+M Nr.
174 260 803
174 260 803
174 260 003
174 260 003
174 260 003

R+M Nr.
174 260 107
174 260 107
174 109 976 3
174 260 129
174 260 117

Pump accessories

Wall bracket



Stainless steel. 200 x 200 x 150 mm. Suitable for our motor-pump units with AR HPV

R+M Nr.
105 000 021



Stainless steel. 280 x 280 x 260 mm. Suitable for our motor-pump units with 3 / 4 and 5.5 KW


R+M Nr.
105 000 022



Stainless steel. 270 x 270 x 500 mm. Capacity: 80 kg. Suitable for our motor-pump units with 3 / 4 / 5.5 and 7.5 KW

R+M Nr.
105 000 020

Vibrationdamper




Rubber buffer type A. M10 x 28. Incl. Screws and washers. Steel or stainless steel and elastic natural rubber 55°. Spring stiffness: 500 N / mm. Load: 2,000 N

R+M Nr.	(M)	(VPE)
105 000 101	steel	4 pieces
105 000 104	stainless steel	4 pieces

Symbols P pressure — flow U revolutions KW kilowatt TYP type M material VPE packing unit

Suttner regulation valves ST-261


ST-261 for panel mounting

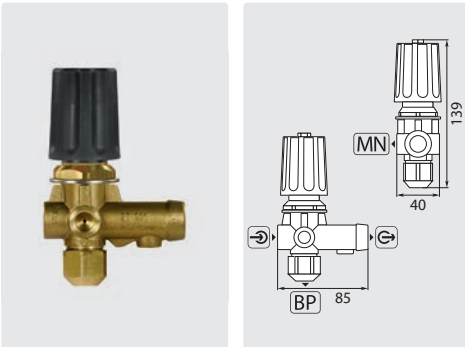

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F.
Max. 250 bar / 80 °C

R+M Nr.	
200 261 559	30 l/min


ST-261 for panel mounting

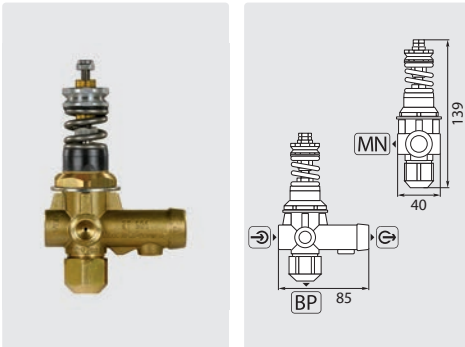

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F.
Max. 250 bar / 80 °C

R+M Nr.	
200 261 557	30 l/min


ST-261 for panel mounting with pressure switch

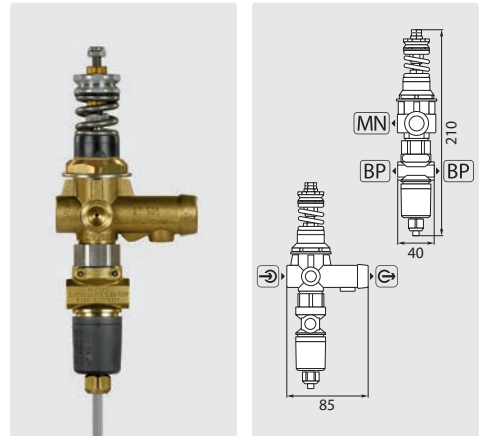

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F. Regulation valve with pressure switch (IP65) and cable 1,200 mm. Max. 250 bar / 80 °C

R+M Nr.	
200 261 655	30 l/min


ST-261 without chemical injector

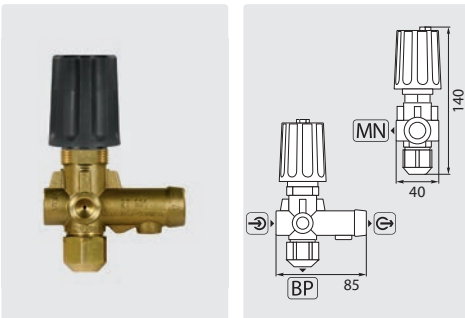

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F.
Max. 250 bar / 80 °C

R+M Nr.	
200 261 500	30 l/min


ST-261 with chemical injector

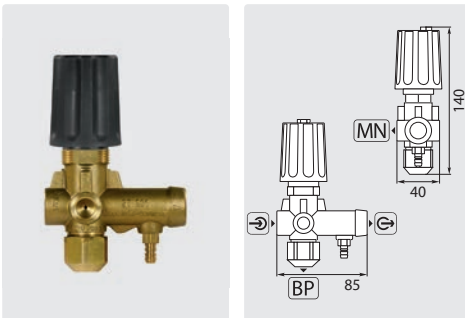

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F. Hose tail 6 mm. Max. 250 bar / 80 °C

R+M Nr.	D	
200 261 560	1.8	30 l/min
200 261 570	2.1	30 l/min
200 261 580	2.4	30 l/min


ST-261 with pressure switch three-core

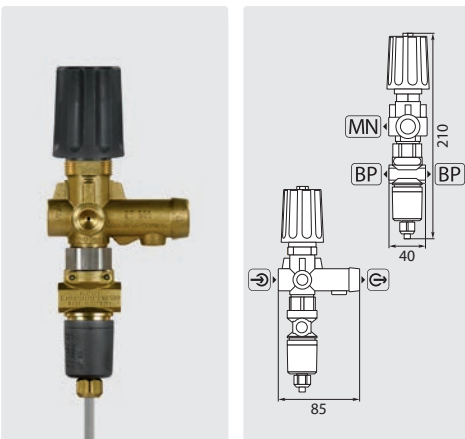

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F. Regulation valve with pressure switch (IP65) three-core and cable 1,200 mm. Max. 250 bar / 80 °C

R+M Nr.	
200 261 550	30 l/min


ST-261 with pressure switch four core

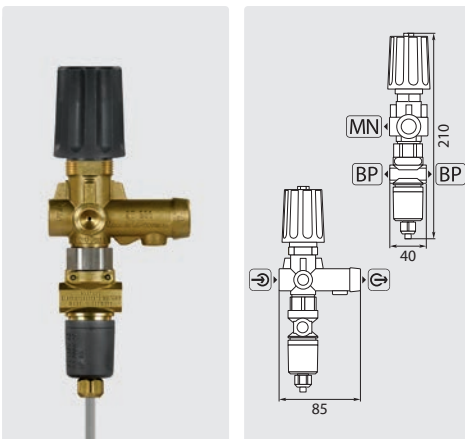

☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F. Regulation valve with pressure switch (IP65) four-core and cable 1,200 mm. Max. 250 bar / 80 °C

R+M Nr.	
200 261 551	30 l/min

ST-261 with pressure switch

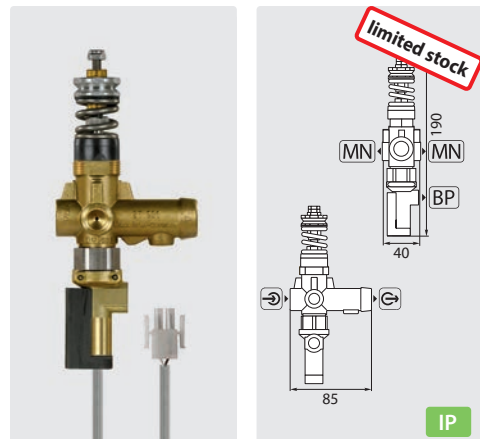


☞ = inlet 3/8" F. ☞ = outlet 3/8" F. BP = bypass 1/4" F. MN = pressure gauge 1/4" F. Regulation valve with pressure switch (IP55) and cable 140 mm. Max. 250 bar / 80 °C

R+M Nr.	
200 261 660	30 l/min

Suttner regulation valves ST-261

Repair kits ST-261

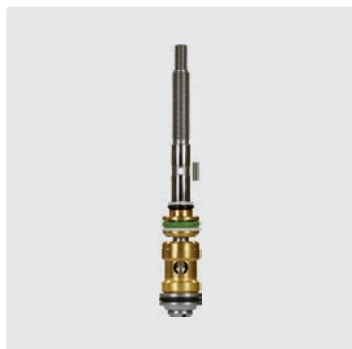

Piston rod

R+M Nr.
200 261 526



Pressure switch (IP55) with cable 1,200 mm

R+M Nr.
200 261 517



Pressure rod

R+M Nr.
200 261 527



HP check valve

R+M Nr.
200 261 528



Handgrip

R+M Nr.
200 260 547



Metering valve. Tail 6 mm

R+M Nr.
050 000 370 1
200 061 500 2



Pressure switch (IP65) three-core and cable 1,200 mm

R+M Nr.
200 261 513




Pressure switch (IP65) with four-core and cable 1,200 mm

R+M Nr.
200 261 514



Micro switch

R+M Nr.
090 000 050

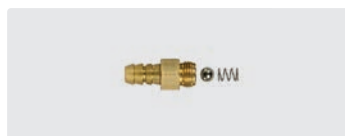

Chemical check valve. Hose tail 6 mm

R+M Nr.
200 060 725




Tamperproof cap for ST-261. Not suitable for panel mounting.

R+M Nr.
020 000 277

Suttner regulation valve ST-261.2

ST-261.2

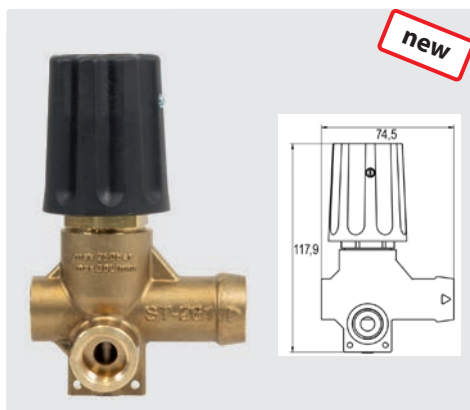


☺ = Inlet 3/8" F. ☹ = Outlet 3/8" F.

BP = Bypass 3/8" F. check valve with plastic valve cone.

Max. 250 bar / 80 °C

R+M Nr. 200 261 700 30 l/min

ST-261.2 with switch



☺ = Inlet 3/8" F. ☹ = Outlet 3/8" F.

BP = Bypass 3/8" F.

Ball check valve. With pressure switch (IP 6K7) and cable 1,200 mm.

Max. 250 bar / 80 °C

R+M Nr. 200 261 750 30 l/min

Repair/retrofit kit switch ST-261.2



Switch for Suttner unloader valve ST-261.2. Protection class IP6K7. Cable 1.200 mm, 3xAWG20. Maximum inrush current: 10 mA-5 A (2 A).


Voltage: 12-24 VDC, 12-250 VAC

R+M Nr. 200 261 401

Symbols ☺ inlet ☹ outlet BP bypass ⇐ flow

Suttner regulation valve ST-265

ST-265

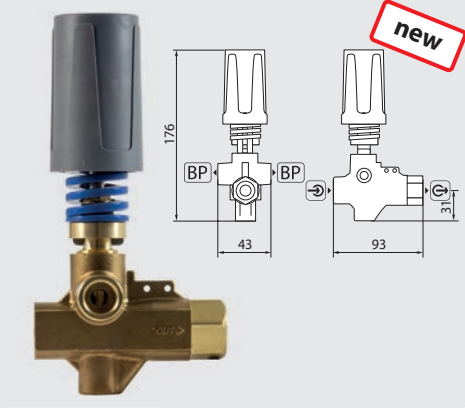

☺ = Inlet 3/8" F. ☹ = Outlet 3/8" F.
BP = Bypass 3/8" F. Check Valve with ball.
Max. 350 bar / 80 °C

R+M Nr.	☞
200 265 500	50 l/min

Rep. Kit ST-265
Check Valve



R+M Nr.
200 265 420

ST-265 with switch



☺ = Inlet 3/8" F. ☹ = Outlet 3/8" F.
BP = Bypass 3/8" F.
Ball check valve. Unloader valve with
pressure switch (IP 6K7) and cable
1,200 mm. Max. 350 bar / 80 °C

R+M Nr.	☞
200 265 550	50 l/min

Repair/retrofit kit switch ST-265




Switch for Suttner unloader valve
ST-265. Protection class IP 6K7. Cable
1.200 mm, 3xAWG20. Maximum
inrush current: 10 mA-5 A (2 A).
Voltage: 12-24 VDC, 12-250 VAC

R+M Nr.
200 265 430

Suttner regulation valve ST-265 with green spring

ST-265 with green spring (240 bar)

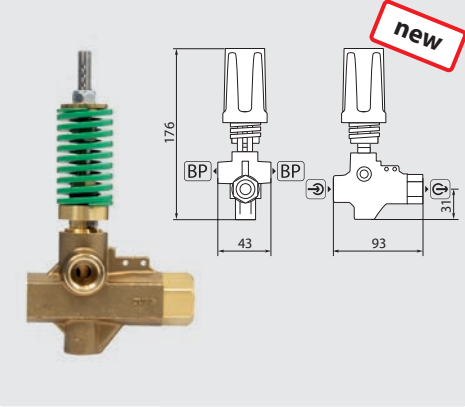

☺ = Inlet 3/8" F. ☹ = Outlet 3/8" F.
BP = Bypass 3/8" F. Check Valve with ball.
Max. 240 bar / 80 °C

R+M Nr.	☞
200 265 505	50 l/min

Rep. Kit ST-265
Check Valve



R+M Nr.
200 265 420

ST-265 with green spring (240
bar) and with switch



☺ = Inlet 3/8" F. ☹ = Outlet 3/8" F.
BP = Bypass 3/8" F.
Ball check valve. Unloader valve with
pressure switch (IP 6K7) and cable
1,200 mm. Max. 240 bar / 80 °C

R+M Nr.	☞
200 265 545	50 l/min

Repair/retrofit kit switch for
ST-265 with green spring




Switch for Suttner unloader valve
ST-265. Protection class IP 6K7. Cable
1.200 mm, 3xAWG20. Maximum
inrush current: 10 mA-5 A (2 A).
Voltage: 12-24 VDC, 12-250 VAC

R+M Nr.
200 265 430

Suttner stainless steel regulation valve ST-275

ST-275

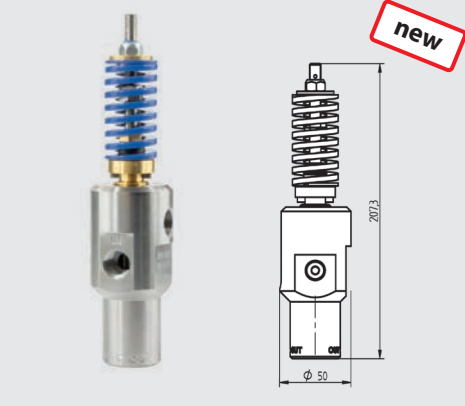

☺ = Inlet 3/8" F. ☹ = Outlet 1/2" F.
BP = Bypass 3/8" F. Valve ball made of high-performance ceramic.
Max. 500 bar / 90 °C

R+M Nr.	☞
200 275 500	40 l/min

Hand grip



For 200 275 500 and 200 275 550

R+M Nr.
200 280 492

ST-275 with switch



☺ = Inlet 3/8" F. ☹ = Outlet 1/2" F.
BP = Bypass 3/8" F. Valve ball made of high-performance ceramic. With pressure switch (IP 6K7) and cable 1,200 mm.
Max. 500 bar / 90 °C

R+M Nr.	☞
200 275 550	40 l/min

Repair/retrofit kit switch ST-275




Switch for Suttner unloader valve ST-275. Protection class IP 6K7. Cable 1.200 mm, 3xAWG20. Maximum inrush current: 10 mA-5 A (2 A). Voltage: 12-24 VDC, 12-250 VAC

R+M Nr.
200 265 430

Symbols ☺ inlet ☹ outlet BP bypass ☞ flow

Suttner regulation valve ST-285

ST-285

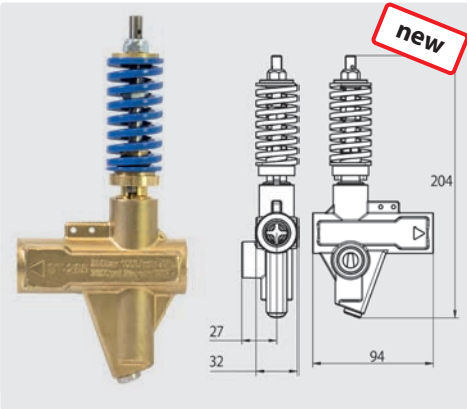

Hand grip



For 200 285 500 and
200 285 550

Repair kit ST-285



R+M Nr.
200 285 420

Repair kit bypass ST-285



R+M Nr.
200 285 425

☉ = Inlet 1/2" F. ☉ = Outlet 1/2" F.
BP = Bypass 1/2" F. Check Valve with ball.
Max. 250 bar / 90 °C

R+M Nr.	☐
200 285 500	100 l/min

R+M Nr.
200 280 492

ST-285 with switch



☉ = Inlet 1/2" F. ☉ = Outlet 1/2" F.
BP = Bypass 1/2" F.
Ball check valve. Unloader valve with
pressure switch (IP 6K7) and cable
1,200 mm. Max. 250 bar / 90 °C

R+M Nr.	☐
200 285 550	100 l/min

Repair/retrofit kit switch ST-285




Switch for Suttner unloader valve
ST-285. Protection class IP 6K7. Cable
1,200 mm, 3 x AWG20. Maximum
inrush current: 10 mA-5 A (2 A).
Voltage: 12-24 VDC, 12-250 VAC

R+M Nr.
200 265 430

Suttner regulation valves

ST-291

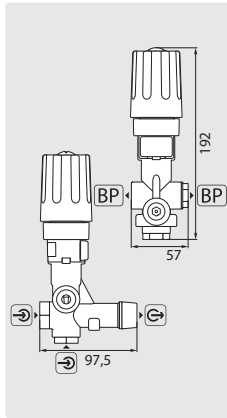


☉ = inlet 3/8" F. ☉ = outlet 3/8" F. BP = bypass 1/2" F. Max. 350 bar / 90 °C

R+M Nr.
200 291 500

40 l/min

ST-291 with switch

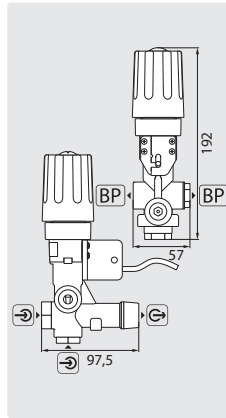

☉ = inlet 3/8" F. ☉ = outlet 3/8" F. BP = bypass 1/2" F. Regulation valve with pressure switch (IP67) and cable 1,200 mm. Max. 350 bar / 90 °C

R+M Nr.
200 291 550

40 l/min

Repair kits ST-291



Piston rod

R+M Nr.
200 291 495



Switch (IP67) with cable 1,200 mm

R+M Nr.
200 291 450



Check valve


R+M Nr.
200 291 490



Seal kit

R+M Nr.
200 291 485

ST-280

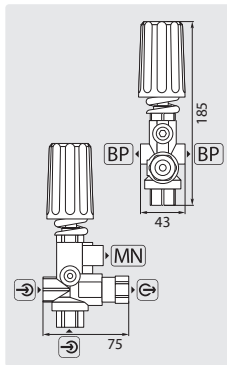

☉ = inlet 3/8" F.
☉ = outlet 3/8" F.
BP = bypass 1/4" F.
MN = pressure gauge 1/4" F.
Max. 250 bar / 80 °C

R+M Nr.
200 280 510


30 l/min

Repair kits ST-280




Type A

R+M Nr.
200 280 650



Type C


R+M Nr.
200 280 646



Type D

R+M Nr.
200 280 526

Setting up of a regulation valve

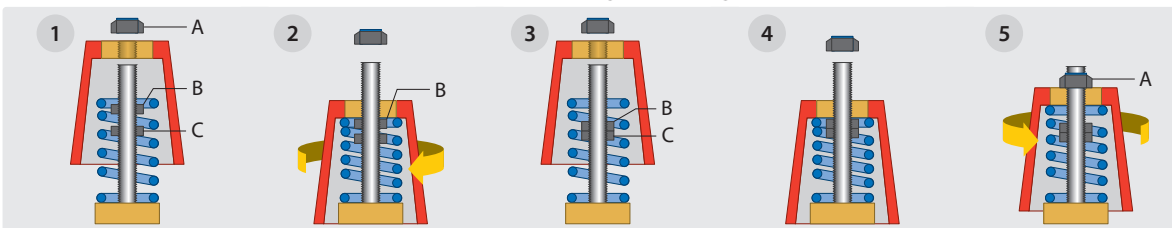

1. Loose fixing nut (A) and take off handgrip. Also loose nut (B) and nut (C). Put handgrip back in position without fixing it. Switch on high pressure device and press gun trigger.
2. While keeping an eye on the gauge's pressure slowly tighten the handgrip. When working pressure is attained turn handgrip one rotation tighter. In this position nut (B) must be next to the handgrip. Otherwise, nut (B) has to be adjusted until this position is reached.

3. Take off handgrip and fix nut (C) against nut (B).
4. Unscrew the handgrip until it bumps to nut. Press trigger of gun several times in order to control the working and switching pressure. If necessary, repeat phase 2.
5. Turn handgrip back until minimum/steam pressure stage is obtained (according to indication of manufacturer). Mount fixing nut until swing of grip. Fixing nut (A) defines the stage of low and steam pressure, nut (B) defines the stage of working and switching pressure.




www.rm-suttner.com

Symbols ☉ inlet ☉ outlet BP bypass MN pressure gauge → flow

Regulation valves


ST-250



= inlet 3/8" F. = outlet 3/8" F.
 = bypass 1/4" F.
 = pressure gauge 1/4" F.
 Ball check valve.
 Max. 250 bar / 80 °C

R+M Nr.	
200 250 500	35 l/min


UL 250



= inlet 3/8" F. = outlet 3/8" F.
 = bypass 1/4" F. = pressure gauge 1/4" F. Ball check valve.
 Max. 250 bar / 60 °C

R+M Nr.	
533 31	35 l/min

UL 250 for panel mounting



= inlet 3/8" F. = outlet 3/8" F.
 = bypass 1/4" F. = pressure gauge 1/4" F. Ball check valve.
 Max. 250 bar / 60 °C

R+M Nr.	
533 351	35 l/min

Rep. Kit UL 250

Standard

R+M Nr.
121 412 9

With ball check valve

R+M Nr.
121 412 91

Rep. Kit ST-250

With ball check valve

R+M Nr.
200 250 490

VB7



= input 3/8" M. = outlet 3/8" F.
 = bypass 3/8" F. = pressure gauge 1/4" F.
 Max. 220 bar / 90 °C

R+M Nr.	
532 722 0	30 l/min

VB9



= inlet 3/8" F. = outlet 3/8" F.
 = bypass 3/8" F. = pressure gauge 1/4" F.
 Regulation valve with switch (IP55) and cable 1,000 mm. Max. 220 bar / 90 °C

R+M Nr.	
532 235 0	30 l/min

VB9



= inlet 3/8" F. = outlet 3/8" F.
 = bypass 3/8" F. = pressure gauge 1/4" F.
 Max. 220 bar / 90 °C

R+M Nr.	
532 234 0	30 l/min

VB56



= inlet 1/2" F. = outlet 3/8" F.
 Regulation valve with banjo-bolt.
 X: 26 mm. Y: 66 - 76 mm.
 Suitable for Leuco or Hawk MT-LT.
 Max. 220 bar / 90 °C

R+M Nr.	
532 137 2	30 l/min



= inlet 1/2" F. = outlet 3/8" F.
 Regulation valve with banjo-bolt.
 X: 4.5 mm. Y: 59.5 - 63.5 mm.
 Suitable for AR Serie RC.
 Max. 220 bar / 90 °C

R+M Nr.	
532 139 2	30 l/min



= inlet 1/2" F. = outlet 3/8" F.
 Regulation valve with banjo-bolt.
 X: 4.5 mm. Y: 62 - 65.5 mm.
 Suitable for AR Series RK, Comet Series FW.
 Max. 220 bar / 90 °C

R+M Nr.	
532 138 0	30 l/min

Regulation valves

VB75



☼ = inlet 1/2" F. ☹ = outlet 3/8" F. Regulation valve with banjo-bolt. X: 19 mm. Y: 62-73 mm. Suitable for IP50, IP44, IP47, IP60, IP63 / Speck NP16. Max. 250 bar / 90 °C

R+M Nr.	P	☹
532 093 0		30 l/min

VB85



☼ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Max. 90 °C

R+M Nr.	P	☹
532 851 6	max. 160 bar	80 l/min
532 852 8	max. 280 bar	80 l/min

Rep. Kit VB85



R+M Nr.
532 851 62

VB80



☼ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Stainless steel. Max. 90 °C

VB80/150



☼ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. [MN] = pressure gauge 1/4" F. Max. 90 °C

R+M Nr.	P	☹
532 801 50	max. 150 bar	80 l/min

VB53/500



☼ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Max. 90 °C

R+M Nr.	P	☹
532 802 84	max. 280 bar	80 l/min

R+M Nr.	P	☹
532 535 00	max. 500 bar	80 l/min

VB26



☼ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Stainless steel. Max. 90 °C

R+M Nr.	P	☹
532 262 80	max. 280 bar	80 l/min

VRT100/190



☼ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Max. 90 °C

R+M Nr.	P	☹
532 056 0	max. 190 bar	100 l/min

Symbols ☼ inlet ☹ outlet [BP] bypass [MN] pressure gauge ☹ flow P pressure

Regulation valves

VB350


☺ = inlet 3/8" M. ☹ = outlet 3/8" F. [BP] = bypass 1/2" F. [MN] = pressure gauge 1/4" F. Regulation valve with switch (IP55) and cable 1,200 mm. Max. 350 bar / 90 °C

R+M Nr.	
532 350	40 l/min

VB350


☺ = inlet 3/8" M. ☹ = outlet 3/8" F. [BP] = bypass 1/2" F. [MN] = pressure gauge 1/4" F. Max. 350 bar / 90 °C

R+M Nr.	
532 340	40 l/min

VB60/600


☺ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Max. 600 bar / 90 °C

R+M Nr.	
532 260 0	60 l/min

Gymatic 3/B



☺ = inlet 3/4" F. ☹ = outlet 3/8" M. Regulation valve with banjo-bolt. X: 8.5 mm. Y: 68-77 mm. Suitable for AR Serie XW. Max. 250 bar / 45 °C (*60 °C)

R+M Nr.	
170 208 02	35 l/min



☺ = inlet 1/2" M. ☹ = outlet 3/8" M. Regulation valve with banjo-bolt. X: 4.5 mm. Y: 53-64 mm. Suitable for AR Serie XM, RR, JK and RK. Max. 250 bar / 45 °C (*60 °C)

R+M Nr.	
170 200 80	35 l/min



☺ = inlet 1/2" M. ☹ = outlet 3/8" M. Regulation valve with banjo-bolt. Chemical injector (Ø 2.1 mm), hose tail 8 mm. X: 4.5 mm. Y: 53-64 mm. Suitable for AR Serie XM, JK and RK. Max. 250 bar / 45 °C (*60 °C)

R+M Nr.	
170 204 00	13 / 18 l/min

VB60/600


☺ = inlet 1/2" F. ☹ = outlet 1/2" F. [BP] = bypass 1/2" F. Regulation valve with micro switch (IP55) and cable 950 mm. Max. 600 bar / 90 °C

R+M Nr.	
532 265 0	60 l/min

Zeromatic 93



☺ = inlet 1/2" F. ☹ = outlet 3/8" M. [BP] = bypass 1/2" F. [MN] = pressure gauge 1/4" F. Max. 250 bar / 60 °C

R+M Nr.	
170 290 7	40 l/min

* short-term, only

INTERPUMP regulation valves


K1



G = inlet 3/8" F, D = outlet 1/2" M.
BP = bypass 1/2" M. MN = pressure gauge 1/4" F.
Max. 250 bar / 60 °C

R+M Nr.	TYP	→
100 000 10		9 - 41 l/min


K5



G = inlet 3/8" F, D = outlet 1/2" M. BP = bypass 1/2" F - 3/4" M. MN = pressure gauge 1/4" F.
Max. 200 bar / 60 °C

R+M Nr.	TYP	→
100 000 51	K5.1	11 - 16 l/min
100 000 52	K5.2	16 - 25 l/min
100 000 53	K5.3	25 - 41 l/min


K7



G = inlet 3/8" F, D = outlet 3/8" M. BP = bypass 3/8" F. MN = pressure gauge 1/4" F.
Max. 200 bar / 60 °C

R+M Nr.	TYP	→
100 000 70	K7.0	8 - 11 l/min
100 000 71	K7.1	11 - 16 l/min
100 000 72	K7.2	16 - 25 l/min
100 000 73	K7.3	25 - 41 l/min


K9



G = inlet 1/2" F, D = outlet 1/2" M.
BP = bypass 1/2" F.
Max. 400 bar / 60 °C

R+M Nr.	TYP	→
100 000 95		50 l/min

H253





G = inlet 3/8" F, D = outlet 3/8" M.
BP = bypass 3/8" F.
Max. 250 bar / 60 °C

R+M Nr.	TYP	→
100 012 53	stainless steel	8 - 30 l/min

Info about the valves K1 . K5 . K7 . K9 . BKX.
By means of the valves the pressure can be zeroed in the entire system (pump and hose).


H284



G = inlet 3/8" F, D = outlet 3/8" M.
BP = bypass 3/8" F.
Max. 280 bar / 85 °C

R+M Nr.	TYP	→
100 002 84		8 - 41 l/min


H450



G = inlet 1/2" F, D = outlet 1/2" M.
BP = bypass 1/2" F.
Max. 400 bar / 85 °C

R+M Nr.	TYP	→
100 014 40		50 l/min

H560




G = inlet 1/2" F, D = outlet 1/2" F. BP = bypass 1/2" F. MN = pressure gauge 1/4" F.
Max. 500 bar / 60 °C


R+M Nr.	TYP	→
100 005 60	stainless steel	60 l/min

Symbols G inlet D outlet BP bypass MN pressure gauge → flow TYP type O thread W weight


HM

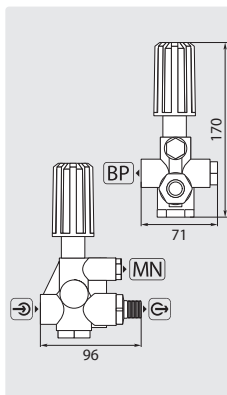

BKC

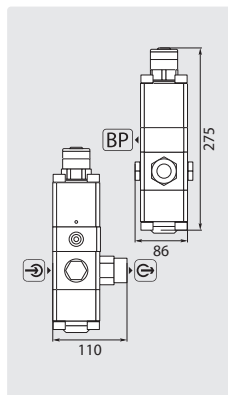

TIMAX

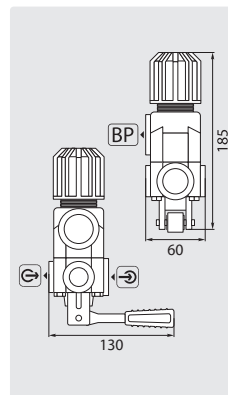

R+M Nr.

010 002 00

5 - 41 l/min

R+M Nr.

010 000 02


60 l/min

R+M Nr.

010 010 01

200 l/min

Rep. Kit BKX

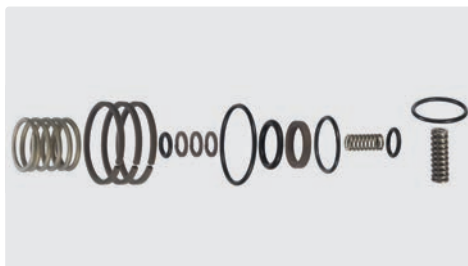

R+M Nr.	Kit Nr.	TYP
340 058 01	58	K5
340 060 01	60	K5
340 070 01	70	K7
340 072 01	72	HM
340 093 01	93	W2, W2L
340 094 01	94	W2, W2L

R+M Nr.

010 000 03


Valve delays pressure increase at pump start.
Brass / stainless steel.
Closes at 4 l/min.
Max. 350 bar / 150 °C

R+M Nr.

200 232 510

1/4" M

IP adjustable

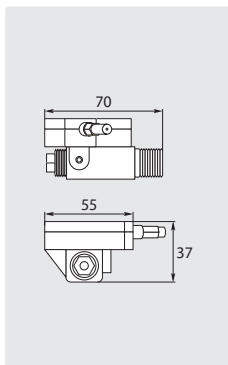

Regulator with string 1,000 mm. Min. 50 bar.
Max. 200 bar / 75 °C

R+M Nr.


995 000 00

☐

3/8" M

RG1

Throttle control for engine motors. It slows RPM down when by-pass is activated.



☐ 1/4" M. 15 - 250 bar - 218 - 3,650 psi.
Max. 160 °C.

R+M Nr.

Stroke

14 mm




158 g

High pressure check valves ST-264



1/4" F. Stainless steel.
 I 62 mm. Opening pressure 0.05 - 0.1 bar. Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 500	19 mm

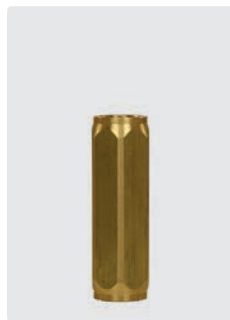

1/4" F. Brass.
 I 62 mm. Opening pressure 0.05 - 0.1 bar. Max. 150 bar / 90 °C

R+M Nr.	SW
200 264 510	19 mm



3/8" F. Stainless steel.
 I 65 mm. Opening pressure 0.05 - 0.1 bar. Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 520	22 mm



3/8" F. Brass.
 I 65 mm. Opening pressure 0.05 - 0.1 bar. Max. 150 bar / 90 °C

R+M Nr.	SW
200 264 530	22 mm



1/2" F. Stainless steel.
 I 90 mm. Opening pressure 0.05 - 0.1 bar. Max. 400 bar / 90 °C

R+M Nr.	SW
200 264 540	27 mm



1/4" M. Stainless steel.
 I 37.8 mm. Opening pressure 0.05 - 0.1 bar. Max. 400 bar / 90 °C


R+M Nr.	SW
200 264 700	17 mm

Thermal relief valves




1/2" M : hose tail 8 mm. Valve with copper sonde. Working temperature 63 °C. Max. 10 bar

R+M Nr.
910 50

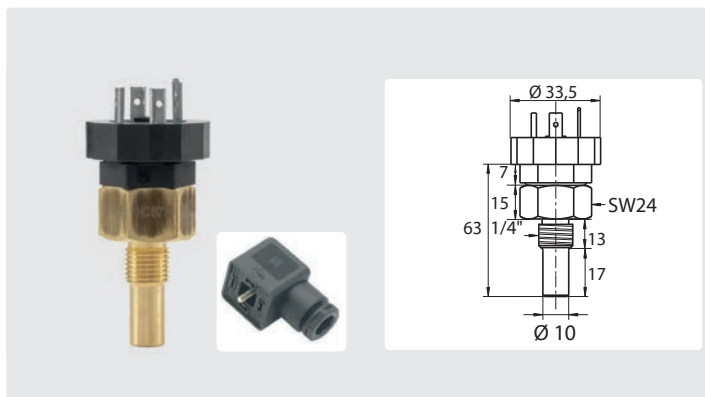

Bimetal temperature switch with plug. Switching point accuracy ± 5 °C. Reset temperature 15...40K. Switching voltage up to AC 250 V / 2A. Max. 10 bar in the inlet. Switch 1/4" M

R+M Nr.	°C	⊙
910 513 560	60	1/4"
910 513 585	85	1/4"



1/2" M : hose tail 8 mm. Valve with copper sonde. Working temperature 63 °C. Max. 10 bar


R+M Nr.
910 55



3/8" M : hose tail 8 mm. Valve with copper sonde. Working temperature 63 °C. Max. 10 bar

R+M Nr.
910 65


Assembly instructions of a relief valves




Symbols ⊗ inlet ⊙ outlet BP bypass I height SW hexagon °C temperature ⊙ thread

Relief valves / pressure regulation valves

Setting up of a relief valve



Screw off fixing nut (B) and regulating nut (A). Switch on high pressure cleaner and press trigger of gun so that the entire water flow runs out of the relief valve.



Slowly unscrew regulating nut (A) until pressure on the gauge is higher than the working pressure of the machine i.e. (> 100 bar = 10 % . < 100 bar = 20 %). Switch off hp cleaner and unscrew fix nut (B) without changing the position of nut (A).

Attention

High pressure cleaner that are equipped with a regulation (bypass) valve must be set after having adjusted the relief valve.

SR



110 mm. Max. 200 bar / 41 l/min / 80 °C

R+M Nr.	⌀	G
010 002 10	1/4" F	3/8" M

VS 240



90 mm. Max. 290 bar / 24 l/min / 60 °C

R+M Nr.	⌀	G
530 525 0	3.5 mm	3/8" M


VS 500



222 mm. Max. 500 bar / 80 l/min / 90 °C

R+M Nr.	BP	G
532 520 0	3/8" F	1/2" F


S 250



160 mm. Max. 250 bar / 35 l/min / 70 °C

R+M Nr.	⌀	G
530 10	1/4" F	3/8" F

Repair kits





S 250

R+M Nr.
121 412 92

Relief valves / pressure regulation valves

ST-220 Pressure regulating valve

Seal possible

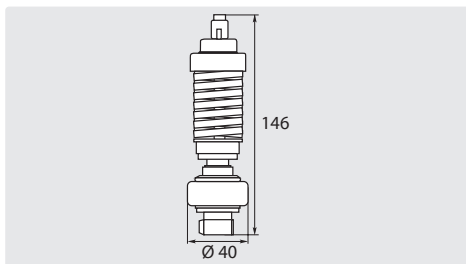


1 146 mm. Max. 50 l/min / 60 °C.
Short-term max. 85 °C

R+M Nr.		
200 220 500	1/2" M	200-700 bar



ST-220 Pressure regulating valve with green spring

Seal possible

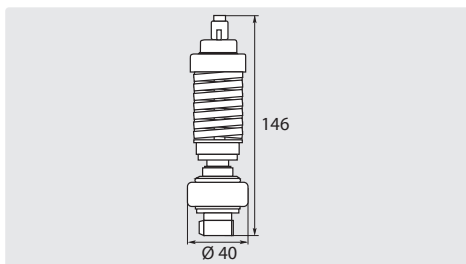

1 146 mm. Max. 50 l/min / 60 °C.
Short-term max. 85 °C

R+M Nr.		
200 220 530	1/2" M	200-425 bar



Symbols  inlet  outlet  pressure  type  height

Relief valves / pressure regulation valves

ST-230 Pressure regulating valves



Seal possible



- » Relief valve intended for use on water-operated high-pressure systems such as high-pressure cleaners or water heaters
- » Approved for use with fluids of Group II according to 2014/68/EU
- » $\varnothing$ 110 mm
- » Max. 30 l/min / 95 °C

R+M Nr.	$\ominus$	$\oplus$	P
200 230 520	1/4" F	1/4" F	10-100
200 230 501	1/4" F	1/4" F	80-250
200 230 502	M16 x 1,5 M	1/4" F	80-250
200 230 601	1/4" F	1/4" F	120-350
200 230 602	M16 x 1,5 M	1/4" F	120-350

Repair kits for ST-230




ST-230

R+M Nr.	for TYP
200 230 496	100 bar
200 230 496	250 bar
200 230 497	350 bar

ST-230-700 Pressure regulating valve

Seal possible

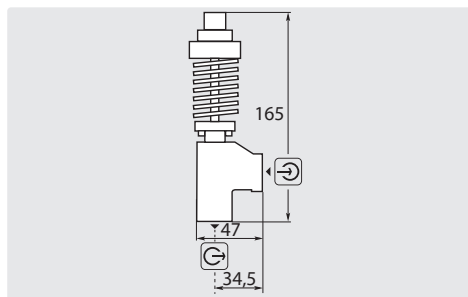


- $\varnothing$ 165 mm. Max. 40 l/min / 60 °C.
- Short-term max. 85 °C

R+M Nr.	$\ominus$	$\oplus$	P
200 230 700	3/8" F	1/4" F	200-700 bar

ST-230 Pressure regulating valve with green spring

Seal possible

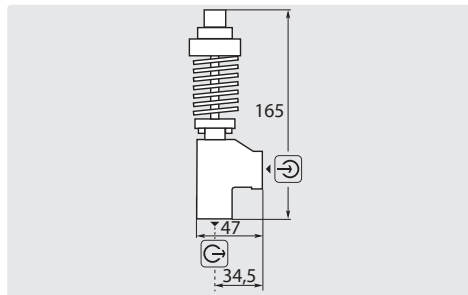

- $\varnothing$ 165 mm. Max. 40 l/min / 60 °C.
- Short-term max. 85 °C

R+M Nr.	$\ominus$	$\oplus$	P
200 230 530	3/8" F	1/4" F	200-425 bar



Repair kit



ST-230-700 and ST-230 with green spring

R+M Nr.
200 230 400

Jetbreaker




- $\varnothing$ 27 mm

R+M Nr.	$\oplus$
200 230 410	3/8" M

Suttner chemical injectors


ST-60



Injector without metering valve.
Max. 250 bar / 60 °C

R+M Nr.	G	↺	D
200 060 600	3/8" M	3/8" F	1.8 mm
200 060 610	3/8" M	3/8" F	2.1 mm
200 060 620	3/8" M	3/8" F	2.4 mm

ST-62



Injector without metering valve. Adjustable bypass allows big water flow rates without reduction of the water pressure. Max. 250 bar / 60 °C

R+M Nr.	G	↺	D
200 062 500	3/8" F NPT	3/8" F NPT	1.6 mm

Metering valves



Valve for Suttner injector.
Hose tail 6 mm

R+M Nr.
050 000 370 1
200 061 500 2

Repair kits




Chemical check valve.
Hose tail 6 mm

R+M Nr.
200 060 725

Suttner foam injectors

ST-60.1



Injector without metering valve.
Max. 250 bar / 60 °C

R+M Nr.	G	↺	D
200 060 700	3/8" M	3/8" F	1.6 mm
200 060 710	3/8" M	3/8" F	1.8 mm

ST-60.1 with quick screw coupling



M22 F : M22 M. Injector with metering valve, suction hose 1,000 mm and suction filter ST-31.
Max. 250 bar / 60 °C

R+M Nr.	D
200 060 760	1.6 mm

Metering valves



Valve for Suttner injector. Hose tail 6 mm

R+M Nr.
050 000 370 1
200 061 500 2

Repair kits




Chemical check valve.
Hose tail 6 mm

R+M Nr.
200 060 725


The suitable foam lances are presented on pages 364 and 365.

Accumulator




Volume 0.07 liter. Max. 80 °C

R+M Nr.	⊙	P
189 307 0	M14 M	15 - 200 bar



Volume 0.21 liter. Max. 85 °C

R+M Nr.	⊙	P
189 321 0	M16 M	25 - 220 bar
189 321 2	3/8" M	25 - 220 bar



Volume 0.35 liter. Max. 85 °C


R+M Nr.	⊙	P
189 211 0 *	3/8" F	40 - 210 bar

* Accumulator must be filled with nitrogen

Symbols G inlet ↺ outlet D nozzle ⊙ thread P pressure TYP type DN nominal diameter VPE packing unit

Chemical injectors

R+M 300



Injector with metering valve.
Max. 220 bar / 90 °C

R+M Nr.			D
544 318 1	3/8" M	3/8" F	1.8 mm
544 321 1	3/8" M	3/8" F	2.1 mm
544 323 1	3/8" M	3/8" F	2.3 mm

R+M 300 with quick screw coupling



Injector with metering valve.
Max. 220 bar / 90 °C

R+M Nr.			D
544 318 11	M22 M	M22 F	1.8 mm
544 321 11	M22 M	M22 F	2.1 mm
544 323 11	M22 M	M22 F	2.3 mm

Suttner chemical suction sets



Suction set with suction hose 1,500 mm, suction filters ST-31 and chemical-resistant plastic tube 320 mm. The tube keeps the suction filter at the deepest point.

R+M Nr.	TYP	DN
200 031 500	clear PVC hose	6 mm
200 031 510	reinforced PVC hose blue	9 mm
200 031 520	reinforced PVC hose yellow	9 mm
200 031 530	reinforced PVC hose clear	9 mm



Suction set with filter check valve ST-32 and stainless steel tube 350 mm.

R+M Nr.	DN
200 032 601	6 mm
200 032 602	8 mm
200 032 603	10 mm

Hose clamps

1.4016 stainless steel housing and band.
Hexagon screw zinc-plated. Worm gear high tension.
Flat tape inner sides with turned up rims.
According to DIN 3017, W2



Clamps with hexagon screw. 9 mm

R+M Nr.	VPE	DN
735 10	1	6 mm
735 30	1	9 mm

R+M Nr.	VPE	DN
735 101 00	100	6 mm
735 301 00	100	9 mm

High pressure Filter ST-33



Brass with stainless steel filter. Bidirectional.
Max. 400 bar / 40 l/min. / 150 °C

R+M Nr.			
200 033 855	45.6 mm	1/4" M	1/4" F

Ultra High Pressure Filter




Stainless steel with brass mesh holder and stainless steel strainer. Suitable as inlet water filter for ST-164. Max. 400 bar / 100 °C


R+M Nr.			
200 163 100	40 mm	M 22 M	3/8" M

Functional principle of a chemical injector

High pressure phase

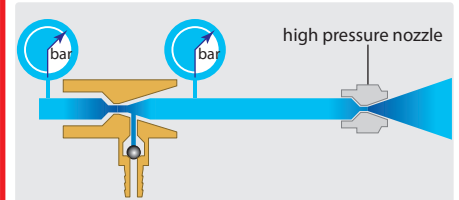

Low pressure phase

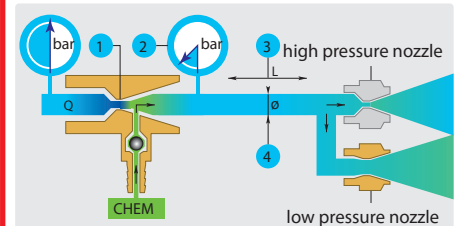

The operation of the injector depends on:

- 1 The nozzle type must be chosen in dependence on the output of the high pressure cleaner.
- 2 The difference of pressure allows addition of chemical products occurred by special effect of "venturi" nozzle. This effect is given when the water also rinses through the low pressure nozzle. This has a bigger orifice than the high pressure nozzle and is mounted on the spray lance (e. g. at a double lance).
- 3 Length of the high pressure hose (should not be longer than 20 m).
- 4 Internal diameter of the high pressure hose (the longer the hose the bigger should be its internal diameter). Hose extensions injure output of the injector.

easyfoam365+® injectors by Suttner

Injectors ST-160



3/8" F : 3/8" M : hose tail 9 mm. Injector for applications with chemicals and foam. The chemical dosing is adjusted by 10 exchangeable nozzle inserts (0.5 - 2.0 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 498	1.1 mm
200 160 499	1.2 mm
200 160 500	1.3 mm
200 160 505	1.4 mm
200 160 510	1.5 mm
200 160 515	1.6 mm
200 160 520	1.7 mm
200 160 525	1.8 mm
200 160 530	1.9 mm
200 160 535	2.0 mm
200 160 540	2.1 mm
200 160 545	2.2 mm
200 160 550	2.3 mm
200 160 560	2.5 mm
200 160 575	2.8 mm



3/8" F : 3/8" M : hose tail 9 mm.
Injector ST-160 with metering valve ST-161.
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 599	1.1 mm
200 160 600	1.2 mm
200 160 601	1.3 mm
200 160 602	1.4 mm
200 160 603	1.5 mm
200 160 604	1.6 mm
200 160 605	1.7 mm
200 160 606	1.8 mm
200 160 607	1.9 mm
200 160 608	2.0 mm
200 160 609	2.1 mm
200 160 610	2.2 mm
200 160 611	2.3 mm
200 160 613	2.5 mm
200 160 614	2.8 mm

Injectors ST-166



3/8" F : 3/8" M : 2 hose tails 9 mm. Injector for applications with chemicals and foam. The injector sucks in/admixes up to two chemicals at the same time.
The chemical dosing is adjusted by 2 x 10 exchangeable nozzle inserts (0.5 - 2.0 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 166 500	1.3 mm
200 166 510	1.6 mm
200 166 530	1.9 mm

Valve lock



Valve lock for metering valve ST-161

R+M Nr.
040 003 566

Metering valves ST-161



Hose tail 9 mm : M14 M. Metering valve ST-161 suitable for being refitted in **easyfoam365+®** injectors (ST-160, ST-166, ST-167 and ST-168)

R+M Nr.	C
200 161 500	blue (FKM)



Hose tail 9 mm : M14 M. Metering valve ST-161 suitable for being refitted in **easyfoam365+®** injectors (ST-160, ST-166, ST-167 and ST-168)

R+M Nr.	C
200 161 515	grey (EPDM)



Hose tail 9 mm : hose tail 9 mm.
Panel mount is possible

R+M Nr.	C
200 161 510	blue (FKM)

Exchangeable nozzle inserts



Plastic. 10 nozzle inserts (0.5 - 2.0 mm).
Incl. o-rings


R+M Nr.
200 163 340



Plastic. 9 nozzle inserts (0.5 - 1.5 mm).
Incl. o-rings.
Incl. 1 insert without hole

R+M Nr.
200 163 335

ST-160 wall mount



Stainless steel. Incl. fastening material for the injector.
Fits for ST-160+161 and 166

R+M Nr.
200 160 160

easyfoam365+® injectors by Suttner

Injectors ST-160 with metering valve ST-161



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 845	1.2 mm
200 160 846	1.3 mm
200 160 847	1.4 mm
200 160 848	1.5 mm
200 160 849	1.6 mm
200 160 850	1.7 mm
200 160 851	1.8 mm
200 160 852	1.9 mm
200 160 853	2.0 mm
200 160 854	2.1 mm
200 160 855	2.2 mm
200 160 856	2.3 mm



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 zinc-plated steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 860	1.2 mm
200 160 861	1.3 mm
200 160 862	1.4 mm
200 160 863	1.5 mm
200 160 864	1.6 mm
200 160 865	1.7 mm
200 160 866	1.8 mm
200 160 867	1.9 mm
200 160 868	2.0 mm
200 160 869	2.1 mm
200 160 870	2.2 mm
200 160 871	2.3 mm



M22 F : M22 M. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 350 bar / 90 °C

R+M Nr.	D
200 160 803	1.2 mm
200 160 804	1.3 mm
200 160 800	1.4 mm
200 160 801	1.5 mm
200 160 802	1.6 mm
200 160 805	1.7 mm
200 160 806	1.8 mm
200 160 808	2.0 mm
200 160 809	2.1 mm
200 160 810	2.2 mm
200 160 811	2.3 mm

Reinforced PVC hoses blue



Max. 60 °C. Other dimensions are available on request

Per metre

R+M Nr.	DN	⊠
080 000 310	9 mm	3.0 mm
306 71	13 mm	3.0 mm

Complete rolls

R+M Nr.	DN	↔	⊠
306 560 50	9 mm	50 m	3.0 mm
306 710 50	13 mm	50 m	3.0 mm

Suction filter ST-31



Filter without check valve. Plastic. Stainless steel weight

R+M Nr.
200 031 615



Filter with check valve. Plastic. Stainless steel weight


R+M Nr.
200 031 611

Accessories injectors



Hose tail 9 mm : M14 M. Check valve

R+M Nr.
200 163 350



1/4" M : M14 M. Check valve

R+M Nr.
200 163 356

easyfoam365+® injectors by Suttner

Injectors ST-160



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 stainless steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 616	1.8 mm : 2.3 mm



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector ST-160 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 615	1.7 mm : 2.3 mm



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 stainless steel. Injector ST-160 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 617	2.2 mm : 2.8 mm

easyfoam365+® bypass injectors ST-167



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 stainless steel. Injector ST-167 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 100 °C

R+M Nr.	D
200 167 850	1.8 mm : 2.3 mm



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector ST-167 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 100 °C

R+M Nr.	D
200 167 855	1.8 mm : 2.3 mm



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 stainless steel. Injector ST-167 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 100 °C

R+M Nr.	D
200 167 860	1.8 mm : 2.8 mm

Reference list manufacturer number to R+M number A

Manufacturer Nr.	R+M Nr.
640 124 4	200 160 616
640 124 4	200 160 615
640 124 6	200 160 617
640 124 2	200 167 850
640 124 3	200 167 855
640 124 7	200 167 860

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Symbols D nozzle O thread C temperature ⇌ flow ⇌ length

Suttner flow switches

ST-5 flow switches ST-5 "High-Flow" 210 bar



Floater ST-5 "High-Flow" with hole



REED switch

R+M Nr.
200 005 528

R+M Nr.
200 005 435

Floater with hole.
Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	°C		cable
200 005 701	1/2" F	vertical	5.2/4.2	80	60 l/min	1,200 mm

ST-5 flow switches 350 bar



Floater ST-5 with hole



REED switch

R+M Nr.
200 005 518

R+M Nr.
200 005 435

Floater with hole. Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	 °C		cable 
200 005 501	3/8" F	vertical	3.4/2.9	80	30 l/min	1,200 mm
200 005 601	3/8" F	horizontal or vertical	5.2/4.2	80	30 l/min	1,200 mm



Floater ST-5 without hole



REED switch

R+M Nr.
200 005 526

R+M Nr.
200 005 435

Floater without hole. Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	 °C		cable 
200 005 558	3/8" F	vertical	0.3/0.17	80	30 l/min	1,200 mm

ST-505 flow switches 600 bar



Floater ST-505 with hole



R+M Nr.	cable ←
200 005 435	1,200 mm
200 005 438	3,500 mm

R+M Nr.
200 005 301

Floater VA with hole.
Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	 °C		cable 
200 505 706	3/8" F	vertical	3.0/2.1	80	30 l/min	1,200 mm
200 505 709	3/8" F	vertical	3.0/2.1	80	30 l/min	3,600 mm



Floater ST-505 without hole



R+M Nr.	cable
200 005 435	1,200 mm
200 005 438	3,500 mm

R+M Nr.
200 005 526

Floater brass without hole.
Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	 °C		cable 
200 505 708	3/8" F	vertical	0.5/0.1	80	30 l/min	1,200 mm
200 505 711	3/8" F	vertical	0.5/0.1	80	30 l/min	3,600 mm



Floater ST-505 without hole



REED switch

R+M Nr.
200 005 311


R+M Nr.
200 005 435

Floater VA without hole. Contact 1 A - 250 V

R+M Nr.		mount	closed/open	°C		cable 
200 505 707	3/8" F	vertical	1.8/1.3	80	30 l/min	1,200 mm

Suttner flow switches

Spare parts flow switches

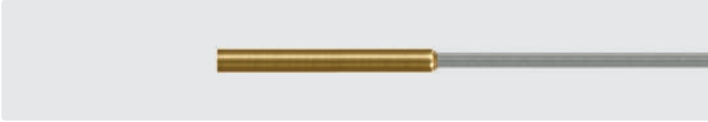

REED switch ST-5 & ST-505


R+M Nr.	 cable
200 005 435	1.200 mm
200 005 438	3.500 mm

ST-6 flow switches



3/8" M : 3/8" M. Horizontal or vertical mount. Cable 1,200 mm.
Contact 1 A - 250 V.
1.8 l closed. 1.4 l open.
Max. 310 bar / 30 l/min / 80 °C

R+M Nr.
200 006 700

REED switch ST-6.
Cable 1,200 mm

Floater ST-6

R+M Nr.	R+M Nr.
200 006 436	200 006 490

ST-7 flow switches




3/8" F. Protection class IP65. Cable 1,200 mm. 10 A. 250 V. Inrush current 20 A (NC) and 15 A (NO). Max. 350 bar / 45 l/min / 80 °C

R+M Nr.	 switch-on points
200 007 500	4.0 l/min 4.0 l closed. 3.5 l open
200 007 510	1.5 l/min 1.5 l closed. 0.8 l open

The ST-7 is a newly developed version of the flow switch having a completely new operating principle. In this new development a robust and industrial micro switch is inserted instead of the usually supersensitive REED-contacts with low switching capacity. This micro switch makes it possible to realize a significantly higher electrical output though having a longer working life. The electrical and water-hydraulic components of the flow switch are completely separated. The construction of the flow switch allows mounting the electrical parts independent of the hydraulic components within the series production process. When fitting together chassis and switch box both parts of the flow switch are connected again. Due to the mature engineering low switching points are realized in spite of maximum water quantities. The pressure drop within the flow switch is only 1.5 bar at 30 l/min.


Functional principle of a flow switch

Without waterflow



The floater is in resting position.
The contact is open.

With waterflow



The floater is in working position.
The contact is closed by the magnetic floater.

Spare parts flow switches ST-7



Repair-Kit floater ST-7


R+M Nr.	 switch-on points
200 007 497	4 l/min
200 007 499	1.5 l/min

Repair-Kit switch ST-7.
Cable 1,200 mm

R+M Nr.
200 007 498


Symbols  length  flow  type  thread  temperature  inlet  outlet  diameter

High pressure gauges glycerine filled




Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom

R+M Nr.	pressure range
549 00	0 - 40 bar . 0 - 580 PSI
549 10	0 - 100 bar . 0 - 1,500 PSI
549 20	0 - 160 bar . 0 - 2,500 PSI
549 30	0 - 250 bar . 0 - 4,000 PSI
549 40	0 - 400 bar . 0 - 6,000 PSI
549 50	0 - 600 bar . 0 - 8,000 PSI




Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the back

R+M Nr.	pressure range
548 10	0 - 100 bar . 0 - 1,500 PSI
548 20	0 - 160 bar . 0 - 2,500 PSI
548 30	0 - 250 bar . 0 - 4,000 PSI
548 40	0 - 400 bar . 0 - 6,000 PSI




Ø 63 mm. 1/4" M. With mounting ring.
Housing stainless steel. Inlet at the back

R+M Nr.	pressure range
549 90	0 - 250 bar . 0 - 4,000 PSI



Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom. Type WIKA


R+M Nr.	pressure range
549 102*	0 - 100 bar . 0 - 1,500 PSI
549 202	0 - 160 bar . 0 - 2,500 PSI
549 302	0 - 250 bar . 0 - 4,000 PSI
549 402	0 - 400 bar . 0 - 6,000 PSI
549 502	0 - 600 bar . 0 - 8,000 PSI



Ø 63 mm. 1/4" M. Housing stainless steel.
Inlet at the back. Type WIKA


R+M Nr.	pressure range
548 102*	0 - 100 bar . 0 - 1,500 PSI
548 202	0 - 160 bar . 0 - 2,500 PSI
548 302	0 - 250 bar . 0 - 4,000 PSI
548 402	0 - 400 bar . 0 - 6,000 PSI
548 631 000	0 - 1,000 bar . 0 - 15,000 PSI

Connecting hoses

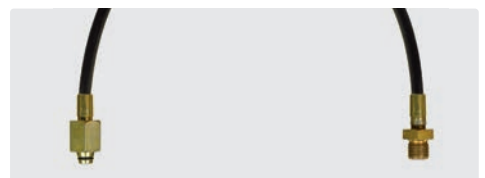


DN 2. Max. 250 bar / 65 °C

R+M Nr.			
495 261 040 5	405 mm	M12x1.5 F	M10x1 M

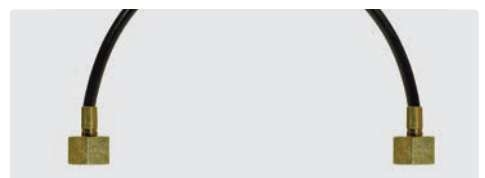


DN 2. Max. 250 bar / 65 °C

R+M Nr.			
495 252 050 0	500 mm	1/4" F	1/4" F
495 252 070 0	700 mm	1/4" F	1/4" F




Ø 50 mm. 1/4" M. Housing stainless steel.
Inlet at the bottom. Type WIKA

R+M Nr.	pressure range
549 352	0 - 250 bar . 0 - 4,000 PSI
549 452	0 - 400 bar . 0 - 6,000 PSI



Ø 50 mm. 1/4" M. Housing stainless steel.
Inlet at the back. Type WIKA

R+M Nr.	pressure range
548 352	0 - 250 bar . 0 - 4,000 PSI
548 432	0 - 400 bar . 0 - 6,000 PSI

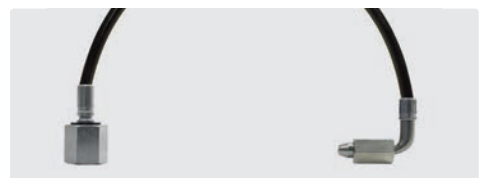

DN 2. Max. 250 bar / 65 °C


R+M Nr.			
495 253 100 0	1,000 mm	1/4" F	1/4" F 90°

Fixing straps

for pressure gauges, except WIKA



R+M Nr.	TYP
548 50	Ø 63 mm
548 55	Ø 50 mm



Ø 40 mm. 1/8" M. Housing plastic.
Inlet at the back

R+M Nr.	pressure range
548 37	0 - 250 bar . 0 - 4,000 PSI

**Before setting the gauge
under pressure please open
the tip of the rubber plug.**

* limited stock

Pressure gauge fitting



1/4" F zinc-plated.
With 24° cone end

R+M Nr.	TYP
580 061 43	6 L
580 081 43	8 L
580 101 43	10 L
580 121 43	12 L




1/4" F zinc-plated.
With 24° sealing cone

R+M Nr.	TYP
581 061 43	6 L
581 081 43	8 L
581 101 43	10 L
581 121 43	12 L

High pressure solenoid valves closed in off-position


Danfoss VDHT

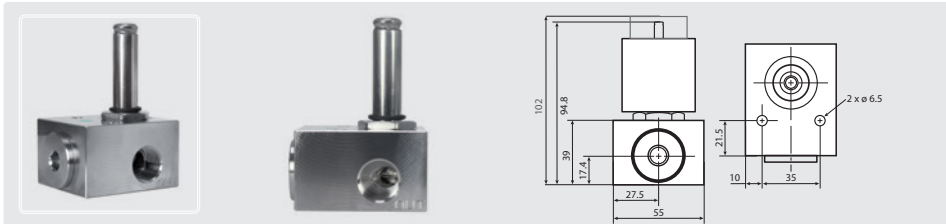

Stainless steel. Viton. Pressure range 4 - 160 bar. Without coil. Max. 90 °C

R+M Nr.	⊙	⊞
837 180 094	1/2"	60 l/min
837 180 092	3/8"	30 l/min

Danfoss solenoid coil

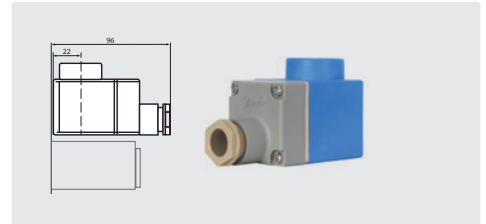

R+M Nr.	V	W
837 018 791 4	24 V / DC	16 W
837 018 791 3	12 V / DC	18 W

AK



1/4" F. NW 1.2 mm. Solenoid valve with connector.
Pressure range 0 - 180 bar. Max. 90 °C

R+M Nr.	↔	↑	V
833 15	48 mm	109 mm	24 V ~ 50 Hz
833 00	48 mm	109 mm	230 V ~ 50 Hz



1/4" F. NW 1.2 mm. Solenoid valve without
connector. Pressure range 0 - 180 bar. Max. 90 °C

R+M Nr.	↔	↑	V
833 10	48 mm	109 mm	24 V =

Connector



R+M Nr.
833 50

Rapa SV 04




1/4" F. NW 1.5 mm. Solenoid valve with connector.
Pressure range 0 - 130 bar. Max. 90 °C

R+M Nr.	V
832 01	24 V =

Symbols ⊙ thread ↑ height ↔ length V voltage W watt ← flow TYP type ⊕ inlet ⊖ outlet ∅ diameter P pressure C colour

Pressure switches


Condor / Fanal



Contact 10 A - 380 V. Thread 3/8" F.
Max. 250 bar / 90 °C

R+M Nr.	TYP	P	I
911 50	FF4-4	0.22 - 4 bar	110 mm
911 40	FF4-32	2 - 32 bar	110 mm
911 20	FF4-250	30 - 250 bar	140 mm

PR 5



Contact 5 A - 250 V. Cable 950 mm. Thread 1/4" M.
Max. 280 bar / 90 °C

R+M Nr.	C	start-up pressure
912 515	blue	15 bar
912 525	red	25 bar
912 540	black	40 bar

Diaphragm pressure switches SW 27



Stainless steel. Contact 4 A - 24 V - 250 V. EPDM seals. Usable as dry running protection.
Max. 300 bar / 90 °C


R+M Nr.	Ø	P
913 186 203	1/4" M	0.5 - 5 bar
913 186 206	1/4" M	0.5 - 10 bar
913 186 204	1/4" M	10 - 100 bar

Connector PG 9



Suitable for diaphragm pressure switch

Spare parts



Micro switches


R+M Nr.
913 118 002

R+M Nr.
912 00

Example of use


with two pressure switches

1 - Starting phase

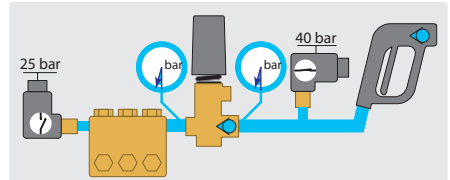


Contact of pressure switch (40 bar) is activated and by this way the cleaner can be started.

2 - High pressure phase

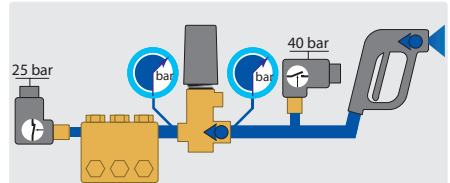

Reaching 25 bar the pressure switch (25 bar) changes the operating condition and secures the operation of the cleaner while pressure switch (40 bar) is deactivated.

3 - Stop phase

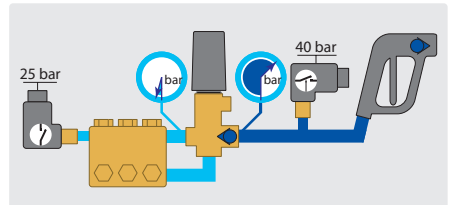

During the bypass phase water circulates in the pump without pressure.

The pressure switch (25 bar) opens and the cleaner stops. At the same time there is still high pressure between the regulation valve and the gun.

The high pressure cleaner starts again when operating the gun.


When exchanging the pressure switch please check the accumulator and if necessary exchange it.

Pressure switches ST-7.1

- » IP 65 protection class.
- » Simultaneous N/O and N/C connection is possible.
- » The design of the micro switch allows comparably high inrush current (20 Amps N/C, 15 Amps N/O).
- » The maximum current of the switch is 10.1 Amps (resistive load).
- » Available switch points are 25 and 40 bar.
- » No ingress of towing water into the environment of the microswitch possible.



Contact 10.1 A - 250 VAC.
Cable 950 mm. Max. 300 bar / 90 °C. IP65




Contacts: red and brown = normally closed / red and blue = normally open.

When used with 2 pressure switches, the two blue cables serve as control lines.




R+M Nr.	P	C	Ø
200 007 800	40 bar	black	1/4" M
200 007 801	25 bar	red	1/4" M

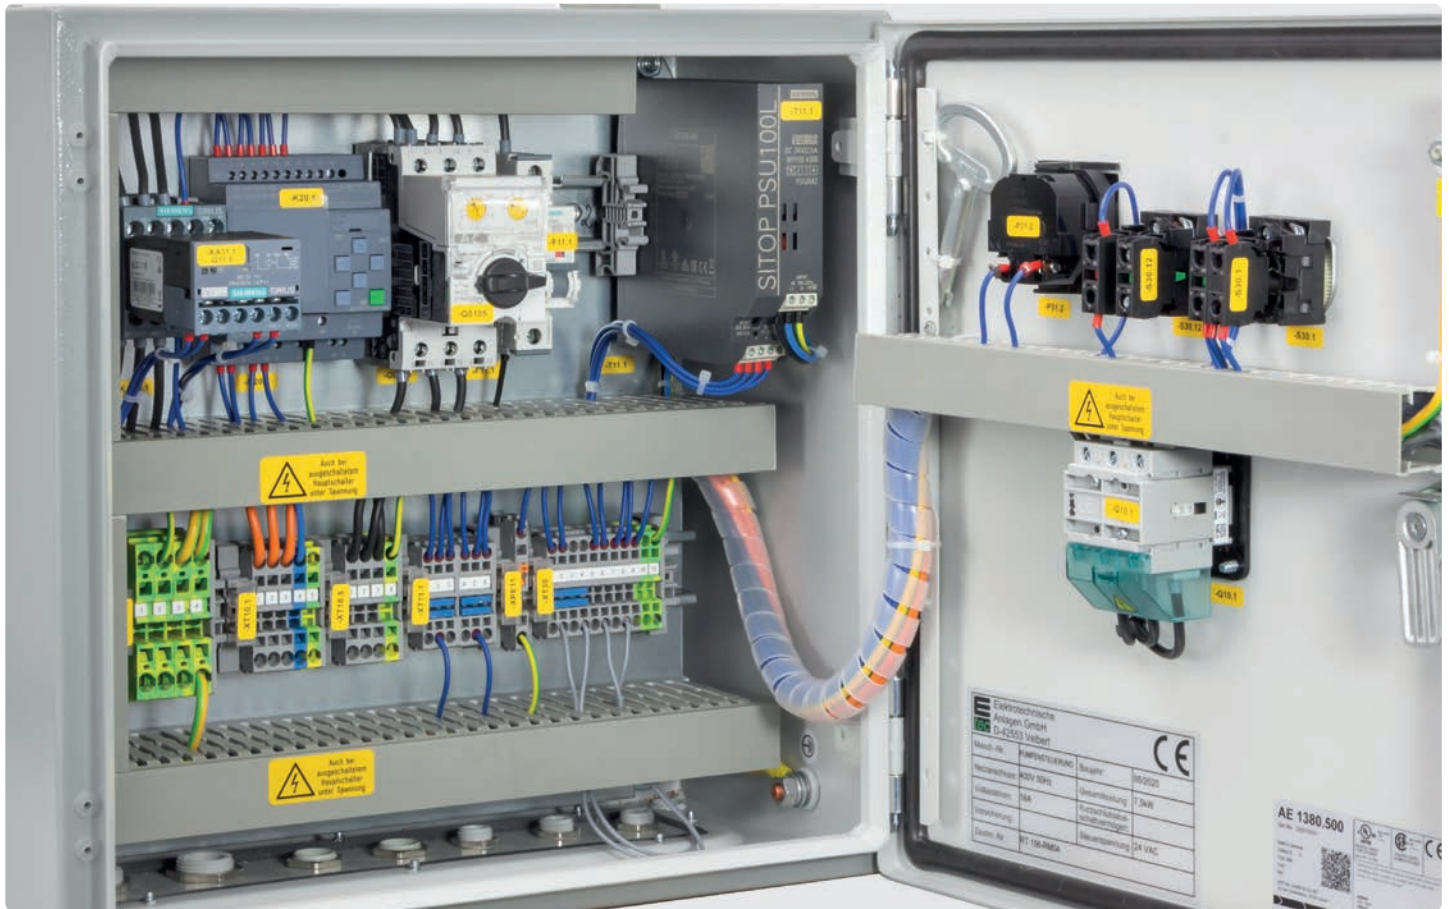

Coin box easywash365+® including control box	92
Motor control easywash365+®	92
Motor protection switches	90
Ravel motors	91
Remote thermometers	90
Remote thermostats	90
Time hour meter	90

Motor protection switches


Type OKN



R+M Nr.	working range
901 516	10.0 - 16.0 A
901 522	16.0 - 22.0 A
901 527*	22.0 - 27.0 A

K F

Type WIMEX




R+M Nr.	working range
901 710	6.3 - 10.0 A
901 716	10.0 - 16.0 A
901 720	16.0 - 20.0 A
901 725	20.0 - 25.0 A

Housing for type WIMEX, IP55

R+M Nr.	(M)
901 730	plastic

Remote thermometers

With contact probe and adjustable knob




1/2" M. Contact 5 A - 250 V (AC1). Indication of temperature 0 - 120 °C

R+M Nr.	working range	tube length
910 20	0 - 80 °C	1,000 mm

Remote thermostats


Emerson 1536



M14 x 1 M. Contact 16 A - 380 V (AC1)

R+M Nr.	working range	tube length
910 16	0 - 160 °C	1,550 mm


Probe with screw



3/8" M. Contact 16 A - 380 V (AC1)

R+M Nr.	working range	tube length
910 12	30 - 150 °C	1,520 mm
910 13	0 - 152 °C	920 mm


Emerson 8654



3/8" M. Contact 16 A - 380 V (AC1)

R+M Nr.	working range	tube length
910 15	30 - 150 °C	1,550 mm



Probe pocket PS1



Brass. Max. 280 bar / 160 °C

R+M Nr.
178 290 260 35

Time hour meter



Time hour meter BW 4018. Front protection class IP 50 according to DIN EN 60529. Protection class II: Double or increased insulation of the device. Connection type Universal connection: screw, solder and AMP plug connection 6.3 x 0.8 mm

Sealing ring. IP 54


R+M Nr.	(V)
915 202 4	24 V ~
915 222 0	230 V ~
915 240 0	400 V ~

R+M Nr.
915 210 100 3

* limited stock

Ravel motors



Motor with hollow shaft



IP54. 1,400 r.p.m.

R+M Nr.	Ø	hole size 1 x 2	TYP	V	A	KW
175 001 061	24	140 x 160 mm	H100	400	6,9	3
175 001 081	24	140 x 190 mm	H112	400	9,4	4
175 001 090	24	140 x 190 mm	H112	400	12,1	5,5
175 001 120	24	140 x 216 mm	H132S	400	15,4	7,5
175 001 143	24	178 x 216 mm	H132M	400	21,3	11


Motor with solid shaft

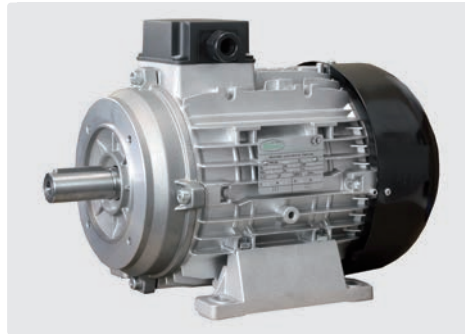

IP54. 1,400 r.p.m.

R+M Nr.	Ø	hole size 1 x 2	TYP	V	A	KW
175 002 004	28	140 x 160 mm	H100	400	5,1	2,2
175 002 001	28	140 x 190 mm	H112	400	9,4	4
175 002 002	28	140 x 190 mm	H112	400	12,6	5,5
175 002 091	38	140 x 216 mm	B3 132S	400	16,8	7,5
175 002 087	38	210 x 254 mm	B3 160M	400	29	15



Flange for hollow shaft motor

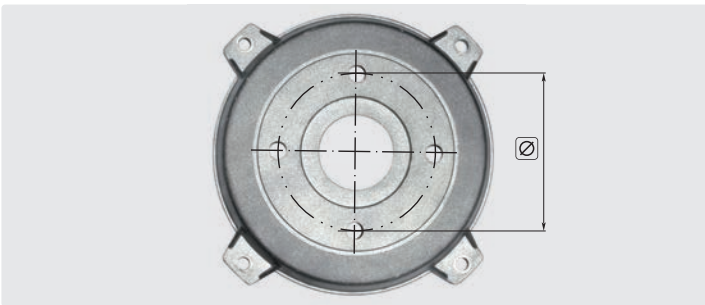

R+M Nr.	TYP	bolt-circle Ø
175 300 306 1	H 100	75 mm
175 300 307 4	H 112	75 mm
175 300 305 1	H 100	87 mm
175 300 305 2	H 112	87 mm

Further versions of Ravel motors
are available on request!

Motors with internal flexible joint RVJ Series

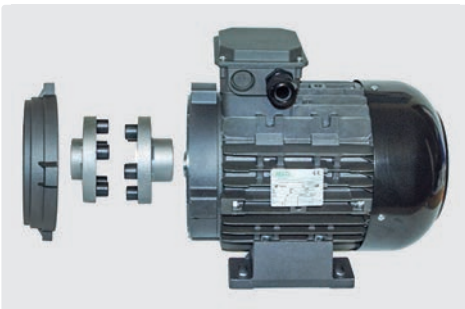

IP54. 1,400 r.p.m.

R+M Nr.	Ø	hole size 1 x 2	TYP	V	A	KW
175 002 400	24	140 x 216 mm	H132S	400	15,4	7,5
175 002 401	24	178 x 216 mm	H132M	400	21,3	11
175 002 402	24	178 x 216 mm	H132M	400	17,8	9,2
175 002 570	24	140 x 216 mm	H112	400	12,1	5,5



Pump/motor assignment on page 44

Symbols **A** ampere **V** voltage **KW** kilowatt **Ø** diameter **TYP** type **M** material shipment by truck

Motor control easywash365+®



Motor control for the operation of motors with 4 - 7.5 kW power at 400 VAC, 50 Hz, IP 65. RAL 7035.

H x W x D 380 x 380 x 210 mm.

Supply: 400VAC, 50Hz, 3Ph / N / PE with main switch (cam switch) 25A. Control voltage conditioning 24VDC, 2.5A with backup fuse 2A.

Motor outlet with power contactor 7.5kW and wide-range motor protection switch 8-32A.

LOGO small control unit.

1 operating hours counter (IP 65) and 2 command and signaling devices built into the door

R+M Nr.	
920 001 380	14 kg

Coin box easywash365+® including control box

Coin box easywash365+® including control box



R+M coin box, mechanical, feat. money return, incl. control box, IP 66, RAL 7035 feat. 2 m supply cable with CEE-plug, 16 A, 400 VAC, 50 Hz, 3 PH/N/PE. Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers. Motor output with power contactor 7.5 kW, wired to CEE add-on box. Feat. a time relay for pulse stretching 0.05 s - 10 h. Excl. control cable

R+M Nr.	money	coin box	control box
925 513 803	chip (profiled)	260 x 160 x 110	300 x 300 x 155
925 513 805	50 Cent	260 x 160 x 110	300 x 300 x 155
925 513 801	1 €	260 x 160 x 110	300 x 300 x 155
925 513 802	2 €	260 x 160 x 110	300 x 300 x 155

Control cable



5 wires, UV-resistant. Sold by metre.

R+M Nr.	
925 510 001	5 G 1.5 mm ²

Control box easywash365+®



Control box, IP 66, RAL 7035. H x W x D 300 x 300 s 155 mm. Feat. 2 m supply cable with CEE-plug 16 A, 400 VAC, 50 Hz, 3 Ph/N/PE.

Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers.


Motor output with power contactor 7.5 kW, wired to CEE add-on box.

Feat. a time relay for pulse stretching 0.05 s - 10 h.

Excl. control cable

R+M Nr.	
925 510 000	9.6 kg

CEE Plug

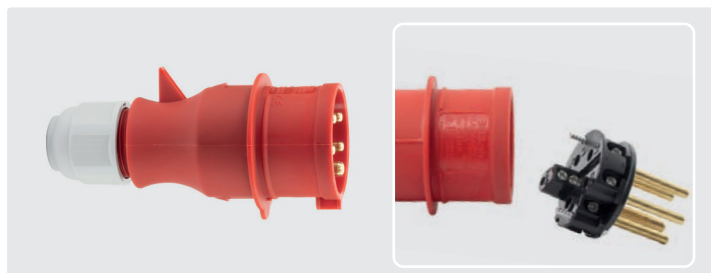

400V / 16A / 3PNE. IP 44. With screw terminals up to a maximum of 2.5 mm²

R+M Nr.
901 338 001



Accessories fuel pumps95

Burner motors96

Coils 100-102

Connector97

Fuel filter96

Fuel nozzles.....99

Fuel nozzles manufacturer comparison chart99

Fuel pumps Danfoss.....95

Fuel pumps Delta94

Fuel pumps drive pegs.....96

Fuel pumps SP95

Fuel pumps Suntec94

Fuel solenoid valves96

Ignition cables97

Ignition electrodes98

Ignition transformers.....97

Spare parts Suntec and Delta fuel pumps94

Fuel pumps Suntec


Pumps with solenoid valve




Coil VM

R+M Nr.	V
827 90	24 V
827 95	230 V

Pump VM. Single line intake or double line intake. Pressure adjustable 7 - 14 bar

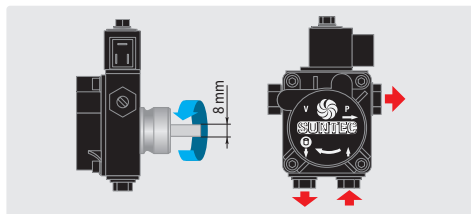

R+M Nr.	TYP	coil	hub
827 00	AS47C 1538	24 V	32 mm
827 10	AS47C 1538	230 V	32 mm

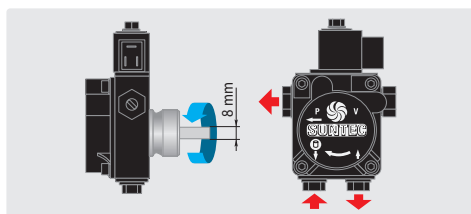

R+M Nr.	TYP	coil	hub
827 15	AS47D 1539	230 V	32 mm


Universal with solenoid valve. Left/right



Coil VU / A

R+M Nr.	V
824 94	24 V
824 95	230 V

Pump VU. Single line intake or double line intake. Cable 700 mm. Pressure adjustable 6 - 18 bar

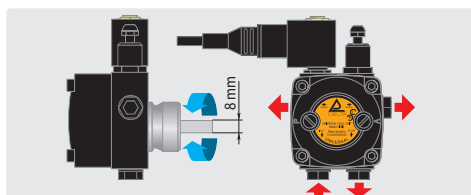

R+M Nr.	TYP	coil	hub
824 40	VU1LR2	24 V	32 mm
824 45	VU1LR2	230 V	32 mm

Fuel pumps Delta


Pumps with solenoid valve




Coil VU / A

R+M Nr.	V
824 94	24 V
824 95	230 V

Pump A. Single line intake or double line intake. Pressure adjustable 6 - 20 bar

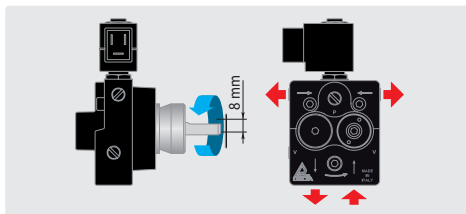

R+M Nr.	TYP	coil	hub
824 31	A1L2	24 V	32 mm
824 30	A1L2	230 V	32 mm

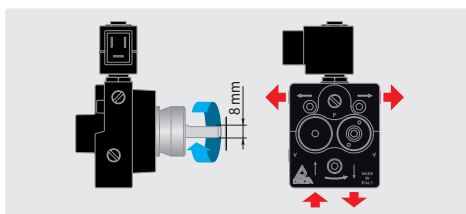


R+M Nr.	TYP	coil	hub
824 32	A1R2	24 V	32 mm
824 33	A1R2	230 V	32 mm


Pumps without solenoid valve



Pump A. Single line intake or double line intake. Pressure adjustable 6 - 20 bar

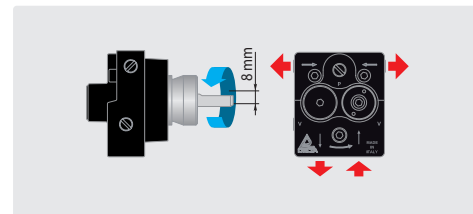


R+M Nr.	TYP	coil	hub
824 04	AD1L2	-	32 mm

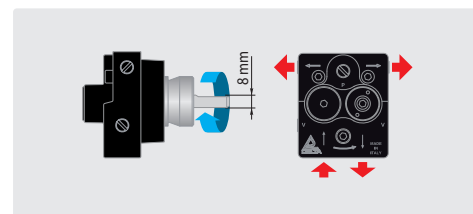

R+M Nr.	TYP	coil	hub
824 05	AD1R2	-	32 mm

Spare parts Suntec and Delta fuel pumps




Gasket for cover (round).
Year of manufacture until 2001

R+M Nr.	TYP
827 992*	Suntec




Filter element

R+M Nr.	TYP
824 96	Delta A



Gasket for cover (square).
Year of manufacture from 2001

R+M Nr.	TYP
827 993	Suntec



Gasket for cover

R+M Nr.	TYP
824 93*	Delta

* limited stock

Symbols TYP type V voltage 8 mm length Ø diameter

Fuel pumps Danfoss


Pumps with solenoid valve



Coil

R+M Nr.	V
826 00	24 V
826 10	230 V

Single line intake or double line intake.
Pressure adjustable 7 - 15 bar

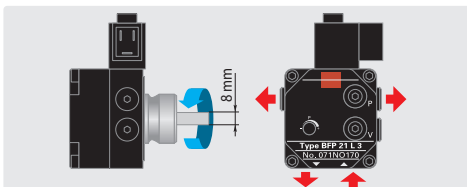

R+M Nr.	TYP	coil	hub
825 45 *	BFP 21 L3	24 V	32 mm
825 40 *	BFP 21 L3	230 V	32 mm

Spare parts Danfoss fuel pumps




Cartridge filter

R+M Nr.
825 01



Cartridge filter

R+M Nr.
825 00

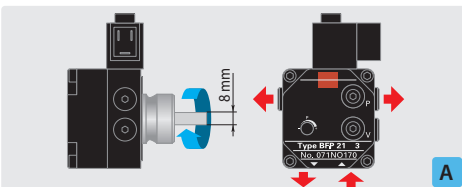

R+M Nr.	TYP	coil	hub
825 35 *	BFP 21 R3	24 V	32 mm
825 30 *	BFP 21 R3	230 V	32 mm

Accessories fuel pumps

Check pressure gauges



1/8" M with o-ring sealing. Undamped $\varnothing$ 40 mm.
Housing plastic.
Hose connection 500 mm

R+M Nr.	indication
547 105 0	0 - 16 bar

Cables with connector




R+M Nr.	
832 40	1050 mm

Fuel pumps SP

Pumps with solenoid valve



Double line intake.
Pressure adjustable 6 - 14 bar

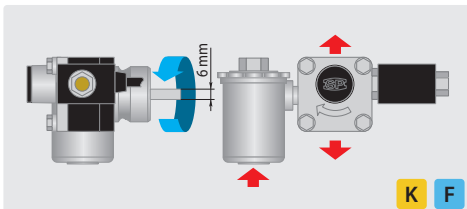


R+M Nr.	TYP	coil	hub
821 10	46L5316M	24 V	32 mm
821 20	46L5316M	230 V	32 mm

Pumps without solenoid valve



Double line intake.
Pressure adjustable 6 - 14 bar

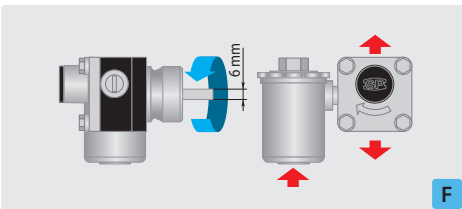

R+M Nr.	TYP	coil	hub
820 20	46L2386	-	32 mm

Filter complete



R+M Nr.
822 40


Membrane



Coil




R+M Nr.	R+M Nr.	V
822 15	821 024	24 V
	821 220	230 V

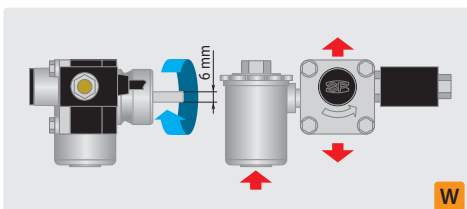

R+M Nr.	TYP	coil	hub
821 30	46L5416 M	24 V	32 mm
821 40	46L5416 M	230 V	32 mm

Attention!

Rotating direction always
stated in view of the shaft.




Cartridge filter




R+M Nr.
822 50

* Since October 2017, all service pumps Diamond Series 2.0 have been manufactured and delivered with Danfoss DLC inside™ and long-life coil Diamond. All service pumps have been inspected and approved for operation with B10 (fuel oil with addition of 10 % of biodiesel).


Fuel pumps drive pegs

Coupling for shaft $\varnothing$ 6 mm

R+M Nr.	$\varnothing$
822 30	6 mm

Coupling for shaft $\varnothing$ 8 mm short

R+M Nr.	$\varnothing$
822 25	8 mm

Coupling for shaft $\varnothing$ 8 mm long

R+M Nr.	$\varnothing$
822 35	8 mm

Fuel solenoid valves

Rapa BV 01 without cable




NC. Normally closed. Max. 24 bar / 60 °C

R+M Nr.	$\varnothing$	coil
830 10	1/8" F	24 V
830 20	1/8" F	230 V
830 40	1/4" F	230 V

Burner motors


Motor with pump shaft 32 mm

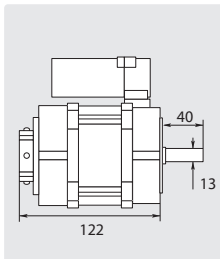

Output max. 150 W - 1.3 A. Cable 500 mm. Right or left rotation

R+M Nr.	V
811 03	230 V

Flange for burner motors



R+M Nr.	TYP	$\varnothing$
811 01	NEMA 1	172 mm
811 02	NEMA 2	184 mm

Spare coils Rapa



Rapa M13


R+M Nr.	V
830 70	230 V

Cable with connector



R+M Nr.	↔
832 40	1,050 mm


Flange with pump shaft 32 mm

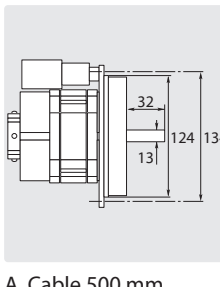


Output max. 110 W - 0.88 A. Cable 500 mm. Left rotation

R+M Nr.	V
810 00	230 V

Cable connection for motor left and right



left rotation





right rotation

C	function
brown+blue	phase
black+white	neutral
yellow/green	ground

C	function
brown+white	phase
black+blue	neutral
yellow/green	ground

Fuel filter

Fuel filter




R+M Nr.
829 05

R+M Nr.
829 00

Symbols $\varnothing$ diameter TYP type V voltage $\varnothing$ thread ↔ length C colour

Ignition transformers


COFI without flange. Cable on side



Connection: ignition cable with self-cutting screw. Output 2 x 4,000 V / 12 mA / 100 % ED

R+M Nr.	TYP	cable	V
805 00	812 C	350 mm	230 V


COFI without flange. Cable on side



Connection: ignition cable with connector
 Ø 4 mm. Output 2 x 4,000 V / 12 mA / 100 % ED

R+M Nr.	TYP	cable	V
805 05	812 C	350 mm	230 V


COFI without flange. Cable on side



Connection: ignition cable with self-cutting screw. Output 2 x 5,000 V / 20 mA / 100 % ED

R+M Nr.	TYP	cable	V
805 40	1020 C	700 mm	230 V
805 50	1020 C	700 mm	400 V

COFI without flange. Cable on side



Connection: ignition cable with connector
 Ø 4 mm. Output 2 x 5,000 V / 20 mA / 100 % ED

R+M Nr.	TYP	cable	V
805 45	1020 C	700 mm	230 V
805 55	1020 C	700 mm	400 V

Connector



Universal


R+M Nr.
852 70



Angle blue. For R+M Nr. 855 40

R+M Nr.
852 30


Ignition cables




Per metre

R+M Nr.	C
855 40	red


Ignition electrodes




R+M Nr.	suitable for
852 10	Kärcher




R+M Nr.	suitable for
852 12	Kärcher




R+M Nr.	suitable for
124 408 0	Kränzle




R+M Nr.	suitable for
851 30*	SIAL




R+M Nr.	suitable for
850 60	Alto




R+M Nr.	suitable for
851 35*	SIRIO




R+M Nr.	suitable for
851 10	LAVORWASH




R+M Nr.	suitable for
851 55	Lavor




R+M Nr.	suitable for
851 60	Idromatic



R+M Nr.	suitable for
851 65*	Idromatic




R+M Nr.	suitable for
851 00	PORTO




R+M Nr.	suitable for
852 15	MAER

Adjustment of electrodes



from side



from top

- 1 Electrodes have to be positioned close to the atomized spray of fuel without getting in touch with it (ends have to stay dry).
- 2 There has to be sufficient space between the electrodes and the fuel nozzle as well as the flame control to avoid a flash over of the ignition spark.

* limited stock

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are no original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Fuel nozzles



Hollow (1 gal = 3.785 litres)

Half hollow (1 gal = 3.785 litres)

		Steinen (H)		Danfoss (H)		Delavan (A)				Danfoss (B)		Delavan (W)	
		60°	80°	60°	80°	45°				60°	80°	45°	
US gph	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	US gph	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
0.50 G					677 41			1.00 G	675 32	677 82			
0.75 G				675 11		679 19 *		1.25 G					
0.85 G	665 31			675 21	677 71			1.35 G	675 52		679 212 1		
1.00 G	665 41			675 31	677 81	679 201		1.50 G		678 12	679 213 1		
1.10 G				675 36	677 851			1.75 G			679 204 1*		
1.25 G	665 51	668 01		675 41	677 91	679 202		2.00 G	675 82				
1.35 G	665 61	668 11		675 51				2.25 G			679 217 1*		
1.50 G	665 71			675 61	678 11								
1.75 G	665 91			675 71	678 21								
2.00 G	666 01			675 81									
2.25 G	666 11	668 61		675 91	678 41								
2.50 G	666 21	668 71		676 01									

Solid (1 gal = 3.785 litres)




Steinen (S/ST)				Danfoss (S)		Delavan (B)	
	45°	60°	80°	60°	80°	45°	60°
US gph	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
0.50 G	660 42	665 10	667 60	674 90	677 40		679 10 *
0.60 G		665 11					
0.65 G	660 45	665 15	667 65	675 00	677 50		
0.75 G	660 46	665 20	667 70	675 10	677 60		
0.85 G	660 47	665 30	667 80	675 20	677 70		679 30 *
1.00 G	660 49	665 40	667 90	675 30	677 80		
1.10 G				675 35	677 85		
1.25 G	660 50	665 50	668 00	675 40	677 90	679 211 *	679 43
1.35 G		665 60	668 10	675 50	678 00		679 44
1.50 G	660 60	665 70	668 20	675 60	678 10	679 213	679 45
1.65 G	660 62	665 80	668 30			679 214	679 47
1.75 G	660 63	665 90	668 40	675 70	678 20		679 46
2.00 G	660 80	666 00	668 50	675 80	678 30		
2.25 G	660 85	666 10	668 60	675 90	678 40		679 49 *
2.50 G		666 20	668 70	676 00	678 50		
2.75 G		666 40	668 90	676 05	678 60		
3.00 G		666 50	669 00	676 15			
3.50 G		666 55					
4.00 G		666 60					

Packing units

Steinen 12 pieces
Danfoss 10 pieces
Delavan 12 pieces

Further nozzles in
different packing units
are available on request.

Fuel nozzles manufacturer comparison chart


	Steinen	Danfoss	Monarch	Delavan	Hago	Fluidics
 Solid	S/ST	S/SR	AR/R	B	ES/B/P	S/SF
 Hollow	H	H/HR	NS/PL	A	H	H/HF
 Half hollow	Q	B	PLS/PLP	W	SS	-

* limited stock

Coils

Suitable for Sirio

limited stock




R+M Nr.	Suitable for hp cleaner	I	Ø	RA	RØ
200 080 645 	SKIPPER	550	280	215	17
200 080 640	MATCH BALL	460	280	215	17

Symbols I height Ø diameter RA pipe distance RØ pipe diameter M material  shipment by truck


Coils

Coils suitable for Kärcher



Manufacturer Nr.	R+M Nr.
4.680-063.0	200 080 512
4.680-077.0	200 080 502
4.680-097.0	200 080 522
4.680-114.0	200 080 114
4.680-123.0	200 080 123
4.680-126.0	200 080 126
4.680-127.0	200 080 502
4.680-135.0	200 080 542
4.680-145.0	200 080 145

R+M Nr.	Suitable for hp cleaner	I	Ø	RA	RØ	M
200 080 502	SB-HDWS1; SB-HDWS2; 500CI; 501C; 550C; 555CI; 555; 555C; 555CS; 557CI; 590C; 600C; 600CI; 600CS; 697CI; 698CSX; 790C; 790CS; 790Ci; 797CI; 798C; 798Ci; 801B; 840C; 890C; Farmer; SB-HDW; SB-HDWS1; SB-HDWS2; Weidner-Waschbär	400	277	57	17,2	steel
200 080 126	5/12C; 6/14C/CX; 501C; 550C; 551C; 558C/CSX; 698C; 798C/CSX; 990; 1000DE/BE; 1200DE; 2600; SB-HDW S/S2	435	277	57	17,2	steel
200 080 512	610; 580; 690; 750; 760; 800B; 800BE; 890; 990; 1000BE; 1000DE; 1200DE; SB-HDW-S; Farmer Super	455	277	57	17,2	steel
200 080 522	650; 655; 695; 699; 745; 755; 795; 891ST; 895; 945; 995; 1291ST; HDS Super; 895S	510	277	57	17,2	steel
200 080 123	650-4M; 655; 695; 698; 699; 745; 755; 795; 798; 8/18-4; 845-4; 850-4; 895; 9/18-4M; 995; Super; SB-HDS695	480	277	57	17,2	steel
200 080 114	650-4M; 655; 695; 698; 699; 745; 755; 795; 798; 8/18-4; 845-4; 850-4; 895; 9/18-4M; 995; Super; SB-HDS695	480	277	57	17,2	stainless steel
200 080 542	7/11; 7/12-4M/MX; 7/16C/CX; 7/16-4C/CX; 8/17C/CX; 8/17-4M/MX; 8/18-4C/CX/M/MX; 9/14ST; 9/15; 9/17-4C/CX/M; 9/18-4M/MX; 11/18-4S; 12/14-4ST/ECO; 650 4M; 655M; 695M/ECO/S/SX; 850-4MX; 891ST; 895/M/MX/S/SX; 918; 995/M/MX/SX; 1195S/SX; 1291ST; Super/M/MX/SX	540	277	57	17,2	steel
200 080 145	10/20-4M/X	580	277	57	17,2	steel




Manufacturer Nr.	R+M Nr.
4.680-070.0	200 080 532
4.680-098.0	200 080 532
4.680-144.0	200 080 144
4.680-146.0	200 080 146
4.680-084.0	200 080 552

R+M Nr.	Suitable for hp cleaner	I	Ø	RA	RØ	M
200 080 532	1210; 1250; 1290; 1390; 1000; 1195; 1295; 1291ST; 1150-4S	530	320	170	21.3	steel
200 080 144	12/18-4S/SX	560	320	170	17.2	steel
200 080 146*	13/20-4S/SX	595	320	170	17.2	steel
200 080 552*	1590	620	320	170	21.3	steel

* limited stock

Coils


Suitable for WAP



Manufacturer Nr.	R+M Nr.
41171	200 080 600


R+M Nr.	Suitable for hp cleaner	I	Ø	RA	RØ
200 080 600	C / CS / DX bis 06/98	500	280	240	17.2

Suitable for Mazzoni



R+M Nr.	Suitable for hp cleaner	I	Ø	RA	RØ
200 080 650	W5050	540	285	80	17


Suitable for Portotecnica



Manufacturer Nr.	R+M Nr.
LAFN06313	200 080 635

R+M Nr.	Suitable for hp cleaner	I	Ø	RA	RØ
200 080 635	Faip HD 200 / Fire Box / Futura / Golden Jet / Mistral Jet Profi 2360T / Mistral Jet Profi 2960T / Mistral Jet Profi DS23660T / Mistral Jet Profi DS2575T / Mistral Jet Profi DS2960T	480	300	250	17

Symbols I height Ø diameter RA pipe distance RØ pipe diameter shipment by truck

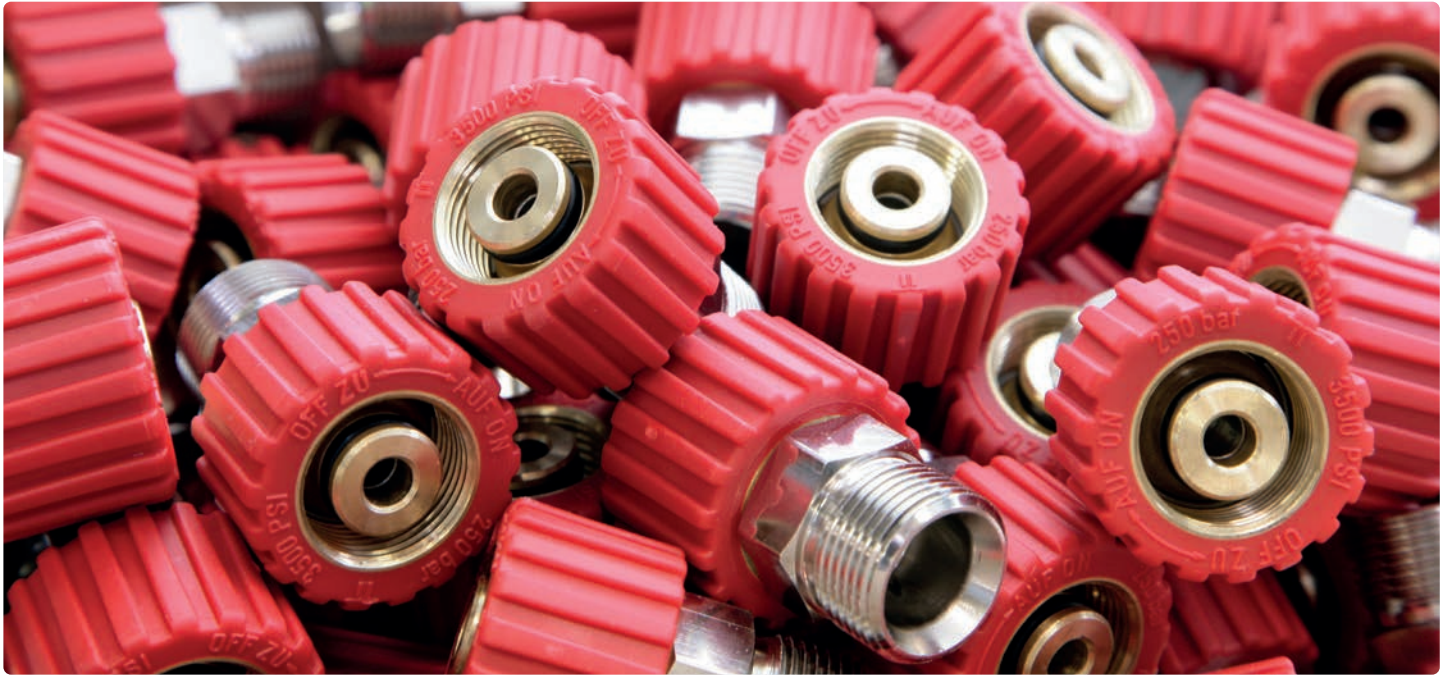

Adhesives & sealing materials	134	Quick screw couplings	
Bonded seals	129	suitable for system 2000	117
Compression fittings (bicone ring system)	110	Quick screw couplings US	117
Couplings "B"	128	Quick screw nipples	116
Distribution fittings	109	R+M swivels	125
Double nipples	105	Reduction double nipples	104
easywash365+® swivels	122	Reduction extension nipples	107
easywash365+® swivels 90°	122	Reduction nipples	105, 131
Elbow	106-107	Reduction sockets	104
Extension nipples	107	Removable screw connections	111
High pressure quick couplings	126	Sockets	104
Hose adapter	130-131	ST-247 coupling system	132-133
Hose connectors	130	Suttner high pressure quick couplings	
Locknut	109	ST-45-250 KW	127
Mosmatic high RPM swivels DY-Series	124	Suttner high pressure quick couplings	
Mosmatic quick screw swivel couplings	113	ST-246	129
Mosmatic seal kits	124	Suttner high pressure quick couplings	
Mosmatic swivels DGE / DGEI	123	ST-3100	128
Mosmatic swivels DGL	124	Suttner quick screw swivel couplings	
Mosmatic swivels DGS / DGV / DGK	123	ST-44	112
Mosmatic swivels DGVI	123	Suttner swivels	119-120
Mosmatic swivels WDG	122	Suttner swivels ST-320	121
Mosmatic swivels WDRS	125	Suttner swivels ST-322	121
Plugs	109	Suttner ultra high pressure quick couplings	
Quick screw couplings	114-115, 118	ST-45-600 KW	129
Quick screw couplings ST-241	113	Swivel connectors	109
Quick screw couplings ST-740 and		T-connections	108
nipples ST-741	111	TR22 K-lock system	131-132

Reduction sockets

Female thread : female thread



Brass

IG : IG
1/8" : 1/4"
1/4" : 3/8"
1/4" : 1/2"
3/8" : 1/2"

R+M Nr.	P	I
518 20	400 bar	26 mm
518 60	400 bar	28 mm



Stainless steel

R+M Nr.	P	I
040 001 023	400 bar	26 mm



Nickel-plated brass

R+M Nr.	P	I
518 524	50 bar	24 mm
518 534	50 bar	26 mm

Sockets

Female thread : female thread



Hexagon. Brass

IG : IG
1/8" : 1/8"
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"
3/4" : 3/4"

R+M Nr.	P	I
518 10	400 bar	22 mm
518 30	400 bar	26 mm
518 40	300 bar	26 mm
518 50	250 bar	30 mm
518 55	150 bar	36 mm



Hexagon. Stainless steel

R+M Nr.	P	I
518 19	500 bar	22 mm
518 39	500 bar	25 mm
518 49	400 bar	26 mm
518 59	400 bar	34 mm
518 559	250 bar	36 mm



Hexagon. Zinc-plated steel

IG : IG
1/4" : 1/4"

R+M Nr.	P	I
518 32	400 bar	25 mm



Round. Stainless steel

R+M Nr.	P	I
519 009	350 bar	25 mm

Reduction double nipples

Male thread : male thread



Brass

AG : AG
1/8" : 1/4"
1/8" : 3/8"
1/4" : 3/8"
1/4" : 1/2"
3/8" : 1/2"
3/8" : 3/4"
1/2" : 3/4"
3/4" : 1"

R+M Nr.	P	I
570 20	400 bar	22 mm
570 30	400 bar	23 mm
570 50	400 bar	24 mm
570 60	400 bar	27 mm
570 80	400 bar	27 mm
571 00	250 bar	34 mm
571 20	150 bar	38 mm



Stainless steel

R+M Nr.	P	I
570 29	500 bar	29 mm
570 39	500 bar	30 mm
570 59	500 bar	33 mm
570 69	500 bar	37 mm
570 89	500 bar	40 mm
571 09	400 bar	43 mm
571 29	250 bar	45 mm



Zinc-plated steel

R+M Nr.	P	I
570 28	500 bar	28 mm
570 38	500 bar	30 mm
570 58	500 bar	32 mm
570 68	500 bar	35 mm
570 88	500 bar	37 mm
570 858	400 bar	39 mm
571 08	400 bar	40 mm
571 28	250 bar	46 mm

Symbols IG female thread AG male thread P pressure I height

Double nipples

Male thread : male thread



Brass

AG : AG	R+M Nr.	P	I
1/8" : 1/8"	570 10	400 bar	20 mm
1/4" : 1/4"	570 40	400 bar	23 mm
1/4" : 1/4"	570 45	400 bar	30 mm
3/8" : 3/8"	570 70	400 bar	25 mm
3/8" : 3/8"	570 71	400 bar	30 mm
1/2" : 1/2"	570 90	400 bar	30 mm
3/4" : 3/4"	571 10	250 bar	33 mm
1" : 1"	571 30	150 bar	32 mm




Stainless steel

R+M Nr.	P	I
570 19	500 bar	25 mm
570 49	500 bar	29 mm
570 79	500 bar	35 mm
570 99	500 bar	42 mm
571 19	400 bar	44 mm
571 39	250 bar	43 mm



Zinc-plated steel

R+M Nr.	P	I
570 18	500 bar	25 mm
570 48	500 bar	29 mm
570 78	500 bar	34 mm
570 98	500 bar	38 mm
571 18	400 bar	42 mm
571 38	250 bar	48 mm



Stainless steel

BSP-m : NPT-m	R+M Nr.	P	I
3/8" : 3/8"			
1/2" : 1/2"			




Zinc-plated steel

R+M Nr.	P	I
570 892	315 bar	38 mm
570 999 2	200 bar	46 mm

R+M Nr.	P	I
570 782	280 bar	35 mm
570 982	200 bar	43 mm

Reduction nipples

Female thread : male thread



Round. Brass

IG : AG	R+M Nr.	P	I
1/8" : 1/4"	575 11	400 bar	13 mm
1/8" : 3/8"			
1/8" : 1/2"			
1/4" : 3/8"			
1/4" : 1/2"			
3/8" : 1/2"			
3/8" : 3/4"			
1/2" : 3/4"			
3/4" : 1"			



Hexagon. Brass

R+M Nr.	P	I
575 10	400 bar	13 mm
575 20	400 bar	14 mm
575 45	400 bar	20 mm
575 30	400 bar	14 mm
575 40	400 bar	20 mm
575 50	400 bar	20 mm
575 60	250 bar	20 mm
575 70	250 bar	20 mm
575 80	150 bar	23 mm



Hexagon. Stainless steel

R+M Nr.	P	I
575 19	500 bar	18 mm
575 29	500 bar	18 mm
575 459	500 bar	18 mm
575 39	500 bar	20 mm
575 49	500 bar	25 mm
575 59	500 bar	23 mm
575 69	250 bar	24 mm
575 79	250 bar	27 mm
575 89	150 bar	27 mm




Hexagon. Zinc-plated steel

IG : AG	R+M Nr.	P	I
1/8" : 1/4"	575 18	500 bar	18 mm
1/8" : 3/8"	575 28	500 bar	20 mm
1/4" : 3/8"	575 38	500 bar	20 mm
1/4" : 1/2"	575 48	500 bar	25 mm
1/4" : 3/4"	575 468	500 bar	27 mm
3/8" : 1/2"	575 58	500 bar	24 mm
3/8" : 3/4"	575 68	250 bar	27 mm
1/2" : 3/4"	575 78	250 bar	27 mm
1/2" : 1"	575 758	150 bar	30 mm

Elbow


Female thread : male thread



Brass


IG : AG
1/8" : 1/8"
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"

R+M Nr.	P	↔	↑
010 005 410	350 bar	29	29
010 005 400	350 bar	29	29




Brass (short version)

R+M Nr.	P	↑
572 00	250 bar	18 mm
572 10	250 bar	19 mm
572 20	250 bar	21 mm

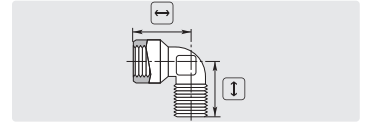

Brass

R+M Nr.	P	↔	↑
572 30	150 bar	26	24
572 35	150 bar	26	24
572 36	150 bar	34	31




Stainless steel

IG : AG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"

R+M Nr.	P	↔	↑
579 15	150 bar	22	28
579 29	150 bar	23	31
579 35	150 bar	26	39


Female thread : female thread



Brass


IG : IG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"

R+M Nr.	P	↑
010 005 420	350 bar	29 mm
010 005 430	350 bar	29 mm





Nickel-plated brass

R+M Nr.	P	↑
572 40	150 bar	26 mm
572 50	150 bar	28 mm
572 51	150 bar	34 mm

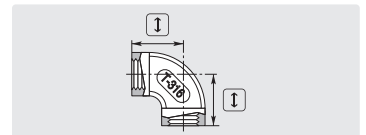

Stainless steel

R+M Nr.	P	↑
579 10	150 bar	19 mm
575 25	150 bar	25 mm





Brass (short version)

IG : IG
1/4" : 1/4"

R+M Nr.	P	↑
710 101 075	250 bar	19,5 mm

Elbow

Male thread : male thread



Brass

Nickel-plated brass

IG : AG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"

R+M Nr.	P	I
010 005 440	350 bar	29 mm
010 005 450	350 bar	29 mm

R+M Nr.	P	I
572 60	150 bar	24 mm
572 70	150 bar	27 mm
572 80	150 bar	32 mm

Reduction extension nipples

Female thread : male thread



Brass

Stainless steel

IG : AG
1/4" : 1/8"
1/4" : 3/8"
3/8" : 1/4"
3/8" : 1/2"
1/2" : 3/8"
3/4" : 1/2"
1" : 1/2"
1" : 3/4"
1-1/4" : 3/4"

R+M Nr.	P	I
576 10	150 bar	25 mm
576 40	250 bar	29 mm
576 30	250 bar	26 mm
576 65	250 bar	34 mm
576 60	250 bar	32 mm
576 70	250 bar	34 mm
576 90	150 bar	26 mm

R+M Nr.	P	I
576 19	400 bar	25 mm
576 49	400 bar	27 mm
576 39	400 bar	26 mm
576 659	400 bar	34 mm
576 69	400 bar	32 mm
576 79	400 bar	34 mm
576 88	400 bar	49 mm
576 900 9	250 bar	51 mm
576 910 9	250 bar	55 mm

Extension nipples

Female thread : male thread



Brass

Stainless steel

IG : AG
1/4" : 1/4"
3/8" : 3/8"
3/8" : 3/8"
1/2" : 1/2"


R+M Nr.	P	I
576 20	400 bar	28 mm
576 50	250 bar	29 mm
576 55	250 bar	40 mm
576 80	250 bar	34 mm

R+M Nr.	P	I
576 29	250 bar	26 mm
576 59	250 bar	29 mm
576 89	250 bar	34 mm

Symbols IG female thread AG male thread P pressure L length I height

T-connections


Female thread



Brass


IG : IG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"

R+M Nr.	P	↔	I
010 005 480	350 bar	58	29



Brass


R+M Nr.	P	↔	I
573 30	150 bar	51	25
573 32	150 bar	56	28
573 33	150 bar	70	35

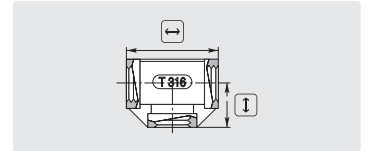

Stainless steel

R+M Nr.	P	↔	I
579 50	150 bar	39	20
579 60	150 bar	48	24
579 70	150 bar	52	26


Female thread : male thread



Brass


IG : AG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"

R+M Nr.	P	↔	I
010 005 470	350 bar	58	29



Nickel-plated brass



R+M Nr.	P	↔	I
573 50	150 bar	49	26
573 60	150 bar	54	28
573 70	150 bar	67	32



Brass

IG : AG
1/8" : 1/8"
1/4" : 1/4"
3/8" : 3/8"
3/8" F : M : 1/4" F

R+M Nr.	P	↔	I
010 005 460	350 bar	58	29

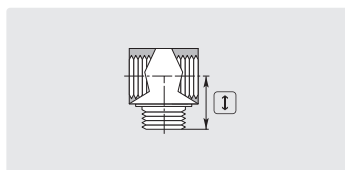

Brass (T-block)

R+M Nr.	P	↔	I
573 00	250 bar	16	16
573 10	250 bar	22	20
573 20	250 bar	27	22

Plugs

Male thread



Brass. With hexagon

AG
1/8"
1/4"
3/8"
1/2"
3/4"

R+M Nr.	P	I
578 01	250 bar	11 mm
578 15	250 bar	13 mm
578 25	250 bar	15 mm
578 30	250 bar	18 mm
578 40	150 bar	24 mm



Brass. With hexagon

R+M Nr.	P	I
578 00	250 bar	8 mm
578 10	250 bar	10 mm
010 000 365	250 bar	10 mm

Nickel-plated brass

R+M Nr.	I
574 638	5.5 mm



Stainless steel. With hexagon

AG
1/8"
1/4"
1/2"

R+M Nr.	P	I
578 09	250 bar	11 mm
578 309	250 bar	18 mm




Stainless steel. With hexagon

R+M Nr.	P	I
578 109	250 bar	10 mm

Distribution fittings

Cross

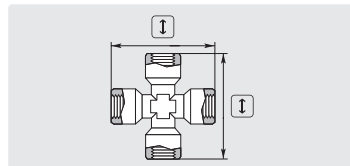


F. Nickel-plated brass

IG
1/4"
3/8"
1/2"


R+M Nr.	P	I
574 514	150 bar	51 mm

3-way



F. Nickel-plated brass

R+M Nr.	P	I
574 00	150 bar	32 36
574 10	150 bar	37 40
574 15	150 bar	45 53

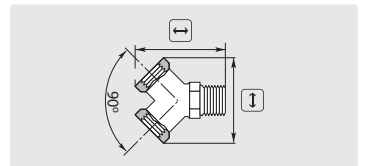

F : M. Nickel-plated brass

R+M Nr.	P	I
574 35	150 bar	42 40

Swivel connectors

Female thread : male thread



Zinc-plated steel

IG : AG
1/4" : 1/4"
3/8" : 3/8"
1/2" : 1/2"
1/2" : 3/8"

R+M Nr.	P	I
582 03	350 bar	34 mm
582 04	350 bar	42 mm
582 02	200 bar	44 mm
582 01	350 bar	44 mm



Stainless steel

R+M Nr.	P	I
582 039	350 bar	34 mm
582 049	350 bar	42 mm
582 029	200 bar	44 mm
582 019	350 bar	44 mm

Symbols IG female thread AG male thread P pressure I length I height

Compression fittings (bicone ring system)

Straight screw connectors



X-GE. Zinc-plated steel

R+M Nr.	TYP	AG	AG	I
580 90	6 LL	M10	1/8"	20
580 95	6 L	M12	1/8"	23
580 98	6 L	M12	1/4"	28
580 99	8 L	M14	1/8"	24
581 00	8 L	M14	1/4"	29
581 05	8 L	M14	3/8"	31
581 10	10 L	M16	1/4"	30
581 20	10 L	M16	3/8"	28
581 25	10 L	M16	1/2"	34
581 50	12 L	M18	1/4"	31
581 60	12 L	M18	3/8"	28
581 55	12 L	M18	1/2"	31
581 141 21	14 S	M22	1/2"	41



X-GE. Stainless steel

R+M Nr.	TYP	AG	AG	I
581 19	10 L	M16	1/4"	30
581 29	10 L	M16	3/8"	28
581 59	12 L	M18	1/4"	31
581 69	12 L	M18	3/8"	28
596 143 81	14 S	M22	3/8"	39
596 141 21	14 S	M22	1/2"	41

Straight screw connectors



X-GAI. Zinc-plated steel

R+M Nr.	TYP	IG	AG	I
580 00	6 L	1/4"	M12	25
580 10	8 L	1/4"	M14	31
580 20	10 L	1/4"	M16	32
580 50	10 L	3/8"	M16	28
580 30	12 L	1/4"	M18	33
580 40	12 L	3/8"	M18	33



X-GAI. Stainless steel

R+M Nr.	TYP	IG	AG	I
580 29	10 L	1/4"	M16	32
580 39	12 L	1/4"	M18	33

Nominal pressure according to DIN 2401

LL = light series
L = solid series
S = heavy duty series
Other connections are available on request.

TYP	Stainless steel	Zinc-plated steel
LL (4 - 8)	100 bar	100 bar
L (6 - 10)	315 bar	500 bar
L (12 - 18)	315 bar	400 bar
L (22 - 42)	160 bar	250 bar
S (6 - 10)	630 bar	800 bar
S (12 - 16)	490 bar	630 bar
S (20 - 38)	315 bar	420 bar

Elbows

WE-R. Zinc-plated steel.
With nut & bicone ring

R+M Nr.	TYP	AG	Ø	I
583 00	6 L	1/8"	6	28
583 20	12 L	3/8"	12	35
583 121 4	12 L	1/4"	12	35

Pipe pieces

EG. Zinc-plated steel.
Nut & bicone ring premounted

R+M Nr.	TYP	AG	Ø	I
581 12	8 L	M14	1/4"	8 42
581 11	10 L	M16	1/4"	10 40
581 61	12 L	M18	3/8"	12 47
581 619*	12 L	M18	3/8"	12 47
581 13	12 L	M18	1/4"	12 47

Pipe pieces

X-EG. Zinc-plated steel.
Without nut & bicone ring

R+M Nr.	AG	Ø	I
582 25	M18	3/8"	12 47

Bicone rings



Zinc-plated steel

R+M Nr.	TYP	Ø
584 102	L / S	10
584 122	L / S	12

Nut



Zinc-plated steel

R+M Nr.	TYP	Ø
584 101	10 L	M16
584 121	12 L	M18

Double nipples / connectors



X-G. Zinc-plated steel

R+M Nr.	TYP	AG	I
581 30	10 L	M16	27
581 70	12 L	M18	28



X-G. Stainless steel

R+M Nr.	TYP	AG	I
581 79	12 L	M18	28



X-G. Stainless steel

R+M Nr.	TYP	AG	I
593 142	14 S	M22	38

* Stainless steel

Removable screw connections

Male thread : male thread



Stainless steel

AG : AG	R+M Nr.	P
1/2" : 1/2"	574 812 009	max. 150 lbs 67
3/4" : 3/4"	574 834 009	max. 150 lbs 73

Quick screw couplings ST-740 and nipples ST-741

Quick screw couplings ST-740 and nipples ST-741



M24 F : M.
Max. 700 bar / 150 °C



M24 F : M.
Max. 700 bar / 150 °C



M : M24 M.
Max. 700 bar / 150 °C



M24 M : M24 M.
Max. 700 bar / 150 °C

⊙	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1/4"			200 741 505	
3/8"	200 740 501	200 740 601	200 741 501	
1/2"	200 740 503		200 741 503	
M24				200 741 600



M24 F : F.
Max. 700 bar / 150 °C



M24 F : F.
Max. 700 bar / 150 °C



F : M24 M.
Max. 700 bar / 150 °C

⊙	R+M Nr.	R+M Nr.	R+M Nr.
1/4"	200 740 504	200 740 604	200 741 504
3/8"	200 740 502	200 740 602	200 741 502
M16x1	200 740 506		

Seals




O-ring - ST-740

R+M Nr.
050 000 408



O-ring - ST-741

R+M Nr.
050 001 000



Back ring - ST-740

R+M Nr.
050 000 407

Symbols IG female thread AG male thread length I height ⊙ thread ⊗ diameter TYP type P pressure

Suttner quick screw swivel couplings ST-44

Quick screw coupling : male thread



K

M22 F : M. Max. 400 bar / 150 °C

1/4"	
3/8"	
1/2"	
M18	
M22	

R+M Nr.	i
568 00	49 mm
568 25	70 mm
568 26	73 mm
568 30	76 mm
568 10	76 mm



W

M21 F : M. Max. 400 bar / 150 °C

R+M Nr.	i
568 50	49 mm
568 70	46 mm



M22 F : M. Max. 200 bar

R+M Nr.	i
200 044 510	49 mm



K

M22 F : M22 M. Stainless steel.
Max. 400 bar / 150 °C

M22	

R+M Nr.	i
568 19	56 mm

Quick screw coupling : female thread



K

M22 F : F. Max. 400 bar / 150 °C

1/4"	
3/8"	

R+M Nr.	i
568 15	67 mm



K

M22 F : F. Max. 400 bar / 150 °C

R+M Nr.	i
568 20	68 mm



W

M21 F : F. Max. 400 bar / 150 °C

R+M Nr.	i
568 80	67 mm

Seals ST-44



O-ring

R+M Nr.	VPE
050 000 651	1
568 009 100	100



U-ring

R+M Nr.	
050 000 379	



O-ring (back)

R+M Nr.	TYP
568 011	small
568 010	big



Back ring

R+M Nr.	VPE
050 001 511	1
568 008 100	100



Seal kit

R+M Nr.	
568 001 1	

Symbols thread height packing unit type

Quick screw couplings ST-241

Quick screw couplings with internal o-ring



1/2" F : F. Max. 300 bar / 150 °C




1/2" F : M. Max. 300 bar / 150 °C


Symbol
1/4"
3/8"
1/2"

R+M Nr.	Symbol
200 241 500	52 mm
200 241 520	52 mm
200 241 540	53 mm


R+M Nr.	Symbol
200 241 510	56 mm
200 241 530	56 mm
200 241 550	58 mm



F : 1/2" M. Max. 300 bar / 150 °C



M : 1/2" M. Max. 300 bar / 150 °C

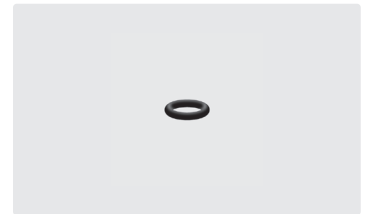

O-ring nipple

Symbol
1/4"
3/8"
1/2"


R+M Nr.	Symbol
200 241 700	34 mm
200 241 720	34 mm
200 241 740	36 mm

R+M Nr.	Symbol
200 241 710	38 mm
200 241 730	38 mm
200 241 750	40 mm


R+M Nr.	VPE
050 000 160	1
791 025 100	100

Mosmatic quick screw swivel couplings


Quick screw coupling : male thread



M22 F : M. Max. 250 bar / 120 °C



M21 F : M. Max. 250 bar / 120 °C

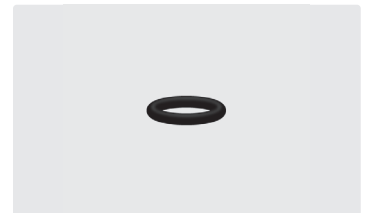

O-ring Swivel MSM


Symbol
1/4"
3/8"
M18
M22

R+M Nr.	Symbol
108 701 01	47 mm
108 701 03	48 mm
108 701 07	42 mm
108 701 09	46 mm


R+M Nr.	Symbol
108 700 01	47 mm
108 700 03	48 mm
108 700 07	42 mm

R+M Nr.	VPE
790 35	1
790 351 00	100

Quick screw coupling : female thread



M22 F : F. Max. 250 bar / 120 °C



M21 F : F. Max. 250 bar / 120 °C

Symbol
1/4"
3/8"

R+M Nr.	Symbol
108 701 02	47 mm
108 701 04	48 mm

R+M Nr.	Symbol
108 700 02	47 mm
108 700 04	48 mm

Quick screw couplings

Quick screw coupling : male thread



Standard M22 : M. Black.
Max. 400 bar / 150 °C



Standard M21 : M. Grey.
Max. 400 bar / 150 °C



Short M22 : M. Black.
Max. 400 bar / 150 °C

AG
1/4"
3/8"
1/2"
M16
M18
M21
M22

R+M Nr.	I
561 40	49 mm
561 60	46 mm
561 66	50 mm
561 80	51 mm
561 90	47 mm
561 98	49 mm
561 95	60 mm

R+M Nr.	I
564 20	44 mm
564 40	45 mm
564 50	43 mm
564 62	49 mm
564 60	60 mm

R+M Nr.	I
560 30	28 mm



Short M21 : M. Grey.
Max. 400 bar / 150 °C



Short M22 : M. Stainless steel.
Max. 400 bar / 150 °C



M22 : M. Stainless steel.
Max. 500 bar


AG
1/4"
3/8"

R+M Nr.	I
563 20	27 mm


R+M Nr.	I
560 39	28 mm

R+M Nr.	I
561 49	48 mm
561 69	45 mm

Quick screw coupling : quick screw coupling



M22 F : M22 F.
Max. 400 bar / 150 °C



M22 F : M21 F.
Max. 400 bar / 150 °C

Q

R+M Nr.	I
561 96	50 mm

R+M Nr.	I
561 97	50 mm

Quick screw couplings


Quick screw coupling : female thread



Standard M22 : F. Black.
Max. 400 bar / 150 °C

IG	
1/8"	
1/4"	
3/8"	
1/2"	

R+M Nr.	I
561 20	45 mm
561 30	45 mm
561 50	45 mm
561 65	45 mm



Standard M21: F. Grey.
Max. 400 bar / 150 °C

R+M Nr.	I
564 00	42 mm
564 10	41 mm
564 30	41 mm



Standard 1/2" : F. Blue.
Max. 400 bar / 150 °C

R+M Nr.	I
561 10	43 mm



Short M22 : F. Black.
Max. 400 bar / 150 °C

IG	
1/8"	
1/4"	
3/8"	

R+M Nr.	I
560 10	31 mm
560 20	28 mm



M22 : F. Stainless steel.
Max. 500 bar

R+M Nr.	I
561 39	45 mm
561 59	45 mm

Seals



O-ring. 10x2.2. Viton

R+M Nr.	VPE
790 24	1
790 241 00	100



Back ring

R+M Nr.	VPE
050 001 440	1
787 001 100	100



O-ring. 10x2. Perbunan

R+M Nr.	VPE
790 10	1
790 100	100



O-ring. 10x2. Viton

R+M Nr.	VPE
790 20	1
790 201 00	100



O-ring. 10x2.2. Perbunan

R+M Nr.	VPE
790 25	1
790 251 00	100

Quick screw nipples

Male thread : female thread



K

M22 M : F. Brass. Max. 400 bar

1/8"	
1/4"	
3/8"	
1/2"	
M16	
M18	
M22	

R+M Nr.	
565 10	29
565 20	29
565 40	29
565 65	29
565 90 *	34
565 66	33



W

M21 M : F. Brass. Max. 400 bar

R+M Nr.	
567 10	30
567 20	29
567 40	29
567 60 *	30



1/2" M : F. Brass. Max. 400 bar

R+M Nr.	
567 80	29



K

M22 M : F. Brass. Long.
Max. 400 bar

1/4"	
3/8"	
1/2"	

R+M Nr.	
565 251	40
565 401	40



Kr

M22 M : F. Brass. With hexagon.
Max. 400 bar

R+M Nr.	
565 80	38



K

M22 M : F. Stainless steel.
Max. 500 bar

R+M Nr.	
565 29	29
565 49	29
565 659	30

Quick screw nipples

Male thread : male thread

M22 M : M. Brass.
Max. 400 bar

1/4"	
3/8"	
1/2"	

R+M Nr.	
565 30	29 mm
565 50	29 mm
565 60	29 mm

M22 M : M with cone (AGR). Brass.
Max. 400 bar

R+M Nr.	
565 301	31.5 mm
565 501	31.5 mm



W

M21 M : M. Brass.
Max. 400 bar

R+M Nr.	
567 30	32 mm
567 50	32 mm

M22 M : M. Brass. Long.
Max. 400 bar

1/4"	
3/8"	
1/2"	

R+M Nr.	
565 311	40 mm
565 511	40 mm

M22 M : M. Stainless steel.
Max. 500 bar

R+M Nr.	
565 39	29 mm
565 59	29 mm
565 69	29 mm

M22 M : M. Stainless steel.
Max. 400 bar

R+M Nr.	
565 312 9	42 mm

* limited stock

Quick screw couplings suitable for system 2000



K

M22 F : M. Max. 400 bar / 150 °C



K

M22 F : F. Max. 400 bar / 150 °C



K

M22 F : M. Max. 400 bar / 150 °C

1/4"

R+M Nr.	
560 302	30 mm

R+M Nr.	
561 302	45 mm

R+M Nr.	
561 402	49 mm



K

M22 F : F. Max. 400 bar / 150 °C



K

M22 F : M. Max. 400 bar / 150 °C

3/8"

R+M Nr.	
561 502	47 mm


R+M Nr.	
561 602	50 mm

Quick screw couplings US

Quick screw couplings US



M22 F : F.
Max. 400 bar / 150 °C

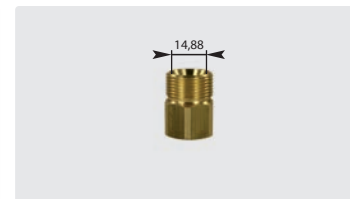

M22 : F.
Max. 400 bar / 150 °C


3/8" F

R+M Nr.	
561 501	45 mm

R+M Nr.	
565 402	29



M22 F : F.
Max. 400 bar / 150 °C

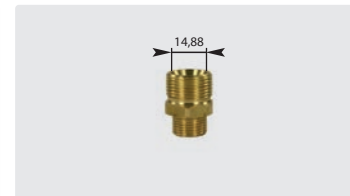

M22 : M.
Max. 400 bar / 150 °C

1/4" M
3/8" M

R+M Nr.	
561 601	46 mm

R+M Nr.	
565 302	29

Seal



O-ring. Quick screw coupling US.
10.77 x 2.62. NBR 70

R+M Nr.	
903 825 00	1
790 117 726 210 0	100

Quick screw couplings

Quick screw couplings with long centric nipple



M22 F : F.
Max. 400 bar / 150 °C



M22 M : M. Long.
Max. 400 bar / 150 °C

1/4"
3/8"

R+M Nr.	
561 31	36 mm

R+M Nr.	
565 311	40 mm
565 511	40 mm



M22 M : F. Long.
Max. 400 bar / 150 °C



M22 M : 1/4" M. Long.
Max. 400 bar / 150 °C

1/4"
3/8"

R+M Nr.	
565 251	40 mm
565 401	40 mm

R+M Nr.	
565 311 9	40 mm

QSC with hexagon centric nipple



M22 F : F.
Max. 400 bar / 150 °C



M22 M : F. With hexagon.
Max. 400 bar / 150 °C

1/4"

R+M Nr.	
560 50	41 mm

R+M Nr.	
565 80	38 mm

Suttner swivels

ST-300 swivels



3/8" M : 3/8" F. Stainless steel / nickel-plated brass. Max. 275 bar / 90 °C

R+M Nr.	
200 300 010	45 mm



Repair kit

R+M Nr.	
200 300 100	



1/4" F : 3/8" F. Stainl. steel / nickel-plated brass. Max. 275 bar / 90 °C

R+M Nr.	
200 300 050	57 mm



Repair kit


R+M Nr.	
200 300 100	

ST-300 swivels



1/4" M : 1/4" F.
Brass.
Max. 275 bar / 90 °C

R+M Nr.	
200 300 040	44 mm



R+M Nr.	

ST-301 swivels



1/4" F : 3/8" F. Stainless steel / brass.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	
200 301 050	58 mm



Repair kit

R+M Nr.	
200 300 100	

ST-301 swivels



1/4" F : M22 M. Stainless steel / brass.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	
200 301 060	62 mm



R+M Nr.	
200 300 100	

ST-310 swivels



1/4" F : 3/8" F.
Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 310 000	57 mm



Repair kit

R+M Nr.	
200 300 100	

ST-310 swivels



3/8" M : 3/8" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 310 010	45 mm



Repair kit

R+M Nr.	
200 300 100	



1/2" M : 1/2" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 310 040	49 mm



Repair kit

R+M Nr.	
200 300 100	

Suttner swivels

ST-311 swivels



1/4" F : 3/8" F. Stainless steel.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	
200 311 050	58 mm




Repair kit

R+M Nr.
200 300 100



1/4" F : M22 M. Stainless steel.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	
200 311 060	58 mm

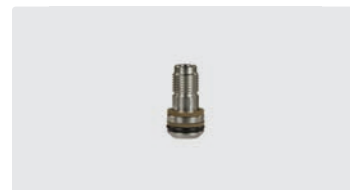

Repair kit

R+M Nr.
200 300 100

ST-340 swivels



1/2" M : 1/2" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 340 010	52 mm



Repair kit

R+M Nr.
200 340 100



1/4" F : 1/2" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 340 050	73 mm



Repair kit

R+M Nr.
200 340 100



1/2" M : 1/2" F. Brass.
Max. 250 bar / 90 °C

R+M Nr.	
200 340 510	52 mm



Repair kit

R+M Nr.
200 340 150



1/4" F : 1/2" F. Brass.
Max. 250 bar / 90 °C

R+M Nr.	
200 340 520	73 mm



Repair kit


R+M Nr.
200 340 100

ST-351 swivels



1/2" M : 1/2" F. Stainless steel.
Max. 600 bar

R+M Nr.	
200 351 510	72 mm



Repair kit swivel ST-351


R+M Nr.
200 351 400

ST-350 swivels



3/8" M : 3/8" F. Stainless steel.
Max. 500 bar / 90 °C

R+M Nr.	
200 350 010	45 mm

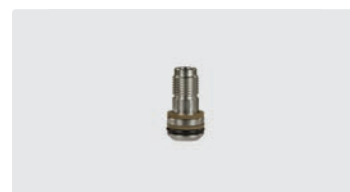

Repair kit

R+M Nr.
200 300 120

ST-345 swivels



1/4" F : 1/4" M. 350 bar. Stainless

R+M Nr.
200 345 500



1/4" F : 1/4" M. 350 bar. Stainless.
easywash365+® blue

R+M Nr.
200 345 510



1/4" F : 1/4" M. 350 bar. Stainless.
RAL 5005

R+M Nr.
200 345 520



1/4" F : 1/4" M. 350 bar. Stainless

R+M Nr.
200 345 530

Suttner swivels ST-320

Completely stainless steel. Swivel with slide ring as sealing element. DN 6



3/8" F : 3/8" M.
Max. 400 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
200 320 500	48 mm



1/4" F : 1/4" M.
Max. 400 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
200 320 550	48 mm



3/8" F : 3/8" M.
Max. 400 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
200 320 502	48 mm



Repair kit swivels ST-320

R+M Nr.
200 320 490

Suttner swivels ST-322

Completely stainless steel. Swivel with slide ring as sealing element. Field of application: Hose reels



3/8" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 500	5-400 bar	65 mm



1/2" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 510	5-300 bar	65 mm



1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 520	5-300 bar	67 mm



1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 522	5-300 bar	68 mm




M28 M. DN 12.

For series R+M 434 - R+M 564.

P 5-300 bar. Max. 30 r.p.m. / 90 °C

R+M Nr.	I	C
200 322 523	79.5 mm	1/2" F
200 322 525	79.5 mm	3/8" F



Repair kit swivels ST-322

R+M Nr.
200 322 490

Symbols I height C inlet P pressure

easywash365+® swivels 90°

Housing nickel-plated brass. Axle stainless steel. Field of application: Ceiling booms in self-service car wash



1/4" F : 1/4" M. DN 7.
Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	I
562 390 503	46 mm



3/8" F : 1/4" M. DN 7.
Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	I
562 390 505	46 mm



3/8" F : 3/8" M. DN 7.
Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	I
562 390 507	46 mm



Repair kit **easywash365+®** swivels

R+M Nr.
750 140 2

easywash365+® swivels

Housing stainless steel / nickel-plated brass. Axle stainless steel. Maintenance-free. DN 6. Field of application: Swivels applicable to high pressure spray guns and hose connections, ceiling booms in self-service car wash



1/4" M : 1/4" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 600	63 mm	1
562 391 601	63 mm	25



1/4" M : 3/8" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 605	64 mm	1
562 391 606	64 mm	25



3/8" M : 1/4" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 610	63 mm	1
562 391 611	63 mm	25



3/8" M : 3/8" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 615	64 mm	1
562 391 616	64 mm	25



1/4" F : 1/4" M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 620	69 mm	1
562 391 621	69 mm	25



3/8" F : 3/8" M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 625	67 mm	1
562 391 626	67 mm	25



1/4" F : M18 M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 630	62 mm	1
562 391 631	62 mm	25



1/4" F : M14 M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 627	62 mm	1
562 391 628	62 mm	25

Mosmatic swivels WDG

Housing nickel-plated brass. Axle stainless steel. Field of application: Ceiling booms in self-service car wash



1/4" F : 1/4" M. DN 7.
Max. 150 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
750 140 11	46 mm



3/8" F : 1/4" M. DN 7.
Max. 150 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
750 140 1	46 mm



Repair kit
Mosmatic swivels WDG

R+M Nr.
750 140 2

Mosmatic swivels DGS / DGV / DGK

Housing stainless steel / nickel-plated brass. Axle stainless steel. DN 6. Rust-proof and maintenance-free. Field of application: Swivels applicable to high pressure spray guns and hose connections, ceiling booms in self-service car wash. Max. 275 bar / 30 r.p.m. / 120 °C



DGS. Double ball bearing system

R+M Nr.	☐	☐	☐
108 300 01	1/4" F	1/4" M	59 mm
108 300 02	1/4" F	1/4" F	62 mm
108 300 03	1/4" F	3/8" M	60 mm
108 300 04	1/4" F	3/8" F	63 mm
108 300 05	1/4" F	M14 M	57 mm
108 300 06	1/4" F	M16 M	57 mm
108 300 07	1/4" F	M18 M	57 mm
108 300 09	1/4" F	M22 M	61 mm
108 301 03	3/8" F	3/8" M	60 mm
108 301 04	3/8" F	3/8" F	63 mm
108 301 07	3/8" F	M18 M	57 mm
108 301 09	3/8" F	M22 M	61 mm



DGV. Single ball bearing system

R+M Nr.	☐	☐	☐
108 325 11	1/4" M	1/4" M	60 mm
108 325 12	1/4" M	1/4" F	63 mm
108 325 13	1/4" M	3/8" M	61 mm
108 325 18	1/4" M	M21 M	62 mm
108 325 21	3/8" M	1/4" M	60 mm
108 325 24	3/8" M	3/8" F	61 mm
108 325 32	3/8" M	1/4" F	63 mm
108 325 33	3/8" M	3/8" M	61 mm
108 325 34	3/8" M	3/8" F	63 mm
108 325 37	3/8" M	M18 M	58 mm
108 325 39	3/8" M	M22 M	62 mm
108 325 82	1/4" F	1/4" F	67 mm
108 325 87	1/4" F	M18 M	62 mm



DGK. Single ball bearing system

R+M Nr.	☐	☐	☐
108 320 31	1/4" M	DN 06	58 mm
108 320 33	1/4" F	DN 06	62 mm
108 321 32	3/8" M	DN 08	66 mm

Mosmatic swivels DGVl

Stainless steel. DN 6. Rust-proof and maintenance-free. Field of application: Swivels applicable to high pressure spray guns and hose connections. Max. 500 bar / 30 r.p.m. / 120 °C



R+M Nr.	☐	☐	☐
108 327 02	1/4" M*	1/4" F	54
108 327 24	3/8" M*	3/8" F	56
108 327 34	3/8" M	3/8" F	64
108 328 14	1/2" M	1/2" F	75

R+M Nr.	☐	☐	☐
108 327 81	1/4" F	1/4" M	64
108 327 83	1/4" F	3/8" M	65

R+M Nr.	☐	☐	☐
108 327 82	1/4" F	1/4" F	66
108 327 84	1/4" F	3/8" F	68

R+M Nr.	☐	☐	☐
108 327 87	1/4" F	M18 M	62
108 327 88	1/4" F	M21 M	66
108 327 89	1/4" F	M22 M	66

Mosmatic swivels DGE / DGEI

Maintenance-free. Field of application: especially designed for high flow rates and low revolutions per minute as for example at automatic car wash plants. Max. 30 r.p.m. / 120 °C. DN 13 for 1/2". DN 25 for 1"



DGE 90°. Housing nickel-plated brass. Single ball bearing system. Rust-proof. Max. 275 bar

R+M Nr.	☐	☐	☐
108 348 23	1/2" F	1/2" M	99

Max. 200 bar

R+M Nr.	☐	☐	☐
108 348 25	1" F	1" M	123



DGE. Housing nickel-plated brass. Single ball bearing system. Rust-proof. Max. 275 bar

R+M Nr.	☐	☐	☐
108 348 03	1/2" F	1/2" M	80

Max. 200 bar

R+M Nr.	☐	☐	☐
108 348 05	1" F	1" M	90



DGEI. Housing stainless steel. Triple ball bearing system. Max. 350 bar

R+M Nr.	☐	☐	☐
108 347 03	1/2" F	1/2" M	80

Max. 200 bar

R+M Nr.	☐	☐	☐
108 347 05	1" F	1" M	95



DGEI 90°. Housing stainless steel. Triple ball bearing system. Max. 350 bar

R+M Nr.	☐	☐	☐
108 347 23	1/2" F	1/2" M	99

Max. 200 bar

R+M Nr.	☐	☐	☐
108 347 25	1" F	1" M	123

* conical

Symbols ☐ inlet ☐ outlet ☐ height ☐ length mm ☐ VPE packing unit

Mosmatic high RPM swivels DY-Series

Axle stainless steel. Housing nickel-plated brass. Triple ball bearing system. DN 6. Rust-proof and maintenance-free. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 275 bar / 2000 r.p.m. / 120 °C



DYF.

R+M Nr.	⌚	⌚	⌚
108 580 03	1/4" F	3/8" M	80
108 581 03	3/8" F	3/8" M	80
108 580 00	1/4" F	M12 M	66



DYF.

R+M Nr.	⌚	⌚	⌚
108 584 01	3/8" F	1/4" M	84



DYG.

R+M Nr.	⌚	⌚	⌚
108 570 03	1/4" F	3/8" M	80
108 571 03	3/8" F	3/8" M	80



DYL.

R+M Nr.	⌚	⌚	⌚
108 560 03	1/4" F	3/8" M	80
108 561 03	3/8" F	3/8" M	80
108 561 04	3/8" F	3/8" F	80
108 560 01	1/4" F	1/4" F	79



DYL 90°

R+M Nr.	⌚	⌚	⌚
108 563 03	1/4" F	3/8" M	84
108 563 01	1/4" F	1/4" M	84

Mosmatic seal kits



R+M Nr.	TYP
108 369 05	DY hard metal
108 369 01	DX ceramic

Mosmatic swivels DGL



Axle stainless steel. Housing nickel-plated brass. Triple ball bearing system. DN 6. Rust-proof and maintenance-free. Field of application: designed for self-spinning applications. Very low torque required. Max. 275 bar / 1,000 r.p.m. / 30 °C. Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	⌚	⌚	⌚
108 311 03	3/8" F	3/8" M	66

Mosmatic high RPM swivels DY-Series

Axle and housing stainless steel. Triple ball bearing system. Maintenance-free. DN 6 for 3/8". DN 13 for 1/2". DN 38 for 1.1/2"



DYCI. Triple ball bearing system. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 350 bar / 2,000 r.p.m. / 120 °C

R+M Nr.	⌚	⌚	⌚
108 550 03	1/4" F	3/8" M	95
108 551 03	3/8" F	3/8" M	95



DYCI. Triple ball bearing system. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 350 bar / 2,000 r.p.m. / 120 °C

R+M Nr.	⌚	⌚	⌚
108 552 53	M22	3/8" M	95



DYDI. Triple ball bearing system. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 500 bar / 2,000 r.p.m. / 120 °C

R+M Nr.	⌚	⌚	⌚
108 552 63	M22	3/8" M	95

Axle and housing stainless steel. Quadruple ball bearing system. DN 6. Maintenance-free. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 2,000 r.p.m. / 120 °C



DYT. Max. 350 bar

R+M Nr.	⌚	⌚	⌚
108 590 03	1/4" F	3/8" M	107
108 591 01	3/8" F	1/4" M	109
108 591 03	3/8" F	3/8" M	109



DYT 90°. Max. 350 bar

R+M Nr.	⌚	⌚	⌚
108 593 03	1/4" F	3/8" M	109
108 594 03	3/8" F	3/8" M	110



DYU. Max. 500 bar

R+M Nr.	⌚	⌚	⌚
108 591 13	3/8" F	3/8" M	109




DYU 90°. Max. 500 bar

R+M Nr.	⌚	⌚	⌚
108 594 13	3/8" F	3/8" M	110

Mosmatic swivels WDRS

Axle and housing stainless steel. Triple ball bearing system. Maintenance-free. DN 13 for 1/2". DN 38 for 1.1/2". DN 65 for 2.1/2"

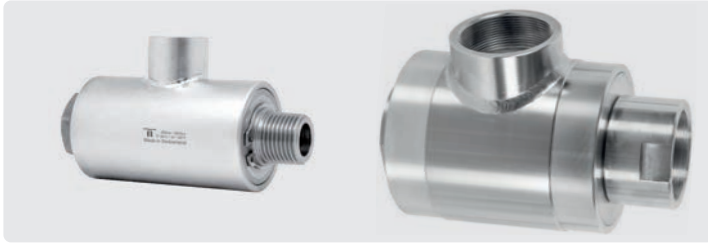

WDRS. Double ball bearing system. Area of application: Especially for large flow rates, e.g. B. designed for automatic washing systems or for large hose reels in agriculture or the mining industry.
Max. 5-80 °C

R+M Nr.	P	G	⊖	↔	U
108 412 11	200 bar	1/2" F	1/2" M	110	150 r.p.m.
108 415 11	200 bar	1.1/2" F	1.1/2" M	150	76 r.p.m.
108 416 36*	20 bar	2.1/2" F	2.1/2" M	242	50 r.p.m.
108 416 37*	20 bar	2.1/2" F	2.1/2" F	246	50 r.p.m.

* Delivery time of approx. 3 weeks

R+M swivels



3/4" F : 3/4" M. DN 19.
Housing and axle stainless steel.
Max. 200 bar / 90 °C

R+M Nr.	I
750 400 1	80 mm



Repair kit swivel 750 400 1

R+M Nr.	I
750 400 2	



3/8" M : 3/8" F.
Brass.
Max. 220 bar / 90 °C

R+M Nr.	I
562 50	39 mm



1/4" F : 3/8" M. DN 6.
Housing and axle stainless steel.
Max. 600 bar / 90 °C

R+M Nr.	I
750 280 0	59 mm



Seal kit swivel 750 280 0

R+M Nr.	I
750 200 2	



3/8" M : 1/4" F.
Brass.
Max. 220 bar / 90 °C

R+M Nr.	I
562 60	39 mm

Symbols inlet outlet height length mm pressure revolutions type

High pressure quick couplings

Couplings 25KB



Coupling : F. Nickel-plated brass. With valve.
Max. 35 bar / 100 °C

Plugs 25SB



Plug : F. $\varnothing$ 12 mm. Brass. With valve.
Max. 35 bar / 100 °C

Back ring



TYP 25KF + 25KB

R+M Nr.

790 41

$\varnothing$	DN
1/4"	7.4
3/8"	7.4

R+M Nr.	I
553 20	55 mm
553 30	54 mm

R+M Nr.	I
556 10	43 mm
556 30	43 mm

Couplings CEJN 322 and plug



Coupling : F. Brass / steel, nickel-plated.
Max. 200 bar / 100 °C



Plug : F. $\varnothing$ 12 mm. Hardened steel, chemically nickel-plated / zinc-plated.
Max. 200 bar / 100 °C



Plug : M. $\varnothing$ 12 mm. Hardened steel, chemically nickel-plated / zinc-plated and brass.
Max. 200 bar / 100 °C

$\varnothing$	DN
1/4"	7.4
3/8"	7.4

R+M Nr.	I
552 001	48 mm
552 002	50 mm

R+M Nr.	I
552 101	36 mm
552 102	38 mm

R+M Nr.	I
552 111	36 mm
552 112	38 mm

Couplings SP-20 250 bar and plug



Coupling : F. Brass.
Max. 250 bar / 100 °C



Coupling : M. Brass.
Max. 250 bar / 100 °C



Plug : F. $\varnothing$ 14.8 mm. Zinc-plated steel. Max. 250 bar / 100 °C

$\varnothing$	DN
1/4"	8.0
3/8"	8.0
1/2"	8.0

R+M Nr.	I
550 10	41 mm
550 30	42 mm

R+M Nr.	I
550 20	43 mm

R+M Nr.	I
551 11	40 mm
551 10	40 mm



Plug : M. $\varnothing$ 14.8 mm. Zinc-plated steel. Max. 250 bar / 100 °C



O-ring. TYP SP-20. 13.1x2.6.
Max. 250 bar / 100 °C

$\varnothing$	DN
3/8"	8.0

R+M Nr.	I
551 20	43 mm

R+M Nr.	I
790 60	

Suttner high pressure quick couplings ST-45-250 KW

Couplings and plug ST-45-250 KW



Coupling : M.
Stainless steel.
Max. 250 bar / 150 °C



Coupling : F.
Stainless steel.
Max. 250 bar / 150 °C



Coupling : F.
Stainless steel.
Max. 250 bar / 150 °C



Plug : F.
Hardened stainless steel.
Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	10
1/2"	10
M22	10

R+M Nr.	I
200 045 595	49 mm

R+M Nr.	I
200 045 570	41 mm
200 045 560	41 mm
200 045 550	41 mm
200 045 575	41 mm

R+M Nr.	I
200 045 565	43 mm
200 045 555	43 mm

R+M Nr.	I
040 005 482	38 mm



Plug : M.
Stainless steel.
Max. 250 bar / 150 °C



Plug : M.
Hardened stainless steel.
Max. 250 bar / 150 °C



Coupling : F.
Nickel-plated brass.
Max. 250 bar / 150 °C



Coupling : F.
Nickel-plated brass.
Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	10
1/2"	10

R+M Nr.	I
557 206	44 mm

R+M Nr.	I
040 005 669	42 mm

R+M Nr.	I
200 045 510	41 mm

R+M Nr.	I
200 045 505	43 mm



Plug : F.
Zinc-plated steel.
Max. 250 bar / 150 °C



Plug : F.
Stainless steel.
Max. 250 bar / 150 °C



Plug : F.
Hardened stainless steel.
Max. 250 bar / 150 °C



O-ring large FKM

R+M Nr.	VPE
791 824 100	100

⊙	DN
3/8"	10
1/2"	10

R+M Nr.	I
557 204	38 mm


R+M Nr.	I
557 209	38 mm
557 29	45 mm

R+M Nr.	I
557 209 2	38 mm

R+M Nr.	VPE
792 026 100	100



Plug : F.
Zinc-plated steel + brass.
Max. 250 bar / 150 °C



Coupling : M.
Nickel-plated brass + brass.
Max. 250 bar / 150 °C



Seal kit

R+M Nr.	M
200 045 465	FKM

⊙	DN
M22	10

R+M Nr.	I
557 205	73 mm

R+M Nr.	I
557 105	63 mm

Symbols I height DN nominal diameter ⊙ thread VPE packing unit ∅ diameter TYP type M material

Suttner high pressure quick couplings ST-3100

Couplings and plug ST-3100

Coupling : F. Stainless steel.
Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	12
1/2"	12

R+M Nr.	I
203 100 466	44 mm
203 100 461	44 mm
203 100 460	44 mm

Coupling : F. Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
203 100 456	50 mm
203 100 455	50 mm


Coupling : M. Stainless steel.
60 °Cone. Max. 250 bar / 150 °C

R+M Nr.	I
203 100 474	50 mm
203 100 655	45 mm

Coupling : M. Stainless steel.
60 °Cone. Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	12
1/2"	12

R+M Nr.	I
203 100 652	53 mm
203 100 473	55 mm
203 100 656	54 mm

Plug : F. Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
040 005 665	35 mm
040 005 667	41 mm
040 005 661	47 mm

Plug : M. Stainless steel. 60 °Cone.
Max. 250 bar / 150 °C

R+M Nr.	I
040 005 668	47 mm
040 005 662	47 mm

Plug : F. Hardened stainless steel.
Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	12
1/2"	12

R+M Nr.	I
040 005 465	35 mm
040 005 467	41 mm
040 005 461	47 mm

Plug : M. Hardened stainless steel. 60
°Cone. Max. 250 bar / 150 °C

R+M Nr.	I
040 005 459	47 mm
040 005 462	47 mm

Plug : F. Stainless steel. For moulded
handles. Max. 250 bar / 150 °C

R+M Nr.	I
040 005 664	40 mm

Plug : F. Stainless steel + brass.
Max. 250 bar / 150 °C

⊙	DN
M22	10

R+M Nr.	I
203 100 665	56 mm

Coupling : M. Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
203 100 660	57 mm



O-ring large EPDM

R+M Nr.	VPE
050 000 196	1
791 552 610	100



O-ring large EPDM


R+M Nr.	VPE
050 000 664	1
791 821 01	100

Couplings "B"


Coupling : F. Stainless steel.
Max. 150 bar / 90 °C

⊙	DN
1/2"	11

R+M Nr.	I
710 247 212 000	35 mm

Plug : M. Stainless steel.
Max. 150 bar / 90 °C

R+M Nr.	I
710 247 112 100	44 mm

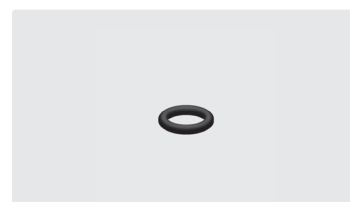

O-ring. 13x2

R+M Nr.	I
791 32	

Suttner ultra high pressure quick couplings ST-45-600 KW

Couplings and plug ST-45-600



Coupling : M. Stainless steel.
Max. 600 bar / 150 °C


⊙	DN
1/4"	8

R+M Nr.	⊓
200 045 600	57 mm



Coupling : M. Stainless steel.
Max. 600 bar / 150 °C

R+M Nr.	⊓
200 045 605	57 mm

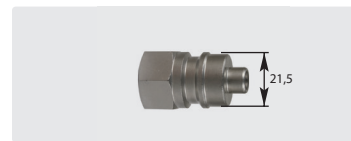

Plug : F. Hardened stainless steel.
Max. 600 bar / 150 °C

R+M Nr.	⊓
040 005 468	40 mm



O-ring. 11x1.5

R+M Nr.
050 000 020



Back ring. 11x14x1

R+M Nr.
050 001 430



O-ring. 10x2.5

R+M Nr.
050 000 160

Suttner high pressure quick couplings ST-246

Coupling and plug ST-246-8



Coupling : F. Stainless steel V2A.
Max. 350 bar / 100 °C

⊙	DN
1/2"	11

R+M Nr.	⊓
710 246 412 000	41.0 mm



Plug : F. Hardened stainless steel.
Max. 350 bar / 100 °C

R+M Nr.	⊓
710 246 312 001	43.7 mm



Plug : M. Hardened stainless steel.
Max. 350 bar / 100 °C

R+M Nr.	⊓
710 246 312 101	45.2 mm


Coupling and plug ST-246-6



Coupling : F.
Stainless steel V2A.
Max. 350 bar / 100 °C

⊙	DN
3/8"	8.5
1/4"	6.0
M22 (CEL)	6.0

R+M Nr.	⊓
710 246 238 000	37.8



Plug : F. Hardened stainless steel.
Max. 350 bar / 100 °C

R+M Nr.	⊓
710 246 138 001	36.6
040 005 423	41.0



Plug : M.
Stainless steel.
Max. 350 bar / 100 °C

R+M Nr.	⊓
040 005 424	42.5

Lip seal



NBR 75

R+M Nr.	⊙	TYP
710 005 004	1/2"	ST-246-8
710 005 003	3/8"	ST-246-6

Bonded seals



Bonded seals.
Steel


R+M Nr.	⊙	VPE
788 881 4	1/4"	1
788 881 410 0	1/4"	100
788 883 8	3/8"	1
788 883 810 0	3/8"	100
788 881 2	1/2"	1
788 881 210 0	1/2"	100
788 881	1"	1



Bonded seals.
Stainless steel

R+M Nr.	⊙	VPE
788 881 49	1/4"	1
788 881 491 00	1/4"	100
788 883 89	3/8"	1
788 883 891 00	3/8"	100
788 881 29	1/2"	1
788 881 291 00	1/2"	100

Functional principle of bonded seal

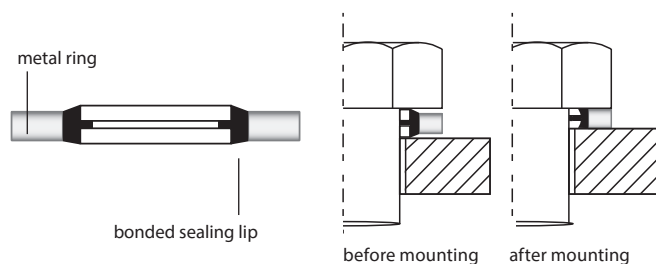

Symbols ⊓ height ⊓ nominal diameter ⊙ thread VPE packing unit TYP type

Hose connectors



M22 M. Standard. Brass.
Max. 400 bar

R+M Nr.
569 20



M21 M. Standard. Brass.
Max. 400 bar

R+M Nr.
569 10



1/2" M. Standard. Brass.
Max. 400 bar

R+M Nr.
569 30



M22 M. Standard. Stainless steel.
Max. 400 bar

R+M Nr.
569 29



M22 M. Solid version stainless steel.
Max. 500 bar

R+M Nr.
569 59



M24 M. Stainless steel.
Max. 700 bar

R+M Nr.
200 741 600



M21 M : M22 M. Brass. Reduction.
Max. 400 bar

R+M Nr.
569 15



M22 M. Solid version. Brass.
Max. 400 bar

R+M Nr.
569 50



M22 M. Solid version stainless steel
with rubber cover.
Max. 500 bar

R+M Nr.
569 49



Rubber cover

R+M Nr.
569 60



M22 M. Solid version with rubber
cover. Max. 400 bar

R+M Nr.
569 40



M22 M. Long with moulded handle.
Max. 280 bar


R+M Nr.
569 70

Comparison chart of metric, bsp and trapezoidal thread

pipe	IG	AG
1/8" (5x10)	8.566 mm	9.728 mm
1/4" (8x13)	11.445 mm	13.157 mm
3/8" (12x17)	14.950 mm	16.662 mm
1/2" (15x21)	18.631 mm	20.955 mm
3/4" (21x27)	24.117 mm	26.441 mm
1" (26x34)	30.291 mm	33.249 mm
1.1/4" (33x42)	38.952 mm	41.910 mm
1.1/2" (40x49)	44.324 mm	47.803 mm
2" (50x60)	56.656 mm	59.614 mm

metric	IG	AG
M12x1.5	10.38 mm	12 mm
M14x1.5	12.38 mm	14 mm
M16x1.5	14.38 mm	16 mm
M18x1.5	16.38 mm	18 mm
M21x1.5	19.38 mm	21 mm
M22x1.5	20.38 mm	22 mm
M24x1.5	22.38 mm	24 mm
M27x1.5	25.38 mm	27 mm
M30x1.5	28.38 mm	30 mm

trapezoidal	IG	AG
TR20	18.1 mm	20 mm
TR22	20.1 mm	22 mm



Hose adaptor



Plug 10 mm : M22 M.
Max. 210 bar

R+M Nr. 316 951 0 190 mm



Plug 11 mm : M22 M.
Max. 400 bar

R+M Nr. 316 961 1 190 mm



Plug 11 mm : M22 M.
Max. 400 bar

R+M Nr. 316 961 2 145 mm
316 961 3 150 mm



M22 M : plug. Brass.
Max. 250 bar / 100 °C

R+M Nr. 559 908 221 104 mm



Back ring

R+M Nr. 790 58 10 mm
790 59 11 mm



O-ring

R+M Nr. 790 55 10 mm
790 57 11 mm

Symbols IG female thread AG male thread thread I height diameter VPE packing unit

Hose adapter



Plug coupling 10 mm : 3/8" M.
Max. 400 bar

R+M Nr.	
559 910 1	



Plug coupling 11 mm.
Max. 400 bar

R+M Nr.	
559 911 12	1/2" M
559 911 38	3/8" M
559 911 22	M22 M
559 911 23	M22 F



M22 F : M22 M. K 2000. Brass.
Max. 400 bar

R+M Nr.	
565 66	



O-ring

R+M Nr.	
790 55	10 mm



M24 M : M. Brass *.
Max. 400 bar

R+M Nr.	
318 241 8	M18
318 242 1	M21



M27 M : M. Brass *.
Max. 400 bar

R+M Nr.	
318 271 8	M18
318 272 1	M21



M24 M : 3/8" F. Brass *.
Max. 400 bar

R+M Nr.	
318 24	



M27 M : 3/8" F. Brass *.
Max. 400 bar

R+M Nr.	
318 27	



Copper washer. K 2000

R+M Nr.	
781 519 1	18.8 mm



Back ring

R+M Nr.	
790 58	10 mm



O-ring

R+M Nr.	
791 42	M24



O-ring

R+M Nr.	
903 598 00	M27



O-ring. 10x2.2. Perbunan

R+M Nr.	
790 25	1
790 251 00	100



O-ring. 9.5x2

R+M Nr.	
050 002 456	1

Reduction nipple

Female thread : male thread



Brass. Max. 400 bar

R+M Nr.	
710 100 032	
710 100 033	

IG : AG	
1/4" : M12x1	
M12x1 : 1/4"	

TR22 K-lock system



Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 749	1/4" F	TR22 M



Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 748	TR22 M	TR22 M




Stainless steel axle.
Max. 350 bar / 150 °C

R+M Nr.		
200 052 615	TR22 M	1/4" M

* not to be used with patented WAP / Venturi inserts

TR22 K-lock system


Lance K

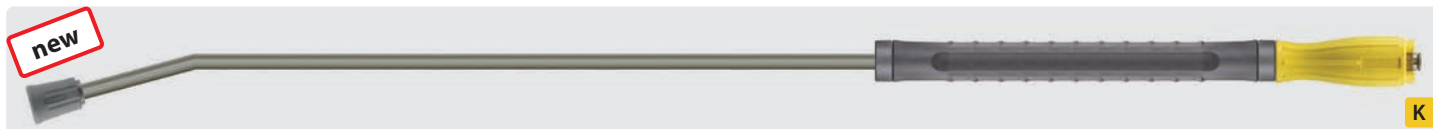

TR22 F swivel. Lance with ST-9.9 insulation and Hydroblade® nozzle protector without nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 009 980	Nozzle protector	300 mm	1.000 mm	Stainless steel

R+M Nr.

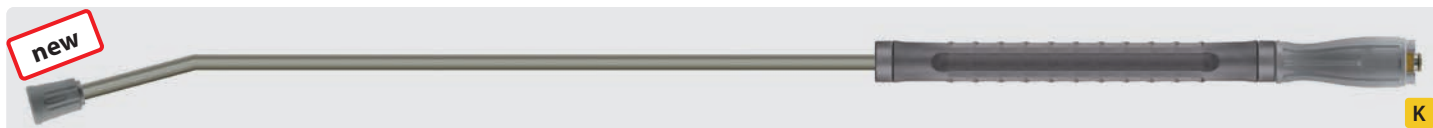

TR22 F. Lance with ST-9.9 insulation and Hydroblade® nozzle protector without nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 009 981	Nozzle protector	300 mm	1.000 mm	Stainless steel

R+M Nr.

ST-247 coupling system

Matches with	Page
Lances	267
HP-gun	226
Hoses	142
Sewer cleaning hoses	195-196
hydroblade®	301-302



The new high-pressure hose and lance coupling system ST-247 can be added to existing high-pressure cleaning systems and provides for quick and reliable changing of accessories without any annoying screwing and jamming.

Thanks to its intuitive operation and very sturdy design, it offers all advantages of a quick coupling system.

Being made of a high-quality combination of brass and stainless steel, it is perfectly suitable for use in professional or industrial environments such as agriculture and cleaning of large surfaces ranging from transporters to public places and outside surfaces.

Thanks to the plastic coating of the handwheels, the coupling system is ideally suited for hot-water applications.

ST-247 couplings



Brass. TR22 F.
Max. 400 bar / 150 °C

R+M Nr.
200 247 310



TR22 F. Brass.
Incl. 2 heat resistant caps.
Max. 400 bar / 150 °C

R+M Nr.
200 247 410



M22 F. Brass.
Incl. 1 heat resistant cap.
Max. 400 bar / 150 °C

R+M Nr.
200 247 420



ST-247. Brass.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.
200 247 255



ST-247 : 1/4" M.
Hardened stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
200 247 110




ST-247 : 1/4" F.
Hardened stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
200 247 100



ST-247 : M22 M.
Hardened stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
200 247 125



ST-247 : TR22 M.
Brass/stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
200 247 120

Symbols outlet ISO insulation length M material

ST-247 coupling system

TR22 adapters (old : new)



TR22 M : M22 F QSC. Alternative to adapter 2+3.
Brass. Max. 400 bar / 150 °C.

R+M Nr.
561 022 220



TR22 M : M22 F QSC. Brass. Swivel.
Alternative to adapter 2+3.
Max. 400 bar / 150 °C.

R+M Nr.
568 022 220




TR22 M : M 22 F QSC. Brass. Swivel.
Alternative to adapter 2+3.
Max. 400 bar / 150 °C.

R+M Nr.
568 022 221



TR22 F : 3/8" F. Swivel. Brass.
Alternative to adapter 12.
Incl. 1 heat resistant cap.
Max. 400 bar / 150 °C

R+M Nr.
200 301 110

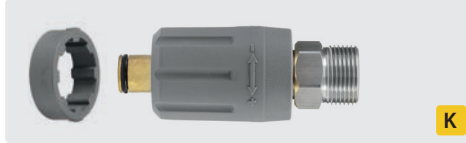

TR22 F : M22 M. Swivel. Brass.
Alternative to adapter 12.
Incl. 1 heat resistant cap.
Max. 400 bar / 150 °C

R+M Nr.
200 301 100



3/8" M : TR22 M.
Brass.
Max. 400 bar / 150 °C

R+M Nr.
010 003 041



TR22 F : TR22 M.
Brass.
Max. 400 bar / 150 °C

R+M Nr.
200 247 250



TR22 F : 3/8" M.
Alternative to adapter 6.
Brass.
Max. 400 bar / 150 °C

R+M Nr.
565 683




TR22 F : 3/8" F.
Alternative to adapter 6.
Brass.
Max. 400 bar / 150 °C

R+M Nr.
565 684



TR22 F : M22 M.
Alternative to adapter 6.
Brass.
Max. 400 bar / 150 °C

R+M Nr.
565 681



TR22 F : Plug coupling Ø 11
mm. Brass/stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
565 688

TR20 adapters lances



TR20 F : M18 M.
Alternative to adapter 8. Brass.
Max. 400 bar / 150 °C

R+M Nr.
565 686




TR20 F : 1/4" M.
Stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
565 685 19



1/4" F : TR20 M.
Alternative to adapter 7. Brass.
Max. 400 bar / 150 °C

R+M Nr.
565 685



M18 IG : TR20 AG.
Alternative to adapter 7. Brass.
Max. 400 bar / 150 °C

R+M Nr.
565 687

Hose connectors



TR22 M. Alternative to adapter 9.
Brass.
Max. 400 bar / 150 °C

R+M Nr.
569 22



TR22 M : M22 x 1,5 M. Alternative to
adapter 1. Brass.
Max. 400 bar / 150 °C

R+M Nr.
569 23



TR22 M : 3/8" F. Stainless steel.
Max. 400 bar / 150 °C

R+M Nr.
040 003 045


Wrench



R+M Nr.	SW
100 000 235	27


Adhesives & sealing materials

Retaining




TYP	R+M Nr.	C	ð	°C	Nm *	function
83.21	954 50	green	50 ml	-55 – +175 °C	25 - 35	high strength retaining and locking approved as sealant or pure Oxygen BAM.
83.21	954 55	green	250 ml	-55 – +175 °C	25 - 35	
83.05	954 830 505 0	green	50 ml	-55 – +200 °C	25 - 35	high tenacity, extremely quick hardening, suitable for passive surfaces as galvanized steel and steel without activator
83.05	954 830 525 0	green	250 ml	-55 – +200 °C	25 - 35	

Threadsealing




TYP	R+M Nr.	C	ð	°C	Nm *	function
53.14	954 531 405 0	brown	50 ml	-55 – +150 °C	12 - 16	brown small diameter pneumatic and hydraulic fittings connection, DVGW approved for gas
58.11	954 581 105 0	yellow	50 ml	-55 – +150 °C	18 - 22	yellow pipe sealant approved for DWGV, WRAS and BAM. Low screwing friction
58.11	954 581 125 0	yellow	250 ml	-55 – +150 °C	18 - 22	
85.86	954 858 605 0	green	50 ml	-55 – +200 °C	25 - 35	green DIN-DVGW/KTW approved for gas and potable water. High temperature sealing +200 °C

Threadlocking




TYP	R+M Nr.	C	ð	°C	Nm *	function
55.03	954 550 305 0	blue	50 ml	-55 – +150 °C	18 - 23	oil tolerant threadlock. DVGW/KTW approved. larger gap filling.
83.54	954 835 405 0	blue	50 ml	-55 – +150 °C	28 - 35	green studlocking general purpose high torque strength
54.03	954 540 350	blue	50 ml	-55 – +150 °C	14 - 18	medium-tight screw locking device for protection of threads in case of a push, vibration and pressure
56.03	954 550 305 1	blue	50 ml	-55 – +150 °C	10 - 16	medium strength up to 2"

Liquid gasketing



TYP	R+M Nr.	C	ð	°C	Nm *	function
58.14	954 581 407 5	orange	75 ml	-55 – +150 °C	5 - 8	orange general purpose flexible, small to medium size gear boxes sealing


Superglue



TYP	R+M Nr.	C	ð	°C	setting time	function
43	954 430 20	green	20 ml	-55 – +80 °C	2 - 5 sec.	multi use instant adhesive. Bonds ceramic, fabrics, aluminium, leather and most plastics

Activator

TYP	R+M Nr.	ð	function	fixture time
11	954 112 00	200 ml	for anaerobic adhesives	30 - 60 seconds



Thread seal tape

* shear strength



R+M Nr.	VPE
954 00	1 reel
954 10	10 reels
954 25	250 reels

Grease for seals



R+M Nr.	ð
953 55	40 g

Threadsealing/threadlocking R+M




TYP	R+M Nr.	C	ð	VPE	°C	Nm *	function
5353	954 535 302 2	green	1.8 gr.	20 pieces	-55 – +150 °C	40 - 50	high strength, for locking and sealing. High viscosity and high thixotropy, allows for higher tolerances

Symbols °C temperature ð volume TYP type VPE packing unit C colour ð weight



blufood365+® - food hose	165
CARWASH COMFORT - the proven hose marvel for self-service car washes.....	159-160
CARWASH COMFORT - you are invited to experience our blue hose wonder in DN 8!	161
CARWASH COMFORT PREMIUM	156-158
Crimp cartridges suitable for different hose models	188
Crimp nipples	184-187
Crimp nipples	187
Dynaflex365+® Highly flexible high-pressure hoses	173, 150-153
Food high pressure hoses per metre.....	176-177
Food hoses.....	167
foodjet365+® - food hose with textile meshwork	166
foodjet365+® 1500 - food hose with textile meshwork.....	166
High pressure hoses	170
High pressure hoses for hose reels	154-155
High pressure hoses for self-service washing bays.....	162
High pressure hoses for special applications	168-170
High pressure hoses per metre	178-179, 181
High pressure hoses per metre 1 ST	176
High pressure hoses per metre 1SN	172
High pressure hoses per metre 2 SC	175
High pressure hoses per metre 2 SC / 2 SN	174
High pressure hoses per metre 2 ST	176
High pressure hoses with smooth cover	137, 139, 141-142, 145-148
High pressure hoses with smooth cover - 500 bar	139
High pressure hoses with wrapped cover	136, 138, 140, 142, 144, 146-147
High pressure hoses with wrapped cover and smooth cover	143
High-pressure hoses for existing systems	149
Hobby high pressure hoses	148
Hose bend restrictor.....	181-183
Hose bend restrictor in wave design - showing your company logo!.....	183
Hose clamps	165
Hose fittings pre-assembled	190
Hose holder.....	191
Hose press	191
Hose protection/shroud easyprotect365+	190
PURClean365+® - food hose	164-165
PURClean365+® Power and 150 - food hose.....	163
Quick screws	187
Re-usable screw nipples	189
Ultra high pressure hoses	171
Whip-stop easyprotect365+	190

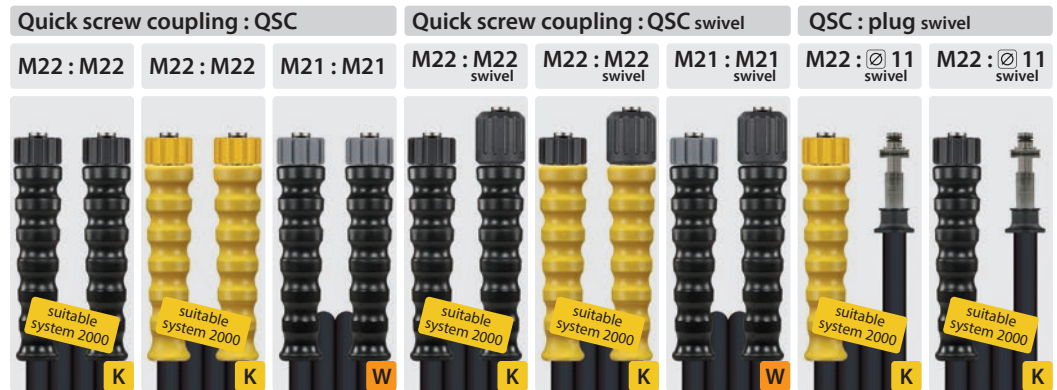High pressure hoses with *wrapped* coverHoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	330 100 310		330 120 310	330 101 310		330 121 310		330 111 310
				15 m	330 100 315		330 120 315	330 101 315		330 121 315		330 111 315
				20 m	330 100 320		330 120 320	330 101 320		330 121 320		330 111 320
1SN	8	210 bar	150 °C	10 m	340 100 310	340 100 410	340 120 310	340 101 310	340 101 410	340 121 310	340 111 410	
				15 m	340 100 315	340 100 415	340 120 315	340 101 315	340 101 415	340 121 315	340 111 415	
				20 m	340 100 320	340 100 420	340 120 320	340 101 320	340 101 420	340 121 320	340 111 420	
1SN	8	315 bar	150 °C	10 m	343 100 310	343 100 410	343 120 310	343 101 310	343 101 410	343 121 310	343 111 410	
				15 m	343 100 315	343 100 415	343 120 315	343 101 315	343 101 415	343 121 315	343 111 415	
				20 m	343 100 320	343 100 420	343 120 320	343 101 320	343 101 420	343 121 320	343 111 420	
1SN	10	210 bar	150 °C	10 m	350 100 310	350 100 410	350 120 310	350 101 310	350 101 410	350 121 310		
				15 m	350 100 315	350 100 415	350 120 315	350 101 315	350 101 415	350 121 315		
				20 m	350 100 320	350 100 420	350 120 320	350 101 320	350 101 420	350 121 320		

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	400 bar	150 °C	10 m	335 100 310		335 120 310	335 101 310		335 121 310		335 111 310
				15 m	335 100 315		335 120 315	335 101 315		335 121 315		335 111 315
				20 m	335 100 320		335 120 320	335 101 320		335 121 320		335 111 320
2SC	8	400 bar	150 °C	10 m	345 100 310	345 100 410	345 120 310	345 101 310	345 101 410	345 121 310	345 111 410	
				15 m	345 100 315	345 100 415	345 120 315	345 101 315	345 101 415	345 121 315	345 111 415	
				20 m	345 100 320	345 100 420	345 120 320	345 101 320	345 101 420	345 121 320	345 111 420	
2SC	10	400 bar	150 °C	10 m	355 100 310	355 100 410	355 120 310	355 101 310	355 101 410	355 121 310		
				15 m	355 100 315	355 100 415	355 120 315	355 101 315	355 101 415	355 121 315		
				20 m	355 100 320	355 100 420	355 120 320	355 101 320	355 101 420	355 121 320		

Hoses with single wire braid and *wrapped* thick cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1ST	8	210 bar	150 °C	10 m	340 200 310	340 200 410	340 220 310	340 201 310	340 201 410	340 221 310	340 211 410	
				15 m	340 200 315	340 200 415	340 220 315	340 201 315	340 201 415	340 221 315	340 211 415	
				20 m	340 200 320	340 200 420	340 220 320	340 201 320	340 201 420	340 221 320	340 211 420	
1ST	10	210 bar	150 °C	10 m	350 200 310	350 200 410	350 220 310	350 201 310	350 201 410	350 221 310		
				15 m	350 200 315	350 200 415	350 220 315	350 201 315	350 201 415	350 221 315		
				20 m	350 200 320	350 200 420	350 220 320	350 201 320	350 201 420	350 221 320		

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.


Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols $\varnothing$ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

High pressure hoses with *smooth cover*

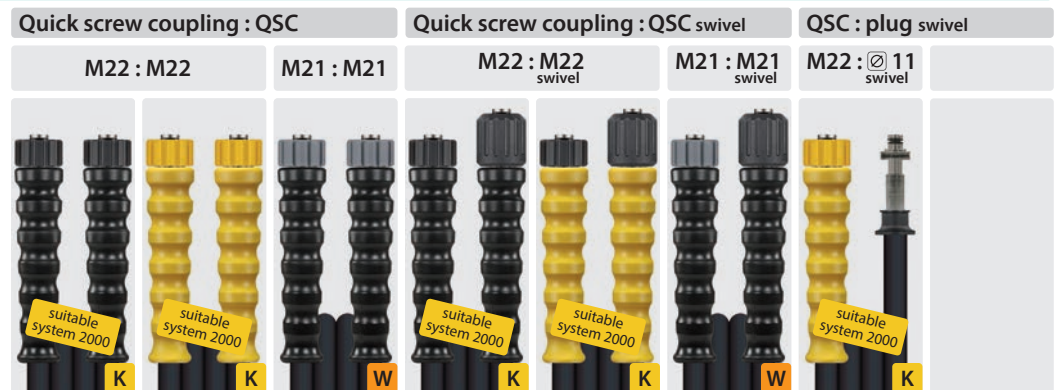

Hoses with single wire braid and *smooth cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	8	250 bar	150 °C	10 m	340 600 310	340 600 410	340 620 310	340 601 310	340 601 410	340 621 310	340 611 410	
				15 m	340 600 315	340 600 415	340 620 315	340 601 315	340 601 415	340 621 315	340 611 415	
				20 m	340 600 320	340 600 420	340 620 320	340 601 320	340 601 420	340 621 320	340 611 420	
1SN	10	210 bar	150 °C	10 m	350 600 310	350 600 410	350 620 310	350 601 310	350 601 410	350 621 310		
				15 m	350 600 315	350 600 415	350 620 315	350 601 315	350 601 415	350 621 315		
				20 m	350 600 320	350 600 420	350 620 320	350 601 320	350 601 420	350 621 320		

Hoses with double wire braid and *smooth cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	345 600 310	345 600 410	345 620 310	345 601 310	345 601 410	345 621 310	345 611 410	
				15 m	345 600 315	345 600 415	345 620 315	345 601 315	345 601 415	345 621 315	345 611 415	
				20 m	345 600 320	345 600 420	345 620 320	345 601 320	345 601 420	345 621 320	345 611 420	
2SN	10	400 bar	150 °C	10 m	355 600 310	355 600 410	355 620 310	355 601 310	355 601 410	355 621 310		
				15 m	355 600 315	355 600 415	355 620 315	355 601 315	355 601 415	355 621 315		
				20 m	355 600 320	355 600 420	355 620 320	355 601 320	355 601 420	355 621 320		

With effect from today - high pressure hoses with smooth cover in our range!


We are talking about an excellent high pressure hose with a very smooth surface having all positive features with the flexy365+® high pressure hose in common. The high pressure hose with smooth cover is characterized by the following features:

- » a high grade of bending property by flexible structure and design
- » is easily cleaned due to the smooth cover
- » is easily pulled around any corner, does not get stuck!
- » a low abrasion due to reduced friction
- » particularly designed for the use on hose reels

The very clean, stain- and ozone-resistant, smooth surface can be easily cleaned and is branded with a durable printing which is vulcanized into the hose. By means of using a special rubber compound the hose's flexibility was considerably improved.



High pressure hoses with *wrapped cover*

QSC : plug swivel *		QSC : male thread		QSC : female thread	
M22 : $\varnothing$ 10 (15.5)	M22 : $\varnothing$ 10 (15.5)	M22 : M22	M22 : 3/8"	M22 : 1/4"	M22 : 3/8"
					

Hoses with single wire braid and *wrapped cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m		330 110 310	330 104 310	330 103 310	330 112 310	330 113 310
				15 m		330 110 315	330 104 315	330 103 315	330 112 315	330 113 315
				20 m		330 110 320	330 104 320	330 103 320	330 112 320	330 113 320
1SN	8	210 bar	150 °C	10 m	340 110 410		340 104 310	340 103 310	340 112 310	340 113 310
				15 m	340 110 415		340 104 315	340 103 315	340 112 315	340 113 315
				20 m	340 110 420		340 104 320	340 103 320	340 112 320	340 113 320
1SN	8	315 bar	150 °C	10 m	343 110 410		343 104 310	343 103 310	343 112 310	343 113 310
				15 m	343 110 415		343 104 315	343 103 315	343 112 315	343 113 315
				20 m	343 110 420		343 104 320	343 103 320	343 112 320	343 113 320
1SN	10	210 bar	150 °C	10 m			350 104 310	350 103 310		350 113 310
				15 m			350 104 315	350 103 315		350 113 315
				20 m			350 104 320	350 103 320		350 113 320

Hoses with double wire braid and *wrapped cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	400 bar	150 °C	10 m		335 110 310	335 104 310	335 103 310	335 112 310	335 113 310
				15 m		335 110 315	335 104 315	335 103 315	335 112 315	335 113 315
				20 m		335 110 320	335 104 320	335 103 320	335 112 320	335 113 320
2SC	8	400 bar	150 °C	10 m	345 110 410		345 104 310	345 103 310	345 112 310	345 113 310
				15 m	345 110 415		345 104 315	345 103 315	345 112 315	345 113 315
				20 m	345 110 420		345 104 320	345 103 320	345 112 320	345 113 320
2SC	10	400 bar	150 °C	10 m			355 104 310	355 103 310		355 113 310
				15 m			355 104 315	355 103 315		355 113 315
				20 m			355 104 320	355 103 320		355 113 320

Hoses with single wire braid and *wrapped thick cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1ST	8	210 bar	150 °C	10 m	340 210 410		340 204 310	340 203 310	340 212 310	340 213 310
				15 m	340 210 415		340 204 315	340 203 315	340 212 315	340 213 315
				20 m	340 210 420		340 204 320	340 203 320	340 212 320	340 213 320
1ST	10	210 bar	150 °C	10 m			350 204 310	350 203 310		350 213 310
				15 m			350 204 315	350 203 315		350 213 315
				20 m			350 204 320	350 203 320		350 213 320

* not to be used for patented Kärcher guns.

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.


Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols $\varnothing$ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

High pressure hoses with *smooth* cover

QSC : plug swivel *			Quick screw coupling : male thread			QSC : female thread	
M22 : $\varnothing$ 10 (15.5)	M22 : $\varnothing$ 10 (15.5)	M22 : $\varnothing$ 10 (18.0)	M22 : M22	M22 : 3/8"		M22 : 1/4"	M22 : 3/8"
							

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m		390 010 210	390 028 210	390 004 210	390 003 210		390 012 210	390 013 210
				15 m		390 010 215	390 028 215	390 004 215	390 003 215		390 012 215	390 013 215
				20 m		390 010 220	390 028 220	390 004 220	390 003 220		390 012 220	390 013 220

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	8	250 bar	150 °C	10 m	340 610 410			340 604 310	340 603 310		340 612 310	340 613 310
				15 m	340 610 415			340 604 315	340 603 315		340 612 315	340 613 315
				20 m	340 610 420			340 604 320	340 603 320		340 612 320	340 613 320
1SN	10	210 bar	150 °C	10 m				350 604 310	350 603 310			350 613 310
				15 m				350 604 315	350 603 315			350 613 315
				20 m				350 604 320	350 603 320			350 613 320


Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	345 610 410			345 604 310	345 603 310		345 612 310	345 613 310
				15 m	345 610 415			345 604 315	345 603 315		345 612 315	345 613 315
				20 m	345 610 420			345 604 320	345 603 320		345 612 320	345 613 320
2SN	10	400 bar	150 °C	10 m				355 604 310	355 603 310			355 613 310
				15 m				355 604 315	355 603 315			355 613 315
				20 m				355 604 320	355 603 320			355 613 320

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
Polya	6	160 bar	60 °C	8 m		460 010 208	460 028 208	460 004 208	460 003 208		460 012 208	460 013 208
				10 m		460 010 210	460 028 210	460 004 210	460 003 210		460 012 210	460 013 210
				15 m		460 010 215	460 028 215	460 004 215	460 003 215		460 012 215	460 013 215

High pressure hoses with *smooth* cover - 500 bar

QSC : QSC		QSC : M thread		M thread : M thread	
M22 : M22 stainless steel		M22 : 1/8" stainless steel	M22 : 1/4" stainless steel	1/4" : 1/4" stainless steel	
					

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	500 bar	150 °C	10 m	338 000 310 9		424 300 010 9	424 301 010 9	424 344 010 9	
				15 m	338 000 315 9		424 300 015 9	424 301 015 9	424 344 015 9	
				20 m	338 000 320 9		424 300 020 9	424 301 020 9	424 344 020 9	

* not to be used for patented Kärcher guns.

High pressure hoses with *wrapped* cover

Female thread (DKOL)			Female thread (DKR)			Male thread (AGR)		
M16 : M16	M18 : M18	M22 : M22	1/4" : 1/4"	3/8" : 3/8"	1/2" : 1/2"	1/4" : 1/4"	3/8" : 3/8"	1/2" : 1/2"
10L : 10L	12L : 12L	15L : 15L						
								

Hoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	330 174 310	330 176 310		330 152 310	330 154 310		330 142 310	330 144 310	
				15 m	330 174 315	330 176 315		330 152 315	330 154 315		330 142 315	330 144 315	
				20 m	330 174 320	330 176 320		330 152 320	330 154 320		330 142 320	330 144 320	
1SN	8	210 bar	150 °C	10 m	340 174 310	340 176 310		340 152 310	340 154 310		340 142 310	340 144 310	
				15 m	340 174 315	340 176 315		340 152 315	340 154 315		340 142 315	340 144 315	
				20 m	340 174 320	340 176 320		340 152 320	340 154 320		340 142 320	340 144 320	
1SN	8	315 bar	150 °C	10 m	343 174 310	343 176 310		343 152 310	343 154 310		343 142 310	343 144 310	
				15 m	343 174 315	343 176 315		343 152 315	343 154 315		343 142 315	343 144 315	
				20 m	343 174 320	343 176 320		343 152 320	343 154 320		343 142 320	343 144 320	
1SN	10	210 bar	150 °C	10 m		350 176 310			350 154 310	350 156 310	350 142 310	350 144 310	350 146 310
				15 m		350 176 315			350 154 315	350 156 315	350 142 315	350 144 315	350 146 315
				20 m		350 176 320			350 154 320	350 156 320	350 142 320	350 144 320	350 146 320
1SN	12	180 bar	150 °C	10 m			360 100 310			360 156 310			360 146 310
				15 m			360 100 315			360 156 315			360 146 315
				20 m			360 100 320			360 156 320			360 146 320

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	400 bar	150 °C	10 m	335 174 310	335 176 310		335 152 310	335 154 310		335 142 310	335 144 310	
				15 m	335 174 315	335 176 315		335 152 315	335 154 315		335 142 315	335 144 315	
				20 m	335 174 320	335 176 320		335 152 320	335 154 320		335 142 320	335 144 320	
2SC	8	400 bar	150 °C	10 m	345 174 310	345 176 310		345 152 310	345 154 310		345 142 310	345 144 310	
				15 m	345 174 315	345 176 315		345 152 315	345 154 315		345 142 315	345 144 315	
				20 m	345 174 320	345 176 320		345 152 320	345 154 320		345 142 320	345 144 320	
2SC	10	400 bar	150 °C	10 m		355 176 310			355 154 310	355 156 310	355 142 310	355 144 310	355 146 310
				15 m		355 176 315			355 154 315	355 156 315	355 142 315	355 144 315	355 146 315
				20 m		355 176 320			355 154 320	355 156 320	355 142 320	355 144 320	355 146 320
2SC	12	300 bar	150 °C	10 m						365 156 310			365 146 310
				15 m						365 156 315			365 146 315
				20 m						365 156 320			365 146 320

Hoses with single wire braid and *wrapped* thick cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1ST	8	210 bar	150 °C	10 m	340 274 310	340 276 310		340 252 310	340 254 310		340 242 310	340 244 310	
				15 m	340 274 315	340 276 315		340 252 315	340 254 315		340 242 315	340 244 315	
				20 m	340 274 320	340 276 320		340 252 320	340 254 320		340 242 320	340 244 320	
1ST	10	210 bar	150 °C	10 m		350 276 310			350 254 310	350 256 310	350 242 310	350 244 310	
				15 m		350 276 315			350 254 315	350 256 315	350 242 315	350 244 315	
				20 m		350 276 320			350 254 320	350 256 320	350 242 320	350 244 320	

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols DN nominal diameter P pressure °C temperature ↔ length TYP type

High pressure hoses with *smooth* cover

Female thread (DKOL)			Female thread (DKR)			Male thread (AGR)		
M16 : M16	M18 : M18	M22 : M22	1/4" : 1/4"	3/8" : 3/8"	1/2" : 1/2"	1/4" : 1/4"	3/8" : 3/8"	1/2" : 1/2"
10L : 10L	12L : 12L	15L : 15L						
								

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	→	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m	390 074 210	390 076 210		390 052 210	390 054 210		390 042 210	390 044 210	
				15 m	390 074 215	390 076 215		390 052 215	390 054 215		390 042 215	390 044 215	
				20 m	390 074 220	390 076 220		390 052 220	390 054 220		390 042 220	390 044 220	

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	→	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	8	250 bar	150 °C	10 m	340 674 310	340 676 310		340 652 310	340 654 310		340 642 310	340 644 310	
				15 m	340 674 315	340 676 315		340 652 315	340 654 315		340 642 315	340 644 315	
				20 m	340 674 320	340 676 320		340 652 320	340 654 320		340 642 320	340 644 320	
1SN	10	210 bar	150 °C	10 m		350 676 310	350 668 310		350 654 310	350 656 310	350 642 310	350 644 310	350 646 310
				15 m		350 676 315	350 668 315		350 654 315	350 656 315	350 642 315	350 644 315	350 646 315
				20 m		350 676 320	350 668 320		350 654 320	350 656 320	350 642 320	350 644 320	350 646 320

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	→	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	345 674 310	345 676 310		345 652 310	345 654 310		345 642 310	345 644 310	
				15 m	345 674 315	345 676 315		345 652 315	345 654 315		345 642 315	345 644 315	
				20 m	345 674 320	345 676 320		345 652 320	345 654 320		345 642 320	345 644 320	
2SN	10	400 bar	150 °C	10 m		355 676 310	355 668 310		355 654 310	355 656 310	355 642 310	355 644 310	355 646 310
				15 m		355 676 315	355 668 315		355 654 315	355 656 315	355 642 315	355 644 315	355 646 315
				20 m		355 676 320	355 668 320		355 654 320	355 656 320	355 642 320	355 644 320	355 646 320

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.

Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

High pressure hoses with *smooth* cover

Quick screw couplings : quick screw couplings		QSC : plug swivel	QSC : plug
M22 : M22	M22 : M22 swivel	M22 : $\varnothing$ 11 swivel	M22 : $\varnothing$ 10 (15.5)
			
K	K	K	K

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m	390 000 321 0	390 001 121 0	390 011 321 0	390 010 321 0
				15 m	390 000 321 5	390 001 121 5	390 011 321 5	390 010 321 5
				20 m	390 000 322 0	390 001 122 0	390 011 322 0	390 010 322 0
1SN	8	250 bar	150 °C	10 m	340 600 321 0	340 601 121 0	340 611 321 0	340 610 321 0
				15 m	340 600 321 5	340 601 121 5	340 611 321 5	340 610 321 5
				20 m	340 600 322 0	340 601 122 0	340 611 322 0	340 610 322 0
1SN	8	315 bar	150 °C	10 m	343 600 321 0	343 601 121 0	343 611 321 0	343 610 321 0
				15 m	343 600 321 5	343 601 121 5	343 611 321 5	343 610 321 5
				20 m	343 600 322 0	343 601 122 0	343 611 322 0	343 610 322 0
1SN	10	210 bar	150 °C	10 m	350 600 321 0	350 601 121 0		
				15 m	350 600 321 5	350 601 121 5		
				20 m	350 600 322 0	350 601 122 0		

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	345 600 321 0	345 601 121 0	345 611 321 0	
				15 m	345 600 321 5	345 601 121 5	345 611 321 5	
				20 m	345 600 322 0	345 601 122 0	345 611 322 0	
2SN	10	400 bar	150 °C	10 m	355 600 321 0			
				15 m	355 600 321 5			
				20 m	355 600 322 0			

High pressure hoses with *wrapped* cover

plug : plug		ST-247 : ST-247	
ST-247 : $\varnothing$ 11 swivel		stainless steel	
			


Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	345 115 551 0	345 114 851 0	347 114 851 0	346 114 851 0
				15 m	345 115 551 5	345 114 851 5	347 114 851 5	346 114 851 5
				20 m	345 115 552 0	345 114 852 0	347 114 852 0	346 114 852 0

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols $\varnothing$ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

High pressure hoses with *wrapped* cover and *smooth* cover

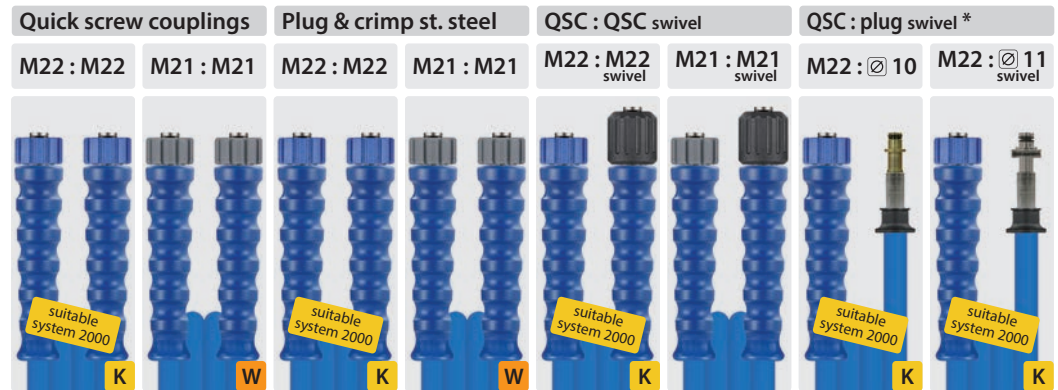

Hoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	331 100 610	331 120 610	331 100 610 7	331 120 610 7	331 101 610	331 121 610	331 110 610	331 111 610
				15 m	331 100 615	331 120 615	331 100 615 7	331 120 615 7	331 101 615	331 121 615	331 110 615	331 111 615
				20 m	331 100 620	331 120 620	331 100 620 7	331 120 620 7	331 101 620	331 121 620	331 110 620	331 111 620
1SN	8	210 bar	150 °C	10 m	341 100 610	341 120 610	341 100 610 7	341 120 610 7	341 101 610	341 121 610	341 110 610	341 111 610
				15 m	341 100 615	341 120 615	341 100 615 7	341 120 615 7	341 101 615	341 121 615	341 110 615	341 111 615
				20 m	341 100 620	341 120 620	341 100 620 7	341 120 620 7	341 101 620	341 121 620	341 110 620	341 111 620
1SN	10	210 bar	150 °C	10 m	351 100 610	351 120 610	351 100 610 7	351 120 610 7	351 101 610	351 121 610		
				15 m	351 100 615	351 120 615	351 100 615 7	351 120 615 7	351 101 615	351 121 615		
				20 m	351 100 620	351 120 620	351 100 620 7	351 120 620 7	351 101 620	351 121 620		

Hoses with single wire braid and *wrapped* thick cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1ST	8	210 bar	150 °C	10 m	341 200 610	341 220 610	341 200 610 7	341 220 610 7	341 201 610	341 221 610	341 210 610	341 211 610
				15 m	341 200 615	341 220 615	341 200 615 7	341 220 615 7	341 201 615	341 221 615	341 210 615	341 211 615
				20 m	341 200 620	341 220 620	341 200 620 7	341 220 620 7	341 201 620	341 221 620	341 210 620	341 211 620
1ST	10	210 bar	150 °C	10 m	351 200 610	351 220 610	351 200 610 7	351 220 610 7	351 201 610	351 221 610		
				15 m	351 200 615	351 220 615	351 200 615 7	351 220 615 7	351 201 615	351 221 615		
				20 m	351 200 620	351 220 620	351 200 620 7	351 220 620 7	351 201 620	351 221 620		

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	346 100 610	346 120 610	346 100 610 7	346 120 610 7	346 101 610	346 121 610	346 110 610	346 111 610
				15 m	346 100 615	346 120 615	346 100 615 7	346 120 615 7	346 101 615	346 121 615	346 110 615	346 111 615
				20 m	346 100 620	346 120 620	346 100 620 7	346 120 620 7	346 101 620	346 121 620	346 110 620	346 111 620
2SC	10	400 bar	150 °C	10 m	356 100 610	356 120 610	356 100 610 7	356 120 610 7	356 101 610	356 121 610		
				15 m	356 100 615	356 120 615	356 100 615 7	356 120 615 7	356 101 615	356 121 615		
				20 m	356 100 620	356 120 620	356 100 620 7	356 120 620 7	356 101 620	356 121 620		

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	10	210 bar	150 °C	10 m	351 600 610	351 620 610	351 600 610 7	351 620 610 7	351 601 610	351 621 610		
				15 m	351 600 615	351 620 615	351 600 615 7	351 620 615 7	351 601 615	351 621 615		
				20 m	351 600 620	351 620 620	351 600 620 7	351 620 620 7	351 601 620	351 621 620		

Hoses with double wire braid and *smooth* cover


TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	346 600 610	346 620 610	346 600 610 7	346 620 610 7	346 601 610	346 621 610	346 610 610	346 611 610
				15 m	346 600 615	346 620 615	346 600 615 7	346 620 615 7	346 601 615	346 621 615	346 610 615	346 611 615
				20 m	346 600 620	346 620 620	346 600 620 7	346 620 620 7	346 601 620	346 621 620	346 610 620	346 611 620
2SN	10	400 bar	150 °C	10 m	356 600 610	356 620 610	356 600 610 7	356 620 610 7	356 601 610	356 621 610		
				15 m	356 600 615	356 620 615	356 600 615 7	356 620 615 7	356 601 615	356 621 615		
				20 m	356 600 620	356 620 620	356 600 620 7	356 620 620 7	356 601 620	356 621 620		

* not to be used for patented Kärcher guns.

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.

Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

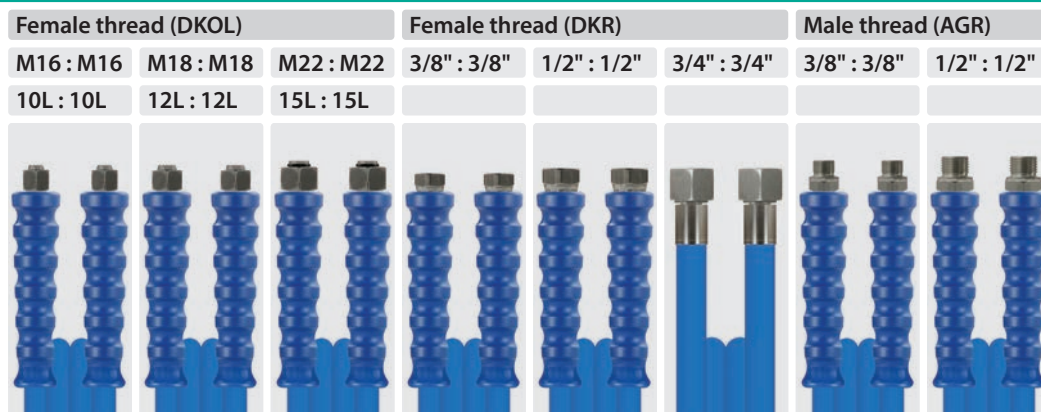High pressure hoses with *wrapped* coverHoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	331 174 610	331 176 610			331 156 610		331 144 610	
				15 m	331 174 615	331 176 615		331 154 615	331 156 615		331 144 615	
				20 m	331 174 620	331 176 620		331 154 620	331 156 620		331 144 620	
1SN	8	210 bar	150 °C	10 m	341 174 610	341 176 610		341 154 610			341 144 610	
				15 m	341 174 615	341 176 615		341 154 615			341 144 615	
				20 m	341 174 620	341 176 620		341 154 620			341 144 620	
1SN	10	210 bar	150 °C	10 m		351 176 610		351 154 610	351 156 610		351 144 610	351 146 610
				15 m		351 176 615		351 154 615	351 156 615		351 144 615	351 146 615
				20 m		351 176 620		351 154 620	351 156 620		351 144 620	351 146 620
1SN	12	180 bar	150 °C	10 m			361 100 610		361 156 610			361 146 610
				15 m			361 100 615		361 156 615			361 146 615
				20 m			361 100 620		361 156 620			361 146 620
1SN	16	130 bar	150 °C	20 m						371 158 020		
				25 m						371 158 025		
				30 m						371 158 030		

Hoses with single wire braid and *wrapped* thick cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1ST	8	210 bar	150 °C	10 m	341 274 610	341 276 610		341 254 610			341 244 610	
				15 m	341 274 615	341 276 615		341 254 615			341 244 615	
				20 m	341 274 620	341 276 620		341 254 620			341 244 620	
1ST	10	210 bar	150 °C	10 m		351 276 610		351 254 610	351 256 610		351 244 610	351 246 610
				15 m		351 276 615		351 254 615	351 256 615		351 244 615	351 246 615
				20 m		351 276 620		351 254 620	351 256 620		351 244 620	351 246 620
1ST	12	180 bar	150 °C	10 m			361 200 610		361 256 610			361 246 610
				15 m			361 200 615		361 256 615			361 246 615
				20 m			361 200 620		361 256 620			361 246 620

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	346 174 610	346 176 610		346 154 610			346 144 610	
				15 m	346 174 615	346 176 615		346 154 615			346 144 615	
				20 m	346 174 620	346 176 620		346 154 620			346 144 620	
2SC	10	400 bar	150 °C	10 m		356 176 610		356 154 610	356 156 610		356 144 610	356 146 610
				15 m		356 176 615		356 154 615	356 156 615		356 144 615	356 146 615
				20 m		356 176 620		356 154 620	356 156 620		356 144 620	356 146 620
2SC	12	300 bar	150 °C	10 m			366 100 610		366 156 610			366 146 610
				15 m			366 100 615		366 156 615			366 146 615
				20 m			366 100 620		366 156 620			366 146 620

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.


Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

Symbols diameter **DN** nominal diameter **P** pressure **°C** temperature **↔** length **TYP** type

High pressure hoses with *smooth* cover

Female thread (DKOL)			Female thread (DKR)			Male thread (AGR)	
M16 : M16	M18 : M18	M22 : M22	3/8" : 3/8"	1/2" : 1/2"		3/8" : 3/8"	1/2" : 1/2"
10L : 10L	12L : 12L	15L : 15L					

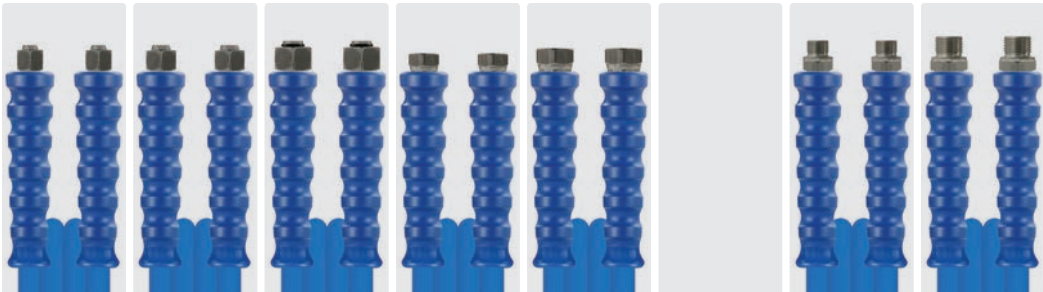

Hoses with single wire braid and *smooth* cover


TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	10	210 bar	150 °C	10 m		351 676 610		351 654 610				351 646 610
				15 m		351 676 615		351 654 615				351 646 615
				20 m		351 676 620		351 654 620				351 646 620
1SN	12	180 bar	150 °C	10 m			361 668 610		361 656 610			361 646 610
				15 m			361 668 615		361 656 615			361 646 615
				20 m			361 668 620		361 656 620			361 646 620

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	346 674 610	346 676 610		346 654 610			346 644 610	
				15 m	346 674 615	346 676 615		346 654 615			346 644 615	
				20 m	346 674 620	346 676 620		346 654 620			346 644 620	
2SN	10	400 bar	150 °C	10 m		356 676 610		356 654 610	356 656 610		356 644 610	356 646 610
				15 m		356 676 615		356 654 615	356 656 615		356 644 615	356 646 615
				20 m		356 676 620		356 654 620	356 656 620		356 644 620	356 646 620

High pressure hoses with *smooth* cover

Quick screw couplings : quick screw couplings				QSC : plug swivel	
M22 : M22		M22 : M22 swivel		M22 : 11 swivel	
		Plug & crimp stainless steel		Plug & crimp stainless steel	

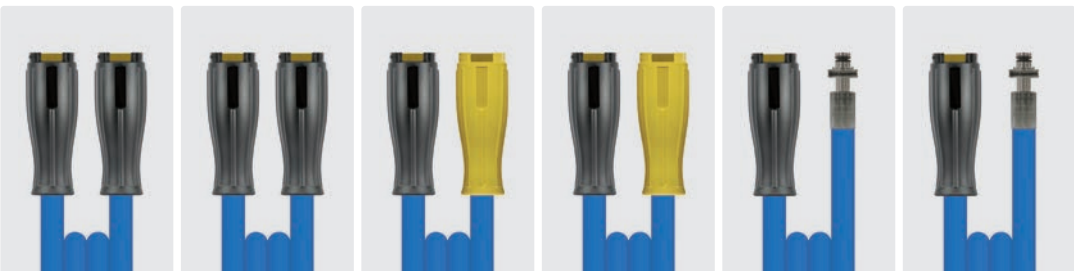

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	10	210 bar	150 °C	10 m	351 600 321 0	351 600 321 07	351 601 121 0	351 601 121 07		
				15 m	351 600 321 5	351 600 321 57	351 601 121 5	351 601 121 57		
				20 m	351 600 322 0	351 600 322 07	351 601 122 0	351 601 122 07		

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	346 600 321 0	346 600 321 07	346 601 121 0	346 601 121 07	346 611 321 0	346 611 321 07
				15 m	346 600 321 5	346 600 321 57	346 601 121 5	346 601 121 57	346 611 321 5	346 611 321 57
				20 m	346 600 322 0	346 600 322 07	346 601 122 0	346 601 122 07	346 611 322 0	346 611 322 07
2SN	10	400 bar	150 °C	10 m	356 600 321 0	356 600 321 07				
				15 m	356 600 321 5	356 600 321 57				
				20 m	356 600 322 0	356 600 322 07				

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

High pressure hoses with *wrapped cover*

QSC : QSC		Plug & crimp st. steel		QSC : QSC swivel		QSC : plug swivel*	
M22 : M22	M21 : M21	M22 : M22	M21 : M21	M22 : M22 swivel	M21 : M21 swivel	M22 : $\varnothing$ 10	M22 : $\varnothing$ 11 swivel
							

Hoses with single wire braid and *wrapped cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	332 100 510	332 120 510	332 100 510 7	332 120 510 7	332 101 510	332 121 510	332 110 510	332 111 510
				15 m	332 100 515	332 120 515	332 100 515 7	332 120 515 7	332 101 515	332 121 515	332 110 515	332 111 515
				20 m	332 100 520	332 120 520	332 100 520 7	332 120 520 7	332 101 520	332 121 520	332 110 520	332 111 520
1SN	8	210 bar	150 °C	10 m	342 100 510	342 120 510	342 100 510 7	342 120 510 7	342 101 510	342 121 510	342 110 510	342 111 510
				15 m	342 100 515	342 120 515	342 100 515 7	342 120 515 7	342 101 515	342 121 515	342 110 515	342 111 515
				20 m	342 100 520	342 120 520	342 100 520 7	342 120 520 7	342 101 520	342 121 520	342 110 520	342 111 520
1SN	10	210 bar	150 °C	10 m	352 100 510	352 120 510	352 100 510 7	352 120 510 7	352 101 510	352 121 510		
				15 m	352 100 515	352 120 515	352 100 515 7	352 120 515 7	352 101 515	352 121 515		
				20 m	352 100 520	352 120 520	352 100 520 7	352 120 520 7	352 101 520	352 121 520		

Hoses with double wire braid and *wrapped cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	347 100 510	347 120 510	347 100 510 7	347 120 510 7	347 101 510	347 121 510	347 110 510	347 111 510
				15 m	347 100 515	347 120 515	347 100 515 7	347 120 515 7	347 101 515	347 121 515	347 110 515	347 111 515
				20 m	347 100 520	347 120 520	347 100 520 7	347 120 520 7	347 101 520	347 121 520	347 110 520	347 111 520
2SC	10	400 bar	150 °C	10 m	357 100 510	357 120 510	357 100 510 7	357 120 510 7	357 101 510	357 121 510		
				15 m	357 100 515	357 120 515	357 100 515 7	357 120 515 7	357 101 515	357 121 515		
				20 m	357 100 520	357 120 520	357 100 520 7	357 120 520 7	357 101 520	357 121 520		

High pressure hoses with *smooth cover*

QSC : QSC		Plug & crimp st. steel		QSC : QSC swivel		QSC : plug swivel*	
M22 : M22	M21 : M21	M22 : M22	M21 : M21	M22 : M22 swivel	M21 : M21 swivel	M22 : $\varnothing$ 10	M22 : $\varnothing$ 11 swivel
							


Hoses with double wire braid and *smooth cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	347 600 510	347 620 510	347 600 510 7	347 620 510 7	347 601 510	347 621 510	347 610 510	347 611 510
				15 m	347 600 515	347 620 515	347 600 515 7	347 620 515 7	347 601 515	347 621 515	347 610 515	347 611 515
				20 m	347 600 520	347 620 520	347 600 520 7	347 620 520 7	347 601 520	347 621 520	347 610 520	347 611 520
2SN	10	400 bar	150 °C	10 m	357 600 510	357 620 510	357 600 510 7	357 620 510 7	357 601 510	357 621 510		
				15 m	357 600 515	357 620 515	357 600 515 7	357 620 515 7	357 601 515	357 621 515		
				20 m	357 600 520	357 620 520	357 600 520 7	357 620 520 7	357 601 520	357 621 520		

* not to be used for patented Kärcher guns.

Symbols $\varnothing$ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

High pressure hoses with *wrapped* cover

Female thread (DKOL)		Female thread (DKR)		Male thread (AGR)			
M16 : M16	M18 : M18	3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"		
10L : 10L	12L : 12L						
							

Hoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	332 174 510	332 176 510	332 154 510		332 144 510			
				15 m	332 174 515	332 176 515	332 154 515		332 144 515			
				20 m	332 174 520	332 176 520	332 154 520		332 144 520			
1SN	8	210 bar	150 °C	10 m	342 174 510	342 176 510	342 154 510		342 144 510			
				15 m	342 174 515	342 176 515	342 154 515		342 144 515			
				20 m	342 174 520	342 176 520	342 154 520		342 144 520			
1SN	10	210 bar	150 °C	10 m		352 176 510	352 154 510	352 156 510	352 144 510	352 146 510		
				15 m		352 176 515	352 154 515	352 156 515	352 144 515	352 146 515		
				20 m		352 176 520	352 154 520	352 156 520	352 144 520	352 146 520		

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	347 174 510	347 176 510	347 154 510		347 144 510			
				15 m	347 174 515	347 176 515	347 154 515		347 144 515			
				20 m	347 174 520	347 176 520	347 154 520		347 144 520			
2SC	10	400 bar	150 °C	10 m		357 176 510	357 154 510	357 156 510	357 144 510	357 146 510		
				15 m		357 176 515	357 154 515	357 156 515	357 144 515	357 146 515		
				20 m		357 176 520	357 154 520	357 156 520	357 144 520	357 146 520		

High pressure hoses with *smooth* cover

Female thread (DKOL)		Female thread (DKR)		Male thread (AGR)			
M16 : M16	M18 : M18	3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"		
10L : 10L	12L : 12L						
							

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	347 674 510	347 676 510	347 654 510		347 644 510			
				15 m	347 674 515	347 676 515	347 654 515		347 644 515			
				20 m	347 674 520	347 676 520	347 654 520		347 644 520			
2SN	10	400 bar	150 °C	10 m		357 676 510	357 654 510	357 656 510	357 644 510	357 646 510		
				15 m		357 676 515	357 654 515	357 656 515	357 644 515	357 646 515		
				20 m		357 676 520	357 654 520	357 656 520	357 644 520	357 646 520		


Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.

Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel


High pressure hoses with *smooth* cover

Quick screw couplings : quick screw couplings				QSC : plug swivel	
M22 : M22		M22 : M22 swivel		M22 : $\varnothing 11$ swivel	
	Plug & crimp stainless steel		Plug & crimp stainless steel		Plug & crimp stainless steel
					

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	10 m	347 600 321 0	347 600 321 07	347 601 121 0	347 601 121 07	347 611 321 0	347 611 321 07
				15 m	347 600 321 5	347 600 321 57	347 601 121 5	347 601 121 57	347 611 321 5	347 611 321 57
				20 m	347 600 322 0	347 600 322 07	347 601 122 0	347 601 122 07	347 611 322 0	347 611 322 07
2SN	10	400 bar	150 °C	10 m	357 600 321 0	357 600 321 07				
				15 m	357 600 321 5	357 600 321 57				
				20 m	357 600 322 0	357 600 322 07				

Hobby high pressure hoses

Quick screw coupling : male thread / plug						f thread	m thread
1/2" : $\varnothing 8$	M22 : $\varnothing 10$ (18.0)	M22 : $\varnothing 10$ (15.5)	M22 : M22	M22 : $\varnothing 8.8$	$\varnothing 8.8$: $\varnothing 8.8$	1/4" : 1/4"	1/4" : 1/4"
	 suitable system 2000 K	 suitable system 2000 K	 suitable system 2000 K	 suitable system 2000 K	 suitable system 2000 K		

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	8 m	390 033 208	390 028 208		390 000 208	390 010 520 8	390 010 420 8	390 052 208	390 042 210
				9 m		390 028 209	390 010 209		390 010 520 9	390 010 420 9		
				10 m	390 033 210	390 028 210	390 010 210	390 000 210	390 010 521 0	390 010 421 0	390 052 210	
				15 m	390 033 215	390 028 215	390 010 215	390 000 215	390 010 521 5	390 010 421 5	390 052 215	390 042 215
				20 m	390 033 220	390 028 220	390 010 220	390 000 220	390 010 522 0	390 010 422 0	390 052 220	390 042 220

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
Polya	6	160 bar	60 °C	8 m	460 033 208	460 028 208	460 010 208	460 000 208	460 010 520 8	460 010 420 8	460 052 208	460 042 208
				9 m		460 028 209	460 010 209		460 010 520 9	460 010 420 9		
				10 m	460 033 210	460 028 210	460 010 210	460 000 210	460 010 521 0	460 010 421 0	460 052 210	460 042 210
				15 m	460 033 215	460 028 215	460 010 215	460 000 215	460 010 521 5	460 010 421 5	460 052 215	460 042 215
				20 m			460 010 220	460 000 220	460 010 522 0	460 010 422 0		

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.


All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.

Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

Symbols $\varnothing$ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

High-pressure hoses for existing systems



Dust protection seal o-ring



R+M Nr.	PU
050 000 110	1 piece
791 932 401	100 pieces

Quick screw couplings : quick screw couplings

TR22 : TR22 swivel



QSC : plug swivel

TR22 swivel : 11 swivel



Hoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	330 117 242 10	331 117 242 10	332 117 242 10	330 116 782 10	331 116 782 10
				15 m	330 117 242 15	331 117 242 15	332 117 242 15	330 116 782 15	331 116 782 15
				20 m	330 117 242 20	331 117 242 20	332 117 242 20	330 116 782 20	331 116 782 20
1SN	8	210 bar	150 °C	10 m	340 117 242 10	341 117 242 10	342 117 242 10		341 116 782 10
				15 m	340 117 242 15	341 117 242 15	342 117 242 15		341 116 782 15
				20 m	340 117 242 20	341 117 242 20	342 117 242 20		341 116 782 20
1SN	8	315 bar	150 °C	10 m	343 117 242 10			343 116 782 10	
				15 m	343 117 242 15			343 116 782 15	
				20 m	343 117 242 20			343 116 782 20	
1SN	10	210 bar	150 °C	10 m	350 117 242 10	351 117 242 10	352 117 242 10		
				25 m	350 117 242 25	351 117 242 25	352 117 242 25		
				40 m	350 117 242 40	351 117 242 40	352 117 242 40		

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	1.2 m	345 617 242 012				
				10 m	345 617 242 10	346 617 242 10	347 617 242 10	345 616 782 10	
				15 m	345 617 242 15	346 617 242 15	347 617 242 15	345 616 782 15	
				20 m	345 617 242 20	346 617 242 20	347 617 242 20	345 616 782 20	
				30 m	345 617 242 30	346 617 242 30	347 617 242 30	345 616 782 30	
				40 m	345 617 242 40	346 617 242 40	347 617 242 40	345 616 782 40	

Dynaflex365+® Highly flexible high-pressure hoses

Dynaflex365+® - Very flexible high-pressure hose, manufactured in accordance with DIN EN 857.

- » Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.
- » Suitable for: water, water-oil emulsions and water mixtures with up to 50% cleaning agents.

- » **Smooth outer cover** made of synthetic rubber. Particularly abrasion-resistant, oil-, ozone-, weather- and pressure-resistant.
- » Inner tube synthetic rubber. 1 or 2 high-tensile wire braids.
- » **Max. 280 bar / 420 bar.** Burst pressure > 1,000 / 1,600 bar.
- 40 °C - +150 °C

Dynaflex365+®

Our new Dynaflex365+® hose with a smooth cover is easy to clean and is characterized by its high flexibility with a very small bending radius.

The operating pressure is significantly higher than with comparable hoses. A high-performance hose with the best flexibility values!



Quick screw coupling : QSC

M22 : M22

M22 : plug
11

Quick screw coupling : QSC swivel

M22 : M22
swivel

M22 : M22
swivel

TR22 :
TR22 swivel



Dynaflex365+®

Hoses with one braid of high tensile steel wire and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SC	6	280 bar	150 °C	10 m	391 110 003 10	391 110 003 210	391 110 113 210	391 110 011 210	391 110 013 10	391 110 172 421 0
				15 m	391 110 003 15	391 110 003 215	391 110 113 215	391 110 011 215	391 110 013 15	391 110 172 421 5
				20 m	391 110 003 20	391 110 003 220	391 110 113 220	391 110 011 220	391 110 013 20	391 110 172 422 0
1SC	8	280 bar	150 °C	10 m	391 210 003 10	391 210 003 210	391 210 113 210	391 210 011 210	391 210 013 10	391 210 172 421 0
				15 m	391 210 003 15	391 210 003 215	391 210 113 215	391 210 011 215	391 210 013 15	391 210 172 421 5
				20 m	391 210 003 20	391 210 003 220	391 210 113 220	391 210 011 220	391 210 013 20	391 210 172 422 0
1SC	10	280 bar	150 °C	10 m	391 310 003 10	391 310 003 210	391 310 113 210	391 310 011 210	391 310 013 10	391 310 172 421 0
				15 m	391 310 003 15	391 310 003 215	391 310 113 215	391 310 011 215	391 310 013 15	391 310 172 421 5
				20 m	391 310 003 20	391 310 003 220	391 310 113 220	391 310 011 220	391 310 013 20	391 310 172 422 0

Hoses with two braids of high tensile steel wire and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	420 bar	150 °C	10 m	391 111 003 10	391 111 003 210	391 111 113 210	391 111 011 210	391 111 013 10	391 111 172 421 0
				15 m	391 111 003 15	391 111 003 215	391 111 113 215	391 111 011 215	391 111 013 15	391 111 172 421 5
				20 m	391 111 003 20	391 111 003 220	391 111 113 220	391 111 011 220	391 111 013 20	391 111 172 422 0
2SC	8	420 bar	150 °C	10 m	391 211 003 10	391 211 003 210	391 211 113 210	391 211 011 210	391 211 013 10	391 211 172 421 0
				15 m	391 211 003 15	391 211 003 215	391 211 113 215	391 211 011 215	391 211 013 15	391 211 172 421 5
				20 m	391 211 003 20	391 211 003 220	391 211 113 220	391 211 011 220	391 211 013 20	391 211 172 422 0
2SC	10	420 bar	150 °C	10 m	391 311 003 10	391 311 003 210	391 311 113 210	391 311 011 210	391 311 013 10	391 311 172 421 0
				15 m	391 311 003 15	391 311 003 215	391 311 113 215	391 311 011 215	391 311 013 15	391 311 172 421 5
				20 m	391 311 003 20	391 311 003 220	391 311 113 220	391 311 011 220	391 311 013 20	391 311 172 422 0

Symbols ∅ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

Dynaflex365+® Highly flexible high-pressure hoses

Dynaflex365+®



Hoses with one braid of high tensile steel wire and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SC	6	280 bar	150 °C	10 m	391 110 176 821 0	391 110 443 10	391 110 553 10	391 110 543 10		
				15 m	391 110 176 821 5	391 110 443 15	391 110 553 15	391 110 543 15		
				20 m	391 110 176 822 0	391 110 443 20	391 110 553 20	391 110 543 20		
1SC	8	280 bar	150 °C	10 m	391 210 176 821 0	391 210 443 10	391 210 553 10	391 210 543 10		
				15 m	391 210 176 821 5	391 210 443 15	391 210 553 15	391 210 543 15		
				20 m	391 210 176 822 0	391 210 443 20	391 210 553 20	391 210 543 20		
1SC	10	280 bar	150 °C	10 m	391 310 176 821 0	391 310 443 10	391 310 553 10	391 310 543 10		
				15 m	391 310 176 821 5	391 310 443 15	391 310 553 15	391 310 543 15		
				20 m	391 310 176 822 0	391 310 443 20	391 310 553 20	391 310 543 20		

Hoses with two braids of high tensile steel wire and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	420 bar	150 °C	10 m	391 111 176 821 0	391 111 443 10	391 111 553 10	391 111 543 10		
				15 m	391 111 176 821 5	391 111 443 15	391 111 553 15	391 111 543 15		
				20 m	391 111 176 822 0	391 111 443 20	391 111 553 20	391 111 543 20		
2SC	8	420 bar	150 °C	10 m	391 211 176 821 0	391 211 443 10	391 211 553 10	391 211 543 10		
				15 m	391 211 176 821 5	391 211 443 15	391 211 553 15	391 211 543 15		
				20 m	391 211 176 822 0	391 211 443 20	391 211 553 20	391 211 543 20		
2SC	10	420 bar	150 °C	10 m	391 311 176 821 0	391 311 443 10	391 311 553 10	391 311 543 10		
				15 m	391 311 176 821 5	391 311 443 15	391 311 553 15	391 311 543 15		
				20 m	391 311 176 822 0	391 311 443 20	391 311 553 20	391 311 543 20		

Dynaflex365+® Highly flexible high-pressure hoses

Dynaflex365+®

Quick screw coupling : QSC

Quick screw coupling : QSC swivel


M22 : M22

M22 : plug 11

M22 : M22 swivel

M22 : M22 swivel

TR22 : TR22 swivel

Hoses with one braid of high tensile steel wire and *smooth cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SC	6	280 bar	150 °C	10 m	392 110 006 10	392 110 003 210	392 110 113 210	392 110 011 210	392 110 016 10	392 110 172 421 0
				15 m	392 110 006 15	392 110 003 215	392 110 113 215	392 110 011 215	392 110 016 15	392 110 172 421 5
				20 m	392 110 006 20	392 110 003 220	392 110 113 220	392 110 011 220	392 110 016 20	392 110 172 422 0
1SC	8	280 bar	150 °C	10 m	392 210 006 10	392 210 003 210	392 210 113 210	392 210 011 210	392 210 016 10	392 210 172 421 0
				15 m	392 210 006 15	392 210 003 215	392 210 113 215	392 210 011 215	392 210 016 15	392 210 172 421 5
				20 m	392 210 006 20	392 210 003 220	392 210 113 220	392 210 011 220	392 210 016 20	392 210 172 422 0
1SC	10	280 bar	150 °C	10 m	392 310 006 10	392 310 003 210	392 310 113 210	392 310 011 210	392 310 016 10	392 310 172 421 0
				15 m	392 310 006 15	392 310 003 215	392 310 113 215	392 310 011 215	392 310 016 15	392 310 172 421 5
				20 m	392 310 006 20	392 310 003 220	392 310 113 220	392 310 011 220	392 310 016 20	392 310 172 422 0


Hoses with two braids of high tensile steel wire and *smooth cover*

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	420 bar	150 °C	10 m	392 111 006 10	392 111 003 210	392 111 113 210	392 111 011 210	392 111 016 10	392 111 172 421 0
				15 m	392 111 006 15	392 111 003 215	392 111 113 215	392 111 011 215	392 111 016 15	392 111 172 421 5
				20 m	392 111 006 20	392 111 003 220	392 111 113 220	392 111 011 220	392 111 016 20	392 111 172 422 0
2SC	8	420 bar	150 °C	10 m	392 211 006 10	392 211 003 210	392 211 113 210	392 211 011 210	392 211 016 10	392 211 172 421 0
				15 m	392 211 006 15	392 211 003 215	392 211 113 215	392 211 011 215	392 211 016 15	392 211 172 421 5
				20 m	392 211 006 20	392 211 003 220	392 211 113 220	392 211 011 220	392 211 016 20	392 211 172 422 0
2SC	10	420 bar	150 °C	10 m	392 311 006 10	392 311 003 210	392 311 113 210	392 311 011 210	392 311 016 10	392 311 172 421 0
				15 m	392 311 006 15	392 311 003 215	392 311 113 215	392 311 011 215	392 311 016 15	392 311 172 421 5
				20 m	392 311 006 20	392 311 003 220	392 311 113 220	392 311 011 220	392 311 016 20	392 311 172 422 0

Symbols diameter nominal diameter pressure temperature length type

Dynaflex365+® Highly flexible high-pressure hoses

Dynaflex365+®

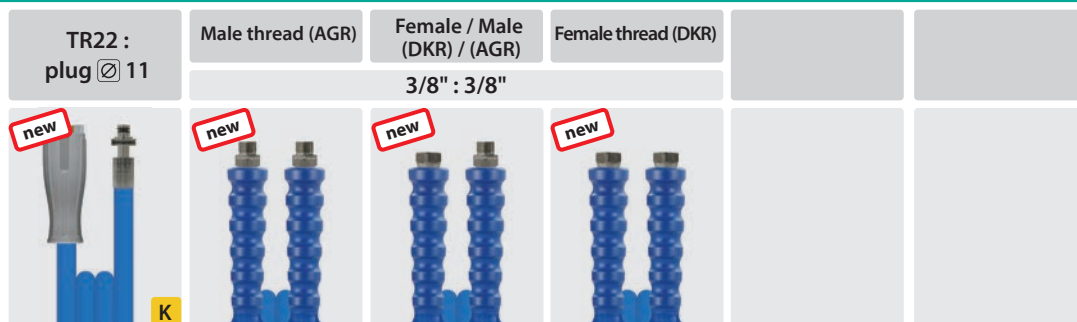

Hoses with one braid of high tensile steel wire and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SC	6	280 bar	150 °C	10 m	392 110 176 821 0	392 110 446 10	392 110 556 10	392 110 546 10		
				15 m	392 110 176 821 5	392 110 446 15	392 110 556 15	392 110 546 15		
				20 m	392 110 176 822 0	392 110 446 20	392 110 556 20	392 110 546 20		
1SC	8	280 bar	150 °C	10 m	392 210 176 821 0	392 210 446 10	392 210 556 10	392 210 546 10		
				15 m	392 210 176 821 5	392 210 446 15	392 210 556 15	392 210 546 15		
				20 m	392 210 176 822 0	392 210 446 20	392 210 556 20	392 210 546 20		
1SC	10	280 bar	150 °C	10 m	392 310 176 821 0	392 310 446 10	392 310 556 10	392 310 546 10		
				15 m	392 310 176 821 5	392 310 446 15	392 310 556 15	392 310 546 15		
				20 m	392 310 176 822 0	392 310 446 20	392 310 556 20	392 310 546 20		

Hoses with two braids of high tensile steel wire and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	420 bar	150 °C	10 m	392 111 176 821 0	392 111 446 10	392 111 556 10	392 111 546 10		
				15 m	392 111 176 821 5	392 111 446 15	392 111 556 15	392 111 546 15		
				20 m	392 111 176 822 0	392 111 446 20	392 111 556 20	392 111 546 20		
2SC	8	420 bar	150 °C	10 m	392 211 176 821 0	392 211 446 10	392 211 556 10	392 211 546 10		
				15 m	392 211 176 821 5	392 211 446 15	392 211 556 15	392 211 546 15		
				20 m	392 211 176 822 0	392 211 446 20	392 211 556 20	392 211 546 20		
2SC	10	420 bar	150 °C	10 m	392 311 176 821 0	392 311 446 10	392 311 556 10	392 311 546 10		
				15 m	392 311 176 821 5	392 311 446 15	392 311 556 15	392 311 546 15		
				20 m	392 311 176 822 0	392 311 446 20	392 311 556 20	392 311 546 20		

Dynaflex365+® Highly flexible high-pressure hoses per metre

1SC black - smooth cover




R+M Nr.	TYP	DN	Ø	P	BP	↩	°C
300 411 061	1SC	6	12.5	280 bar	1,000 bar	60 mm	-40 °C - +150 °C
300 411 081	1SC	8	13.8	280 bar	1,000 bar	80 mm	-40 °C - +150 °C
300 411 101	1SC	10	16.2	280 bar	1,000 bar	90 mm	-40 °C - +150 °C

1SC blue - smooth cover



R+M Nr.	TYP	DN	Ø	P	BP	↩	°C
300 411 062	1SC	6	12.5	280 bar	1,000 bar	60 mm	-40 °C - +150 °C
300 411 082	1SC	8	13.8	280 bar	1,000 bar	80 mm	-40 °C - +150 °C
300 411 102	1SC	10	16.2	280 bar	1,000 bar	90 mm	-40 °C - +150 °C

2SC black - smooth cover

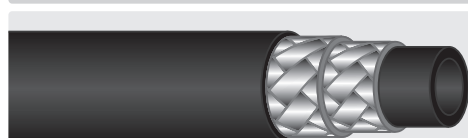

R+M Nr.	TYP	DN	Ø	P	BP	↩	°C
300 421 061	2SC	6	13.2	420 bar	1,600 bar	80 mm	-40 °C - +150 °C
300 421 081	2SC	8	15.8	420 bar	1,600 bar	90 mm	-40 °C - +150 °C
300 421 101	2SC	10	17.2	420 bar	1,600 bar	110 mm	-40 °C - +150 °C

2SC blue - smooth cover



R+M Nr.	TYP	DN	Ø	P	BP	↩	°C
300 421 062	2SC	6	13.2	420 bar	1,600 bar	80 mm	-40 °C - +150 °C
300 421 082	2SC	8	15.8	420 bar	1,600 bar	90 mm	-40 °C - +150 °C
300 421 102	2SC	10	17.2	420 bar	1,600 bar	110 mm	-40 °C - +150 °C

High pressure hoses for hose reels

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m					
				15 m	390 036 815				

Hoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	330 136 810	330 110 081 0	330 110 281 0		
				15 m	330 136 815	330 110 081 5	330 110 281 5		
1SN	8	210 bar	150 °C	20 m				340 100 820 1	
				30 m				340 100 830 1	

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	6	400 bar	150 °C	10 m	335 136 810				
				15 m	335 136 815				
				20 m	335 136 820				
2SC	8	400 bar	150 °C	10 m	345 136 810			345 100 810 1	
				15 m	345 136 815			345 100 815 1	
				20 m	345 136 820			345 100 820 1	346 100 820 1
				30 m				345 100 830 1	
				40 m				345 100 840 1	

Symbols $\varnothing$ diameter DN nominal diameter P pressure °C temperature ↔ length TYP type

High pressure hoses for hose reels



Hoses with single wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	15 m	330 113 381 5			330 107 815		
1SN	8	210 bar	150 °C	15 m	340 113 381 5					

Hose with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m			390 007 810			
				15 m	390 013 381		390 007 815			
1SN	8	250 bar	150 °C	15 m		340 601 815 1				
				20 m		340 601 820 1				

Hoses with double wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	15 m		345 601 815 1			345 616 815	
				20 m		345 601 820 1			345 616 820	
				30 m		346 601 830 1			345 616 830	

Hoses with double wire braid and *wrapped* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	10	400 bar	150 °C	20 m						355 115 332 0

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.

Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

CARWASH COMFORT PREMIUM

- » Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound
- » For use in professional car cleaning
- » Highest resistance to oil, UV-, ozone- and weatherproof
- » Experience the new orange miracle in use, maximum durability and flexibility for perfect vehicle care
- » The solution in the self-service washing area for professionals by professionals
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F
- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12.8 mm at DN 6
- » Burst pressure > 800 bar



1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔	
466 052 133 5	3.5 m	
466 052 133 7	3.7 m	
466 052 134	4.0 m	
466 052 134 2	4.2 m	
466 052 134 5	4.5 m	
466 052 134 7	4.7 m	
466 052 135	5.0 m	
466 052 135 5	5.5 m	
466 052 136	6.0 m	

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔	
466 054 133 5	3.5 m	
466 054 133 7	3.7 m	
466 054 134	4.0 m	
466 054 134 2	4.2 m	
466 054 134 5	4.5 m	
466 054 134 7	4.7 m	
466 054 135	5.0 m	
466 054 135 5	5.5 m	
466 054 136	6.0 m	

M14 : M14



Female thread (DKOL)

R+M Nr.	↔	
466 072 133 5	3.5 m	
466 072 133 7	3.7 m	
466 072 134	4.0 m	
466 072 134 2	4.2 m	
466 072 134 5	4.5 m	
466 072 134 7	4.7 m	
466 072 135	5.0 m	
466 072 135 5	5.5 m	
466 072 136	6.0 m	

M18 : M18



Female thread (DKOL)

R+M Nr.	↔	
466 076 133 5	3.5 m	
466 076 133 7	3.7 m	
466 076 134	4.0 m	
466 076 134 2	4.2 m	
466 076 134 5	4.5 m	
466 076 134 7	4.7 m	
466 076 135	5.0 m	
466 076 135 5	5.5 m	
466 076 136	6.0 m	

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔	
466 044 133 5	3.5 m	
466 044 133 7	3.7 m	
466 044 134	4.0 m	
466 044 134 2	4.2 m	
466 044 134 5	4.5 m	
466 044 134 7	4.7 m	
466 044 135	5.0 m	
466 044 135 5	5.5 m	
466 044 136	6.0 m	



Female thread (DKR)

R+M Nr.	↔	
461 105 260 35	3.5 m	
461 105 260 37	3.7 m	
461 105 260 4	4.0 m	
461 105 260 42	4.2 m	
461 105 260 45	4.5 m	
461 105 260 47	4.7 m	
461 105 260 5	5.0 m	
461 105 260 55	5.5 m	
461 105 260 6	6.0 m	



Female thread (DKR)

R+M Nr.	↔	
461 105 460 35	3.5 m	
461 105 460 37	3.7 m	
461 105 460 4	4.0 m	
461 105 460 42	4.2 m	
461 105 460 45	4.5 m	
461 105 460 47	4.7 m	
461 105 460 5	5.0 m	
461 105 460 55	5.5 m	
461 105 460 6	6.0 m	



Female thread (DKOL)

R+M Nr.	↔	
461 107 260 35	3.5 m	
461 107 260 37	3.7 m	
461 107 260 4	4.0 m	
461 107 260 42	4.2 m	
461 107 260 45	4.5 m	
461 107 260 47	4.7 m	
461 107 260 5	5.0 m	
461 107 260 55	5.5 m	
461 107 260 6	6.0 m	



Female thread (DKOL)

R+M Nr.	↔	
461 107 660 35	3.5 m	
461 107 660 37	3.7 m	
461 107 660 4	4.0 m	
461 107 660 42	4.2 m	
461 107 660 45	4.5 m	
461 107 660 47	4.7 m	
461 107 660 5	5.0 m	
461 107 660 55	5.5 m	
461 107 660 6	6.0 m	



Male thread (AGR)

R+M Nr.	↔	
461 104 460 35	3.5 m	
461 104 460 37	3.7 m	
461 104 460 4	4.0 m	
461 104 460 42	4.2 m	
461 104 460 45	4.5 m	
461 104 460 47	4.7 m	
461 104 460 5	5.0 m	
461 104 460 55	5.5 m	
461 104 460 6	6.0 m	

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols ↔ length

CARWASH COMFORT PREMIUM

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
462 105 230 35	3.5 m
462 105 230 37	3.7 m
462 105 230 4	4.0 m
462 105 230 42	4.2 m
462 105 230 45	4.5 m
462 105 230 47	4.7 m
462 105 230 5	5.0 m
462 105 230 55	5.5 m
462 105 230 6	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
462 105 430 35	3.5 m
462 105 430 37	3.7 m
462 105 430 4	4.0 m
462 105 430 42	4.2 m
462 105 430 45	4.5 m
462 105 430 47	4.7 m
462 105 430 5	5.0 m
462 105 430 55	5.5 m
462 105 430 6	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
462 107 230 35	3.5 m
462 107 230 37	3.7 m
462 107 230 4	4.0 m
462 107 230 42	4.2 m
462 107 230 45	4.5 m
462 107 230 47	4.7 m
462 107 230 5	5.0 m
462 107 230 55	5.5 m
462 107 230 6	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	
462 107 630 35	3.5 m
462 107 630 37	3.7 m
462 107 630 4	4.0 m
462 107 630 42	4.2 m
462 107 630 45	4.5 m
462 107 630 47	4.7 m
462 107 630 5	5.0 m
462 107 630 55	5.5 m
462 107 630 6	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
462 104 430 35	3.5 m
462 104 430 37	3.7 m
462 104 430 4	4.0 m
462 104 430 42	4.2 m
462 104 430 45	4.5 m
462 104 430 47	4.7 m
462 104 430 5	5.0 m
462 104 430 55	5.5 m
462 104 430 6	6.0 m



Female thread (DKR)

R+M Nr.	
463 105 270 35	3.5 m
463 105 270 37	3.7 m
463 105 270 4	4.0 m
463 105 270 42	4.2 m
463 105 270 45	4.5 m
463 105 270 47	4.7 m
463 105 270 5	5.0 m
463 105 270 55	5.5 m
463 105 270 6	6.0 m



Female thread (DKR)

R+M Nr.	
463 105 470 35	3.5 m
463 105 470 37	3.7 m
463 105 470 4	4.0 m
463 105 470 42	4.2 m
463 105 470 45	4.5 m
463 105 470 47	4.7 m
463 105 470 5	5.0 m
463 105 470 55	5.5 m
463 105 470 6	6.0 m



Female thread (DKOL)

R+M Nr.	
463 107 270 35	3.5 m
463 107 270 37	3.7 m
463 107 270 4	4.0 m
463 107 270 42	4.2 m
463 107 270 45	4.5 m
463 107 270 47	4.7 m
463 107 270 5	5.0 m
463 107 270 55	5.5 m
463 107 270 6	6.0 m



Female thread (DKOL)

R+M Nr.	
463 107 670 35	3.5 m
463 107 670 37	3.7 m
463 107 670 4	4.0 m
463 107 670 42	4.2 m
463 107 670 45	4.5 m
463 107 670 47	4.7 m
463 107 670 5	5.0 m
463 107 670 55	5.5 m
463 107 670 6	6.0 m



Male thread (AGR)

R+M Nr.	
463 104 470 35	3.5 m
463 104 470 37	3.7 m
463 104 470 4	4.0 m
463 104 470 42	4.2 m
463 104 470 45	4.5 m
463 104 470 47	4.7 m
463 104 470 5	5.0 m
463 104 470 55	5.5 m
463 104 470 6	6.0 m

CARWASH COMFORT PREMIUM

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔
464 105 230 35	3.5 m
464 105 230 37	3.7 m
464 105 230 4	4.0 m
464 105 230 42	4.2 m
464 105 230 45	4.5 m
464 105 230 47	4.7 m
464 105 230 5	5.0 m
464 105 230 55	5.5 m
464 105 230 6	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔
464 105 430 35	3.5 m
464 105 430 37	3.7 m
464 105 430 4	4.0 m
464 105 430 42	4.2 m
464 105 430 45	4.5 m
464 105 430 47	4.7 m
464 105 430 5	5.0 m
464 105 430 55	5.5 m
464 105 430 6	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	↔
464 107 230 35	3.5 m
464 107 230 37	3.7 m
464 107 230 4	4.0 m
464 107 230 42	4.2 m
464 107 230 45	4.5 m
464 107 230 47	4.7 m
464 107 230 5	5.0 m
464 107 230 55	5.5 m
464 107 230 6	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	↔
464 107 630 35	3.5 m
464 107 630 37	3.7 m
464 107 630 4	4.0 m
464 107 630 42	4.2 m
464 107 630 45	4.5 m
464 107 630 47	4.7 m
464 107 630 5	5.0 m
464 107 630 55	5.5 m
464 107 630 6	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔
464 104 430 35	3.5 m
464 104 430 37	3.7 m
464 104 430 4	4.0 m
464 104 430 42	4.2 m
464 104 430 45	4.5 m
464 104 430 47	4.7 m
464 104 430 5	5.0 m
464 104 430 55	5.5 m
464 104 430 6	6.0 m



Female thread (DKR)

R+M Nr.	↔
465 105 230 35	3.5 m
465 105 230 37	3.7 m
465 105 230 4	4.0 m
465 105 230 42	4.2 m
465 105 230 45	4.5 m
465 105 230 47	4.7 m
465 105 230 5	5.0 m
465 105 230 55	5.5 m
465 105 230 6	6.0 m



Female thread (DKR)

R+M Nr.	↔
465 105 430 35	3.5 m
465 105 430 37	3.7 m
465 105 430 4	4.0 m
465 105 430 42	4.2 m
465 105 430 45	4.5 m
465 105 430 47	4.7 m
465 105 430 5	5.0 m
465 105 430 55	5.5 m
465 105 430 6	6.0 m



Female thread (DKOL)

R+M Nr.	↔
465 107 230 35	3.5 m
465 107 230 37	3.7 m
465 107 230 4	4.0 m
465 107 230 42	4.2 m
465 107 230 45	4.5 m
465 107 230 47	4.7 m
465 107 230 5	5.0 m
465 107 230 55	5.5 m
465 107 230 6	6.0 m



Female thread (DKOL)

R+M Nr.	↔
465 107 630 35	3.5 m
465 107 630 37	3.7 m
465 107 630 4	4.0 m
465 107 630 42	4.2 m
465 107 630 45	4.5 m
465 107 630 47	4.7 m
465 107 630 5	5.0 m
465 107 630 55	5.5 m
465 107 630 6	6.0 m




Male thread (AGR)

R+M Nr.	↔
465 104 430 35	3.5 m
465 104 430 37	3.7 m
465 104 430 4	4.0 m
465 104 430 42	4.2 m
465 104 430 45	4.5 m
465 104 430 47	4.7 m
465 104 430 5	5.0 m
465 104 430 55	5.5 m
465 104 430 6	6.0 m

Symbols ↔ length

CARWASH COMFORT - the proven hose marvel for self-service car washes

The original

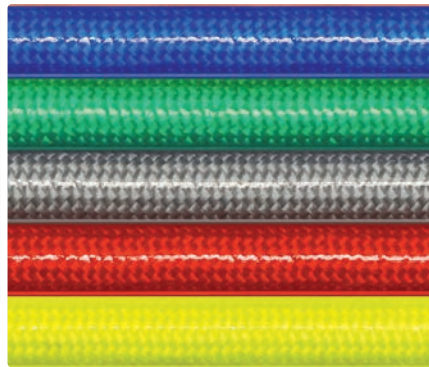

- » High standard of easy and comfortable use in combination with spraying equipment, e.g. brush lance
- » Light weight, 92 g/m at DN 6. More than half in weight in comparison to an usual self-service hose
- » Chemically resistant, smooth interior made out of PES
- » Transparent surface made out of a thermoplastic elastomer, depending on colour: CCBL, CCRT, CCGR, CCGE, CCGN
- » Oil-, UV-, ozone-resistant and weatherproof
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F

- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12 mm at DN 6
- » Burst pressure > 800 bar

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
461 052 603 5	3.5 m
461 052 603 7	3.7 m
461 052 604	4.0 m
461 052 604 2	4.2 m
461 052 604 5	4.5 m
461 052 604 7	4.7 m
461 052 605	5.0 m
461 052 605 5	5.5 m
461 052 606	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
461 054 603 5	3.5 m
461 054 603 7	3.7 m
461 054 604	4.0 m
461 054 604 2	4.2 m
461 054 604 5	4.5 m
461 054 604 7	4.7 m
461 054 605	5.0 m
461 054 605 5	5.5 m
461 054 606	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
461 072 603 5	3.5 m
461 072 603 7	3.7 m
461 072 604	4.0 m
461 072 604 2	4.2 m
461 072 604 5	4.5 m
461 072 604 7	4.7 m
461 072 605	5.0 m
461 072 605 5	5.5 m
461 072 606	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	
461 076 603 5	3.5 m
461 076 603 7	3.7 m
461 076 604	4.0 m
461 076 604 2	4.2 m
461 076 604 5	4.5 m
461 076 604 7	4.7 m
461 076 605	5.0 m
461 076 605 5	5.5 m
461 076 606	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
461 044 603 5	3.5 m
461 044 603 7	3.7 m
461 044 604	4.0 m
461 044 604 2	4.2 m
461 044 604 5	4.5 m
461 044 604 7	4.7 m
461 044 605	5.0 m
461 044 605 5	5.5 m
461 044 606	6.0 m



Female thread (DKR)

R+M Nr.	
462 052 303 5	3.5 m
462 052 303 7	3.7 m
462 052 304	4.0 m
462 052 304 2	4.2 m
462 052 304 5	4.5 m
462 052 304 7	4.7 m
462 052 305	5.0 m
462 052 305 5	5.5 m
462 052 306	6.0 m



Female thread (DKR)

R+M Nr.	
462 054 303 5	3.5 m
462 054 303 7	3.7 m
462 054 304	4.0 m
462 054 304 2	4.2 m
462 054 304 5	4.5 m
462 054 304 7	4.7 m
462 054 305	5.0 m
462 054 305 5	5.5 m
462 054 306	6.0 m



Female thread (DKOL)

R+M Nr.	
462 072 303 5	3.5 m
462 072 303 7	3.7 m
462 072 304	4.0 m
462 072 304 2	4.2 m
462 072 304 5	4.5 m
462 072 304 7	4.7 m
462 072 305	5.0 m
462 072 305 5	5.5 m
462 072 306	6.0 m



Female thread (DKOL)

R+M Nr.	
462 076 303 5	3.5 m
462 076 303 7	3.7 m
462 076 304	4.0 m
462 076 304 2	4.2 m
462 076 304 5	4.5 m
462 076 304 7	4.7 m
462 076 305	5.0 m
462 076 305 5	5.5 m
462 076 306	6.0 m



Male thread (AGR)

R+M Nr.	
462 044 303 5	3.5 m
462 044 303 7	3.7 m
462 044 304	4.0 m
462 044 304 2	4.2 m
462 044 304 5	4.5 m
462 044 304 7	4.7 m
462 044 305	5.0 m
462 044 305 5	5.5 m
462 044 306	6.0 m

CARWASH COMFORT - the proven hose marvel for self-service car washes

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔
463 052 703 5	3.5 m
463 052 703 7	3.7 m
463 052 704	4.0 m
463 052 704 2	4.2 m
463 052 704 5	4.5 m
463 052 704 7	4.7 m
463 052 705	5.0 m
463 052 705 5	5.5 m
463 052 706	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔
463 054 703 5	3.5 m
463 054 703 7	3.7 m
463 054 704	4.0 m
463 054 704 2	4.2 m
463 054 704 5	4.5 m
463 054 704 7	4.7 m
463 054 705	5.0 m
463 054 705 5	5.5 m
463 054 706	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	↔
463 072 703 5	3.5 m
463 072 703 7	3.7 m
463 072 704	4.0 m
463 072 704 2	4.2 m
463 072 704 5	4.5 m
463 072 704 7	4.7 m
463 072 705	5.0 m
463 072 705 5	5.5 m
463 072 706	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	↔
463 076 703 5	3.5 m
463 076 703 7	3.7 m
463 076 704	4.0 m
463 076 704 2	4.2 m
463 076 704 5	4.5 m
463 076 704 7	4.7 m
463 076 705	5.0 m
463 076 705 5	5.5 m
463 076 706	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔
463 044 703 5	3.5 m
463 044 703 7	3.7 m
463 044 704	4.0 m
463 044 704 2	4.2 m
463 044 704 5	4.5 m
463 044 704 7	4.7 m
463 044 705	5.0 m
463 044 705 5	5.5 m
463 044 706	6.0 m



Female thread (DKR)

R+M Nr.	↔
464 052 303 5	3.5 m
464 052 303 7	3.7 m
464 052 304	4.0 m
464 052 304 2	4.2 m
464 052 304 5	4.5 m
464 052 304 7	4.7 m
464 052 305	5.0 m
464 052 305 5	5.5 m
464 052 306	6.0 m



Female thread (DKR)

R+M Nr.	↔
464 054 303 5	3.5 m
464 054 303 7	3.7 m
464 054 304	4.0 m
464 054 304 2	4.2 m
464 054 304 5	4.5 m
464 054 304 7	4.7 m
464 054 305	5.0 m
464 054 305 5	5.5 m
464 054 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
464 072 303 5	3.5 m
464 072 303 7	3.7 m
464 072 304	4.0 m
464 072 304 2	4.2 m
464 072 304 5	4.5 m
464 072 304 7	4.7 m
464 072 305	5.0 m
464 072 305 5	5.5 m
464 072 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
464 076 303 5	3.5 m
464 076 303 7	3.7 m
464 076 304	4.0 m
464 076 304 2	4.2 m
464 076 304 5	4.5 m
464 076 304 7	4.7 m
464 076 305	5.0 m
464 076 305 5	5.5 m
464 076 306	6.0 m



Male thread (AGR)

R+M Nr.	↔
464 044 303 5	3.5 m
464 044 303 7	3.7 m
464 044 304	4.0 m
464 044 304 2	4.2 m
464 044 304 5	4.5 m
464 044 304 7	4.7 m
464 044 305	5.0 m
464 044 305 5	5.5 m
464 044 306	6.0 m



Female thread (DKR)

R+M Nr.	↔
465 052 303 5	3.5 m
465 052 303 7	3.7 m
465 052 304	4.0 m
465 052 304 2	4.2 m
465 052 304 5	4.5 m
465 052 304 7	4.7 m
465 052 305	5.0 m
465 052 305 5	5.5 m
465 052 306	6.0 m



Female thread (DKR)

R+M Nr.	↔
465 054 303 5	3.5 m
465 054 303 7	3.7 m
465 054 304	4.0 m
465 054 304 2	4.2 m
465 054 304 5	4.5 m
465 054 304 7	4.7 m
465 054 305	5.0 m
465 054 305 5	5.5 m
465 054 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
465 072 303 5	3.5 m
465 072 303 7	3.7 m
465 072 304	4.0 m
465 072 304 2	4.2 m
465 072 304 5	4.5 m
465 072 304 7	4.7 m
465 072 305	5.0 m
465 072 305 5	5.5 m
465 072 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
465 076 303 5	3.5 m
465 076 303 7	3.7 m
465 076 304	4.0 m
465 076 304 2	4.2 m
465 076 304 5	4.5 m
465 076 304 7	4.7 m
465 076 305	5.0 m
465 076 305 5	5.5 m
465 076 306	6.0 m



Male thread (AGR)

R+M Nr.	↔
465 044 303 5	3.5 m
465 044 303 7	3.7 m
465 044 304	4.0 m
465 044 304 2	4.2 m
465 044 304 5	4.5 m
465 044 304 7	4.7 m
465 044 305	5.0 m
465 044 305 5	5.5 m
465 044 306	6.0 m

Symbols ↔ length

CARWASH COMFORT - you are invited to experience our blue hose wonder in DN 8!

High-tensile polyester reinforcing, working pressure of up to 200 bar. DN 8. -40 °C – +60 °C, -40 °F – +140 °F

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
471 052 603 5	3.5 m
471 052 603 7	3.7 m
471 052 604	4.0 m
471 052 604 2	4.2 m
471 052 604 5	4.5 m
471 052 604 7	4.7 m
471 052 605	5.0 m
471 052 605 5	5.5 m
471 052 606	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
471 054 603 5	3.5 m
471 054 603 7	3.7 m
471 054 604	4.0 m
471 054 604 2	4.2 m
471 054 604 5	4.5 m
471 054 604 7	4.7 m
471 054 605	5.0 m
471 054 605 5	5.5 m
471 054 606	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
471 072 603 5	3.5 m
471 072 603 7	3.7 m
471 072 604	4.0 m
471 072 604 2	4.2 m
471 072 604 5	4.5 m
471 072 604 7	4.7 m
471 072 605	5.0 m
471 072 605 5	5.5 m
471 072 606	6.0 m

M18 : M18



Female thread (DKOL)


R+M Nr.	
471 076 603 5	3.5 m
471 076 603 7	3.7 m
471 076 604	4.0 m
471 076 604 2	4.2 m
471 076 604 5	4.5 m
471 076 604 7	4.7 m
471 076 605	5.0 m
471 076 605 5	5.5 m
471 076 606	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
471 044 603 5	3.5 m
471 044 603 7	3.7 m
471 044 604	4.0 m
471 044 604 2	4.2 m
471 044 604 5	4.5 m
471 044 604 7	4.7 m
471 044 605	5.0 m
471 044 605 5	5.5 m
471 044 606	6.0 m



Female thread (DKR)

R+M Nr.	
471 405 230 35	3.5 m
471 405 230 37	3.7 m
471 405 230 4	4.0 m
471 405 230 42	4.2 m
471 405 230 45	4.5 m
471 405 230 47	4.7 m
471 405 230 5	5.0 m
471 405 230 55	5.5 m
471 405 230 6	6.0 m



Female thread (DKR)

R+M Nr.	
471 405 430 35	3.5 m
471 405 430 37	3.7 m
471 405 430 4	4.0 m
471 405 430 42	4.2 m
471 405 430 45	4.5 m
471 405 430 47	4.7 m
471 405 430 5	5.0 m
471 405 430 55	5.5 m
471 405 430 6	6.0 m




Female thread (DKOL)

R+M Nr.	
471 407 230 35	3.5 m
471 407 230 37	3.7 m
471 407 230 4	4.0 m
471 407 230 42	4.2 m
471 407 230 45	4.5 m
471 407 230 47	4.7 m
471 407 230 5	5.0 m
471 407 230 55	5.5 m
471 407 230 6	6.0 m




Female thread (DKOL)

R+M Nr.	
471 407 630 35	3.5 m
471 407 630 37	3.7 m
471 407 630 4	4.0 m
471 407 630 42	4.2 m
471 407 630 45	4.5 m
471 407 630 47	4.7 m
471 407 630 5	5.0 m
471 407 630 55	5.5 m
471 407 630 6	6.0 m



Male thread (AGR)

R+M Nr.	
471 404 430 35	3.5 m
471 404 430 37	3.7 m
471 404 430 4	4.0 m
471 404 430 42	4.2 m
471 404 430 45	4.5 m
471 404 430 47	4.7 m
471 404 430 5	5.0 m
471 404 430 55	5.5 m
471 404 430 6	6.0 m



Female thread (DKR)

R+M Nr.	
471 205 230 35	3.5 m
471 205 230 37	3.7 m
471 205 230 4	4.0 m
471 205 230 42	4.2 m
471 205 230 45	4.5 m
471 205 230 47	4.7 m
471 205 230 5	5.0 m
471 205 230 55	5.5 m
471 205 230 6	6.0 m




Female thread (DKR)

R+M Nr.	
471 205 430 35	3.5 m
471 205 430 37	3.7 m
471 205 430 4	4.0 m
471 205 430 42	4.2 m
471 205 430 45	4.5 m
471 205 430 47	4.7 m
471 205 430 5	5.0 m
471 205 430 55	5.5 m
471 205 430 6	6.0 m




Female thread (DKOL)

R+M Nr.	
471 207 230 35	3.5 m
471 207 230 37	3.7 m
471 207 230 4	4.0 m
471 207 230 42	4.2 m
471 207 230 45	4.5 m
471 207 230 47	4.7 m
471 207 230 5	5.0 m
471 207 230 55	5.5 m
471 207 230 6	6.0 m



Female thread (DKOL)

R+M Nr.	
471 207 630 35	3.5 m
471 207 630 37	3.7 m
471 207 630 4	4.0 m
471 207 630 42	4.2 m
471 207 630 45	4.5 m
471 207 630 47	4.7 m
471 207 630 5	5.0 m
471 207 630 55	5.5 m
471 207 630 6	6.0 m



Male thread (AGR)

R+M Nr.	
471 204 430 35	3.5 m
471 204 430 37	3.7 m
471 204 430 4	4.0 m
471 204 430 42	4.2 m
471 204 430 45	4.5 m
471 204 430 47	4.7 m
471 204 430 5	5.0 m
471 204 430 55	5.5 m
471 204 430 6	6.0 m

High pressure hoses for self-service washing bays

Hoses with single wire braid and wrapped cover. 15N. Nominal diameter 6. Max. 210 bar /150 °C

1/4" : 1/4"



Female thread (DKR)

3/8" : 3/8"



Female thread (DKR)

1/4" : 1/4"



Female thread (DKR)

M22 : 10  swivel



QSC - swivel disc plug



QSC - swivel disc plug

R+M Nr.	
331 152 803 5	3.5 m
331 152 804	4.0 m
331 152 804 2	4.2 m
331 152 805	5.0 m

R+M Nr.	
331 154 803 5	3.5 m
331 154 804 2	4.2 m
331 154 805	5.0 m

R+M Nr.	
331 152 603 5	3.5 m
331 152 604	4.0 m
331 152 604 2	4.2 m
331 152 605	5.0 m
331 152 605 5	5.5 m

R+M Nr.	
330 117 303 5	3.5 m
330 117 304	4.0 m
330 117 304 2	4.2 m
330 117 310	10.0 m

R+M Nr.	
331 117 303 5	3.5 m
331 117 304	4.0 m
331 117 304 2	4.2 m
331 117 305	5.0 m
331 117 310	10.0 m

Further high pressure hoses suitable for self-service washing bays are available on request.



Symbols  length  nominal diameter  wall thickness  pressure  burst pressure  diameter  weight

PURClean365+® Power and 150 - food hose

PURClean365+® Power DN 8

- » PURClean365+® Power - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006.
- » 3-layer plastic hose with a smooth cover.
- » Particularly pressure-stable and flexible up to a maximum of 200 bar working pressure.
- » Area of application: high-pressure cleaning hose in the food industry.
- » Suitable for water and water mixes of usual cleaning detergents.
- » Suitable for contact with liquid food products
- » Increased 1-layer rot-proof textile mesh.

-40 °C - +60 °C. Fittings stainless steel

Female thread DKR 3/8"	Male thread AGR 3/8"	M22 Quick screw couplings																														
																																
<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>478 054 610 9</td><td>10.0 m</td></tr><tr><td>478 054 615 9</td><td>15.0 m</td></tr><tr><td>478 054 620 9</td><td>20.0 m</td></tr><tr><td>478 054 625 9</td><td>25.0 m</td></tr></table>	R+M Nr.	↔	478 054 610 9	10.0 m	478 054 615 9	15.0 m	478 054 620 9	20.0 m	478 054 625 9	25.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>478 044 610 9</td><td>10.0 m</td></tr><tr><td>478 044 615 9</td><td>15.0 m</td></tr><tr><td>478 044 620 9</td><td>20.0 m</td></tr><tr><td>478 044 625 9</td><td>25.0 m</td></tr></table>	R+M Nr.	↔	478 044 610 9	10.0 m	478 044 615 9	15.0 m	478 044 620 9	20.0 m	478 044 625 9	25.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>478 000 610 9</td><td>10.0 m</td></tr><tr><td>478 000 615 9</td><td>15.0 m</td></tr><tr><td>478 000 620 9</td><td>20.0 m</td></tr><tr><td>478 000 625 9</td><td>25.0 m</td></tr></table>	R+M Nr.	↔	478 000 610 9	10.0 m	478 000 615 9	15.0 m	478 000 620 9	20.0 m	478 000 625 9	25.0 m
R+M Nr.	↔																															
478 054 610 9	10.0 m																															
478 054 615 9	15.0 m																															
478 054 620 9	20.0 m																															
478 054 625 9	25.0 m																															
R+M Nr.	↔																															
478 044 610 9	10.0 m																															
478 044 615 9	15.0 m																															
478 044 620 9	20.0 m																															
478 044 625 9	25.0 m																															
R+M Nr.	↔																															
478 000 610 9	10.0 m																															
478 000 615 9	15.0 m																															
478 000 620 9	20.0 m																															
478 000 625 9	25.0 m																															









PURClean365+® Power per metre

R+M Nr.	DN	↔	↘	P	BP	Ø	⊞
303 672 00	8	100 m	3.8 mm	200 bar	>800 bar	15.3 mm	0.15 kg

PURClean365+® 150, DN 11

- » PURClean365+® 150 - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006.
- » 3-layer plastic hose with a smooth cover.
- » Particularly pressure-stable and flexible up to a maximum of 150 bar working pressure.
- » Area of application: high-pressure cleaning hose in the food industry, also suitable for foam and spray cleaning.
- » Suitable for water and water mixes of usual cleaning detergents.
- » Suitable for contact with liquid food products
- » Increased 1-layer rot-proof textile mesh.

-40 °C - +60 °C. Fittings stainless steel

Female thread DKR 1/2"	DKR 1/2" : AGR 1/2"	Male thread (AGR)1/2"	Female thread DKR 3/8"	DKR 3/8" : AGR 3/8"	Male thread (AGR) 3/8"																																																																																																												
																																																																																																																	
<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>479 056 602 59</td><td>2.5 m</td></tr><tr><td>479 056 610 9</td><td>10.0 m</td></tr><tr><td>479 056 615 9</td><td>15.0 m</td></tr><tr><td>479 056 620 9</td><td>20.0 m</td></tr><tr><td>479 056 625 9</td><td>25.0 m</td></tr><tr><td>479 056 630 9</td><td>30.0 m</td></tr><tr><td>479 056 635 9</td><td>35.0 m</td></tr><tr><td>479 056 640 9</td><td>40.0 m</td></tr></table>	R+M Nr.	↔	479 056 602 59	2.5 m	479 056 610 9	10.0 m	479 056 615 9	15.0 m	479 056 620 9	20.0 m	479 056 625 9	25.0 m	479 056 630 9	30.0 m	479 056 635 9	35.0 m	479 056 640 9	40.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>479 057 602 59</td><td>2.5 m</td></tr><tr><td>479 057 610 9</td><td>10.0 m</td></tr><tr><td>479 057 615 9</td><td>15.0 m</td></tr><tr><td>479 057 620 9</td><td>20.0 m</td></tr><tr><td>479 057 625 9</td><td>25.0 m</td></tr><tr><td>479 057 630 9</td><td>30.0 m</td></tr><tr><td>479 057 635 9</td><td>35.0 m</td></tr><tr><td>479 057 640 9</td><td>40.0 m</td></tr></table>	R+M Nr.	↔	479 057 602 59	2.5 m	479 057 610 9	10.0 m	479 057 615 9	15.0 m	479 057 620 9	20.0 m	479 057 625 9	25.0 m	479 057 630 9	30.0 m	479 057 635 9	35.0 m	479 057 640 9	40.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>479 046 602 59</td><td>2.5 m</td></tr><tr><td>479 046 610 9</td><td>10.0 m</td></tr><tr><td>479 046 615 9</td><td>15.0 m</td></tr><tr><td>479 046 620 9</td><td>20.0 m</td></tr><tr><td>479 046 625 9</td><td>25.0 m</td></tr><tr><td>479 046 630 9</td><td>30.0 m</td></tr><tr><td>479 046 635 9</td><td>35.0 m</td></tr><tr><td>479 046 640 9</td><td>40.0 m</td></tr></table>	R+M Nr.	↔	479 046 602 59	2.5 m	479 046 610 9	10.0 m	479 046 615 9	15.0 m	479 046 620 9	20.0 m	479 046 625 9	25.0 m	479 046 630 9	30.0 m	479 046 635 9	35.0 m	479 046 640 9	40.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>479 054 602 59</td><td>2.5 m</td></tr><tr><td>479 054 610 9</td><td>10.0 m</td></tr><tr><td>479 054 615 9</td><td>15.0 m</td></tr><tr><td>479 054 620 9</td><td>20.0 m</td></tr><tr><td>479 054 625 9</td><td>25.0 m</td></tr><tr><td>479 054 630 9</td><td>30.0 m</td></tr><tr><td>479 054 635 9</td><td>35.0 m</td></tr><tr><td>479 054 640 9</td><td>40.0 m</td></tr></table>	R+M Nr.	↔	479 054 602 59	2.5 m	479 054 610 9	10.0 m	479 054 615 9	15.0 m	479 054 620 9	20.0 m	479 054 625 9	25.0 m	479 054 630 9	30.0 m	479 054 635 9	35.0 m	479 054 640 9	40.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>479 055 602 59</td><td>2.5 m</td></tr><tr><td>479 055 610 9</td><td>10.0 m</td></tr><tr><td>479 055 615 9</td><td>15.0 m</td></tr><tr><td>479 055 620 9</td><td>20.0 m</td></tr><tr><td>479 055 625 9</td><td>25.0 m</td></tr><tr><td>479 055 630 9</td><td>30.0 m</td></tr><tr><td>479 055 635 9</td><td>35.0 m</td></tr><tr><td>479 055 640 9</td><td>40.0 m</td></tr></table>	R+M Nr.	↔	479 055 602 59	2.5 m	479 055 610 9	10.0 m	479 055 615 9	15.0 m	479 055 620 9	20.0 m	479 055 625 9	25.0 m	479 055 630 9	30.0 m	479 055 635 9	35.0 m	479 055 640 9	40.0 m	<table><tr><th>R+M Nr.</th><th>↔</th></tr><tr><td>479 044 602 59</td><td>2.5 m</td></tr><tr><td>479 044 610 9</td><td>10.0 m</td></tr><tr><td>479 044 615 9</td><td>15.0 m</td></tr><tr><td>479 044 620 9</td><td>20.0 m</td></tr><tr><td>479 044 625 9</td><td>25.0 m</td></tr><tr><td>479 044 630 9</td><td>30.0 m</td></tr><tr><td>479 044 635 9</td><td>35.0 m</td></tr><tr><td>479 044 640 9</td><td>40.0 m</td></tr></table>	R+M Nr.	↔	479 044 602 59	2.5 m	479 044 610 9	10.0 m	479 044 615 9	15.0 m	479 044 620 9	20.0 m	479 044 625 9	25.0 m	479 044 630 9	30.0 m	479 044 635 9	35.0 m	479 044 640 9	40.0 m
R+M Nr.	↔																																																																																																																
479 056 602 59	2.5 m																																																																																																																
479 056 610 9	10.0 m																																																																																																																
479 056 615 9	15.0 m																																																																																																																
479 056 620 9	20.0 m																																																																																																																
479 056 625 9	25.0 m																																																																																																																
479 056 630 9	30.0 m																																																																																																																
479 056 635 9	35.0 m																																																																																																																
479 056 640 9	40.0 m																																																																																																																
R+M Nr.	↔																																																																																																																
479 057 602 59	2.5 m																																																																																																																
479 057 610 9	10.0 m																																																																																																																
479 057 615 9	15.0 m																																																																																																																
479 057 620 9	20.0 m																																																																																																																
479 057 625 9	25.0 m																																																																																																																
479 057 630 9	30.0 m																																																																																																																
479 057 635 9	35.0 m																																																																																																																
479 057 640 9	40.0 m																																																																																																																
R+M Nr.	↔																																																																																																																
479 046 602 59	2.5 m																																																																																																																
479 046 610 9	10.0 m																																																																																																																
479 046 615 9	15.0 m																																																																																																																
479 046 620 9	20.0 m																																																																																																																
479 046 625 9	25.0 m																																																																																																																
479 046 630 9	30.0 m																																																																																																																
479 046 635 9	35.0 m																																																																																																																
479 046 640 9	40.0 m																																																																																																																
R+M Nr.	↔																																																																																																																
479 054 602 59	2.5 m																																																																																																																
479 054 610 9	10.0 m																																																																																																																
479 054 615 9	15.0 m																																																																																																																
479 054 620 9	20.0 m																																																																																																																
479 054 625 9	25.0 m																																																																																																																
479 054 630 9	30.0 m																																																																																																																
479 054 635 9	35.0 m																																																																																																																
479 054 640 9	40.0 m																																																																																																																
R+M Nr.	↔																																																																																																																
479 055 602 59	2.5 m																																																																																																																
479 055 610 9	10.0 m																																																																																																																
479 055 615 9	15.0 m																																																																																																																
479 055 620 9	20.0 m																																																																																																																
479 055 625 9	25.0 m																																																																																																																
479 055 630 9	30.0 m																																																																																																																
479 055 635 9	35.0 m																																																																																																																
479 055 640 9	40.0 m																																																																																																																
R+M Nr.	↔																																																																																																																
479 044 602 59	2.5 m																																																																																																																
479 044 610 9	10.0 m																																																																																																																
479 044 615 9	15.0 m																																																																																																																
479 044 620 9	20.0 m																																																																																																																
479 044 625 9	25.0 m																																																																																																																
479 044 630 9	30.0 m																																																																																																																
479 044 635 9	35.0 m																																																																																																																
479 044 640 9	40.0 m																																																																																																																

PURClean365+® 150 per metre

R+M Nr.	DN	↔	↘	P	BP	Ø	⊞
303 681 50	11	100 m	5.0 mm	150 bar	>550 bar	20.5 mm	0.27 kg



PURClean365+® - food hose

PURClean365+® - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006. Designed for industrial foam applications

- » Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products
- » Suitable for water and water mixes of usual cleaning detergents
- » PVC hose with three layers and a smooth cover
- » Increased 1-layer rot-proof textile mesh.
- » **About 20 % lighter and more flexible than comparable hose types**

**PURClean365+® 65**

-10 °C - +100 °C. Fittings stainless steel

Female thread DKR 1/2"	Male thread (AGR) 1/2"	Female thread DKR 1/2"	Male thread (AGR) 1/2"	Female thread DKR 1/2"	Male thread (AGR) 1/2"
R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
476 056 602 59 2.5 m	476 046 602 59 2.5 m	476 356 402 59 2.5 m	476 346 402 59 2.5 m	476 456 202 59 2.5 m	476 446 202 59 2.5 m
476 056 610 9 10.0 m	476 046 610 9 10.0 m	476 356 410 9 10.0 m	476 346 410 9 10.0 m	476 456 210 9 10.0 m	476 446 210 9 10.0 m
476 056 615 9 15.0 m	476 046 615 9 15.0 m	476 356 415 9 15.0 m	476 346 415 9 15.0 m	476 456 215 9 15.0 m	476 446 215 9 15.0 m
476 056 620 9 20.0 m	476 046 620 9 20.0 m	476 356 420 9 20.0 m	476 346 420 9 20.0 m	476 456 220 9 20.0 m	476 446 220 9 20.0 m
476 056 625 9 25.0 m	476 046 625 9 25.0 m	476 356 425 9 25.0 m	476 346 425 9 25.0 m	476 456 225 9 25.0 m	476 446 225 9 25.0 m
476 056 630 9 30.0 m	476 046 630 9 30.0 m	476 356 430 9 30.0 m	476 346 430 9 30.0 m	476 456 230 9 30.0 m	476 446 230 9 30.0 m
476 056 635 9 35.0 m	476 046 635 9 35.0 m	476 356 435 9 35.0 m	476 346 435 9 35.0 m	476 456 235 9 35.0 m	476 446 235 9 35.0 m
476 056 640 9 40.0 m	476 046 640 9 40.0 m	476 356 440 9 40.0 m	476 346 440 9 40.0 m	476 456 240 9 40.0 m	476 446 240 9 40.0 m

Female thread DKR 1/2"	Male thread (AGR) 1/2"
R+M Nr.	R+M Nr.
476 256 702 59 2.5 m	476 246 702 59 2.5 m
476 256 710 9 10.0 m	476 246 710 9 10.0 m
476 256 715 9 15.0 m	476 246 715 9 15.0 m
476 256 720 9 20.0 m	476 246 720 9 20.0 m
476 256 725 9 25.0 m	476 246 725 9 25.0 m
476 256 730 9 30.0 m	476 246 730 9 30.0 m
476 256 735 9 35.0 m	476 246 735 9 35.0 m
476 256 740 9 40.0 m	476 246 740 9 40.0 m

PURClean365+® 65 blue per metre							
R+M Nr.	DN			P 20 °C	P 70 °C	BP 20 °C	
303 660 401 12	10 - 100 m	4.0		100 bar	65 bar	> 300 bar	0.25 kg


PURClean365+® 65 yellow per metre							
R+M Nr.	DN			P 20 °C	P 70 °C	BP 20 °C	
303 660 411 12	10 - 100 m	4.0		100 bar	65 bar	> 300 bar	0.25 kg

PURClean365+® 65 green per metre							
R+M Nr.	DN			P 20 °C	P 70 °C	BP 20 °C	
303 660 421 12	10 - 100 m	4.0		100 bar	65 bar	> 300 bar	0.25 kg

PURClean365+® 65 red per metre							
R+M Nr.	DN			P 20 °C	P 70 °C	BP 20 °C	
303 660 431 12	10 - 100 m	4.0		100 bar	65 bar	> 300 bar	0.25 kg


PURClean365+® - food hose

Screw fittings for PURClean365+®




1/2" M with 60° cone. Stainless steel. Max. 50 bar

R+M Nr.	DN
329 412 129	12



1/2" F with 60° cone. Stainless steel. Max. 50 bar

R+M Nr.	DN
329 512 129	12



1/2" F. Stainless steel. Max. 50 bar. Flat sealing

R+M Nr.	DN
329 612 129	12


blufood365+® - food hose

blufood365+® - Food hose according to (EC) 2002/72, (EC) 10/2011, (EC) 1935/2004 and (EC) 2023/2006. Designed for industrial foam applications

- » Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products
- » Suitable for water and water mixes of usual cleaning detergents
- » PVC hose with five layers and a smooth cover

- » Reinforcing by twofold textile meshwork
- » -20 °C - +80 °C


Female thread DKR 1/2"



Fittings stainless steel

R+M Nr.	↔
475 056 602 59	2.5 m
475 056 610 9	10.0 m
475 056 615 9	15.0 m
475 056 620 9	20.0 m
475 056 625 9	25.0 m
475 056 630 9	30.0 m
475 056 635 9	35.0 m
475 056 640 9	40.0 m


Male thread (AGR) 1/2"



Fittings stainless steel

R+M Nr.	↔
475 046 602 59	2.5 m
475 046 610 9	10.0 m
475 046 615 9	15.0 m
475 046 620 9	20.0 m
475 046 625 9	25.0 m
475 046 630 9	30.0 m
475 046 635 9	35.0 m
475 046 640 9	40.0 m

ST-3100 Coupling : Plug



Coupling ST-3100 : plug ST-3100

R+M Nr.	↔
475 012 262 09	20 m
475 012 262 59	25 m
475 012 263 09	30 m


blufood365+® per metre

R+M Nr.	DN	↔	⊗	P 23 °C	P 80 °C	BP 20 °C	⊞
303 70	12	10 - 100 m	5	80 bar	50 bar	≥ 240 bar	0.32 kg
303 700 019	19	10 - 60 m	6	50 bar	12 bar	≥ 200 bar	0.61 kg

Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004.
Especially designed for applications in the food industry.




Screw fittings for blufood365+®

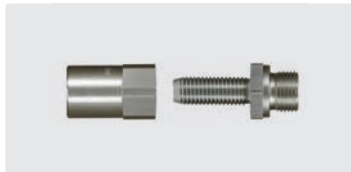

1/2" M with 60° cone.
Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 012 129	12



1/2" F with 60° cone.
Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 112 129	12



Detachable fitting.
3/4" F. Stainless steel.
Max. 15 bar

R+M Nr.	DN
574 734 009	19



Hose barb 3/4" M.
60° cone. Stainless steel.
Max. 15 bar

R+M Nr.	DN
711 341 909	19

Hose clamps

Heavy duty clamp

Heavy duty clamp completely stainless steel X5CrNi1810. According to DIN 1.4301/AISI 304



Clamp with hexagon bolt. W4. I 20 mm

R+M Nr.	VPE	⊗	R+M Nr.	VPE	⊗
736 029 401	1	29 - 31 mm	736 032 401	1	32 - 35 mm

Symbols ↔ length DN nominal diameter ⊗ wall thickness P pressure BP burst pressure ⊞ weight VPE packing unit I height ⊘ diameter

foodjet365+® - food hose with textile meshwork

foodjet365+® - High pressure hose according to DIN EN 854, **FDA compliant**. Particularly resistant to animal fats




- » Field of application: Cleaning hose for food processing plants
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent
- » Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and

weatherproof.

- » Interior synthetic, oil-resistant rubber
- » 2 high-tensile textile braids
- » **Max. 125 bar.** Burst pressure > 375 bar.
- 40 °C - +150 °C

Female thread DKR**Male thread (AGR)****Male thread (AGR) : DKR****foodjet365+® per metre**

1/2" : 1/2"



Fittings stainless steel

Fittings stainless steel

Fittings stainless steel

R+M Nr.	
490 056 002 59	2.5 m
490 056 010 9	10.0 m
490 056 015 9	15.0 m
490 056 020 9	20.0 m
490 056 025 9	25.0 m
490 056 030 9	30.0 m
490 056 035 9	35.0 m
490 056 040 9	40.0 m

R+M Nr.	
490 046 002 59	2.5 m
490 046 010 9	10.0 m
490 046 015 9	15.0 m
490 046 020 9	20.0 m
490 046 025 9	25.0 m
490 046 030 9	30.0 m
490 046 035 9	35.0 m
490 046 040 9	40.0 m

R+M Nr.	
490 057 002 59	2.5 m
490 057 610 9	10.0 m
490 057 615 9	15.0 m
490 057 620 9	20.0 m
490 057 625 9	25.0 m
490 057 630 9	30.0 m
490 057 635 9	35.0 m
490 057 640 9	40.0 m

DN 12

R+M Nr.	
303 601	10 - 100 m

**foodjet365+® 1500 - food hose with textile meshwork**

foodjet365+® 1500 - High pressure hose according to DIN EN 854. Particularly resistant to animal and poultry fats




- » Field of application: cleaning hose designed for the poultry processing industry
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent

» Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and weatherproof.

- » Interior synthetic, oil-resistant rubber
- » 2 high-tensile textile braids
- » **Max. 125 bar.** Burst pressure > 375 bar.
- 40 °C - +150 °C

Female thread DKR**Male thread (AGR)****Male thread (AGR) : DKR****foodjet365+® 1500 per metre**

1/2" : 1/2"



Fittings stainless steel

Fittings stainless steel

Fittings stainless steel

R+M Nr.	
490 445 660 259	2.5 m
490 445 661 09	10.0 m
490 445 661 59	15.0 m
490 445 662 09	20.0 m
490 445 662 59	25.0 m
490 445 663 09	30.0 m
490 445 663 59	35.0 m
490 445 664 09	40.0 m

R+M Nr.	
490 444 660 259	2.5 m
490 444 661 09	10.0 m
490 444 661 59	15.0 m
490 444 662 09	20.0 m
490 444 662 59	25.0 m
490 444 663 09	30.0 m
490 444 663 59	35.0 m
490 444 664 09	40.0 m

R+M Nr.	
490 445 760 259	2.5 m
490 445 761 09	10.0 m
490 445 761 59	15.0 m
490 445 762 09	20.0 m
490 445 762 59	25.0 m
490 445 763 09	30.0 m
490 445 763 59	35.0 m
490 445 764 09	40.0 m

DN 12

R+M Nr.	
303 601 500	70 - 100 m

Fittings zinc-plated steel

Fittings zinc-plated steel

Fittings zinc-plated steel


R+M Nr.	
490 445 660 25	2.5 m
490 445 661 0	10.0 m
490 445 661 5	15.0 m
490 445 662 0	20.0 m
490 445 662 5	25.0 m
490 445 663 0	30.0 m
490 445 663 5	35.0 m
490 445 664 0	40.0 m

R+M Nr.	
490 444 660 25	2.5 m
490 444 661 0	10.0 m
490 444 661 5	15.0 m
490 444 662 0	20.0 m
490 444 662 5	25.0 m
490 444 663 0	30.0 m
490 444 663 5	35.0 m
490 444 664 0	40.0 m

R+M Nr.	
490 445 760 25	2.5 m
490 445 761 0	10.0 m
490 445 761 5	15.0 m
490 445 762 0	20.0 m
490 445 762 5	25.0 m
490 445 763 0	30.0 m
490 445 763 5	35.0 m
490 445 764 0	40.0 m

Food hoses

- » Interior synthetic rubber. Very temperature-resistant. Resistant to usual detergents.
- » Surface special synthetic rubber. Non marking (soot free). Resistant to animal fats.
- » **Field of application:** slaughterhouses, fishing, bakeries etc. Not suitable for swimming baths, poultry fat, standard and industrial cleaning applications.

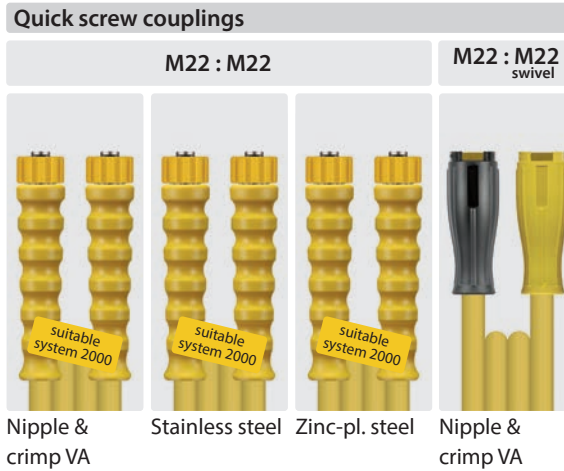

Other lengths or connections are available on request.

Hoses with double wire braid and wrapped cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	349 100 410 7	349 100 410 9	349 100 410	349 101 121 07
				15 m	349 100 415 7	349 100 415 9	349 100 415	349 101 121 57
				20 m	349 100 420 7	349 100 420 9	349 100 420	349 101 122 07
2SC	10	400 bar	150 °C	10 m	381 100 410 7	381 100 410 9	381 100 410	
				15 m	381 100 415 7	381 100 415 9	381 100 415	
				20 m	381 100 420 7	381 100 420 9	381 100 420	

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.

Please be so kind as to state the following on your order: R+M Nr. plus number:

7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

High pressure hoses for special applications

Superball

- » High pressure cleaning hose with double steel wire braids for hot water
- » Equipped with assembled protection balls which simplify the hose's application
- » Lower friction, easy to pull the hose around any corner, does not get stuck, free water flow under the hose is guaranteed, a very clean and hygienic cleaning hose
- » Increased durability due to lower abrasive wear. Ideal for cleaning swimming baths
- » -40 °C - +150 °C


QSC : QSC

M22 : M22



Male thread (AGR)

3/8" : 3/8"

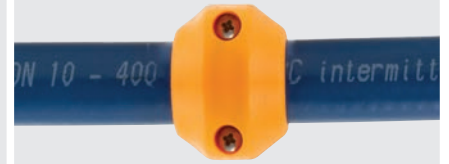

Hose assemblies


TYP	DN	P	BP	°C	↔
2SN	10	400 bar	>1,400 bar	150 °C	25 m

R+M Nr.

356 600 625 10

R+M Nr.

356 644 625 10

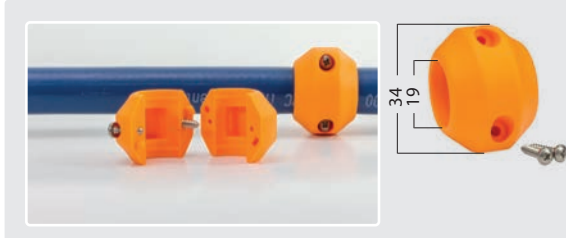

Superball-Sliding Balls

For high pressure cleaning hose outer- $\varnothing$ 19 mm. Set consisting of 1 sliding ball with 2 stainless steel screws.

Outer- $\varnothing$ 34 mm

R+M Nr.	Set-VPE	for Hose--↔
329 190 100	10	5 m
329 190 240	24	10 m
329 190 370	37	15 m
329 190 490	49	20 m
329 190 610	61	25 m

powershield365+®

- » Ideal for cleaning applications on rough floors which need to be cleaned by very non-abrasive hoses.
- » Compact hose with corrosion-protected steel wire.
- » Interior and surface synthetic rubber.
- » Very abrasion-resistant UHMPE-coating
- » Particularly abrasion-, oil-, ozone-resistant and weatherproof.
- » Considerably increased durability compared to usual high pressure hoses.
- » MSHA-permission
- » -40 °C - +100 °C

QSC: QSC

M22 : M22

QSC: QSC
Stainl. steelMale thread
(AGR)

3/8" : 3/8"

Male thread
Stainl. steel

1/2" : 1/2"

Hose assemblies

TYP	DN	P	BP	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	>1,600 bar	100 °C	10 m	345 500 310	345 500 310 9	345 544 310	
					15 m	345 500 315	345 500 315 9	345 544 315	
					20 m	345 500 320	345 500 320 9	345 544 320	
					25 m	345 500 325	345 500 325 9	345 544 325	
					30 m	345 500 330	345 500 330 9	345 544 330	
					35 m	345 500 335	345 500 335 9	345 544 335	
2SC	10	375 bar	>1,500 bar	100 °C	10 m	355 500 310	355 500 310 9	355 544 310	
					15 m	355 500 315	355 500 315 9	355 544 315	
					20 m	355 500 320	355 500 320 9	355 544 320	
					25 m	355 500 325	355 500 325 9	355 544 325	
					30 m	355 500 330	355 500 330 9	355 544 330	
					35 m	355 500 335	355 500 335 9	355 544 335	
2SC	12	310 bar	>1,240 bar	100 °C	10 m	365 500 310			365 546 310 9
					15 m	365 500 315			365 546 315 9
					20 m	365 500 320			365 546 320 9
					25 m	365 500 325			365 546 325 9
					30 m	365 500 330			365 546 330 9
					35 m	365 500 335			365 546 335 9

High pressure hoses for special applications

easyfarm365+® high pressure hose for the agriculture



- » Especially developed for the use in the agriculture
- » For the professional cot and machine cleaning.
- » Considerably longer working life in comparison to common high pressure hoses
- » Ideal for the use on rough floors under hardest conditions
- » Transparent surface made out of thermoplastic elastomer

- » Oil-, UV-, ozone-resistant and weatherproof
- » Brass-plated wire braid for high stability
- » Excellent ease of use and high safety
- » -40 °C - +120 °C. -40 °F - +250 °F



Female thread (DKR)		Male thread (AGR)		Male thread (AGR) : Female thread (DKR)		QSC : QSC	QSC : plug swivel
3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"	M22 : M22	M22 : 11 swivel

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
easyfarm365+® 8	250 bar	120 °C	10 m		348 201 543 10		348 201 443 10		348 201 558 10		348 201 003 10	348 201 113 10
				15 m	348 201 543 15		348 201 443 15		348 201 558 15		348 201 003 15	348 201 113 15
				20 m	348 201 543 20		348 201 443 20		348 201 558 20		348 201 003 20	348 201 113 20
				25 m	348 201 543 25		348 201 443 25		348 201 558 25		348 201 003 25	348 201 113 25
				30 m	348 201 543 30		348 201 443 30		348 201 558 30		348 201 003 30	348 201 113 30
				40 m	348 201 543 40		348 201 443 40		348 201 558 40		348 201 003 40	348 201 113 40
easyfarm365+® 10	275 bar	120 °C	10 m		348 201 543 50		348 201 443 50		348 201 558 50		348 201 003 50	348 201 113 50
				15 m	354 201 543 10	354 201 563 10	354 201 443 10	354 201 463 10	354 201 558 10	354 201 578 10	354 201 003 10	354 201 113 10
				20 m	354 201 543 15	354 201 563 15	354 201 443 15	354 201 463 15	354 201 558 15	354 201 578 15	354 201 003 15	354 201 113 15
				25 m	354 201 543 20	354 201 563 20	354 201 443 20	354 201 463 20	354 201 558 20	354 201 578 20	354 201 003 20	354 201 113 20
				30 m	354 201 543 25	354 201 563 25	354 201 443 25	354 201 463 25	354 201 558 25	354 201 578 25	354 201 003 25	354 201 113 25
				40 m	354 201 543 30	354 201 563 30	354 201 443 30	354 201 463 30	354 201 558 30	354 201 578 30	354 201 003 30	354 201 113 30
easyfarm365+® 12	180 bar	120 °C	20 m		354 201 543 40	354 201 563 40	354 201 443 40	354 201 463 40	354 201 558 40	354 201 578 40	354 201 003 40	354 201 113 40
				50 m	354 201 543 50	354 201 563 50	354 201 443 50	354 201 463 50	354 201 558 50	354 201 578 50	354 201 003 50	354 201 113 50
				25 m		363 201 563 20		363 201 463 20		363 201 578 20	363 201 003 20	
				30 m		363 201 563 25		363 201 463 25		363 201 578 25	363 201 003 25	
				40 m		363 201 563 30		363 201 463 30		363 201 578 30	363 201 003 30	
				50 m		363 201 563 40		363 201 463 40		363 201 578 40	363 201 003 40	
				60 m		363 201 563 50		363 201 463 50		363 201 578 50	363 201 003 50	
				80 m		363 201 563 60		363 201 463 60		363 201 578 60	363 201 003 60	
						363 201 563 80		363 201 463 80		363 201 578 80	363 201 003 80	



Symbols TYP type DN nominal diameter P pressure BP burst pressure °C temperature ↔ length ⊗ diameter VPE packing unit 🚚 shipment by truck

High pressure hoses for special applications

greyflex – high pressure hose

- » Ideal field of application: food and beverage industry, fish farming and swimming pools
- » Plug, crimp and connection stainless steel
- » Excellent ease of use, extremely light weight and flexible in case of low temperatures
- » Smooth and stain-resistant surface made out of thermoplastic elastomer
- » Ideal for the use on rough floors due to high abrasion resistance
- » Grease, oil-, UV-, ozone-resistant and weatherproof
- » Brass-plated wire braid
- » Suitable for working pressures of max. 275 bar.
DN 10. -40 °C - +120 °C, -40 °F - +248 °F



Female thread (DKR)		Male thread (AGR)		Male thread (AGR) : Female thread (DKR)		QSC : QSC	QSC : plug swivel
3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"	3/8" : 3/8"	1/2" : 1/2"	M22 : M22	M22 :  11 swivel
							
R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
342 201 545 109		342 201 445 109	342 201 465 109	342 201 555 109	342 201 578 109	342 201 005 109	342 201 115 109
342 201 545 159		342 201 445 159	342 201 465 159	342 201 555 159	342 201 578 159	342 201 005 159	342 201 115 159
342 201 545 209		342 201 445 209	342 201 465 209	342 201 555 209	342 201 578 209	342 201 005 209	342 201 115 209
342 201 545 259		342 201 445 259	342 201 465 259	342 201 555 259	342 201 578 259	342 201 005 259	342 201 115 259
342 201 545 309		342 201 445 309	342 201 465 309	342 201 555 309	342 201 578 309	342 201 005 309	342 201 115 309
352 201 545 109	352 201 565 109	352 201 445 109	352 201 465 109	352 201 555 109	352 201 578 109	352 201 005 109	352 201 115 109
352 201 545 159	352 201 565 159	352 201 445 159	352 201 465 159	352 201 555 159	352 201 578 159	352 201 005 159	352 201 115 159
352 201 545 209	352 201 565 209	352 201 445 209	352 201 465 209	352 201 555 209	352 201 578 209	352 201 005 209	352 201 115 209
352 201 545 259	352 201 565 259	352 201 445 259	352 201 465 259	352 201 555 259	352 201 578 259	352 201 005 259	352 201 115 259
352 201 545 309	352 201 565 309	352 201 445 309	352 201 465 309	352 201 555 309	352 201 578 309	352 201 005 309	352 201 115 309

High pressure hoses

Quick screw couplings

M22 : M22	M22 : M22 plug VA	M22 : M22 swivel
		
suitable system 2000	suitable system 2000	suitable system 2000

Hoses with single wire braid and wrapped cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.
1SN	8	315 bar	150 °C	10 m	344 100 710	344 100 710 8	344 101 710
				15 m	344 100 715	344 100 715 8	344 101 715
				20 m	344 100 720	344 100 720 8	344 101 720

Symbols  diameter  nominal diameter  pressure  temperature  length  type

Ultra high pressure hoses

Hoses with double wire braid and wrapped cover. Type 2SC. Nominal diameter 10. Safety factor 3.5. Fittings stainless steel. Max. 150 °C

Female thread (DKOS)

M22 : M22




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 177 310 9	10 m
358 177 315 9	15 m
358 177 320 9	20 m
358 177 330 9	30 m

Male thread (AGR)

3/8" : 3/8"




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 144 310 9	10 m
358 144 315 9	15 m
358 144 320 9	20 m
358 144 330 9	30 m

Quick screw couplings

M22 : M22



maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 100 310 9	10 m
358 100 315 9	15 m
358 100 320 9	20 m
358 100 330 9	30 m




Type 2SC.
Max. 500 bar

R+M Nr.	
364 100 310 9	10 m
364 100 315 9	15 m
364 100 320 9	20 m
364 100 330 9	30 m

Hoses with double wire braid and wrapped cover. Nominal diameter 10.
Fittings stainless steel. Max. 150 °C

Quick screw couplings

M24 : M24



maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 197 310 9	10 m
358 197 315 9	15 m
358 197 320 9	20 m
358 197 330 9	30 m



Type 2SC.
Max. 500 bar

R+M Nr.	
364 197 310 9	10 m
364 197 315 9	15 m
364 197 320 9	20 m
364 197 330 9	30 m




maxpressure. Type 2SN.
Max. 500 bar

R+M Nr.	
368 697 610 9	10 m
368 697 615 9	15 m
368 697 620 9	20 m
368 697 630 9	30 m

Hoses with double wire braid and wrapped cover. Nominal diameter 10.
Fittings stainless steel. Max. 150 °C

Quick screw couplings : male thread

M24 : M24




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 114 431 09	10 m
358 114 431 59	15 m
358 114 432 09	20 m
358 114 433 09	30 m



Type 2SC.
Max. 500 bar

R+M Nr.	
364 114 471 09	10 m
364 114 471 59	15 m
364 114 472 09	20 m
364 114 473 09	30 m



R+M Nr.	

Hoses with double wire braid and smooth cover. Nominal diameter 6.
Fittings stainless steel. Max. 150 °C

Quick screw couplings / male thread (AGR)

M22 : M22



flexy365+® 500.
Max. 500 bar

R+M Nr.	
338 000 310 9	10 m
338 000 315 9	15 m
338 000 320 9	20 m
338 000 330 9	30 m

M22 : 1/8"



flexy365+® 500.
Max. 500 bar

R+M Nr.	
424 300 010 9	10 m
424 300 015 9	15 m
424 300 020 9	20 m
424 300 030 9	30 m


M22 : 1/4"



flexy365+® 500.
Max. 500 bar

R+M Nr.	
424 301 010 9	10 m
424 301 015 9	15 m
424 301 020 9	20 m
424 301 030 9	30 m

1/4" : 1/4"



flexy365+® 500.
Max. 500 bar

R+M Nr.	
424 344 010 9	10 m
424 344 015 9	15 m
424 344 020 9	20 m
424 344 030 9	30 m

High pressure hoses per metre 1SN

- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual detergents
- » **Single wire braid**

- » Surface synthetic rubber
- » Abrasion-, oil-, ozone-resistant and weatherproof
- » -40 °C - +150 °C
- » DIN EN 853

1SN black - wrapped cover



Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 00	1SN	6	13.0	250 bar	≥840 bar	-40 °C - +150 °C
301 10	1SN	8	14.7	210 bar	≥840 bar	-40 °C - +150 °C
301 15	1SN	8	14.7	315 bar	≥1,260 bar	-40 °C - +150 °C
302 100 1	1SN	10	17.3	210 bar	≥840 bar	-40 °C - +150 °C
302 150 1	1SN	12	20.7	180 bar	≥720 bar	-40 °C - +150 °C

1SN black - smooth cover



Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 110 1	1SN	8	15.1	250 bar	≥840 bar	-40 °C - +150 °C
301 151	1SN	8	15.0	315 bar	≥1,000 bar	-40 °C - +150 °C
302 120 1	1SN	10	16.9	210 bar	≥840 bar	-40 °C - +150 °C

1SN blue - wrapped cover



Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 070 1	1SN	6	13.2	250 bar	≥840 bar	-40 °C - +150 °C
301 16	1SN	8	14.7	315 bar	≥1,260 bar	-40 °C - +150 °C
302 451	1SN	10	17.0	210 bar	≥840 bar	-40 °C - +150 °C
302 900 1	1SN	12	20.0	180 bar	≥720 bar	-40 °C - +150 °C
303 16	1SN	16	23.2	130 bar	≥520 bar	-40 °C - +150 °C

1SN blue - smooth cover



Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 072	1SN	6	13.0	250 bar	≥900 bar	-40 °C - +150 °C
302 452 01	1SN	10	17.5	210 bar	≥720 bar	-40 °C - +150 °C
302 902	1SN	12	20.8	180 bar	≥640 bar	-40 °C - +150 °C

1SN grey - wrapped cover



Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 06	1SN	6	13.0	250 bar	≥840 bar	-40 °C - +150 °C
301 46	1SN	8	14.7	210 bar	≥840 bar	-40 °C - +150 °C
302 451	1SN	10	16.8	210 bar	≥840 bar	-40 °C - +150 °C

1SN red - wrapped cover



Non Marking (soot free). **Field of application:** industrial plants, offices and plants. Red colour for warning at hot water installations or for avoiding trips and falls / protection against being run over

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 180 1	1SN	8	15.2	315 bar	≥1,260 bar	-40 °C - +150 °C

new

Dynaflex365+® Highly flexible high-pressure hoses

Dynaflex365+®

Dynaflex365+® - Very flexible high-pressure hose, manufactured in accordance with DIN EN 857.

- » Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.
- » Suitable for: water, water-oil emulsions and water mixtures with up to 50% cleaning agents.

- » **Smooth outer cover** made of synthetic rubber. Particularly abrasion-resistant, oil-, ozone-, weather- and pressure-resistant.
- » Inner tube synthetic rubber. 1 or 2 high-tensile wire braids.
- » **Max. 280 bar / 420 bar.** Burst pressure > 1.000 / 1 600 bar. -40 °C - +150 °C

1SC black - smooth cover




R+M Nr.	TYP	DN	Ø	P	BP		°C
300 411 061	1SC	6	12.5	280 bar	1,000 bar	60 mm	-40 °C - +150 °C
300 411 081	1SC	8	13.8	280 bar	1,000 bar	80 mm	-40 °C - +150 °C
300 411 101	1SC	10	16.2	280 bar	1,000 bar	90 mm	-40 °C - +150 °C

1SC blue - smooth cover



R+M Nr.	TYP	DN	Ø	P	BP		°C
300 411 062	1SC	6	12.5	280 bar	1,000 bar	60 mm	-40 °C - +150 °C
300 411 082	1SC	8	13.8	280 bar	1,000 bar	80 mm	-40 °C - +150 °C
300 411 102	1SC	10	16.2	280 bar	1,000 bar	90 mm	-40 °C - +150 °C

2SC black - smooth cover



R+M Nr.	TYP	DN	Ø	P	BP		°C
300 421 061	2SC	6	13.2	420 bar	1,600 bar	80 mm	-40 °C - +150 °C
300 421 081	2SC	8	15.8	420 bar	1,600 bar	90 mm	-40 °C - +150 °C
300 421 101	2SC	10	17.2	420 bar	1,600 bar	110 mm	-40 °C - +150 °C

2SC blue - smooth cover



R+M Nr.	TYP	DN	Ø	P	BP		°C
300 421 062	2SC	6	13.2	420 bar	1,600 bar	80 mm	-40 °C - +150 °C
300 421 082	2SC	8	15.8	420 bar	1,600 bar	90 mm	-40 °C - +150 °C
300 421 102	2SC	10	17.2	420 bar	1,600 bar	110 mm	-40 °C - +150 °C

Symbols TYP type DN nominal diameter Ø diameter P pressure BP burst pressure  bending radius °C temperature

High pressure hoses per metre 2 SC / 2 SN

- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual cleaning agents
- » Double wire braid

- » Surface synthetic rubber
- » Abrasion-, oil-, ozone-resistant and weatherproof
- » -40 °C - +150 °C
- » DIN EN 853 / 857

2SC blue - wrapped cover



DIN EN 857. Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 950 1	2SC	12	21.5	300 bar	≥1,200 bar	-40 °C - +150 °C


2SN blue - smooth cover



DIN EN 853. Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 052 01	2SN	8	16.7	400 bar	≥1,600 bar	-40 °C - +150 °C
302 653 01	2SN	10	18.9	400 bar	≥1,600 bar	-40 °C - +150 °C


2SN grey - smooth cover



DIN EN 853. Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 062 1	2SN	8	16.7	400 bar	≥1,600 bar	-40 °C - +150 °C
302 662	2SN	10	18.9	400 bar	≥1,600 bar	-40 °C - +150 °C


2SC black - wrapped cover



DIN EN 857. **Field of application:** suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 810 1	2SC	12	20.0	300 bar	≥1,200 bar	-40 °C - +150 °C


2SN black - smooth cover



DIN EN 853. **Field of application:** suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 520 1	2SN	8	16.7	400 bar	≥1,600 bar	-40 °C - +150 °C
302 520 1	2SN	10	18.9	400 bar	≥1,600 bar	-40 °C - +150 °C


2SC black - wrapped cover



DIN EN 857. **Field of application:** suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 020 1	2SC	6	13.2	400 bar	≥1,600 bar	-40 °C - +150 °C
301 50	2SC	8	14.5	400 bar	≥1,400 bar	-40 °C - +150 °C
302 50	2SC	10	16.8	400 bar	≥1,320 bar	-40 °C - +150 °C

maxpressure®



DIN EN 857. Black. Wrapped cover. **Field of application:** suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 551	2SC	10	17.5	500 bar	≥1,500 bar	-40 °C - +150 °C

Symbols TYP type DN nominal diameter Ø diameter P pressure BP burst pressure °C temperature

High pressure hoses per metre 2 SC

- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual detergents
- » **Double wire braid**

- » Surface synthetic rubber
- » Non Marking (soot free)
- » Abrasion-, oil-, ozone-resistant and weatherproof
- » DIN EN 857. -40 °C - +150 °C


2SC blue - wrapped cover



Field of application: suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 05	2SC	8	14.5	400 bar	≥1,400 bar	-40 °C - +150 °C
302 65	2SC	10	16.8	400 bar	≥1,320 bar	-40 °C - +150 °C

2SC grey - wrapped cover



Field of application: suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 060 1	2SC	8	14.5	400 bar	≥1,400 bar	-40 °C - +150 °C
302 660 1	2SC	10	16.8	400 bar	≥1,320 bar	-40 °C - +150 °C

maxpressure®



Field of application: industrial plants, offices and plants. Red colour for warning at hot water installations or for avoiding trips and falls / protection against being run over

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 560 1	2SC	10	17.5	500 bar	≥1,500 bar	-40 °C - +150 °C

2SC green - wrapped cover



Field of application: industrial plants, offices and plants

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 60	2SC	10	17.7	400 bar	≥1,600 bar	-40 °C - +150 °C

High pressure hoses per metre 2 SC

- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual detergents
- » **Double wire braid**

- » **Surface special synthetic rubber**
- » Non Marking (soot free)
- » **Resistant to animal fats, not resistant to poultry fats**
- » DIN EN 857. -40 °C - +150 °C

2SC yellow - wrapped cover



Field of application: slaughterhouses, fishing, bakeries etc. Not suitable for swimming baths, standard and industrial cleaning applications. The hoses should be cleaned with hot water but not with any solvents or chemicals as this makes them harden and unserviceable

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 082	2SC	8	15.3	400 bar	≥1,600 bar	-40 °C - +150 °C
302 682	2SC	10	17.7	400 bar	≥1,600 bar	-40 °C - +150 °C

Please note that the hose dimensions given may vary within the DIN.
Hose sold by the metre may be supplied only in production lengths, otherwise cut costs will arise.

High pressure hoses per metre 1 ST

- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual detergents
- » **Single wire braid**

- » Surface synthetic rubber
- » Abrasion-, oil-, ozone-resistant and weatherproof
- » -40 °C - +150 °C
- » DIN EN 853

1ST black - wrapped thick cover



Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
301 20	1ST	8	17.5	210 bar	≥840 bar	-40 °C - +150 °C
302 20	1ST	10	19.8	210 bar	≥840 bar	-40 °C - +150 °C

1ST blue - wrapped thick cover



Non Marking (soot free). **Field of application:** suitable for versatile, universal applications such as self service car wash, swimming baths, offices and plants being equipped with e.g. tiles or special flooring


R+M Nr.	TYP	DN	Ø	P	BP	°C
301 40	1ST	8	17.5	210 bar	≥840 bar	-40 °C - +150 °C
302 40	1ST	10	19.8	210 bar	≥840 bar	-40 °C - +150 °C
302 70	1ST	12	23.0	180 bar	≥720 bar	-40 °C - +150 °C

High pressure hoses per metre 2 ST

- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual detergents
- » **Double wire braid**

- » Surface synthetic rubber
- » Abrasion-, oil-, ozone-resistant and weatherproof
- » -40 °C - +150 °C
- » DIN EN 853

2ST black - wrapped thick cover

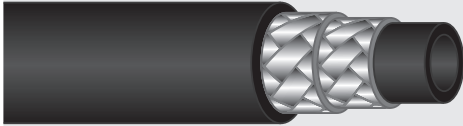

Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.


R+M Nr.	TYP	DN	Ø	P	BP	°C
301 350 1	2ST	8	19.1	400 bar	≥1,600 bar	-40 °C - +150 °C

Food high pressure hoses per metre

blufood365+®

- » Food hose according to (EC)2002/72, (EC) 10/2011, (EC) 1935/2004 and (EC) 2023/2006.
- » Especially designed for industrial foam cleaning applications
- » Fivefold coated PVC hose with a flush cover

- » **Twofold textile meshwork**
- » Suitable for: water and water mixes of usual cleaning detergents

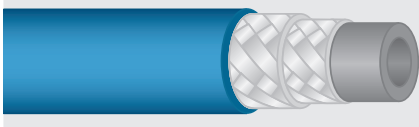

Field of application: foam hose and pre-spraying hose for the food industry.

Suitable for the contact with liquid food products

R+M Nr.	TYP	DN	Ø	P 23 °C	P 80 °C	BP 20 °C	°C
303 70	blufood365+® 12	22	80 bar	50 bar	≥ 240 bar	-20 °C - +80 °C	
303 700 019	blufood365+® 19	31	50 bar	12 bar	≥ 200 bar	-20 °C - +80 °C	

Symbols TYP type DN nominal diameter Ø length Ø diameter P pressure BP burst pressure °C temperature

Food high pressure hoses per metre

PURClean365+® Power

- » Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006 » **Increased 1-layer rot-proof textile mesh**
- » Suitable for: water and water mixes of usual cleaning detergents
- » Especially designed for industrial foam cleaning applications
- » 3-layer hose with smooth cover. Surface made out of thermoplastic elastomer, fabric inlay of synthetic fibre and PE



Field of application: high-pressure cleaning hose in the food industry.
Suitable for the contact with liquid food products

R+M Nr.	TYP	↔	DN	Ø	P	BP	°C
303 672 00	Power	100 m	8	15,3	200 bar	≥ 800 bar	-40 °C - +60 °C

PURClean365+® 150

- » Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006 » **Increased 1-layer rot-proof textile mesh**
- » Suitable for: water and water mixes of usual cleaning detergents
- » Especially designed for industrial foam cleaning applications. This hose is grease-resistant and suitable for use as a cleaning hose in abattoirs.
- » 3-layer PVC hose with smooth cover. surface made out of Polyvinyl chloride, fabric inlay of synthetic fibre and Polyvinyl chloride-interior



Field of application: high-pressure cleaning hose in the food industry, also suitable for foam and spray cleaning.

Suitable for the contact with liquid food products. Resistant to animal fats

R+M Nr.	TYP	↔	DN	Ø	P	BP	°C
303 681 50	150	100 m	11	20,5	150 bar	≥ 550 bar	-40 °C - +60 °C

PURClean365+® 65

- PURClean365+® - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006. Designed for industrial foam applications
- » Suitable for water and water mixes of usual cleaning detergents
- » PVC hose with three layers and a smooth cover
- » Increased 1-layer rot-proof textile mesh.
- » **About 20 % lighter and more flexible than comparable hose types**
- » Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products



Field of application: foam hose and pre-spraying hose for the food industry.
Suitable for the contact with liquid food products

R+M Nr.	TYP	↔	DN	Ø	P 20 °C	P 70 °C	BP 20 °C	°C
303 660 401	65	10 - 100 m	12	21.6	100 bar	65 bar	> 300 bar	-10 °C - +100 °C



R+M Nr.	TYP	↔	DN	Ø	P 20 °C	P 70 °C	BP 20 °C	°C
303 660 411	65	10 - 100 m	12	21.6	100 bar	65 bar	> 300 bar	-10 °C - +100 °C



R+M Nr.	TYP	↔	DN	Ø	P 20 °C	P 70 °C	BP 20 °C	°C
303 660 421	65	10 - 100 m	12	21.6	100 bar	65 bar	> 300 bar	-10 °C - +100 °C



R+M Nr.	TYP	↔	DN	Ø	P 20 °C	P 70 °C	BP 20 °C	°C
303 660 431	65	10 - 100 m	12	21.6	100 bar	65 bar	> 300 bar	-10 °C - +100 °C

High pressure hoses per metre

foodjet365+®



- » High pressure hose according to DIN EN 854
- » With FDA approval
- » **Particularly resistant to animal fats**
- » Surface synthetic rubber
- » **Interior synthetic, oil-resistant rubber, tight twofold textile meshwork.**
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent
- » Particularly abrasion-, oil-, ozone-resistant and weatherproof

Field of application: cleaning hose for food processing plants. **Resistant to animal fats**

R+M Nr.	TYP	DN	Ø	P	BP	°C
303 601	foodjet365+®	12	21.7	125 bar	375	-40 °C - +150 °C

foodjet365+® 1500




- » High pressure hose according to DIN EN 854
- » **Particularly resistant to animal and poultry fats**
- » Surface synthetic rubber
- » **Interior synthetic, oil-resistant rubber, tight textile meshwork.**
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent
- » Particularly abrasion-, oil-, ozone-resistant and weatherproof

Field of application: cleaning hose for food processing plants. **Resistant to animal and poultry fats**

R+M Nr.	TYP	DN	Ø	P	BP	°C
303 601 500	foodjet365+® 1500	12	21.7	125 bar	375	-40 °C - +150 °C

greyflex



- » Especially developed to meet highest requirements to hygiene and ergonomics
- » Smooth surface made out of thermoplastic elastomer
- » **Brass-plated wire braid, fabric braid, high-tensile polyester meshwork and PES-interior very resistant to detergents**
- » Suitable for: oil, water, water-oil emulsion and water-detergent mixture.
- » Particularly abrasion-, UV-, grease-, oil-, ozone-resistant and weatherproof
- » extremely light weight and flexible in case of low temperatures
- » Roll at 100 m

Field of application: Food and beverage industry, fish farming and swimming pools

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 201 108	greyflex	8	15,2	250 bar	1.000	-40 °C - +120 °C
300 201 110	greyflex	10	17,4	275 bar	1.100	-40 °C - +120 °C

easyfarm365+®



- » Especially developed for the use in the agriculture
- » Excellent ease of use and high safety
- » Smooth transparent surface made out of thermoplastic elastomer
- » **Brass-plated wire braid, fabric braid, high-tensile polyester meshwork and PES-interior very resistant to detergents**
- » Suitable for: oil, water, water-oil emulsion and water-detergent mixture
- » Particularly abrasion-, UV-, oil-, ozone-resistant and weatherproof
- » Ideal for the use on rough floors under hardest conditions
- » Roll at 100 m

Field of application: Professional cot and machine cleaning in the agriculture

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 201 408	easyfarm365+®	8	15.1	250 bar	1,000	-40 °C - +120 °C
300 201 410	easyfarm365+®	10	17.4	275 bar	1,100	-40 °C - +120 °C
300 201 412	easyfarm365+®	12	20.8	180 bar	720	-40 °C - +120 °C

Please note that the hose dimensions given may vary within the DIN.
Hose sold by the metre may be supplied only in production lengths, otherwise cut costs will arise.

High pressure hoses per metre

maxpressure®



- » Interior synthetic rubber
- » Very temperature-resistant
- » Resistant to usual detergents
- » **Double wire braid**
- » Surface synthetic rubber
- » Abrasion-, oil-, ozone-resistant and weatherproof
- » DIN EN 857

Field of application: suitable for versatile, universal applications such as industrial plants, agriculture, petrol stations etc.

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 540 1	2SC/DIN EN 857	10	17.5	500 bar	1,500 bar	-40 °C - +150 °C

powershield365+®



- » Interior synthetic rubber
- » **Corrosion-protected steel wire**
- » Surface synthetic rubber
- » Very abrasion-resistant UHMPE-coating
- » Abrasion-, oil-, ozone-resistant and weatherproof.
- » Ideal for cleaning applications on rough floors which must be very non-abrasive
- » Considerably increased durability compared to usual hp hoses
- » MSHA-permission

Field of application: Highly abrasion charged application areas, e.g. underground coal mining.

R+M Nr.	TYP	DN	Ø	P	BP	°C
302 278	1SN/DIN EN 853	10	16.7	210 bar	> 840 bar	-40 °C - +100 °C
302 178	1SN/DIN EN 853	12	19.9	180 bar	> 720 bar	-40 °C - +100 °C
301 578	2SC/DIN EN 857	8	14.5	400 bar	>1,600 bar	-40 °C - +100 °C
302 578	2SC/DIN EN 857	10	16.5	375 bar	>1,500 bar	-40 °C - +100 °C
302 878	2SC/DIN EN 857	12	19.9	310 bar	>1,240 bar	-40 °C - +100 °C

new

High pressure hoses per metre

CARWASH COMFORT PREMIUM



- » Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound.
- » For use in professional car cleaning.
- » Highest resistance to oil, UV-, ozone- and weather-proof.
- » Experience the new miracle in use, maximum durability and flexibility for perfect vehicle care.
- » The solution in the self-service washing area for professionals by professionals.
- » roll at 200 m

Field of application: self-service washing bays

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 160 6	orange	6	12.8	200 bar	>800 bar	-40 °C - +60 °C
300 100 61	blue	6	12.8	200 bar	>800 bar	-40 °C - +60 °C
300 110 61	grey	6	12.8	200 bar	>800 bar	-40 °C - +60 °C
300 120 61	red	6	12.8	200 bar	>800 bar	-40 °C - +60 °C
300 150 61	yellow	6	12.8	200 bar	>800 bar	-40 °C - +60 °C
300 140 61	green	6	12.8	200 bar	>800 bar	-40 °C - +60 °C

Symbols TYP type DN nominal diameter Ø diameter P pressure BP burst pressure °C temperature

CARWASH COMFORT



- » Special PES interior very resistant to detergents
- » High-tensile polyester reinforcing
- » Transparent and thermoplastic surface made out of polyurethane
- » Oil-, UV-, ozone-resistant and weatherproof
- » Light weight and flexible in case of low temperatures
- » DN 8 ideally used at foam lances, excellent bending behaviour
- » DN 8: roll at 100 m
- » DN 6: roll at 200 m

Field of application: self-service washing bays

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 100 6	blue	6	12.0	200 bar	>800 bar	-40 °C - +60 °C
300 110 6	grey	6	12.0	200 bar	>800 bar	-40 °C - +60 °C
300 120 6	red	6	12.0	200 bar	>800 bar	-40 °C - +60 °C
300 140 6	green	6	12.0	200 bar	>800 bar	-40 °C - +60 °C
300 150 6	yellow	6	12.0	200 bar	>800 bar	-40 °C - +60 °C
300 100 8	blue	8	15.0	200 bar	>800 bar	-40 °C - +60 °C
300 120 8	red	8	15.0	200 bar	>800 bar	-40 °C - +60 °C
300 140 8	green	8	15.0	200 bar	>800 bar	-40 °C - +60 °C

Plastic



- » Interior polyethylene
- » Polyester inlay free of rotting, high-tensile
- » PVC-surface
- » Limited oil-resistance
- » Roll at 400 m

Field of application: Semi-professional hp cleaning & pipe cleaning

R+M Nr.	TYP	DN	Ø	P	BP	°C
304 01	black	5	9.9	120 bar	≥440 bar	-20 °C - 60 °C



- » Interior polyethylene
- » Polyester inlay free of rotting, high-tensile
- » PVC-surface
- » Limited oil-resistance
- » Roll at 400 m

Field of application: Semi-professional hp cleaning & pipe cleaning

R+M Nr.	TYP	DN	Ø	P	BP	°C
304 10	black	5	10.4	200 bar	≥800 bar	-30 °C - 60 °C



- » Interior polyethylene
- » Polyester inlay free of rotting, high-tensile
- » PVC-surface
- » Limited oil-resistance
- » Roll at 400 m

Field of application: Semi-professional hp cleaning & pipe cleaning

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 01	black	6	11.6	160 bar	≥640 bar	-20 °C - 65 °C

blupur



- » Interior polyethylene
- » Polyester inlay free of rotting, high-tensile
- » PVC-surface
- » Limited oil-resistance
- » Roll at 400 m. * Roll at 100 m

Field of application: Semi-professional hp cleaning & pipe cleaning

R+M Nr.	TYP	DN	Ø	P	BP	°C
304 15	blupur	5	10.3	200 bar	≥800 bar	-40 °C - 60 °C
304 18*	blupur	8	13.0	180 bar	≥640 bar	-20 °C - 60 °C

* limited stock


Please note that the hose dimensions given may vary within the DIN.

Hose sold by the metre may be supplied only in production lengths, otherwise cut costs will arise.

Symbols TYP type DN nominal diameter Ø length Ø diameter P pressure BP burst pressure °C temperature C color VPE packing unit

High pressure hoses per metre

R+M 1 / Bronze

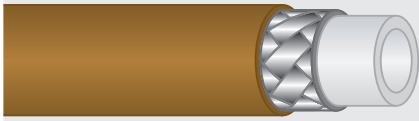

- » Interior polyester / elastomer
- » Very elastic version

- » Single wire braid
- » Surface polyurethane

Field of application: Semi-professional hp cleaning & pipe cleaning

R+M Nr.	TYP	DN	Ø	P	BP	°C
304 20	R+M 1	4	9.2	300 bar	≥ 1,000 bar	-40 °C - +98 °C

flexy365+®



- » Interior synthetic rubber
- » Very elastic version




- » Single wire braid, * double wire braid
- » Surface synthetic rubber
- » Abrasion-, oil-resistant and weatherproof

Field of application: Professional hp cleaning & pipe cleaning

R+M Nr.	TYP	DN	Ø	P	BP	°C
300 95	flexy365+® 300	6	10.8	300 bar	≥ 800 bar	-40 °C - +100 °C
300 97*	flexy365+® 500	6	14.5	600 bar	≥ 2,000 bar	-40 °C - +150 °C

Sliding Balls Superball / Suttner

For high pressure cleaning hose outer- Ø 12 / 15,8 / 17,5 / 18 mm.
Set consisting of 1 sliding ball with 2 stainless steel screws.
Outer- Ø 34 mm

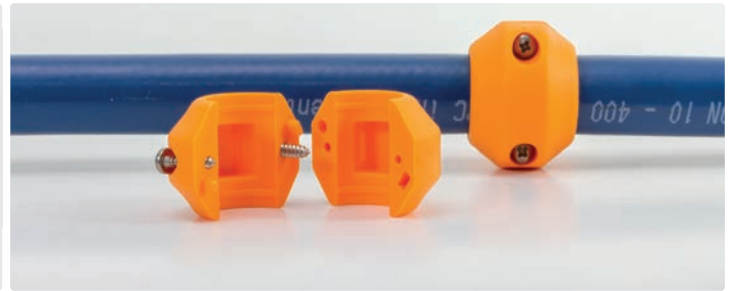

R+M Nr.	C	TYP	for Hose- Ø	Set- VPE	for Hose- m
329 191 240	blue	Suttner	12	24	10 m
329 191 370	blue	Suttner	12	37	15 m
329 191 490	blue	Suttner	12	49	20 m
329 191 610	blue	Suttner	12	61	25 m
329 192 240	orange	Suttner	15,8	24	10 m
329 192 370	orange	Suttner	15,8	37	15 m
329 192 490	orange	Suttner	15,8	49	20 m
329 192 610	orange	Suttner	15,8	61	25 m
329 193 240	red	Suttner	17,5	24	10 m
329 193 370	red	Suttner	17,5	37	15 m
329 193 490	red	Suttner	17,5	49	20 m
329 193 610	red	Suttner	17,5	61	25 m
329 190 240	orange	Superball	19	24	10 m
329 190 370	orange	Superball	19	37	15 m
329 190 490	orange	Superball	19	49	20 m
329 190 610	orange	Superball	19	61	25 m

Hose bend restrictor

Hose bend restrictor - elastomer, short

Special material which is substantially more UV- and ozone-resistant than usual rubber.
Conical fit



DN	Ø 1	Ø 2	R+M Nr.	R+M Nr.	R+M Nr.
6	15,1	15,5	308 50	308 51	308 53

Packing units

Hose bend restrictor - elastomer	175 pieces
Hose bend restrictor - elastomer short	350 pieces

Hose bend restrictor

Hose bend restrictor - elastomer

Special material which is substantially more UV- and ozone-resistant than usual rubber.



DN	Ø
6	15.5 mm
8	18.0 mm
10	20.5 mm
12	23.5 mm
12	23.5 mm blufood®

Further colours of the hose bend restrictor are available on request.

Black	Blue	Blue	Grey	Yellow	Red
R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
308 505		308 515			
308 605		309 055	309 005	308 805	308 855
308 705	309 156 06	309 155	309 105	308 905	308 955
308 765		309 165		309 185	309 175
		309 166 01*			

Special material which is substantially more UV- and ozone-resistant than usual rubber. Conical fit




DN	Ø 1	Ø 2	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
8	16.5	17.8	308 60	309 00	309 05	308 80
10	19.4	20.5	308 70	309 10	309 15	308 90
12	20.4	22.8	308 76		309 16	

Packing units

Hose bend restrictor - elastomer	175 pieces
Hose bend restrictor - elastomer short	350 pieces

Special material which is substantially more UV- and ozone-resistant than usual rubber. Conical fit

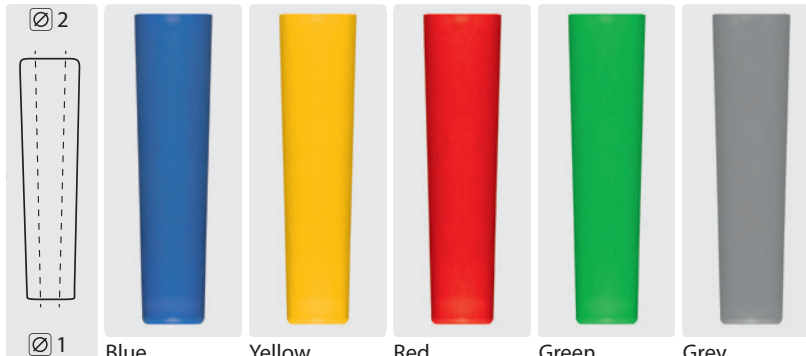

DN	Ø 1	Ø 2	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
12	22.5	25.0	020 000 710	020 000 718	020 000 716	020 000 719	020 000 717

* FDA-Compliant and 1935 / 2004 / EC (food contact safe plastics)

Symbols DN nominal diameter Ø diameter ⊙ internal diameter VPE packing unit

Hose bend restrictor

Hose bend restrictor - plastic



Black

R+M Nr.	Ø
308 52	13.5 mm

Cartridge for plugs



K

For plugs placed at the gun

R+M Nr.	DN
316 960 6	6
316 960 8	8

Hose protection



PVC

R+M Nr.	VPE	Ø	Ø
308 491 620	per metre	20 mm	16 mm
308 491 621	roll at 20 m	20 mm	16 mm

Hose bend restrictor - plastic / spiral



Spiral black

R+M Nr.	Ø
308 55	13.2 mm



Spiral blue

R+M Nr.	Ø
308 551	13.2 mm



Spiral red

R+M Nr.	Ø
308 552	13.2 mm



Spiral orange

R+M Nr.	Ø
308 553	13.2 mm

Packing units


Hose bend restrictor - plastic	500 pieces
Hose bend restrictor - plastic / spiral	400 pieces

Hose bend restrictor in wave design - showing your company logo!

We offer you the possibility to combine your personal spray guns ST-2300 and ST-2600 with your individual hose bend restrictor, this is possible from 525 pieces. You are invited to choose your favourite colour of your hose bend restrictor and to think about what you would like to have written on it or which logo you would like to see on it. It is really up to you as you can give free rein to your creativity! The lettering on the two fields is solely determined by you. By means of labelling your personal hose bend restrictor you succeed in enhancing the product itself and also in making your company and brand better known.

The hose bend restrictor very bendable and also flexible at low temperature is equipped with a lip that engages behind the crimp cartridge and avoids any loosening. It is characterized by a very smooth surface structure, oil and abrasion resistance.

The black and yellow versions are recommended to be used for outdoor applications. The blue and grey hose bend restrictor is especially designed for being used inside as for example in the food industry. It is generally phthalate-free, resistant to chemicals as well as chlorine- and grease resistant in all colours.

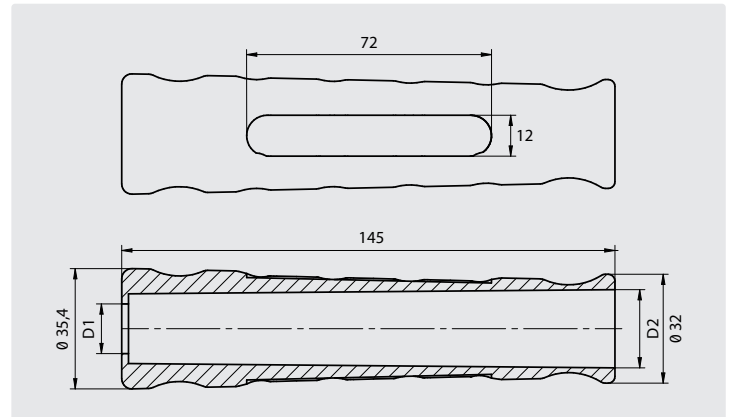



colour	colour-number	nominal diameter	D1	D2
red	1040	DN 8	14.6	21.7
		DN 10	14.6	23.0
		DN 12	21.0	26.6
		DN 12 *	21.0	26.5
black	660	DN 8	14.6	21.7
		DN 10	14.6	23.0
		DN 12	21.0	26.6
		DN 12 *	21.0	26.5
blue	1010	DN 8	14.6	21.7
		DN 10	14.6	23.0
		DN 12	21.0	26.6
		DN 12 *	21.0	26.5
grey	1020	DN 8	14.6	21.7
		DN 10	14.6	23.0
		DN 12	21.0	26.6
		DN 12 *	21.0	26.5
yellow	1030	DN 8	14.6	21.7
		DN 10	14.6	23.0
		DN 12	21.0	26.6
		DN 12 *	21.0	26.5



* hose bend restrictor for blufood365+®

Crimp nipples

Nipples with cone, metric thread DKOL / DKOS



Zinc-plated steel

Stainless steel

90°. Zinc-pl. steel


90°. Stainless steel

45°. Zinc-pl. steel

45°. Stainless steel

DN	⌀	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
6	M12 x 1.5 (6L)	316 45	316 459	316 452	316 452 9		
6	M14 x 1.5 (8L)	316 46	316 469	316 462			
6	M16 x 1.5 (10L)	316 49	316 499	316 041 61		316 041 62	
6	M18 x 1.5 (12L)	316 60	316 69	316 041 81		316 041 82	
8	M14 x 1.5 (8L)	316 140 8					
8	M16 x 1.5 (10L)	316 50	316 59	316 51	316 519		
8	M18 x 1.5 (12L)	316 70	316 79	316 71	316 719	316 72	
8	M18 x 1.5 (10S)	316 180 82	316 180 829	316 180 83	316 739		
10	M16 x 1.5 (10L)		316 161 09				
10	M18 x 1.5 (12L)	316 80	316 89	316 061 81	316 819	316 82	316 829
10	M20 x 1.5 (12S)		317 449				
10	M22 x 1.5 (15L)	316 221 0	316 221 09	316 73		316 74	
10	M22 x 1.5 (14S)	317 710	317 710 9		316 221 019		
10	M24 x 1.5 (16S)		316 241 09				
12	M18 x 1.5 (12L)	316 181 2				316 181 21	
12	M22 x 1.5 (15L)	317 40	317 49	317 45	317 492	317 44	
12	M24 x 1.5 (16S)	317 46	316 746 9				
12	M26 x 1.5 (18L)						
16	M22 x 1.5 (15L)	316 221 6					
16	M26 x 1.5 (18L)	316 261 6					
16	M30 x 2 (20S)	316 301 6		316 301 69			
20	M30 x 2 (22L)		316 302 09				
25	M36 x 2 (28L)	316 362 5		316 362 590		316 362 545	

Nipples with cone, pipe thread DKR / AGR



Zinc-plated steel

Stainless steel

45°. Zinc-pl. steel

90°. Zinc-pl. steel

90°. Stainless steel

Zinc-plated steel

Stainless steel

DN	⌀	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
4	1/4"	316 05					
5	1/8"	315 95				315 11	
6	1/8"						315 069
6	1/4"	316 10	316 19	316 12	316 11	315 20	315 29
6	3/8"	316 15	316 16		316 151	315 46	315 469
6	1/2"	316 18					
8	1/4"	316 00	316 09			315 30	315 39
8	3/8"	316 20	316 29	316 22	316 21	315 50	315 59
8	1/2"	316 105 08	316 105 09				
10	1/4"					315 45	315 459
10	3/8"	316 30	316 25		316 31	315 60	315 69
10	1/2"	316 40	316 409		316 41	315 61	315 619
12	3/8"	316 38	316 381 2			315 080 6	315 080 69
12	1/2"	316 42	316 429	316 080 81	316 43	315 65	315 66
12	3/4"	316 081 2	316 081 29				
16	1/2"		316 449				315 64
16	3/4"	316 48	316 489		316 101 21	315 67	315 679
20	3/4"	316 342 0	316 342 9		316 101 20	315 68	315 689
20	1"		316 121 69				
25	3/4"	316 47				315 161 2	
25	1"	316 161 6	316 161 69			315 161 6	

Crimp nipples

Nipples with cone, metric thread CEL



Zinc-plated steel



Stainless steel

Double crimp nipples



Zinc-plated steel

DN	⊙	R+M Nr.	R+M Nr.	R+M Nr.	DN
6	M12 x 1.5 (6L)			318 506	6
6	M14 x 1.5 (8L)	316 461		318 508	8
6	M16 x 1.5 (10L)			318 510	10
6	M18 x 1.5 (12L)	315 806		318 513	12
8	M14 x 1.5 (8L)			318 516	16
8	M16 x 1.5 (10L)	315 70			
8	M18 x 1.5 (12L)	315 808	315 809		
8	M18 x 1.5 (10S)				
10	M16 x 1.5 (10L)				
10	M18 x 1.5 (12L)	315 80	315 800 9		
10	M20 x 1.5 (12S)				
10	M22 x 1.5 (15L)	315 85	315 859		
10	M22 x 1.5 (14S)				
10	M24 x 1.5 (16S)				
12	M18 x 1.5 (12L)	315 812			
12	M22 x 1.5 (15L)		315 869		
12	M24 x 1.5 (16S)				
12	M26 x 1.5 (18L)	315 826 120			
16	M22 x 1.5 (15L)				
16	M26 x 1.5 (18L)				
16	M30 x 2 (20S)				
20	M30 x 2 (22L)	315 90	315 909		
25	M36 x 2 (28L)				

Nipples, pipe thread RR




Brass. O-ring



Stainless steel


Stainless steel.
Flat sealing

DN	⊙	R+M Nr.	R+M Nr.	R+M Nr.
4	1/8"		315 03	
5	1/8"	315 10		
6	1/8"	315 06		
6	1/4"	315 00		
8	1/4"			315 393
8	3/8"			315 593
10	3/8"			315 693
12	1/2"			315 663





- AGR = pipe male thread
 CEL = male threads for connection pieces 24°, universal sealing head and cutting ring
 DKOL = conical nipple with O-ring, light series
 DKOS = conical nipple with O-ring, heavy series
 DKR = conical nipple with pipe thread
 RR = for sewer cleaning hoses

Symbols $\square$ DN nominal diameter $\odot$ thread

Crimp nipples


Crimp nipples



X-TRA.
Brass

R+M Nr.	DN
317 521 6	6


Crimp nipples



Brass. Swivel



R+M Nr.	DN
316 951 9	6

Crimp nipples with pipe pieces

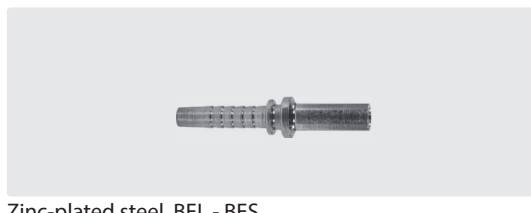

Zinc-plated steel. BEL - BES

DN	Ø	R+M Nr.
6	08	316 65
6	10	316 61
6	12	316 62
8	12	316 612 08
10	15	316 63



Plug.
Brass

R+M Nr.	DN
317 520 6	6



Brass

R+M Nr.	DN
200 000 092	6

Crimp nipples premounted



ST-44.
Stainless steel.
M22 F swivel

R+M Nr.	DN
317 25	6
317 20	8
317 30	10



ST-44.
Stainless steel.
M21 F swivel

R+M Nr.	DN
317 26	6
317 21	8
317 31	10



M22 F. Brass.
Crimp nipple zinc-plated steel
Type 01

R+M Nr.	DN
316 902 2	6
317 002 2	8
317 102 2	10



M22 F. Stainless steel. Screw nut
stainless steel
Type 02

R+M Nr.	DN
316 902 29	6
317 002 29	8
317 102 29	10




1/2" F. Brass.
Crimp nipple
stainless steel.
Type 01

R+M Nr.	DN
316 901 2	6
317 001 2	8
317 101 2	10



M22 F. Brass. Crimp
nipple stainless steel.
US-Version 14.88.
Type 05

R+M Nr.	DN
317 606	6
317 608	8
317 610	10



M22 F. 90°. Zinc-plated steel.
Type 01

R+M Nr.	DN
317 02	6
317 01	8
317 03	10



ST-740.
M24 x 1.5

R+M Nr.	DN
317 102 49	10



ST-740.
M24 x 1.5

R+M Nr.	DN
040 001 980	10

Crimp nipples with swivel



1/4" M. Stainless steel. Single ball bearing.
Max. 275 bar / 120 °C

R+M Nr.	DN
108 320 31	6



3/8" M. Stainless steel. Single ball bearing.
Max. 275 bar / 120 °C

R+M Nr.	DN
108 321 32	8



1/4" F. Stainless steel. Single ball bearing.
Max. 275 bar / 120 °C

R+M Nr.	DN
108 320 33	6

Crimp nipples with quick screw coupling for hose reels



QSC. M22. Screw nut brass. Crimp nipple stainless steel

R+M Nr.	DN
317 062 209	6
317 082 209	8

Crimp nipples with quick screw coupling



- » Hard PVC cover in black / yellow / grey
- » Brass screw nut
- » Stainless steel swivel



QSC. M22, black.
Crimp nipple zinc-plated steel

R+M Nr.	DN
200 088 516	6
200 088 518	8
200 088 520	10



QSC. M22, yellow.
Swivel. Crimp nipple stainless steel

R+M Nr.	DN
200 088 506	6
200 088 508	8
200 088 510	10



QSC. TR22, grey.
Crimp nipple zinc-plated steel

R+M Nr.	DN
200 146 919	6
200 146 920	8
200 146 921	10



QSC. TR22, yellow.
Swivel. Crimp nipple stainless steel

R+M Nr.	DN
200 146 930	6
200 146 931	8
200 146 932	10

Repair kit









Repair kit für crimp nipple stainless steel TR22, yellow

R+M Nr.
200 146 490

Symbols DN nominal diameter Ø diameter VPE packing unit TYP type

Crimp nipples

Crimp nipples

					
Plug. Zinc-plated steel. Type 03 & 04	Plug. Brass. Type 03	Plug. Zinc-plated steel. Type 03 & 04	Swivel $\varnothing$ 10 mm. Stainless steel. Type 03 & 04	Swivel $\varnothing$ 11 mm. Stainless steel. Type 03 & 04	Swivel $\varnothing$ 11 mm. Zinc-plated steel. Type 03 & 04
					
R+M Nr. $\varnothing$ DN	R+M Nr. $\varnothing$ DN	R+M Nr. $\varnothing$ DN	R+M Nr. $\varnothing$ DN	R+M Nr. $\varnothing$ DN	R+M Nr. $\varnothing$ DN
316 95 6	316 951 6 6	316 951 8 6	316 93 6	316 94 6	316 961 8
316 98 8				316 96 8	316 961 0 10

Crimp nipples

Crimp nipples

	1/4" F. Stainless steel		O-ring. Type 01		O-ring, Viton. Type 02		O-ring. Type 03		Back ring. Type 04		O-ring. Type 05		Seal kit ST-44
R+M Nr. $\varnothing$ DN		R+M Nr. $\varnothing$ VPE		R+M Nr. $\varnothing$ VPE		R+M Nr. $\varnothing$ TYP		R+M Nr. $\varnothing$ TYP		R+M Nr. $\varnothing$ TYP		R+M Nr. $\varnothing$ TYP	
314 79 6		790 10 1		790 20 1		790 55 10 mm		790 58 10 mm		791 032 4		568 001 1	
314 89 8		790 100 100		790 201 00 100		790 57 11 mm		790 59 11 mm					

Quick screws

Quick screw for crimp nipples


- » M22 F.
- » Stainless steel.
- » Max. 500 bar



				
R+M Nr. $\varnothing$	R+M Nr. $\varnothing$	R+M Nr. $\varnothing$	R+M Nr. $\varnothing$	R+M Nr. $\varnothing$
319 209 16.4	319 219 16.4	319 269 16.4	319 259 16.4	040 000 824 16.4

Quick screw for crimp nipples

- » Brass.
- » Max. 400 bar

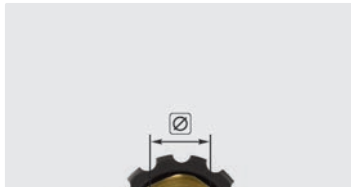


				
M22 F	M22 F	M22 F	M22 F	M22 F. HEX 24
R+M Nr. $\varnothing$	R+M Nr. $\varnothing$	R+M Nr. $\varnothing$	R+M Nr. $\varnothing$	R+M Nr. $\varnothing$
319 20 16.4	319 21 16.4	319 26 16.4	319 25 16.4	010 000 721 16.4

Quick screw for crimp nipples



- » Zinc-plated steel
- » Max. 400 bar

M22 x 1.5 F

R+M Nr. $\varnothing$	
319 28 16.3	



Crimp nipples

	Type 01		Type 02		Type 01
R+M Nr. $\varnothing$ DN		R+M Nr. $\varnothing$ DN		R+M Nr. $\varnothing$ DN	
100 001 942 6		040 001 942 6		317 00 8	
100 001 940 8		040 001 940 8		317 10 10	
100 001 944 10		040 001 944 10			
		040 001 945 12			

For quick screw.
Zinc-plated steel.


For quick screw.
Stainless steel.

For quick screw.
Zinc-plated steel.

Crimp cartridges suitable for different hose models

Plastic

DN	R+M Nr.	hoses	TYP	Ø	I	M
5	310 10	RR-120	ns	11.2 mm	17 mm	zinc-plated steel
5	310 10	RR-200	ns	11.2 mm	17 mm	zinc-plated steel
5	310 10	blupur	ns	11.2 mm	17 mm	zinc-plated steel
6	310 20	6-160	ns	13.3 mm	25 mm	zinc-plated steel
6	310 20	CARWASH COMFORT	ns	13.3 mm	25 mm	zinc-plated steel
6	310 209	CARWASH COMFORT	ns	13.3 mm	25 mm	stainless steel
8	310 807 08	CARWASH COMFORT	ns	15.3 mm	30 mm	zinc-plated steel
12	313 301	blufood365+®	ns	23.0 mm	34 mm	zinc-plated steel
12	313 329	blufood365+®	ns	23.0 mm	34 mm	stainless steel
12	313 329	PURClean365+®	ns	23.0 mm	34 mm	stainless steel



1ST

DN	R+M Nr.	hoses	TYP	Ø	I	M
8	312 10	1ST	s	14.0 mm	31 mm	zinc-plated steel
8	312 19	1ST	s	14.0 mm	31 mm	stainless steel
10	313 10	1ST	s	16.6 mm	32 mm	zinc-plated steel
10	313 19	1ST	s	16.6 mm	32 mm	stainless steel
12	313 30	1ST	s	20.5 mm	34 mm	zinc-plated steel
12	313 39	1ST	s	19.4 mm	34 mm	stainless steel
16	313 40	1ST	s	24.0 mm	37 mm	zinc-plated steel
16	313 49	1ST	s	24.0 mm	37 mm	stainless steel
20	314 00	1ST	s	27.1 mm	43 mm	zinc-plated steel
20	313 59	1ST	s	27.8 mm	43 mm	stainless steel

1SC / 1SN

DN	R+M Nr.	hoses	TYP	Ø	I	M
6	312 05	1SC compact	s	12.3 mm	31 mm	zinc-plated steel
6	312 00	1SN	s	13.2 mm	30 mm	zinc-plated steel
6	312 001	1SN	ns	14.4 mm	31 mm	zinc-plated steel
6	312 09	1SN	s	13.1 mm	30 mm	stainless steel
8	312 10	1SN 210 bar	s	14.0 mm	31 mm	zinc-plated steel
8	312 101	1SN 210 bar	ns	16.0 mm	30 mm	zinc-plated steel
8	312 19	1SN 210 bar	s	14.0 mm	31 mm	stainless steel
8	312 191	1SN 210 bar	ns	15.4 mm	30 mm	stainless steel
8	312 10	1SN 315 bar	s	14.0 mm	31 mm	zinc-plated steel
8	312 101	1SN 315 bar	ns	16.0 mm	30 mm	zinc-plated steel
8	312 19	1SN 315 bar	s	14.0 mm	31 mm	stainless steel
8	312 191	1SN 315 bar	ns	17.8 mm	30 mm	stainless steel
10	313 10	1SN	s	16.6 mm	32 mm	zinc-plated steel
10	313 101	1SN	ns	18.3 mm	32 mm	zinc-plated steel
10	313 19	1SN	s	16.6 mm	32 mm	stainless steel
10	313 191	1SN	ns	20.0 mm	34 mm	stainless steel
10	313 192	1SN	ns	19.6 mm	32 mm	stainless steel
12	313 30	1SN	s	20.5 mm	34 mm	zinc-plated steel
12	313 39	1SN	s	19.4 mm	34 mm	stainless steel
12	313 319	1SN	ns	22.7 mm	34 mm	stainless steel
16	313 40	1SN	s	24.0 mm	37 mm	zinc-plated steel
16	313 401	1SN	ns	26.0 mm	37 mm	zinc-plated steel
16	313 49	1SN	s	24.0 mm	37 mm	stainless steel
20	314 00	1SN	s	27.1 mm	43 mm	zinc-plated steel
20	313 59	1SN	s	27.8 mm	43 mm	stainless steel
20	313 69	1SN	ns	30.3 mm	42 mm	stainless steel
25	313 601	1SN	ns	36.8 mm	50 mm	zinc-plated steel
25	313 659	1SN	ns	39.0 mm	48 mm	stainless steel

2ST / 2SN

DN	R+M Nr.	hoses	TYP	Ø	I	M
6	312 04	2ST / 2SN	s	14.2 mm	30 mm	zinc-plated steel
8	312 20	2ST / 2SN	s	15.7 mm	30 mm	zinc-plated steel
8	312 29	2ST / 2SN	s	15.7 mm	30 mm	stainless steel
8	312 204	2SN	ns	18.5 mm	28 mm	zinc-plated steel
10	313 192	2SN	ns	19.6 mm	32 mm	stainless steel
10	313 192	2ST	s	19.6 mm	32 mm	stainless steel
10	313 20	2ST / 2SN	s	18.1 mm	32 mm	zinc-plated steel
10	313 29	2ST / 2SN	s	18.0 mm	32 mm	stainless steel
10	313 201	2SN	ns	18.0 mm	32 mm	zinc-plated steel
12	313 35	2ST / 2SN	s	22.0 mm	34 mm	zinc-plated steel
12	313 359	2ST / 2SN	s	21.0 mm	35 mm	stainless steel
20	313 69	2SN	ns	30.3 mm	42 mm	stainless steel
20	313 69	2ST	s	30.3 mm	42 mm	stainless steel
25	313 601	2SN	ns	36.8 mm	50 mm	zinc-plated steel
25	313 659	2SN	ns	39.0 mm	48 mm	stainless steel
25	313 659	2ST	s	39.0 mm	48 mm	stainless steel

2SC

DN	R+M Nr.	hoses	TYP	Ø	I	M
6	312 00	2SC	s	13.2 mm	30 mm	zinc-plated steel
6	312 09	2SC	s	13.1 mm	30 mm	stainless steel
8	312 10	2SC	s	14.0 mm	31 mm	zinc-plated steel
8	312 19	2SC	s	14.0 mm	31 mm	stainless steel
10	313 10	2SC	s	16.6 mm	32 mm	zinc-plated steel
10	313 19	2SC	s	16.6 mm	32 mm	stainless steel
10	313 192	2SC	ns	19.6 mm	32 mm	stainless steel
12	313 39	2SC	s	19.4 mm	34 mm	stainless steel
20	313 69	2SC	ns	30.3 mm	42 mm	stainless steel
25	313 659	2SC	ns	39.0 mm	48 mm	stainless steel

R+M

DN	R+M Nr.	hoses	TYP	Ø	I	M
4	310 05	R+M 1 Bronze	ns	10.3 mm	12 mm	zinc-plated steel
6	310 20	flexy365+® 300	ns	13.3 mm	25 mm	zinc-plated steel
6	310 209	flexy365+® 300	ns	13.3 mm	25 mm	stainless steel
6	312 09	flexy365+® 500	s	13.1 mm	30 mm	stainless steel
10	313 15	2SC 500 bar	s	18.3 mm	34 mm	zinc-plated steel
10	313 29	2SN 500 bar	s	18.0 mm	32 mm	stainless steel
10	313 19	2SC 500 bar	s	16.6 mm	32 mm	stainless steel
12	313 301	foodjet365+®	ns	23.0 mm	34 mm	zinc-plated steel
12	313 319	foodjet365+®	ns	22.7 mm	34 mm	stainless steel

s = to skive, ns = not to skive

Symbols DN nominal diameter TYP type Ø diameter I height M material Ø thread

Re-usable screw nipples

Re-usable screw nipples, BSP thread

» Zinc-plated steel



Re-usable screw nipples with metric thread

» Zinc-plated steel



DN	Ø	R+M Nr.	TYP	R+M Nr.	TYP	DN	Ø	R+M Nr.	TYP	R+M Nr.	TYP	R+M Nr.	TYP
6	1/4"	328 05	DKR			6	M14 x 1.5	328 48	DKOL				
8	3/8"	328 20	DKR	328 10	AGR	8	M16 x 1.5	328 60	DKOL	328 50	CEL		
10	3/8"	328 40	DKR	328 30	AGR	8	M22 x 1.5					320 60	QSC
12	1/2"	328 46	DKR	328 45	AGR	10	M18 x 1.5	328 80	DKOL	328 70	CEL		

Screw cartridges



» Zinc-plated steel
» Not to skive

Hose with single wire braid - SAE 100

R+M Nr.	DN	hose
327 05	6	1SN 06
327 15	8	1SN 08
327 35	10	1SN 10
327 55	12	1SN 12

Hose with double wire braid - DIN standard


R+M Nr.	DN	hose
327 25	8	2SN 08
327 45	10	2SN 10

Screw fittings for blufood®



1/2" M with 60 °Cone. Stainless steel.
Max. 50 bar


R+M Nr.	DN
329 012 129	12



1/2" F with 60 °Cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 112 129	12

Screw fittings for PURClean365+®



1/2" M with 60 °Cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 412 129	12



1/2" F with 60 °Cone. Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 512 129	12



1/2" F. Stainless steel. Max. 50 bar.
Flat sealing

R+M Nr.	DN
329 612 129	12

Hose fittings pre-assembled

suitable for blufood®



AGR 1/2". Stainless steel.
Max. 150 bar

R+M Nr.	DN
315 665	12



DKR 1/2". Stainless steel.
Max. 150 bar

R+M Nr.	DN
316 429 5	12



Whip-stop easyprotect365+

For securing hose ends at foot pedals, pumps or connections. Catches the broken hose and prevents it from whipping. Mounted by slipping it over the hose ends, stretching it and finally tightening the ends, securing with the rubber lock rings. Easy to carry, easy to clean.

Width approx 25 mm/1 in.

Produced and tested in accordance with EN 12195-2.



R+M Nr.	VPE	↔	M	Tensile strength
956 160 050	50	750 mm	polyester	30 kN/3 tons

Hose protection/shroud easyprotect365+

The hose is held close to vital parts of the body, so the danger of bursting hoses for the body is very high. The hose protection provides effective protection for the operator!

It was tested at 500 bar / 7500 psi. An adjustable strap keeps the hose guard securely in place.

The hose protection is very smooth and flexible.




R+M Nr.	↔	Ø	P
956 160 045	750 mm	41 mm	500 bar

Symbols DN nominal diameter VPE packing unit ↔ length Ø diameter M material P pressure TYP type 🚚 shipment by truck


Hose holder

Hose holder

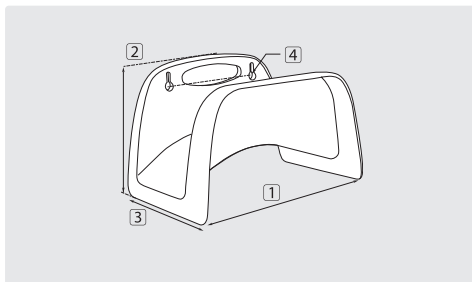


R+M Nr.	M	holding capacity	1	2	3	4
110 00	plastic	1/2" = 40 m / 3/4" = 30 m	260	170	170	140

Hose holder aluminium

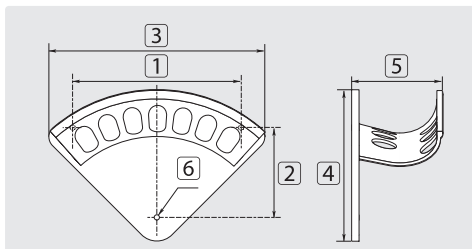

R+M Nr.	TYP	holding capacity	1	2	3	4	5	6
110 01	S	1/4" = 30 m - 3/8" = 20 m	152	108	190	140	69,5	8.5
110 02	M	3/8" = 30 m - 1/2" = 20 m	228	161	259	189	106	8.5
110 03	L	1/2" = 30 m - 3/4" = 20 m	305	215	339	247	136	8.5
110 031	XL	3/4" = 30 m - 1" = 20 m	381	242	412	300	189	8.5

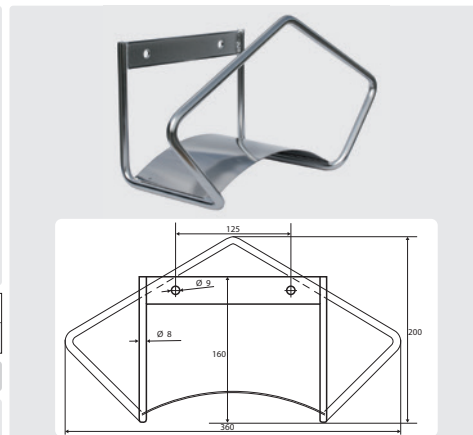

Holding capacity 1/2" = 40 m / 3/4" = 30 m. Hole size 125 mm. W x H x D = 360 x 200 x 170 mm

R+M Nr.	M
110 06	polished stainless steel, 1.4301

Hose holder



Holder with hooks. Suitable for scaffolding

R+M Nr.	M
110 10	zinc-plated steel

Hose press




R+M Nr.	pressing jaws incl.
300 5	8 sets (10 – 36 mm)

The **powercrimp365+** hose press is an innovative, high quality machine which is especially designed for the assembly and repair of hose lines. The handling of the press is easily learnt. Fundamental features of the **powercrimp365+**:

- » access to press head on both sides
- » compact model
- » two-stage hand pump
- » variable adjustment of press measures
- » check of press measures by signal light
- » carrying handle
- » integrated drawer in the housing for storing the pressing jaws

A 9 V block battery and 0.55 liters of HLP46 hydraulic oil are required for operation.

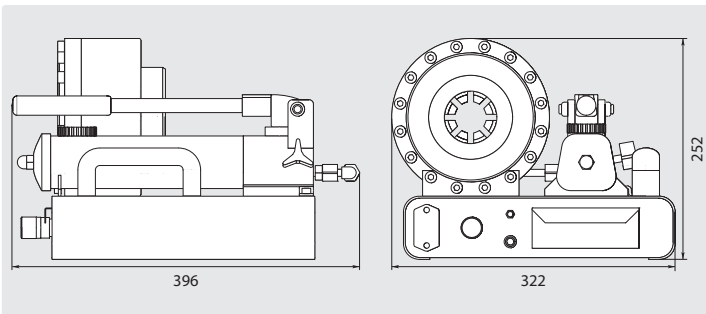

Spare pressing jaws powercrimp365+

TYP	press area	R+M Nr.
P16 HP-10	10 – 12 mm	300 501 0
P16 HP-12	12 – 14 mm	300 501 2
P16 HP-14	14 – 16 mm	300 501 4
P16 HP-16	16 – 19 mm	300 501 6
P16 HP-19	19 – 23 mm	300 501 9
P16 HP-23	23 – 27 mm	300 502 3
P16 HP-27	27 – 31 mm	300 502 7
P16 HP-31	31 – 36 mm	300 503 1

Technical specifications

length of basic jaws	64 mm
max. opening diameter	min. press diameter + 20 mm
press performance	2-steel wire hose up to DN 25
press area	Ø 10 – 45 mm
max. press power	720 kN
power	3.62 cm ³ / 0.90 cm ³
pressure	14 bar / 630 bar
weight (without oil)	20 kg



Accessories STKI with electric drive	216
Blasting nozzle	215
Coupling-system ST-245	208
Crimp nipples	199
Drain jet extension	210
Driver for rotating nozzles	212
Egg-type Nozzles	206
Egg-type Radial-Nozzles	206
High pressure hoses with smooth cover - 500 bar	197
Hydro-Excavation Nozzles	214
Hydro-Excavation-Nozzle ST-458	214
Jetter Valves	210
Long Cast Nozzle	215
Milling Type Nozzles ST-49	207
Mini-nozzles for sewer cleaning	203
Nozzle Inserts	212
Pipe Cleaning Program Overview	194
Reduction nipple	199
Rotating nozzle adaptor	209
Rotating nozzles with drivers	212
Rotating nozzles with integrated drivers	213
Sewer cleaning hose assemblies	195-198
Sewer cleaning hose assemblies with mini-nozzle	197
Sewer cleaning nozzles	213
Sewer Cleaning Program Overview	194
Slot Drain Cleaner	215
Small plough jet nozzle	209
ST-33 high pressure Filter	199
ST-49 Ball type nozzle, 20°	205
ST-49 Ball type nozzle, 30°	204
ST-49 nozzles for sewer cleaning	202-203
ST-49.2 Rotating nozzles	211
ST-49.2 VIBRA Rotating nozzles	211
ST-540 foot valves	199
ST-71 hose reel with sewer cleaning hose	199
Sting extension	210
Suttner mini rotating nozzles for sewer cleaning ST-49.3	201
Suttner nozzles for sewer cleaning ST-49	200
Suttner rotating nozzles for sewer cleaning ST-49.1	201
Tip cleaner	210
Towing-Eye Kit ST-49	210

Sewer Cleaning Program Overview


Milling Type Nozzles ST-49

Available				
1/4"	3/8"	1/2"	3/4"	1"
Hardened stainless steel				




Egg Type Nozzels

Available				
1/4"	3/8"	1/2"	3/4"	1"
Hardened stainless steel				




ST-49 Ball Type Nozzels, 30°

Available				
1/4"	3/8"	1/2"	3/4"	1"
Hardened stainless steel				





ST-49 Ball Type Nozzels, 20°

Available	
1/4"	3/8"
Stainless steel	




ST-49.2 Rotating Nozzels

Available			
1/4"	3/8"	1/2"	3/4"
Stainless steel / Bronze rotating body			




Rotating Nozzels with Drivers

Available	
3/8"	1/2"
Stainless steel / brass	




Rotating nozzels with integrated drivers

Available	
1/4"	
Stainless steel	



Small Plough Jet Nozzels




Available:	
1/2"	
Brass	

Available:	
3/8"	
Brass	

Pipe Cleaning Program Overview


Suttner Pipe Cleaning Nozzels ST-49

Available		
1/8"	1/4"	3/8"
Stainless steel		




Front Jet Pipe Cleaning Nozzels ST-49

Available		
1/8"	1/4"	3/8"
Stainless steel		




Rotating Nozzels ST-49.1

Available		
1/8"	1/4"	3/8"
Stainless steel		



Mini Rotating Nozzels ST-49.3

Available	
1/8"	
Hardened stainless steel	



Cleaning Nozzle ST-49 System K

Available	
M22M	TR22M
Stainless steel	




Root Rat / Grease Ball

Available	
1/4"	
Hardened stainless steel	




Female Nozzels

Available	
1/8"	1/4"
Hardened stainless steel	



Practice



Symbols DN nominal diameter P pressure °C temperature ⇄ length TYP type

Sewer cleaning hose assemblies

without nozzle

QSC : male thread + O-ring

Plug : male thread + O-ring

M22 : 1/8"

M22 : 1/4"

M21 : 1/8"

KW : 1/8"

KW : 1/4"

KW : 1/8"

K : 1/8"

K : 1/8"

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m	420 300 010	420 301 010	420 315 010	420 335 010	420 336 010	420 330 010	420 345 010	
				15 m	420 300 015	420 301 015	420 315 015	420 335 015	420 336 015	420 330 015	420 345 015	
				20 m	420 300 020	420 301 020	420 315 020	420 335 020	420 336 020	420 330 020	420 345 020	
				25 m	420 300 025	420 301 025	420 315 025	420 335 025	420 336 025	420 330 025	420 345 025	
				30 m	420 300 030	420 301 030	420 315 030	420 335 030	420 336 030	420 330 030	420 345 030	

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
Polya	5	200 bar	20 °C	10 m	410 000 010		410 015 010	410 035 010		410 030 010		410 045 010
				15 m	410 000 015		410 015 015	410 035 015		410 030 015		410 045 015
				20 m	410 000 020		410 015 020	410 035 020		410 030 020		410 045 020
				25 m	410 000 025		410 015 025	410 035 025		410 030 025		410 045 025
				30 m	410 000 030		410 015 030	410 035 030		410 030 030		410 045 030
Polya	5	120 bar	20 °C	10 m	400 000 010		400 015 010	400 035 010		400 030 010		400 045 010
				15 m	400 000 015		400 015 015	400 035 015		400 030 015		400 045 015
				20 m	400 000 020		400 015 020	400 035 020		400 030 020		400 045 020
				25 m	400 000 025		400 015 025	400 035 025		400 030 025		400 045 025
				30 m	400 000 030		400 015 030	400 035 030		400 030 030		400 045 030

without nozzle

Plug : M +
O-ring

M : M + O-ring

M thread + O-rings

ST-247 : 1/8"

M22 : 1/8"

M22 : 1/4"

1/8" : 1/8"

1/4" : 1/4"



As required our sewer cleaning hoses have a safety clearance marking directly on the hose which is placed 0.5 m of the nozzle.

Hoses with single wire braid and *smooth* cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m	420 361 010	420 310 010	420 311 010	420 340 010	420 342 010
				15 m	420 361 015	420 310 015	420 311 015	420 340 015	420 342 015
				20 m	420 361 020	420 310 020	420 311 020	420 340 020	420 342 020
				25 m	420 361 025	420 310 025	420 311 025	420 340 025	420 342 025
				30 m	420 361 030	420 310 030	420 311 030	420 340 030	420 342 030

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
Polya	5	200 bar	20 °C	10 m		410 010 010		410 040 010	
				15 m		410 010 015		410 040 015	
				20 m		410 010 020		410 040 020	
				25 m		410 010 025		410 040 025	
				30 m		410 010 030		410 040 030	
Polya	5	120 bar	20 °C	10 m		400 010 010		400 040 010	
				15 m		400 010 015		400 040 015	
				20 m		400 010 020		400 040 020	
				25 m		400 010 025		400 040 025	
				30 m		400 010 030		400 040 030	

Sewer cleaning hose assemblies

with nozzle

Quick screw couplings

Plug

M thread

M22 : 1/8"

M21 : 1/8"

KW : 1/8"

KW : 1/8"

K : 1/8"

ST-247 : 1/8"

M22 : 1/8"



Hoses with single wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m	420 302 010	420 317 010	420 337 010	420 332 010	420 347 010		420 363 010	420 312 010
				15 m	420 302 015	420 317 015	420 337 015	420 332 015	420 347 015		420 363 015	420 312 015
				20 m	420 302 020	420 317 020	420 337 020	420 332 020	420 347 020		420 363 020	420 312 020
				25 m	420 302 025	420 317 025	420 337 025	420 332 025	420 347 025		420 363 025	420 312 025
				30 m	420 302 030	420 317 030	420 337 030	420 332 030	420 347 030		420 363 030	420 312 030

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
Polya	5	200 bar	20 °C	8 m	410 002 008	410 017 008	410 037 008	410 032 008		410 047 008		410 012 008
				10 m	410 002 010	410 017 010	410 037 010	410 032 010		410 047 010		410 012 010
				15 m	410 002 015	410 017 015	410 037 015	410 032 015		410 047 015		410 012 015
				20 m	410 002 020	410 017 020	410 037 020	410 032 020		410 047 020		410 012 020
				25 m	410 002 025	410 017 025	410 037 025	410 032 025		410 047 025		410 012 025
				30 m	410 002 030	410 017 030	410 037 030	410 032 030		410 047 030		410 012 030
Polya	5	120 bar	20 °C	40 m	410 002 040	410 017 040	410 037 040	410 032 040		410 047 040		410 012 040
				10 m	400 002 010	400 017 010	400 037 010	400 032 010		400 047 010		400 012 010
				15 m	400 002 015	400 017 015	400 037 015	400 032 015		400 047 015		400 012 015
				20 m	400 002 020	400 017 020	400 037 020	400 032 020		400 047 020		400 012 020
				25 m	400 002 025	400 017 025	400 037 025	400 032 025		400 047 025		400 012 025
				30 m	400 002 030	400 017 030	400 037 030	400 032 030		400 047 030		400 012 030

without nozzle

with nozzle

rotating nozzle

QSC : male thread

M : M

Plug KW : M thread

M : M

Plug KW

M22 : 1/8"


M21 : 1/8"

1/8" : 1/8"

KW : 1/8"

M22 : 1/8"

KW : 1/8"




Plastic hoses with single wire braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
R+M 1	4	300 bar	99 °C	10 m	411 000 010	411 015 010	411 040 010	411 035 010		411 010 010	411 037 010	411 038 010
				15 m	411 000 015	411 015 015	411 040 015	411 035 015		411 010 015	411 037 015	411 038 015
				20 m	411 000 020	411 015 020	411 040 020	411 035 020		411 010 020	411 037 020	411 038 020
				25 m	411 000 025	411 015 025	411 040 025	411 035 025		411 010 025	411 037 025	411 038 025
				30 m	411 000 030	411 015 030	411 040 030	411 035 030		411 010 030	411 037 030	411 038 030

Symbols DN nominal diameter D nozzle size P pressure °C temperature ↔ length TYP type

Sewer cleaning hose assemblies

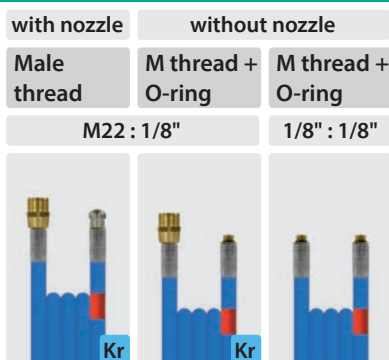

Plastic hoses with single fabric braid

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.
blupur	5	200 bar	20 °C	8 m	412 012 008	412 010 008	412 040 008
				10 m	412 012 010	412 010 010	412 040 010
				15 m	412 012 015	412 010 015	412 040 015
				20 m	412 012 020	412 010 020	412 040 020
				25 m	412 012 025	412 010 025	412 040 025
				30 m	412 012 030	412 010 030	412 040 030
				40 m	412 012 040	412 010 040	412 040 040

Hoses with single wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.
flexy365+®	6	300 bar	100 °C	10 m	420 302 321 0	420 300 321 0
				15 m	420 302 321 5	420 300 321 5
				20 m	420 302 322 0	420 300 322 0
				25 m	420 302 322 5	420 300 322 5
				30 m	420 302 323 0	420 300 323 0


High pressure hoses with smooth cover - 500 bar



Hoses with double wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.
flexy365+®	6	500 bar	150 °C	10 m	424 300 010 9	424 301 010 9	424 344 010 9
				15 m	424 300 015 9	424 301 015 9	424 344 015 9
				20 m	424 300 020 9	424 301 020 9	424 344 020 9

Sewer cleaning hose assemblies with mini-nozzle

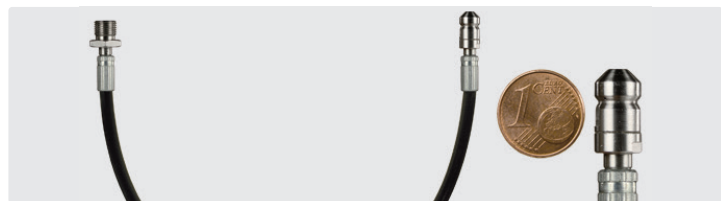

Heat exchangers in thermal power stations or conveyor pipes in the food industry are often sewers of 10 to 12 mm in diameter. In order to clean them effectively from the inside a device for sewer cleaning with small diameters and high pressures is required.

We have also in this case the best possible solution for you!

"small" as desired and "powerful" with great performance.

We are talking about the new mini-device for sewer cleaning. Being only 9 mm in diameter the nozzle withstands the working pressure of up to 500 bar. Completely sensational or what do you think? The nozzle for sewer cleaning is made out of stainless steel and equipped with three jet outlets to the back and one forward.

The mini-nozzle for sewer cleaning is supplied with a black plastic hose with a nominal diameter of 2 and assembled with 1/8" M. The device is so suitable for all common high pressure cleaner.

R+M Nr.	DN	D	P	°C	↔
495 334 000 5	2	03	350 - 500 bar	60 °C	0.5 m
495 334 002 0	2	03	350 - 500 bar	60 °C	2.0 m
495 334 005 0	2	03	350 - 500 bar	60 °C	5.0 m
495 334 008 0	2	03	350 - 500 bar	60 °C	8.0 m
495 334 010 0	2	03	350 - 500 bar	60 °C	10.0 m
495 334 015 5	2	03	350 - 500 bar	60 °C	15.5 m
495 334 020	2	03	350 - 500 bar	60 °C	20.0 m
495 334 025	2	03	350 - 500 bar	60 °C	25.0 m

Sewer cleaning hose assemblies

sewerclean365+ PU-sewer cleaning hose

- » cut- and abrasion-resistant
- » extremely long operating life
- » highly tearproof by two-fold braid of aramid fibres and polyurethane surface
- » good swimming features
- » ageing resistant and weather-resistant surface
- » -40 °C - +60 °C, -40 °F - +140 °F



All hoses are supplied together with a test certificate according to EN 10204.3.1.1.

DN	P	⊙	⊘	BP	↔
12	275 bar	12.7 mm	23.4 mm	840 bar	40 m
					60 m
					80 m
					100 m
					120 m



DKR : M

1/2" : 1/2"



R+M Nr.
432 457 120 040
432 457 120 060
432 457 120 080
432 457 120 100
432 457 120 120


sewerstar365+ rubber-sewer cleaning hose

- » highly abrasion-resistant with an extremely long operating life
- » high flexibility by especially developed rubber compound
- » extremely abrasion-resistant, ageing resistant and weather-resistant surface
- » easy handling by low weight
- » excellent pressure resistance and tensile strength
- » very low bending radius
- » wire braid for high stability
- » interior and surface are made out of NBR/SBR
- » -40 °C - +150 °C, -40 °F - +302 °F




DKR : M


1/2" : 1/2"



3/8" : 3/8"



3/8" : 1/4"



DN	P	⊙	⊘	BP	↔
08	500 bar	7.9 mm	15.0 mm	1,260 bar	40 m
					80 m
10	280 bar	9.8 mm	16.9 mm	740 bar	40 m
					60 m
					80 m
					100 m
					120 m
12	250 bar	12.7 mm	22.6 mm	640 bar	40 m
					60 m
					80 m
					100 m
					120 m

R+M Nr.

432 557 100 040
432 557 100 060
432 557 100 080
432 557 100 100
432 557 100 120
432 557 120 040
432 557 120 060
432 557 120 080
432 557 120 100
432 557 120 120

R+M Nr.

432 558 080 040
432 558 080 080
432 558 100 040
432 558 100 060
432 558 100 080
432 558 100 100
432 558 100 120

R+M Nr.

432 556 080 040
432 556 080 080

Symbols DN nominal diameter ⊙ internal diameter P pressure BP burst pressure shipment by truck I height ↔ length ⊘ thread ⊕ outlet ⊖ inlet

ST-71 hose reel with sewer cleaning hose



The ST-71 hose reel is equipped with a 15 m flexy365+® sewer cleaning hose DN 6. The frame of the reel is made out of stainless steel and the reel is made out of plastic.


The space-saving and orderly solution can either be hung up at the wall or refitted in high pressure cleaner.

The hose can be used as extension of high pressure hoses or as sewer cleaning hose.

Max. 300 bar / 100 °C

R+M Nr.	⊖	⊕
200 071 615	1/4" M	M22 M
200 071 620	1/8" M	M22 M
200 071 625	M22 F	M22 M
200 071 626	M22 F swivel	M22 M

ST-540 foot valves

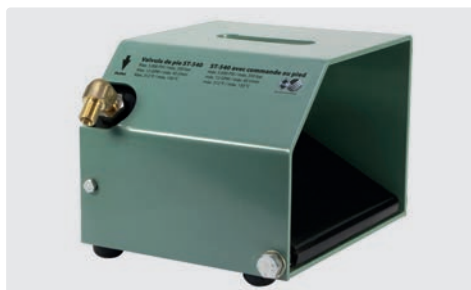

Incl. HP-gun ST-2605. Material housing powder-coated steel.

Rubber feet.

Max. 350 bar / 45 l/min / 150 °C



Incl. HP-gun ST-2750. Material housing powder-coated steel.

Rubber feet.

Max. 500 bar / 30 l/min / 150 °C



Incl. HP-gun ST-2750. Material housing powder-coated steel.

Rubber feet.


Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	⊖	⊕
200 540 500	1/4" M	3/8" F

R+M Nr.	⊖	⊕
200 540 550	1/4" M	3/8" F

R+M Nr.	⊖	⊕
200 540 560	M22 M	M22 M

ST-33 high pressure Filter

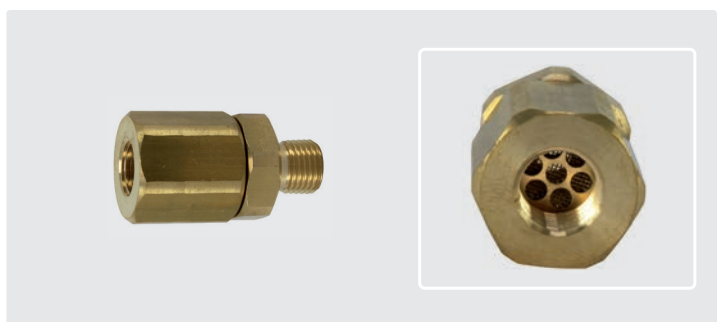

Brass with stainless steel filter. Bidirectional.


Max. 400 bar / 40 l/min. / 150 °C

R+M Nr.	⊖	⊕	⊕
200 033 855	45.6 mm	1/4" M	1/4" F

Crimp nipples

Stainless steel. Flat sealing

R+M Nr.	DN	⊖
315 293	6	1/4"
315 393	8	1/4"
315 593	8	3/8"
315 693	10	3/8"
315 663	12	1/2"

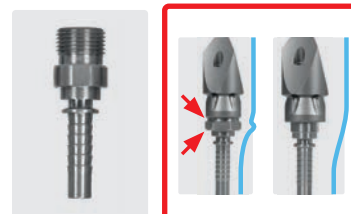

Reduction nipple



Stainless steel. 500 bar

R+M Nr.	⊖	⊕
040 002 207	1/4" F	1/8" M

Protective clothing is shown on the pages 581-583.

Suttner nozzles for sewer cleaning ST-49

Nozzles without centric hole

With 3 or 4 rear jets (45°) for maximum thrust and simultaneously, a flushing away of the waste material. Stainless steel.
Max. 250 bar



1/8" F. Ø 15 mm. Stainless steel



1/4" F. Ø 19 mm. Stainless steel



3/8" F. Ø 24 mm. Stainless steel

D	R+M Nr.	R+M Nr.	R+M Nr.
035	650 01	651 05	
04	650 05	651 04	
045	650 00	651 00	
05		651 08	
055	650 09	651 16	
06	650 10	651 10	
07			651 84
090	650 40	651 40	
12		651 48	

Nozzles with centric hole

Cleaning of clogged pipes. With centric front jet and 3 or 4 rear jets (45°).
Front jet for penetrating of completely clogged pipes and frozen pipelines, rear jets for flushing away of the waste material. Stainless steel. Max. 250 bar



1/8" F. Ø 15 mm. Stainless steel




1/4" F. Ø 19 mm. Stainless steel




3/8" F. Ø 24 mm. Stainless steel

D	R+M Nr.	R+M Nr.	R+M Nr.
035			
04	122 370 170	651 14	651 88
045		651 12	
05	650 60	651 13	
055	650 50	651 15	651 87
06	650 55	651 18	
065	650 56		651 89
075	650 20	651 20	
08			651 86
090		651 25	
10	650 30	651 30	651 85
11		651 46	
12			651 83
15			651 82
20			651 81

Functional principle without centric hole

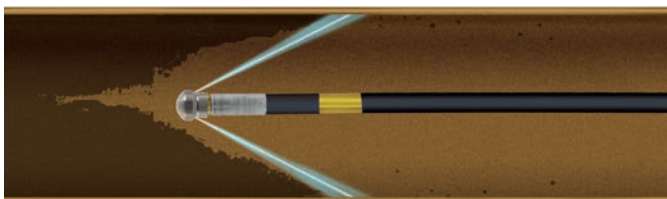

Functional principle with centric hole

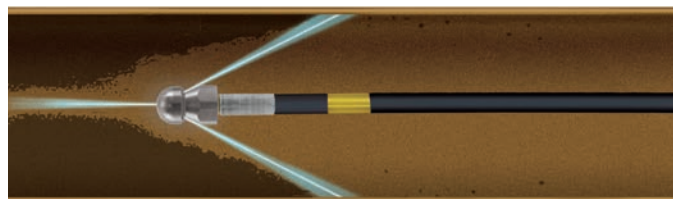

Suttner rotating nozzles for sewer cleaning ST-49.1


Rotating nozzles ST-49.1 without centric hole



1/8" F. ⌀ 19 mm. Max. 250 bar



1/4" F. ⌀ 19 mm. Max. 250 bar

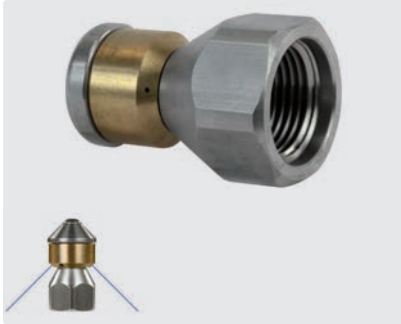

3/8" F. ⌀ 24 mm. Max. 250 bar

⌀
04
045
05
055
06
07
08
090
10
12
15
20

R+M Nr.
200 049 825
200 049 830
200 049 835
200 049 840
200 049 845
200 049 850

R+M Nr.
200 049 794
200 049 795
200 049 800
200 049 805
200 049 810
200 049 815
200 049 820

R+M Nr.
651 61 *

R+M Nr.
651 62 **

R+M Nr.
200 049 860
200 049 870
200 049 880
200 049 890
200 049 891
200 049 892
200 049 893
200 049 894
200 049 895

ST-49.1 with centric hole



3/8" F. ⌀ 24 mm. Max. 250 bar

⌀
10
12
15
18

R+M Nr.
200 049 896
200 049 897
200 049 898
200 049 899

Suttner mini rotating nozzles for sewer cleaning ST-49.3

1/8" F. Nozzle with thrust. ⌀ 12 mm.
Ideal for cleaning or flushing out pipes as well as adjoining lateral pipes at any angle. Small pump capacities required, only. 2 rotating radial jets (90°) to the pipe wall for best cleaning results. 2 rotating rear jets (45°) for forward thrust and flushing away of the waste material. Suitable for pipes from 14 - 50 mm. Hardened stainless steel. Max. 500 bar



R+M Nr.	⌀
200 049 950	05
200 049 970	07




Applications:
» Cleaning of deposits
» Cleaning of grease, fat and organic deposits
» To clean heat exchangers

Functional principle



* Two side jets
** Additional two side jets and three front jets. Reduced thrust, only.

Functional principle

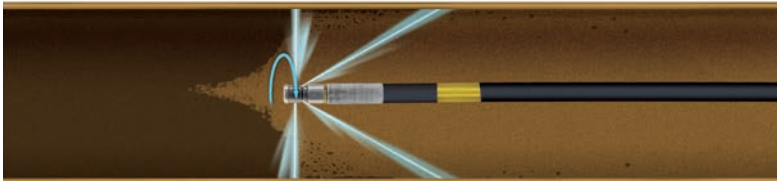

Symbols ⌀ nozzle ⌀ diameter

ST-49 nozzles for sewer cleaning

Sewer cleaning nozzles with male thread



Due to its conical front design this is the ideal solution to make its way through tight bends and traps. Ideal for hobby and semi-professional use. rear jets for maximum thrust. Nozzle drillings as stepped bore for protection against mechanical impact.

Outside $\varnothing$ 15 mm.

Brass.

Max. 210 bar / 16 l/min



Due to its conical front design this is the ideal solution to make its way through tight bends and traps. rear jets for maximum thrust and high cleaning impact. Front jet to blast through roots and scale or de-icing. Nozzle drillings as stepped bore for best protection against mechanical impact.

Outside $\varnothing$ 15 mm.

Stainless steel.

Max. 350 bar / 17 l/min



Due to its conical front design this is the ideal solution to make its way through tight bends and traps. rear jets for maximum thrust and best wall coverage. Front jet to blast through roots and scale or de-icing. Nozzle drillings as stepped bore for best protection against mechanical impact.

Outside $\varnothing$ 17 mm.

Stainless steel.

Max. 350 bar / 25 l/min

R+M Nr.			
121 000 360	1/4" M	035	3

R+M Nr.			
121 160 360	1/4" M	040	3

R+M Nr.			
123 160 860	3/8" M	060	8



Compact and heavy construction with rear jets.

For standard cleaning and desilting applications.

Outside $\varnothing$ 25 mm. Stainless steel.

Max. 500 bar / 40 l/min

R+M Nr.			
120 000 312	1/2" M	080	3



Drain cleaning nozzle suitable for use on most van and trailer mounted cleaning machines. rear jets for higher thrust.

Front jet to blast through roots and scale or de-icing.

Conical head for tight bends and offsets.

Outside $\varnothing$ 24.2 mm. Stainless steel. Max. 500 bar / 45 l/min

R+M Nr.			
120 110 410	1/2" M	090	4 (30°)

Sewer cleaning nozzles with female thread



Due to its very compact design this is the ideal solution for tight elbows.

rear jets for maximum thrust and powerful cleaning impact.

*Front jet to blast through roots and scale or de-icing.

1/8" F. Outside $\varnothing$ 15 mm.

Hardened stainless steel.

Max. 500 bar



Due to its very compact design this is the ideal solution for tight elbows.

rear jets for maximum thrust and powerful cleaning impact.

Front jet to blast through roots and scale or de-icing.

Outside $\varnothing$ 22 mm.

Hardened stainless steel.

Max. 500 bar / 30 l/min.

R+M Nr.			
120 163 391	1/4" F	050	3



Due to its very compact design this is the ideal solution for tight elbows.


rear jets for maximum thrust and best wall coverage.

Outside $\varnothing$ 22 mm.

Hardened stainless steel.

Max. 500 bar / 30 l/min

R+M Nr.			
120 000 675	1/4" F	060	6

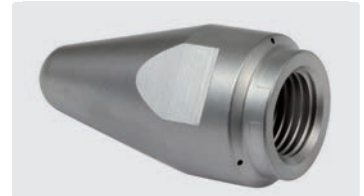

Due to its conical front design this is the ideal solution to make its way through tight bends and traps.

rear jets for maximum thrust and powerful cleaning impact.

Front jet to blast through roots and scale or de-icing.

Outside $\varnothing$ 22 mm.

Hardened stainless steel.

Max. 500 bar / 25 l/min

R+M Nr.			
120 163 390	1/4" F	045	3
120 163 397	1/4" F	065	6
120 163 398	1/4" F	080	6

Symbols nozzle diameter inlet rear jets flow length

ST-49 nozzles for sewer cleaning

Sewer cleaning nozzles with female thread

Hydro Mole

With its 3 very strong concentrated forward jets the Hydro Mole will tear through almost any kind of blockage.

Front jets to blast thru roots and scale or for de-icing.

Nozzle drilling as stepped bore for best protection against mechanical impact.

Made of wear-resistant, hardened stainless steel.



Outside $\varnothing$ 22 mm.
Hardened stainless steel.
Max. 500 bar / 35 l/min.

R+M Nr.	C	D
120 460 385	1/4" F	070



Outside $\varnothing$ 22 mm.
Hardened stainless steel.
Max. 500 bar / 32 l/min.

R+M Nr.	C	D
120 163 392	1/4" F	065



Outside $\varnothing$ 25 mm.
Hardened stainless steel.
Max. 500 bar / 32 l/min.

R+M Nr.	C	D
120 163 393	3/8" F	065

Grease ball



⚙ rear jets for extreme thrust and highest wall coverage of the pipe. Designed for the ability to clean grease off the sidewall of pipes but has proven to be great on root chokes, too. Completely spherical shape.

Nozzle drilling as stepped bore for best protection against mechanical impact.

Hardened stainless steel.
Max. 500 bar

R+M Nr.	C	D	⚙
120 000 860	1/4" F	080	8 (0,6 mm)

Root rat



Equipped with ⚙ rear jets for maximum thrust and 3 additional nozzles (45°) right behind its nose for better cleaning results and wall coverage the nozzle has proven to be ideal on root chokes.

Hardened stainless steel.
Max. 500 bar / 30 l/min

R+M Nr.	C	D	⚙
120 155 672	1/4" F	060	3 (30°)

Mini-nozzles for sewer cleaning

Heat exchangers in thermal power stations or conveyor pipes in the food industry are often sewers of 10 to 12 mm in diameter. In order to clean them effectively from the inside a device for sewer cleaning with small diameters and high pressures is required.



Crimp nipple.
DN 4.
M7x0,5 M.
Stainless steel.
Max. 500 bar

R+M Nr.	↔
040 001 946	22



M7x0,5 F. ⚙ rear jets for maximum thrust and powerful cleaning impact.
Outside $\varnothing$ 9.8 mm.
Stainless steel.
Max. 500 bar

R+M Nr.	D	⚙
120 000 380	030	3
120 001 380	065	3



M7x0,5 F. ⚙ rear jets for maximum thrust. Additional 3 side jets (90°) for powerful cleaning impact and optimal wall coverage.
Outside $\varnothing$ 9.8 mm. Stainless steel.
Max. 500 bar

R+M Nr.	D	⚙
120 373 373	065	3


ST-49 Ball type nozzle, 30°

Made out of wear-resistant, hardened stainless steel provided with front jet insert or blind plug (interchangeable). Angle of jet is 30°, sturdy wall thickness, long service life and a minimum of wear and tear. All nozzles are provided with hardened stainless steel inserts. Due to this feature the

efficiency is considerably higher compared with those nozzles with drilled holes and the service life is several times longer.
Max. 500 bar


Applications:

- » Suitable for removal of sludge deposits
- » Desilting of pipes
- » Opening of frozen pipelines



1/4" F.
Outside $\varnothing$ 25 mm.
rear jets, with front jet

R+M Nr.	D	
649 030 216 060	060	6
649 030 216 080	080	6
649 030 216 100	100	6
649 030 216 120	120	6
649 030 216 150	150	6
649 030 216 200	200	6



3/8" F.
Outside $\varnothing$ 30 mm.
rear jets, with front jet

R+M Nr.	D	
649 030 314 060	060	4
649 030 314 080	080	4
649 030 314 100	100	4
649 030 314 120	120	4
649 030 314 150	150	4
649 030 314 200	200	4




3/8" F.
Outside $\varnothing$ 30 mm.
rear jets, with front jet

R+M Nr.	D	
649 030 316 060	060	6
649 030 316 080	080	6
649 030 316 100	100	6
649 030 316 120	120	6
649 030 316 150	150	6
649 030 316 200	200	6




1/2" M. MR cone.
Outside $\varnothing$ 30 mm.
rear jets, with front jet

R+M Nr.	D	
649 040 416 060	060	6
649 040 416 080	080	6
649 040 416 100	100	6
649 040 416 120	120	6
649 040 416 150	150	6
649 040 416 200	200	6

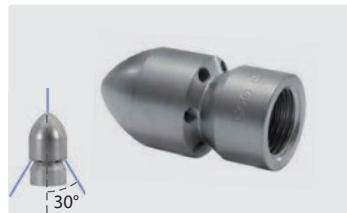

1/2" F.
Outside $\varnothing$ 30 mm.
rear jets, with front jet

R+M Nr.	D	
649 030 416 060	060	6
649 030 416 080	080	6
649 030 416 100	100	6
649 030 416 120	120	6
649 030 416 150	150	6
649 030 416 200	200	6
649 030 416 315	315	6



3/4" F.
Outside $\varnothing$ 38 mm.
rear jets, with front jet

R+M Nr.	D	
649 030 516 100	100	6
649 030 516 120	120	6
649 030 516 150	150	6
649 030 516 170	170	6
649 030 516 200	200	6
649 030 516 250	250	6



1" F.
Outside $\varnothing$ 48 mm.
rear jets, with front jet

R+M Nr.	D	
649 030 618 120	120	8
649 030 618 150	150	8
649 030 618 170	170	8
649 030 618 210	210	8
649 030 618 260	260	8
649 030 618 315	315	8
649 030 618 390	390	8



M22x1.5 M.
Outside $\varnothing$ 25 mm.
rear jets


R+M Nr.	D	
120 000 833*	090	6



TR22 M**.
Outside $\varnothing$ 25 mm.
rear jets

R+M Nr.	D	
120 000 832	090	6

Functional principle

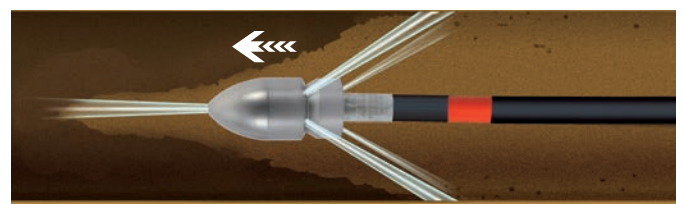

Functional principle



** thread coated with microencapsulated thread locking fluid
* stainless steel

ST-49 Ball type nozzle, 20°

Made out of stainless steel provided with front jet insert or blind plug (interchangeable). Angle of jet is 20°, sturdy wall thickness, long service life and a minimum of wear and tear. All nozzles are provided with hardened stainless steel inserts. Due to this feature the efficiency is considerably

higher compared with those nozzles with drilled holes and the service life is several times longer.
Max. 500 bar

Applications:

- » Suitable for removal of sludge deposits
- » Desilting of pipes
- » Opening of frozen pipelines



1/4" F.
Outside $\varnothing$ 25 mm.
rear jets

R+M Nr.	D	rear jets
649 090 206 060	060	6
649 090 206 080	080	6
649 090 206 100	105	6
649 090 206 120	120	6
649 090 206 160	160	6
649 090 206 200	200	6



1/4" F.
Outside $\varnothing$ 25 mm.
rear jets, with front jet

R+M Nr.	D	rear jets
649 090 216 060	060	6
649 090 216 080	080	6
649 090 216 100	100	6
649 090 216 120	120	6
649 090 216 150	150	6
649 090 216 200	200	6



3/8" F.
Outside $\varnothing$ 30 mm.
rear jets

R+M Nr.	D	rear jets
649 090 306 060	060	6
649 090 306 080	080	6
649 090 306 100	105	6
649 090 306 120	120	6
649 090 306 160	160	6
649 090 306 200	200	6




3/8" F.
Outside $\varnothing$ 30 mm.
rear jets, with front jet

R+M Nr.	D	rear jets
649 090 316 060	060	6
649 090 316 080	080	6
649 090 316 100	100	6
649 090 316 120	120	6
649 090 316 150	150	6
649 090 316 200	200	6

Functional principle



Jet angle INFO



30° = more efficient wall cleaning

20° = better traction

Egg-type Radial-Nozzles

Best performing and most durable design for higher efficiency.

These are light and agile used as a great all around nozzle with replaceable inserts. They include a forward jet.

The egg-type radial nozzle is wear resistant and cost competitive. Great for sanitary applications. With unrivaled cleaning power on heavy encrusted grease and sludge, hardened stainless steel body and replaceable nozzle inserts for longer life.

The ideal tool for the toughest applications of hard grease and scale that may be encrusted on the interior wall of the pipe.

Material: Hardened stainless steel.

Max. 500 bar / 150 °C



1/4" F. 6x 75° 3x 30° + 1x 0°. 25-70 l/min. For (R) (D) 75-150 mm. Outside (D) 30 mm. (S) 223 g.

R+M Nr.	(D)	(S)
649 110 219 065	065	50
649 110 219 080	080	50
649 110 219 100	100	50
649 110 219 120	120	50
649 110 219 150	150	50
649 110 219 200	200	50



3/8" F. 6x 75° 3x 30° + 1x 0°. 30-100 l/min. For (R) (D) 100-200 mm. Outside (D) 35 mm. (S) 314 g.

R+M Nr.	(D)	(S)
649 110 319 065	065	55
649 110 319 080	080	55
649 110 319 100	100	55
649 110 319 120	120	55
649 110 319 150	150	55
649 110 319 200	200	55



1/2" F. 6x 75° 3x 30° + 1x 0°. 80-140 l/min. For (R) (D) 120-250 mm. Outside (D) 40 mm. (S) 630 g.

R+M Nr.	(D)	(S)
649 110 419 080	080	70
649 110 419 100	100	70
649 110 419 120	120	70
649 110 419 150	150	70
649 110 419 200	200	70
649 110 419 250	250	70



3/4" F. 6x 75° 3x 30° + 1x 0°. 100-250 l/min. For (R) (D) 150-300 mm. Outside (D) 50 mm. (S) 1,367 g.

R+M Nr.	(D)	(S)
649 110 519 100	100	100
649 110 519 120	120	100
649 110 519 150	150	100
649 110 519 200	200	100
649 110 519 250	250	100
649 110 519 310	310	100

Egg-type Nozzles

Best performing and most durable design for higher efficiency.

These are light and agile used as a great all around nozzle with replaceable inserts. They include a forward jet. The egg-type nozzle is wear resistant and cost competitive. Great for sanitary applications.

Threaded inserts can easily be serviced/replaced for longer life span.

Material: Hardened stainless steel.

Max. 500 bar / 150 °C



1/4" F. 6x 75° + 1x 0°. 20-50 l/min. For (R) (D) 50-100 mm. Outside (D) 30 mm. (S) 127 g.

R+M Nr.	(D)	(S)
649 120 216 065	065	40
649 120 216 080	080	40
649 120 216 100	100	40
649 120 216 120	120	40
649 120 216 150	150	40
649 120 216 200	200	40



3/8" F. 6x 75° + 1x 0°. 25-70 l/min. For (R) (D) 75-150 mm. Outside (D) 35 mm. (S) 207 g.

R+M Nr.	(D)	(S)
649 120 316 065	065	50
649 120 316 080	080	50
649 120 316 100	100	50
649 120 316 120	120	50
649 120 316 150	150	50
649 120 316 200	200	50



1/2" F. 6x 75° + 1x 0°. 30-100 l/min. For (R) (D) 100-200 mm. Outside (D) 40 mm. (S) 281 g.

R+M Nr.	(D)	(S)
649 120 416 080	080	55
649 120 416 100	100	55
649 120 416 120	120	55
649 120 416 150	150	55
649 120 416 200	200	55
649 120 416 250	250	55



3/4" F. 6x 75° + 1x 0°. 30-100 l/min. For (R) (D) 120-250 mm. Outside (D) 50 mm. (S) 567 g.


R+M Nr.	(D)	(S)
649 120 516 100	100	70
649 120 516 120	120	70
649 120 516 150	150	70
649 120 516 200	200	70
649 120 516 250	250	70
649 120 516 315	315	70



1" F. 8x 75° + 1x 0°. 100-250 l/min. For (R) (D) 150-300 mm. Outside (D) 62 mm. (S) 1,265 g.

R+M Nr.	(D)	(S)
649 120 618 100	100	100
649 120 618 120	120	100
649 120 618 150	150	100
649 120 618 210	210	100
649 120 618 260	260	100
649 120 618 320	320	100

Functional principle

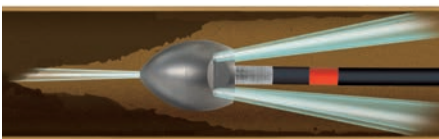

Milling Type Nozzles ST-49

With its 3 to 4 very strong concentrated forward jets and the sharp cutting edges the milling type nozzles will tear through almost any kind of blockage. The sharp edges cut, break and penetrate through every kind of blockage. Made out of wear-resistant, hardened stainless steel. All nozzles are equipped with replaceable hardened stainless steel rear and


centric front jets. Due to this feature the efficiency is considerably higher compared to those nozzles with drilled holes and the service life is several times longer. Max. 300 bar

Applications:

- » Penetration of completely clogged pipes
- » Opening of root masses
- » Opening of frozen pipelines
- » Hydraulic thrust boring flushing operations



Functional principle

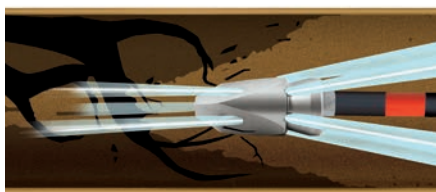

300 bar. 1/4" F. $\square$ 50 mm, $\varnothing$ = 25 mm, $\boxplus$ 0.13 kg.
For tubes > 30 mm.

Lateral front jets 0.5 mm drilled

R+M Nr.	D	Front	
649 010 234 045	045	3	4
649 010 234 050	050	3	4
649 010 234 055	055	3	4
649 010 244 060	060	4	4
649 010 244 070	070	4	4
649 010 244 080	080	4	4
649 010 244 085	085	4	4
649 010 244 100	100	4	4
649 010 244 120	120	4	4
649 010 244 150	150	4	4
649 010 244 200	200	4	4



300 bar. 3/8" F. $\square$ 55 mm, $\varnothing$ = 28 mm, $\boxplus$ 0.13 kg.
For tubes > 50 mm.

Lateral front jets with hardened stainless steel nozzle inserts

R+M Nr.	D	Front	
649 010 336 055	055	3	6
649 010 346 070	070	4	6
649 010 346 080	080	4	6
649 010 346 100	100	4	6
649 010 346 120	120	4	6
649 010 346 150	150	4	6
649 010 346 200	200	4	6
649 010 346 250	250	4	6
649 010 346 270	270	4	6



300 bar. 1/2" F. $\square$ 68 mm, $\varnothing$ = 31 mm, $\boxplus$ 0.17 kg.
For tubes > 60 mm.

Lateral front jets with hardened stainless steel nozzle inserts

R+M Nr.	D	Front	
649 010 446 100	100	4	6
649 010 446 120	120	4	6
649 010 446 150	150	4	6
649 010 446 200	200	4	6
649 010 446 250	250	4	6
649 010 446 270	270	4	6
649 010 446 310	310	4	6
649 010 446 495	495	4	6
649 010 446 580	580	4	6



300 bar. 3/4" F. $\square$ 80 mm, $\varnothing$ = 38 mm, $\boxplus$ 0.29 kg.
For tubes > 60 mm.

Lateral front jets with hardened stainless steel nozzle inserts

R+M Nr.	D	Front	
649 010 546 120	120	4	6
649 010 546 150	150	4	6
649 010 546 180	180	4	6
649 010 546 200	200	4	6
649 010 546 250	250	4	6
649 010 546 270	270	4	6
649 010 546 310	310	4	6
649 010 546 450	450	4	6
649 010 546 495	495	4	6



300 bar. 1" F. $\square$ 100 mm, $\varnothing$ = 50 mm, $\boxplus$ 0.64 kg.
For tubes > 100 mm.

Lateral front jets with hardened stainless steel nozzle inserts

R+M Nr.	D	Front	
649 010 549 120	120	4	9
649 010 549 150	150	4	9
649 010 549 180	180	4	9
649 010 549 200	200	4	9
649 010 549 265	265	4	9
649 010 549 285	285	4	9
649 010 549 345	345	4	9
649 010 549 445	445	4	9
649 010 549 545	545	4	9

Coupling-system ST-245

Nipple ST-245



☞ 1/4" M.
Stainless steel.
Max. 350 bar

R+M Nr.	☞
040 005 447	27.5




☞ 1/4" M.
Stainless steel.
Max. 350 bar

R+M Nr.	☞
040 005 446	33.5



☞ 1/4" M. Stainless
steel. Max. 350 bar.
For wear cone

R+M Nr.	☞
040 005 445	3 42.0

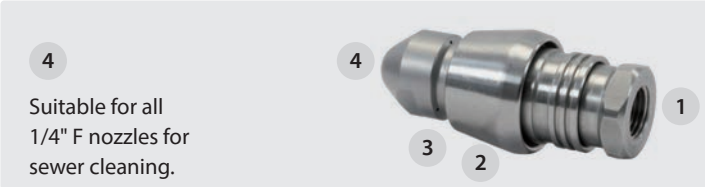

ST-245 Coupling / wear cone ST-245



R+M Nr.	☞
200 245 500	1 1/4" F



R+M Nr.	☞
200 245 510	1 3/8" M



Stainless steel.
For 040 005 445

R+M Nr.	☞
040 005 431	2



POM. Red.
For 040 005 445

R+M Nr.	☞
020 005 432	2



POM. Black.
For 040 005 445

R+M Nr.	☞
020 005 431	2

Symbols ☞ outlet ☞ inlet ☞ length ☞ diameter

Small plough jet nozzle

For 2 fan jets 1/4" M NPT



Fitted with two rear facing fan jets the small plough jet nozzle is great for desilting drains and sewers. The heavy forged brass construction keeps the jet firmly planted in the base of the pipe where the silt deposits collect and blasts them back towards the manhole.
Width approx. 72 mm. Weight 1.5 kg.
Max. 420 bar / 150° C / 80 l/min.
1/4"-nozzles need to be assembled under 45° to achieve best cleaning results. Select nozzle size according to pressure and flow rate of the machine.

R+M Nr.		
010 000 399	1/2" F	2 x 1/4" F NPT

For 2 ST-357 rotating nozzles



Fitted with two rear facing ST-357 rotating nozzles the small plough jet nozzle is the ideal solution for desilting drains and sewers. The heavy forged brass construction keeps the jet firmly planted in the base of the pipe where the silt deposits collect and blasts them back towards the manhole.
Width approx. 88 mm. Weight 2.5 kg.
Max. 350 bar / 90° C / 80 l/min.
Select rotor nozzle size symmetric according to pressure and flow rate of the machine.

R+M Nr.		
200 049 410	3/8" F	2 x 1/4" M

Our rotating nozzles are on pages 213 and 306.

Rotating nozzle adaptor


Designed for connecting the ST-357 rotating nozzle to a sewer cleaning hose. Hardened stainless steel body with extra sharp edges.
Max. 400 bar

For ST-357 rotating nozzle



R+M Nr.		
200 049 405	1/4" F	1/4" M

Possible jet configurations

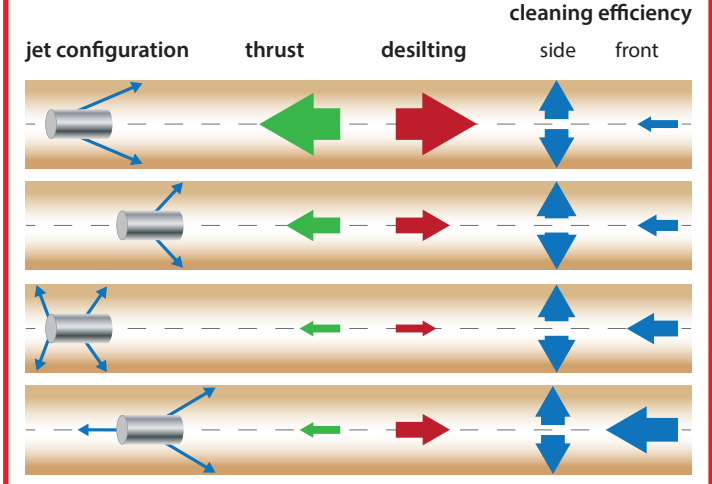

Jetter Valves



Jetter valves are special valve assemblies which allow to shut off one particular intake valve. The jetter valve cuts off the flow of one of the three pistons of the jetter pump. Due to this the pump starts pulsating which causes significant vibrations at the nozzle and an increased cleaning effect at a reduced flow rate (approx. -1/3 of the full flow rate of the pump). Jetter valves create vibrations to help the hose sliding around tight bends in small lines. Jetter valves should not be combined with pulsation dampers in one jetter unit. Pulsation can be started or stopped by a lever or hand wheel at the jetter valve.

Tip cleaner




R+M Nr.	TYP
170 402 35	XT, XM
170 401 61	RK
170 402 36	XW

High speed steel (HSS) with aluminium shaft.
 42 mm

R+M Nr.	Ø
200 049 042	0.5

Functional principle of a Jetter Valve

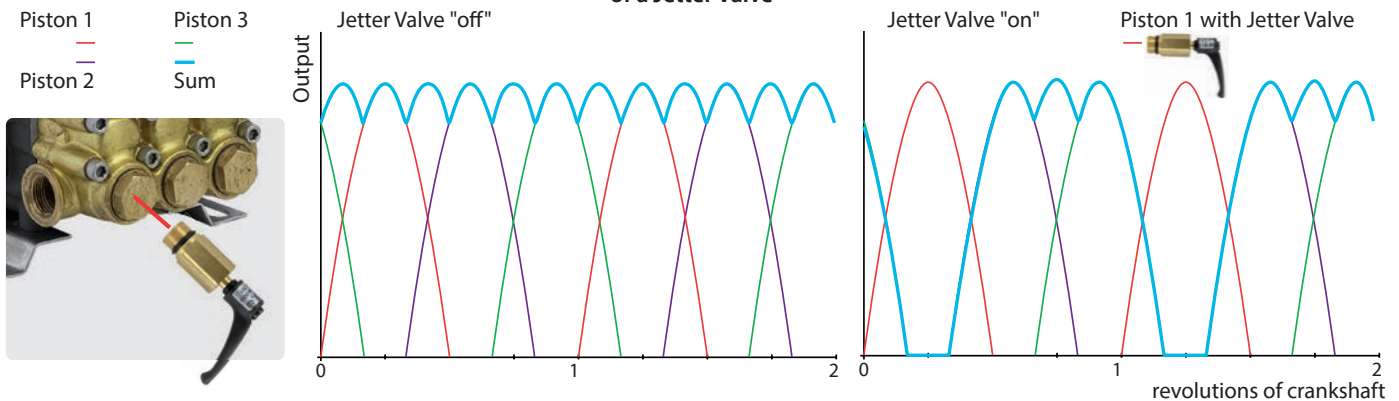

Towing-Eye Kit ST-49



For M5 nozzle bodies

Sting extension



Hardened stainless steel.
 For M5 nozzle bodies

R+M Nr.	Ø
200 049 015	0,5

R+M Nr.	Ø
040 075 090	M5 M

Drain jet extension

Lance with female thread

1/4" M : 1/4" F BSP.

Drain jet extension for cleaning pipes and shafts of large diameter to prevent reversal in direction of travel.

Max. 400 bar



R+M Nr.	↔	(M)
070 000 097	100 mm	stainless steel
070 000 098	150 mm	stainless steel
070 000 099	200 mm	stainless steel
070 000 095	250 mm	stainless steel
070 000 101	350 mm	stainless steel

Functional principle



ST-49.2 Rotating nozzles

Stainless steel. Brazen rotating body. Excellent cleaning by rotating nozzle jets. Exchangeable inserts included.

Excellent pulling power by min. 4 rear jets specially placed. Pressure max. 350 bar.



1/4" F. rear jets. 3 side jets.
Outside 30 mm.

317 g.

R+M Nr.	D	rear jets	length
649 050 234 060	060	4	69 mm
649 050 234 080	080	4	69 mm
649 050 234 105	105	4	69 mm
649 050 234 130	130	4	69 mm
649 050 234 150	150	4	69 mm
649 050 234 200	200	4	69 mm



3/8" F. rear jets. 3 side jets.
Outside 30 mm.

307 g.

R+M Nr.	D	rear jets	length
649 050 334 080	080	4	69 mm
649 050 334 105	105	4	69 mm
649 050 334 130	130	4	69 mm
649 050 334 150	150	4	69 mm
649 050 334 200	200	4	69 mm
649 050 334 250	250	4	69 mm



1/2" F. rear jets. 3 side jets.
Outside 38 mm.

585 g.

R+M Nr.	D	rear jets	length
649 050 435 100	100	5	84 mm
649 050 435 120	120	5	84 mm
649 050 435 150	150	5	84 mm
649 050 435 200	200	5	84 mm
649 050 435 250	250	5	84 mm
649 050 435 300	300	5	84 mm



3/4" F. rear jets. 3 side jets.
Outside 38 mm.

554 g.

R+M Nr.	D	rear jets	length
649 050 536 130	130	6	84 mm
649 050 536 150	150	6	84 mm
649 050 536 200	200	6	84 mm
649 050 536 250	250	6	84 mm
649 050 536 300	300	6	84 mm
649 050 536 375	375	6	84 mm

ST-49.2 VIBRA Rotating nozzles

Stainless steel. Brazen rotating body. Excellent cleaning by rotating nozzle jets and vibration for the reduction of the friction between hose and pipe wall. Exchangeable inserts included.

Excellent pulling power by min. 4 rear jets specially placed. Pressure max. 350 bar.



1/4" F. rear jets. 3 side jets.
Outside 30 mm.

314 g.

R+M Nr.	D	rear jets	length
649 070 234 060	060	4	69 mm
649 070 234 080	080	4	69 mm
649 070 234 105	105	4	69 mm
649 070 234 130	130	4	69 mm
649 070 234 150	150	4	69 mm
649 070 234 200	200	4	69 mm



3/8" F. rear jets. 3 side jets.
Outside 30 mm.

305 g.

R+M Nr.	D	rear jets	length
649 070 334 080	080	4	69 mm
649 070 334 105	105	4	69 mm
649 070 334 130	130	4	69 mm
649 070 334 150	150	4	69 mm
649 070 334 200	200	4	69 mm
649 070 334 250	250	4	69 mm



1/2" F. rear jets. 3 side jets.
Outside 38 mm.

580 g.

R+M Nr.	D	rear jets	length
649 070 435 100	100	5	84 mm
649 070 435 130	130	5	84 mm
649 070 435 150	150	5	84 mm
649 070 435 200	200	5	84 mm
649 070 435 250	250	5	84 mm
649 070 435 300	300	5	84 mm




3/4" F. rear jets. 3 side jets.
Outside 38 mm.

550 g.

R+M Nr.	D	rear jets	length
649 070 536 130	130	6	84 mm
649 070 536 150	150	6	84 mm
649 070 536 200	200	6	84 mm
649 070 536 250	250	6	84 mm
649 070 536 300	300	6	84 mm
649 070 536 375	375	6	84 mm

Functional principle

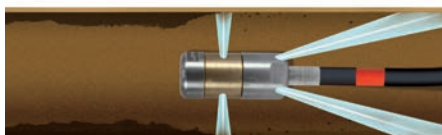


Symbols $\varnothing$ diameter TYP type $\leftrightarrow$ length M material g weight rear jets

Rotating nozzles with drivers

Rotor nozzle driver and rotor nozzles are the perfect combination for drilling through blockages with its rotary forward facing jet. Driven up to the blockage by 6 powerful rear facing hardened stainless steel nozzles the high speed forward facing spinning jet creates a cone shape that has

enough cutting force to blast through roots and scale. It is also ideal for cutting up and shredding tissue and fat deposits

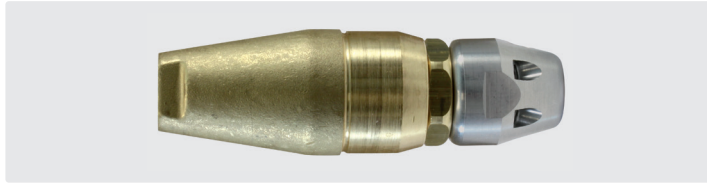

ST-357.1. Max. 250 bar / 100 °C

R+M Nr.	D	G
649 140 216 065	065	1/4" F
649 140 216 085	085	1/4" F
649 140 216 095	095	1/4" F
649 140 216 110	110	1/4" F
649 140 216 120	120	1/4" F
649 140 216 130	130	1/4" F
649 140 216 140	140	1/4" F

R+M Nr.	D	G
649 140 316 100	100	3/8" F
649 140 316 135	135	3/8" F
649 140 316 145	145	3/8" F
649 140 316 160	160	3/8" F
649 140 316 180	180	3/8" F
649 140 316 200	200	3/8" F
649 140 316 235	235	3/8" F




ST-458.1. Max. 400 bar / 100 °C

R+M Nr.	D	G
649 160 316 125	125	3/8" F
649 160 316 145	145	3/8" F
649 160 316 160	160	3/8" F
649 160 316 180	180	3/8" F
649 160 316 200	200	3/8" F
649 160 316 235	235	3/8" F
649 160 316 250	250	3/8" F

R+M Nr.	D	G
649 160 416 150	150	1/2" F
649 160 416 170	170	1/2" F
649 160 416 195	195	1/2" F
649 160 416 215	215	1/2" F
649 160 416 240	240	1/2" F
649 160 416 275	275	1/2" F
649 160 416 300	300	1/2" F

Functional principle

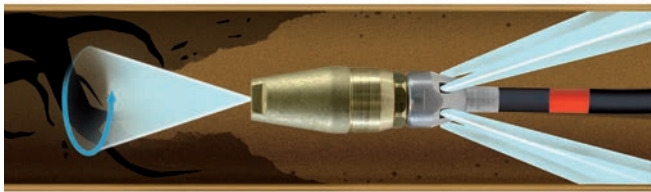

Driver for rotating nozzles



Hardened stainless steel. 6 M5 threads for nozzle inserts (see table below)

R+M Nr.	G	G	for	P
040 075 200	1/4" F	1/4" M	ST-357/ST-456	350 bar
040 075 205	3/8" F	1/4" M	ST-357/ST-456	350 bar
040 075 210	3/8" F	1/4" M	ST-458/ST-559	500 bar
040 075 215	1/2" F	1/4" M	ST-458/ST-559	500 bar

Nozzle Inserts




Full jet. 500 bar.
Hex for allen key 2.5 mm.
Hardened stainless steel

R+M Nr.	TYP	hole-Ø	nozzle size
040 075 000	M5	plug	-
040 075 005	M5	0.50 mm	0066
040 075 006	M5	0.60 mm	0085
040 075 007	M5	0.70 mm	0117
040 075 008	M5	0.75 mm	0133
040 075 009	M5	0.80 mm	0161
040 075 010	M5	1.00 mm	0237
040 075 012	M5	1.10 mm	0293
040 075 015	M5	1.30 mm	0458
040 075 020	M5	1.90 mm	0885

Nozzle configuration

Nozzle inserts for sewer cleaning nozzles and nozzle driver have to be installed symmetrically.

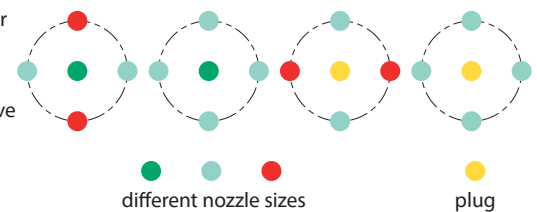

Rotating nozzles with integrated drivers

Rotor nozzles with integrated Rotor nozzle drivers are perfect for drilling through blockages with its rotary forward facing jet. Driven up to the blockage by 5-8 powerful rear facing stainless steel nozzles the high speed forward facing spinning jet creates a cone shape that has enough cutting force to blast through roots and scale. It is also ideal for cutting up and shredding tissue and fat deposits




Stainless steel. 1/4" F. Rotor nozzle with 1 rotating front jet, 5 to 8 precision holes 0.4 mm for the rear feed jets.

Max. 350 bar / 150 °C


R+M Nr.	D	C	thrust jets
200 358 650	050	1/4" F	5 x 0.4 mm
200 358 660	060	1/4" F	6 x 0.4 mm
200 358 670	070	1/4" F	7 x 0.4 mm
200 358 680	080	1/4" F	8 x 0.4 mm

Functional principle

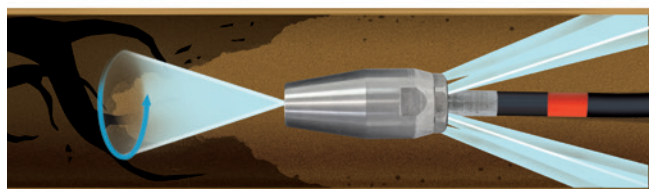

Sewer cleaning nozzles


Rotating nozzles RT . 1,000 bar

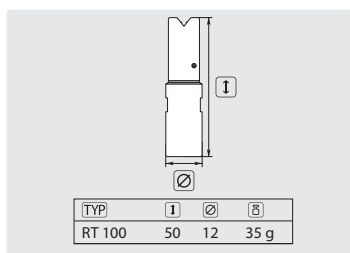

Stainless steel. Rotating body hp-bronze. Compact model, universally applicable. Extreme cleaning performance, removes hard deposits. Pressure max. 1,000 bar

R+M Nr.	TYP	—	⊙	side jet	front jet
652 710 006	RT 100	6 l/100 bar	1/8" F	2	2
652 710 014	RT 100	14 l/100 bar	1/8" F	2	2


Rotating nozzles RH . 1,000 bar



Stainless steel. Rotating body hp-bronze. Compact model, universally applicable. Extreme cleaning performance, removes hard deposits. Pressure max. 1,000 bar

R+M Nr.	TYP	—	⊙	side jet
652 810 006	RH 100	6 l/100 bar	1/8" F	2
652 810 010	RH 100	10 l/100 bar	1/8" F	2
652 810 014	RH 100	14 l/100 bar	1/8" F	2


Cone shape nozzles LK . 500 bar *



Stainless steel. Extremely high impact force. Long reach. Pressure max. 500 bar. Applications: cleaning of shafts. Delivery time of approx. 3 - 4 weeks

R+M Nr.	TYP	orifice Ø	⊙
652 400 01	LK 200	2 - 5 mm	1/4" M
652 400 02	LK 400	3 - 6 mm	1/2" M
652 400 03	LK 500	3 - 7 mm	3/4" M
652 400 04	LK 600	4 - 8 mm	1" M

Nozzle inserts solid stream VS . 500 bar



Stainless steel. Pressure max. 500 bar

R+M Nr.	TYP	orifice Ø	⊙
652 600 02	VS 200	0.6 - 2.0 mm	M6
652 600 03	VS 300	0.6 - 2.5 mm	M8
652 600 04	VS 400	0.6 - 3.8 mm	M10

* When placing an order, please state flow rate + pressure!

Symbols TYP type ⊙ thread — flow Ø weight C inlet ⊖ outlet — length mm I height Ø diameter D nozzle size

Hydro-Excavation Nozzles

In all geological areas fast and effective:


- » Areas difficult to access
- » Safe removal of contaminated material
- » 50 percent faster than usual digging by hand



Hardened stainless steel.
3 x lateral front jets 15 °and centric front jet.
Max. 500 bar /100 °C

R+M Nr.			D
649 130 413 060	1/2" F	060	
649 130 413 090	1/2" F	090	
649 130 413 120	1/2" F	120	

Principle of operation HYDRO-Excavation Nozzle

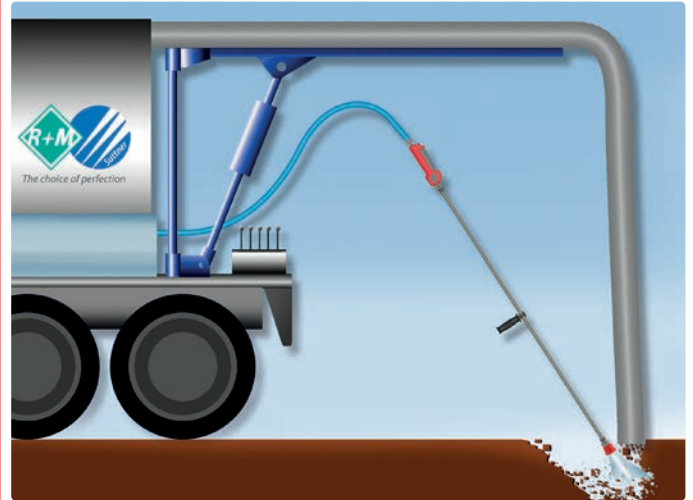

Hydro-Excavation-Nozzle ST-458

Particularly durable, powerful and effective in all geological soil types:

- » Overmoulding of the rotor nozzle at the outlet with an extension to reduce contamination of the ceramic parts of the nozzle
- » For areas difficult to access

- » Safe removal of contaminated soil material
- » Max. 400 bar / 100 °C

Repair Kit



R+M Nr.			D
200 458 983	1/2" F	035	
200 458 984	1/2" F	04	
200 458 985	1/2" F	045	
200 458 986	1/2" F	05	
200 458 987	1/2" F	055	
200 458 988	1/2" F	06	
200 458 990	1/2" F	07	
200 458 981	1/2" F	08	
200 458 991	1/2" F	09	
200 458 992	1/2" F	100	

R+M Nr.
200 458 235
200 458 240
200 458 245
200 458 250
200 458 255
200 458 260
200 458 270
200 458 280
200 458 290
200 458 210

R+M Nr.
200 458 190
200 458 110

Symbols inlet outlet nozzle size diameter length mm pressure

Long Cast Nozzle

Stainless steel

- » Applications: cleaning of shafts
- » Extremely high impact force
- » Long reach

» Nozzle protection

» Max. 500 bar / 150 °C



R+M Nr.	Ø	G
040 001 963	5 mm	3/4" M

ST-3500 with Long Cast Nozzle

Industrial high-flow gun ST-3500, lance 500 mm with side handle.

Long Cast Nozzle.

Max. 350 bar / 200 l/min / 150 °C

Application:

- » Man hole cleaning
- » Paper Industry. Removal of snow balls during fibre jetting
- » Cleaning Tasks in Off-Shore or Marine Applications

R+M Nr.	↔	G
203 500 560	750 mm	1/2" F swivel

Blasting nozzle

Stainless steel

» Wrench size 27



R+M Nr.	Ø	G
040 002 041	8 mm	1/2" M




Slot Drain Cleaner

Application areas:

- » Slot drain cleaning for terraces, driveways, water feature installations, swimming pools and leisure pools.
- » In civil engineering, food industry, air- or seaports and in gardening and landscaping.


Robust stainless steel design. Centered guide roller for precise, central use. Can be used centered or sideways, for cleaning directly on stairs or walls. A nozzle protector for the adapter is included in the scope of delivery. By using the adapter, you can quickly switch to high-pressure cleaning with a lance. The nozzle protector is quickly installed and always ready to hand.

Depending on your needs, the angle of the cleaning nozzle can be changed on the axis in order to reach the dirt even at the end of the slot.

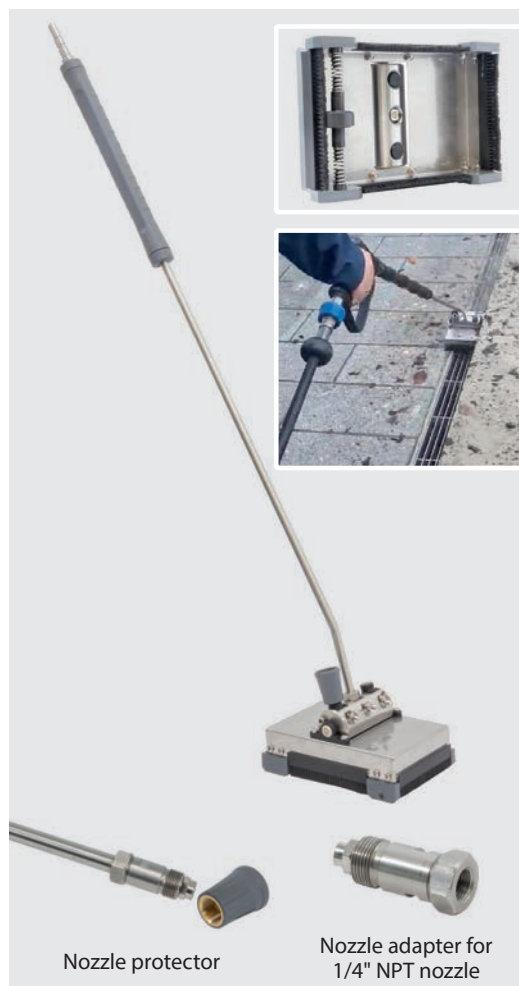

Nozzle protector

Nozzle adapter for 1/4" NPT nozzle

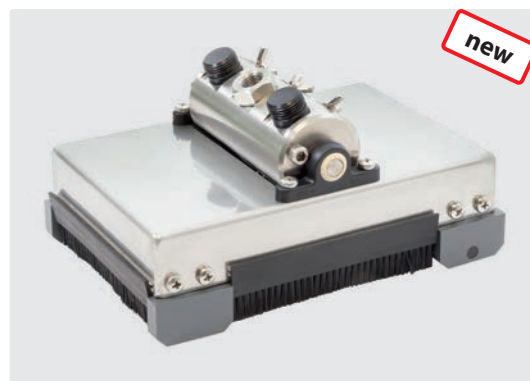

Stainless steel/plastic. Incl. nozzle adapter for 1/4" NPT nozzle and nozzle protector.

Max. 90 °C / 20 l/min.

H x W x L = 150 x 150 x 220 mm. 2.4 kg

R+M Nr.	G	⊗	P
710 100 700	1/4" F	1/4" F NPT	max. 200 bar

Repair kit



Repair kit for slot drain cleaner


R+M Nr.
710 101 580

High pressure hose reels with electric drive

STKI with electric drive

The STKI series suitable for applications in craft and industry:

- » The base frame is made out of canted steel sheet profiles which stand for excellent stability.
- » For horizontal winding above ground.
- » The drum has an almost closed sheet steel hub and runs in maintenance-free plastic bearings.
- » Easy to use thanks to electric drive and remote control.
- » Drum can be separated from the drive thanks to the sliding clutch.
- » Right/left rotation can be controlled via buttons.
- » Suitable for the mediums water or water with cleaning detergent, air, oils and greases.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a slide ring as sealing element.

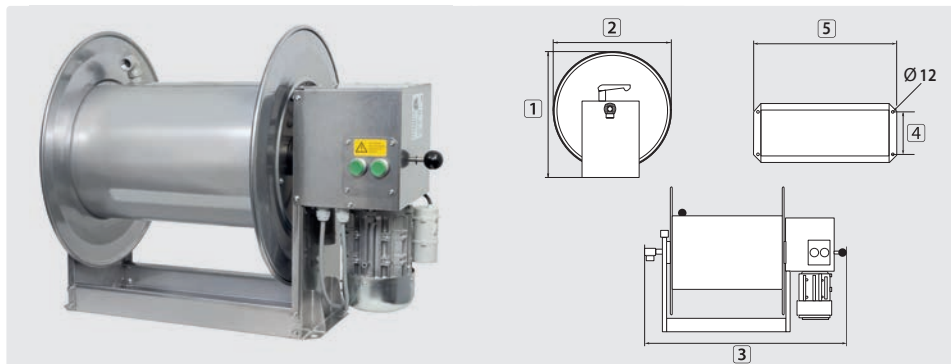

TYP	outer Ø = hose
01	17.0 mm = 125 m
02	17.0 mm = 150 m
03	17.0 mm = 185 m
01	22.0 mm = 70 m
02	22.0 mm = 85 m
03	22.0 mm = 100 m

Stainless steel V2A / AISI 304. With 230 V / 24 V / 12 V, 50 Hz worm gear motor, 0.22 kW with manual claw clutch

R+M Nr.	⊕ & ⊖	V	DN	P	°C	Ⓕ	1	2	3	4	5	TYP
739 602 30	1/2" F	230 V / AC	12	5-300 bar	90 °C	24 kg	515 mm	460 mm	730 mm	153 mm	480 mm	01
739 602 302	1/2" F	230 V / AC	12	5-300 bar	90 °C	25 kg	515 mm	460 mm	830 mm	153 mm	580 mm	02
739 602 303	1/2" F	230 V / AC	12	5-300 bar	90 °C	26 kg	515 mm	460 mm	930 mm	153 mm	680 mm	03
739 600 240	1/2" F	24 V / DC	12	5-300 bar	90 °C	24 kg	515 mm	460 mm	730 mm	153 mm	480 mm	01
739 600 241	1/2" F	24 V / DC	12	5-300 bar	90 °C	25 kg	515 mm	460 mm	830 mm	153 mm	580 mm	02
739 600 242	1/2" F	24 V / DC	12	5-300 bar	90 °C	26 kg	515 mm	460 mm	930 mm	153 mm	680 mm	03
739 600 120	1/2" F	12 V / DC	12	5-300 bar	90 °C	24 kg	515 mm	460 mm	730 mm	153 mm	480 mm	01
739 600 121	1/2" F	12 V / DC	12	5-300 bar	90 °C	25 kg	515 mm	460 mm	830 mm	153 mm	580 mm	02
739 602 122	1/2" F	12 V / DC	12	5-300 bar	90 °C	26 kg	515 mm	460 mm	930 mm	153 mm	680 mm	03

Accessories STKI with electric drive

Swivel ST-322



1/2" F : 1/2" M. DN 12.
P 5-300 bar.
Max. 30 r.p.m. / 90 °C

R+M Nr.	1
200 322 520	67 mm



Repair kit swivels
ST-322

R+M Nr.
200 322 490



Radio remote control retrofit kit.
868.3 MHz hand transmitter, receiver and rod
antenna


R+M Nr.
739 704 013

Symbols ⊕ inlet ⊖ outlet DN nominal diameter P pressure 1 height ↔ length Ø diameter Ⓕ weight ⊙ thread TYP type V voltage



Adapter for lances	257
Create your individual Suttner spray gun	252
Create your individual Suttner vented handle	253
easyfarm365+® spray guns	228
easywash365+® handles by Suttner	249
easywash365+® lance swivels ST-345 by Suttner	249
easywash365+® spray guns with swivels running in ball bearings by Suttner	246
easywash365+® spray guns by Suttner	245
Gun exit connections	254
Gun extensions	256
Gun extensions with handle	257
Half lance exit connections	255
Half-shell kits: Makeover of your gun	251
High pressure spray guns	250
Insulations for lances	257
kommunal365+	242
Longcast lances	244
Longcast nozzle	243
R+M EcoLine No. ONE	231
ST-2750 - the lightweight among the 500 bar spray guns	241
ST-3500 high-flow spray guns	243
ST-540 foot valves	250
ST-550 foot valves	250
Suttner 500 bar ultra high pressure guns	240
Suttner 600 bar ultra high pressure guns	238-239
Suttner foam guns	233, 236-237
Suttner high pressure spray guns	218-230, 242-243, 248
Suttner high pressure spray guns for self-service car wash	247
Suttner spray guns	233-235
Suttner steam guns	232
Wall mount	236, 255

Suttner high pressure spray guns

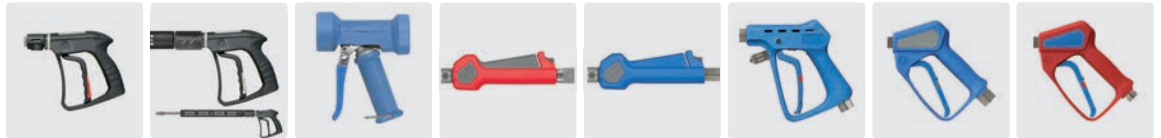

Spray gun:	ST-860D	ST-4000	ST-1200	ST-3240	ST-3225	ST-3100	ST-2725	ST-2720
Max. pressure	20 bar	20 bar	24 bar	310 bar	24,5 / 60 bar	60 bar	80 bar	125 bar
Max. flow	30 l/min	50 l/min	100 l/min	120 l/min	120 l/min	100 l/min	80 l/min	80 l/min
Max. temperature	200 °C	200 °C	50 °C	100 °C	100 °C	150 °C	150 °C	150 °C
Inlet	front	front	rear	linear	linear	rear	rear	rear
Swivel at inlet	–	–	–	☐	☒	☐	☐	☐
Chemical resistance	very high	–	–	high	high	high	high	high
Freeze stop version	–	–	–	–	–	–	–	–
Weep version	–	☐	–	–	–	–	–	–
LTF technology	–	–	–	☒	☒	–	☒	☒
Material valve housing	brass	aluminium	stainless steel	stainless steel	stainless steel	stainless steel	stainless steel	stainless steel
Material valve	PEEK / brass	PEEK / stainless steel	stainless steel	PEEK / stainless steel	PEEK / stainless steel	PEEK / stainless steel	PEEK / stainless steel	PEEK / stainless steel
Food safe	–	–	–	–	☒	☒	☒	–
One-piece valve kit	–	–	–	–	–	–	–	–
Quick coupling	–	–	–	☐	☐	☐	☐	☐
Quick coupling	–	–	–	–	–	–	–	–
Progressive closing	–	–	–	☐	☐	☒	☒	–
Private label	☐	☐	–	☐	☐	☐	☐	☐
Swivel at outlet	–	–	–	–	–	–	–	–
Catalogue page	19, 232	19, 232	16	243	233, 349, 353, 360-361	237	236	234



Spray gun:	ST-810 ND	ST-3300	kommunal365+	ST-810 HD	ST-860	ST-1100	R+M EcoLine ONE	easyfarm365+
Max. pressure	140 bar	150 bar	150 bar	210 bar	210 bar	210 bar	250 bar	250 bar
Max. flow	30 l/min	100 l/min	80 l/min	30 l/min	30 l/min	25 l/min	45 l/min	60 l/min
Max. temperature	80 °C	150 °C	150 °C	150 °C	100 °C	150 °C	150 °C	150 °C
Inlet	front	rear	rear	front	front	rear	rear	rear
Swivel at inlet	–	☐	☐	–	–	☐	–	☐
Chemical resistance	high	high	–	–	high	–	–	high
Freeze stop version	–	–	–	–	–	–	–	–
Weep version	–	–	–	–	–	☐	–	–
LTF technology	–	–	–	–	–	–	–	☒
Material valve housing	brass	stainless steel	brass	brass	brass	brass	brass	brass
Material valve	POM / stainless steel	stainless steel	brass / stainless steel	stainless steel	PEEK / stainless steel	brass / stainless steel	brass / stainless steel	PEEK / stainless steel
Food safe	–	☒	–	–	–	–	–	–
One-piece valve kit	–	–	–	–	–	–	☒	–
Quick coupling	–	☐	–	–	–	☐	☐	☒
Quick coupling	–	–	–	–	–	–	–	–
Progressive closing	–	–	–	–	–	–	–	–
Private label	–	–	☐	–	☐	–	–	☐
Swivel at outlet	–	–	–	–	–	–	–	–
Catalogue page	17	237, 352	242, 244, 523	228	228	229, 247	231	228, 244, 520

Symbols ☒ standard ☐ optional outlet inlet

Suttner high pressure spray guns

								
Spray gun:	ST-1500	ST-2000	ST-601	ST-3500	easywash365+	ST-2300	ST-2600	ST-2700
Max. pressure	275 bar	275 bar	275 bar	350 bar	310 bar	310 bar	310 bar	310 bar
Max. flow	45 l/min	45 l/min	45 l/min	200 l/min	45 l/min	45 l/min	45 l/min	45 l/min
Max. temperature	150 °C	150 °C	150 °C	150 °C	150 °C	150 °C	150 °C	150 °C
Inlet	rear	rear	linear	rear	rear	rear	rear	rear
Swivel at inlet	☐	☐	-	☐	☒	☐	☐	☐
Chemical resistance	☐	☐	☐	-	-	-	-	-
Freeze stop version	☐	-	☐	-	☐	☐	☐	-
Weep version	☐	-	☐	-	☐	☐	☐	-
LTF technology	-	-	-	-	☒	-	☒	☒
Material valve housing	brass	brass	brass	stainless steel	brass	brass	brass	stainless steel
Material valve	brass / stainless steel	brass / stainless steel	brass / stainless steel	stainless steel	brass / stainless steel	brass / stainless steel	brass / stainless steel	stainless steel
Food safe	-	-	-	-	-	-	-	☒
One-piece valve kit	☒	☒	-	-	☒	☒	☒	☐
Quick coupling 	☐	☐	-	-	☐	☐	☐	☐
Quick coupling 	-	-	-	-	-	-	☐	-
Progressive closing	-	-	-	-	-	-	-	-
Private label	-	-	-	☐	☐	☐	☐	☐
Swivel at outlet	-	-	-	-	☐	☐	☐	-
Catalogue page	230, 248	242	248	243, 526	245, 452	220, 222, 224, 247, 454, 522	221, 223-224, 247	233-234, 350

								
Spray gun:	ST-2200	ST-2315	ST-2605	ST-2615	ST-2635	ST-2715	ST-2750	ST-3600
Max. pressure	350 bar	350 bar	350 bar	350 bar	400 bar	350 bar	500 bar	600 bar
Max. flow	40 l/min	45 l/min	45 l/min	45 l/min	35 l/min	45 l/min	30 l/min	80 l/min
Max. temperature	150 °C	150 °C	150 °C	150 °C	150 °C	150 °C	150 °C	150 °C
Inlet	rear	rear	rear	rear	rear	rear	rear	rear
Swivel at inlet	☐	☐	☐	☐	☒	-	☐	☐
Chemical resistance	-	high	-	high	-	high	-	-
Freeze stop version	-	-	-	-	-	-	-	-
Weep version	-	-	-	-	-	-	-	-
LTF technology	-	-	☒	☒	☒	☒	☒	-
Material valve housing	brass	brass	brass	brass	brass	stainless steel	stainless steel	stainless steel
Material valve	brass / stainless steel	stainless steel / ceramic	brass / stainless steel	ceramic / stainless steel	carbide / stainless steel	ceramic / stainless steel	stainless steel / carbide	stainless steel
Food safe	-	-	-	-	-	☒	-	-
One-piece valve kit	☒	☒	☒	☒	☒	☒	☒	☐
Quick coupling 	☐	☐	☐	☐	☐	-	-	☐
Quick coupling 	-	-	-	-	-	-	-	-
Progressive closing	-	-	-	-	-	-	-	-
Private label	☐	☐	☐	☐	☐	☐	☐	☐
Swivel at outlet	-	-	-	-	-	-	-	-
Catalogue page	225	226	226	226	227, 527	234, 350	241, 404-405	240, 404

Suttner high pressure spray guns

ST-2300



Professional gun.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 500	1/4" F	3/8" F



Professional gun.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 550	1/4" F	3/8" F swivel



Professional gun.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 520	1/4" F	M22 M



Professional gun.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 553	1/4" F	M22 M swivel



Professional gun.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 730	M21 M	M21 M



Professional gun.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 760	M22 F	M22 M



Professional gun with insulated outlet suitable for lances with swivel screw coupling.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 710	M22 M	M22 M



Professional gun with insulated outlet suitable for lances with swivel screw coupling.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 720	M22 M	M22 M swivel



Professional gun with lance swivel ST-345.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 801	1/4" F swivel	3/8" F swivel



Professional gun with Variopress. Variopress regulates the water quantity and serves for the adjustment of pressure.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 810	1/4" F	3/8" F



Professional gun with Variopress. Variopress regulates the water quantity and serves for the adjustment of pressure.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 830	M22 M	M22 M swivel



Professional gun with Variopress and coupling KW. Variopress regulates the water quantity and serves for the adjustment of pressure.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☻
202 300 631	coupling KW	3/8" F

Symbols ☺ outlet ☻ inlet

Suttner high pressure spray guns

ST-2600



LTF

Professional gun with patented LTF technology. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 500	1/4" F	3/8" F



LTF

Professional gun with patented LTF technology. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 550	1/4" F	3/8" F swivel



LTF

Professional gun with patented LTF technology. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 520	1/4" F	M22 M



LTF

Professional gun with patented LTF technology. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 553	1/4" F	M22 M swivel



LTF

Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 730	M21 M	M21 M



LTF

Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 760	M22 F	M22 M



LTF

Professional gun with patented LTF technology and insulated outlet suitable for lances with swivel screw coupling.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 710	M22 M	M22 M



LTF

Professional gun with patented LTF technology and insulated outlet suitable for lances with swivel screw coupling.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 720	M22 M	M22 M swivel



LTF

Professional gun with patented LTF technology and lance swivel ST-345.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 801	1/4" F swivel	3/8" F swivel



LTF

Professional gun with patented LTF technology and Variopress. Variopress regulates the water quantity and serves for the adjustment of pressure.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 810	1/4" F	3/8" F



LTF

Professional gun with patented LTF technology and Variopress. Variopress regulates the water quantity and serves for the adjustment of pressure.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 830	M22 M	M22 M swivel



LTF

Professional gun with patented LTF technology and Variopress and coupling KW. Variopress regulates the water quantity and serves for the adjustment of pressure.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 632	coupling KW	3/8" F swivel

Suttner high pressure spray guns

ST-2300



Professional gun with coupling KW.
Max. 310 bar / 45 l/min / 150 °C



Professional gun with extension ST-9.1 260 mm and coupling KW.
Max. 310 bar / 45 l/min / 150 °C

Plug KW



Plug KW : 1/4" F

R+M Nr.
040 001 255

R+M Nr.  
202 300 560 coupling KW 3/8" F

R+M Nr.  
202 300 681 coupling KW 3/8" F

O-ring



O-ring for coupling KW

R+M Nr.
050 000 248



Professional gun with coupling KW.
Max. 310 bar / 45 l/min / 150 °C



Professional gun with extension ST-9.1 260 mm and coupling KW.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.  
202 300 570 coupling KW 3/8" F swivel

R+M Nr.  
202 300 682 coupling KW 3/8" F swivel



Professional gun with coupling KW.
Max. 310 bar / 45 l/min / 150 °C



Professional gun with extension ST-9.1 260 mm and coupling KW.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.  
202 300 605 coupling KW M22 M swivel

R+M Nr.  
202 300 684 coupling KW M22 M

Coupling KW

Spare coupling for ST-2300 / ST-2600 with coupling KW



R+M Nr.
202 300 301

R+M Nr.
202 300 306

R+M Nr.
202 300 304

R+M Nr.
202 300 303

Symbols  outlet  inlet

Suttner high pressure spray guns

ST-2600



Professional gun with patented LTF technology. Gun with extension ST-9.1 260 mm and coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 581	coupling KW	3/8" F



Professional gun with patented LTF technology. Gun with extension ST-9.1 260 mm and coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 582	coupling KW	3/8" F swivel



Professional gun with patented LTF technology. Gun with extension ST-9.1 260 mm and coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 684	coupling KW	M22 M

ST-345 lance swivel



1/4" F : 1/4" M. Lance swivel for spray guns ST-2300 / ST-2600



R+M Nr.
200 345 500



Professional gun with patented LTF technology and coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 540	coupling KW	3/8" F



Professional gun with patented LTF technology and coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 545	coupling KW	3/8" F swivel



Professional gun with patented LTF technology and coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 625	coupling KW	M22 M swivel

ST-345 lance swivel



1/4" F : 3/8" F

R+M Nr.
200 301 050



1/4" F : M22 M

R+M Nr.
200 301 060



Repair kit ST-301

R+M Nr.
200 300 100

Valves complete



ST-2300 / ST-2600

R+M Nr.
202 300 490

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Suttner high pressure spray guns

ST-2300



Professional gun with extension ST-9.1 350 mm and M22 F.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 860	M22 F	M22 M



Professional gun with extension ST-9.9 370 mm and M22 F.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 701	M22 F	M22 M swivel

ST-2600



Professional gun with patented LTF technology. Gun with extension ST-9.1 350 mm and M22 F.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 860	M22 F	M22 M



Professional gun with patented LTF technology. Gun with extension ST-9.9 370 mm and M22 F.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 701	M22 F	M22 M swivel

ST-2300



Professional gun with extension 340 mm and M22 F.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 640	M22 F	M22 M swivel



Professional gun with extension 340 mm and M22 F.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 685	M22 F	3/8" M

Valves complete ST-2300 / ST-2600



202 300 640,
202 300 860,
202 300 685 and
202 300 701

R+M Nr.
202 300 490

Suttner high pressure spray guns

With the ST-2200 and ST-1700 high-pressure spray guns, we offer two professional solutions that combine top performance, durability, and

ergonomics. Both models are based on state-of-the-art technology and are designed for reliable continuous use.

ST-2200

ST-2200 – Maximum robustness for intensive professional use.
The first choice for demanding applications.

Ideal for: Car washes, industry, workshops, and high-traffic cleaning companies.

Your advantage:

Reliable performance and maximum service life.



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
202 200 500	1/4" F	3/8" F



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
202 200 550	1/4" IG	3/8" F swivel



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
202 200 520	1/4" F	3/8" M



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
202 200 570	coupling KW	3/8" F swivel

ST-1700

ST-1700 – Compact, ergonomic, professional.

The comfortable solution for smaller professional users. Smaller dimensions for optimal handling.

Ideal for: Commercial businesses, mobile cleaning services, and users who prioritize comfort and weight.

Your advantage:

Full professional performance in a compact, user-friendly design.



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
201 700 500	1/4" F	3/8" F



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
201 700 550	1/4" F	3/8" F swivel



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Max. 350 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
201 700 570	coupling KW	3/8" F swivel



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Weep version.
Max. 275 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
201 700 580	1/4" F	3/8" F swivel



Professional spray gun with LFT technology (Low Friction Trigger). Ergonomic handle with non-slip surface structure.
Freeze stop version.
Max. 275 bar / 40 l/min / 150 °C

R+M Nr.	☺	☺
201 700 582	1/4" F	3/8" F swivel

LFT - „Low Friction Trigger“
significantly reduces friction and wear, thus ensuring lower trigger forces and a longer service life of the high-pressure spray gun

Suttner high pressure spray guns

ST-2315



Professional gun. Ceramic ball, chemically resistant valve and acid-resistant stain. steel sealing seat. Designed for applications e.g. in the prewash of vehicles.
Max. 350 bar / 45 l/min / 150 °C



Professional gun. Ceramic ball, chemically resistant valve and acid-resistant stain. steel sealing seat. Designed for applications e.g. in the prewash of vehicles.
Max. 350 bar / 45 l/min / 150 °C

ST-2600



Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C



Professional gun with patented LTF technology. Coupling ST-247 stainless steel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☺	☺
202 315 500	1/4" F	3/8" F

R+M Nr.	☺	☺
202 315 550	1/4" F	3/8" F swivel

R+M Nr.	☺	☺
202 600 560	1/4" F	3/8" F

R+M Nr.	☺	☺
202 600 747	ST-247 swivel	ST-247 swivel

ST-2600



Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C



Professional gun with patented LTF technology.
Max. 310 bar / 45 l/min / 150 °C

ST-2605



Professional gun with patented LTF technology.
Max. 350 bar / 45 l/min / 150 °C

ST-2615



Professional gun. Ceramic ball, chemically resistant valve and acid-resistant stainless steel sealing seat. Designed for applications e.g. in the prewash of vehicles.
Max. 350 bar / 45 l/min / 150 °C

R+M Nr.	☺	☺
202 600 749	1/4" IG	TR22 AG

R+M Nr.	☺	☺
202 600 748	TR22 AG	TR22 AG

R+M Nr.	☺	☺
202 605 500	1/4" F	3/8" Stainl. steel

R+M Nr.	☺	☺
202 615 500	1/4" F	3/8" F

ST-2615



Professional gun. Ceramic ball, chemically resistant valve and acid-resistant stainless steel sealing seat. Designed for applications e.g. in the prewash of vehicles.
Max. 350 bar / 45 l/min / 150 °C



Professional gun. Ceramic ball, chemically resistant valve and acid-resistant stainless steel sealing seat. Designed for applications e.g. in the construction industry, road works or mining.
Max. 350 bar / 45 l/min / 150 °C



Professional gun. Ceramic ball, chemically resistant valve and acid-resistant stainless steel sealing seat. Designed for applications e.g. in the construction industry, road works or mining.
Max. 350 bar / 45 l/min / 150 °C

R+M Nr.	☺	☺
202 615 550	1/4" F	3/8" F swivel

R+M Nr.	☺	☺
202 615 615	1/4" F	3/8" F swivel

R+M Nr.	☺	☺
202 615 525	coupling KW	3/8" F swivel

Symbols ☺ outlet ☺ inlet

Suttner high pressure spray guns

ST-2635 Industrial


LTF+

Professional gun. Patented valve kit. Especially wear-resistant ball made out of carbide. Max. 400 bar / 35 l/min / 150 °C

R+M Nr.			Swivel	Trigger
202 635 550	1/4" F	3/8" F swivel	ST-311	black/red
202 635 555	1/4" F	3/8" F swivel	ST-303	black/grey


LTF+

Professional gun with coupling KW. Patented valve kit. Especially wear-resistant ball made out of carbide. Max. 400 bar / 35 l/min / 150 °C

R+M Nr.			Swivel	Trigger
202 635 570	Coupling KW	3/8" F swivel	ST-311	black/red
202 635 575	Coupling KW	3/8" F swivel	ST-303	black/grey


LTF+
K

Professional gun with insulated outlet suitable for lances with swivel screw coupling. Patented valve kit. Especially wear-resistant ball made out of carbide. Swivel made out of stainless steel.

Max. 400 bar / 35 l/min / 150 °C

R+M Nr.		
202 635 720	M22 M	M22 M swivel

ST-311 swivel



1/4" F : 3/8" F

R+M Nr.
200 311 050



1/4" F : M22 M

R+M Nr.
200 311 060



Repair kit ST-311

R+M Nr.
200 300 100

LTF+ - Low Trigger Force + 90 % reduced holding force and 55 % reduced trigger force against usual market guns.

easyfarm365+® spray guns



LTF

Professional gun with coupling KW.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.	☞	☜
202 620 655	coupling KW	1/2" F swivel



LTF

Professional gun with coupling
ST-3100.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.	☞	☜
202 620 650	ST-3100	1/2" F swivel



LTF

Professional gun.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.	☞	☜
202 620 660	3/8" F	1/2" F swivel

ST-340 swivel



1/4" F : 1/2" F

R+M Nr.
200 340 520



Repair kit ST-340

R+M Nr.
200 340 150

Valves complete



ST-2315, ST-2615

R+M Nr.
202 315 490



ST-2600, ST-2605

R+M Nr.
202 300 490



ST-2635 Industrial

R+M Nr.
202 300 492



easyfarm365+®

R+M Nr.
202 620 491

LTF - Low Trigger Force 90 % reduced holding force and
40 % reduced trigger force against usual market guns.

Suttner high pressure spray guns

ST-810



Max. 210 bar / 30 l/min / 150 °C

R+M Nr.	☞	☜
200 810 740	M22 M	M22 M



Max. 210 bar / 30 l/min / 150 °C

R+M Nr.	☞	☜
200 810 530	1/4" F	1/4" F



Gun with extension 340 mm and M22 F.
Max. 210 bar / 30 l/min / 150 °C

R+M Nr.	☞	☜
200 810 750	M22 F	M22 M

ST-810



Valve complete

R+M Nr.
200 810 492

ST-860



Gun with PEEK piston.
Max. 210 bar / 30 l/min / 100 °C

R+M Nr.	☞	☜
200 860 500	1/4" F	1/4" F



Gun with PEEK piston.
Max. 210 bar / 30 l/min / 100 °C

R+M Nr.	☞	☜
200 860 520	M22 M	M22 M



Valve complete ST-860

R+M Nr.
200 860 490

Symbols ☞ outlet ☜ inlet

Suttner high pressure spray guns

ST-1100



Professional gun.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 500	1/4" F	3/8" F



Professional gun.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 540	1/4" F	3/8" F swivel



Professional gun.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 545	M22 M	M22 M



Professional gun. Weep version.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 535	1/4" F	3/8" F



Professional gun. Weep version.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 530	1/4" F	3/8" F swivel




Professional gun ST-1100 with coupling KW.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 560	coupling KW	3/8" F



Professional gun without valve.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 570	1/4" F	3/8" F swivel

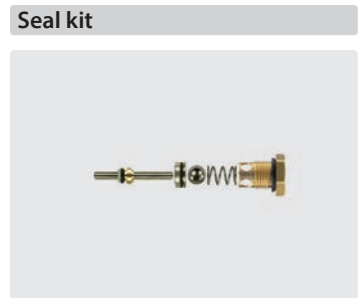

ST-1100

R+M Nr.
201 100 403



Professional gun with extension 340 mm and M22 F.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 522	M22 F	3/8" F

Suttner high pressure spray guns

ST-1500



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 500	1/4" F	3/8" F



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 560	1/4" F	3/8" F swivel



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 550	1/4" F	M22 M



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 545	M22 M	M22 M



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 760	M22 F	M22 M



Professional gun. Freeze stop version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 580	1/4" F	3/8" F



Professional gun. Freeze stop version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 581	1/4" F	3/8" F swivel



Professional gun. Weep version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 620	1/4" F	3/8" F



Professional gun without valve.
Max. 275 bar / 45 l/min / 150 °C


R+M Nr.		
201 500 750	1/4" F	3/8" F

ST-300 swivel



1/4" F : 3/8" F. ST-1500


R+M Nr.
200 300 050

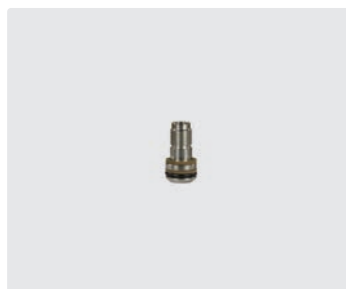

Repair kit ST-300

R+M Nr.
200 300 100

Repair kit ST-1500

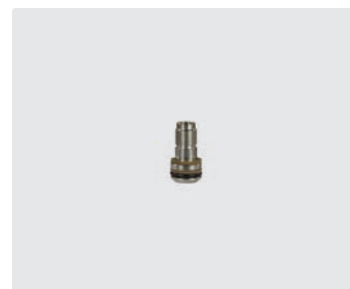

ST-1100. Swivel

R+M Nr.
200 300 100

Valves complete for ST-1500




ST-1500

R+M Nr.
202 000 044



ST-1500 weep

R+M Nr.
202 000 045



ST-1500 freeze stop

R+M Nr.
202 000 101

Symbols outlet inlet

R+M EcoLine No. ONE

R+M EcoLine No. ONE

R+M EcoLine No. ONE ergonomic design - innovative - reliable



Professional gun R+M EcoLine No. ONE.
Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 500	1/4" F	3/8" F



Professional gun R+M EcoLine No. ONE.
Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 550	1/4" F	M22 M



Professional gun R+M EcoLine No. ONE.
Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 580	M22 M	M22 M



Professional gun R+M EcoLine No. ONE.
Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 590	M22 M	10 mm



Professional gun R+M EcoLine No. ONE.
Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 591	M22 M	11 mm



Professional gun R+M EcoLine No. ONE with coupling KW.
Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 560	coupling KW	3/8" F
507 001 562	coupling KW	M22 M

Valve complete



R+M Nr.
202 000 044

Piston rod



R+M Nr.
201 000 900

ST-300 swivel



3/8" M : 3/8" F

R+M Nr.
200 300 010



Repair kit ST-300

R+M Nr.
200 300 100

R+M EcoLine No. ONE



Professional gun R+M EcoLine No. ONE with lance 900 mm zinc-plated steel, insulation ST-28 Cool & Compact 300 mm and nozzle protector ST-10 without nozzle. Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 790	1/4" F NPT	3/8" F



Professional gun R+M EcoLine No. ONE with lance 900 mm zinc-plated steel, insulation ST-28 Cool & Compact 300 mm and nozzle protector without tip. Max. 250 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
507 001 951	nozzle protector	M22 M

Suttner steam guns

The steam guns of the series ST-4000 and ST-860D are the ideal solution for cleaning tasks with steam. Both series are designed for a medium temperature of up to 200 °C and for a working pressure of max. 20 bar. By means of a specifically produced valve housing with 3/4" F made out of aluminium the ST-4000 is suitable for extremely high flow rates. The ST-860D is unbeatable in case of small and medium flow rates.

Apart from being enormously resistant to high temperatures the sealing copolymer is suitable for all liquids based on mineral oil as well as for inorganic acids, alkaline solutions, alcohol and anti-corrosion liquids based on amines and seawater or on their mixtures.

The fact that the hose connection is positioned in the front of the gun positively effects the professional handling with the gun as well as the heat radiation close to hand and body.

ST-860D steam gun



Professional steam gun ST-860D.
Max. 20 bar / 200 °C

R+M Nr.		
200 860 550	1/4" F	1/4" F

ST-860D steam gun with lance



Professional steam gun with lance stainless steel 400 mm, vented handle ST-9.1 220 mm and nozzle protector ST-12 without nozzle.
Max. 20 bar / 200 °C

R+M Nr.		
200 860 555	nozzle protector ST-12	1/4" F

ST-4000 steam guns with lance



Professional steam gun with lance stainless steel, vented handle ST-9 380 mm and steam low pressure nozzle made out of stainless steel.
Max. 20 bar / 200 °C

R+M Nr.		
204 000 500	500 mm	3/4" F
204 000 520	1,000 mm	3/4" F

ST-4000 steam gun weep version with lance



Professional steam gun ST-4000 weep version with lance stainless steel, vented handle ST-9 380 mm and steam low pressure nozzle made out of stainless steel. Max. 20 bar / 200 °C

R+M Nr.		
204 000 560	1,000 mm	3/4" F

Suttner foam guns

ST-3225 HP



Professional hp gun with progressive closing system and coupling ST-3100. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 60 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 550	coupling ST-3100	1/2" F swivel



Professional hp gun with progressive closing system. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 60 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 545	1/2" F	1/2" F swivel

ST-3225 LP



Professional gun with progressive closing system, locking in opened position and coupling ST-3100. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 24.5 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 650	coupling ST-3100	1/2" F swivel



Professional gun with progressive closing system and locking in opened position. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 24.5 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 645	1/2" F	1/2" F swivel



Suttner spray guns

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 560	coupling KW	3/8" F

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 575	coupling KW	3/8" F swivel

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 565	coupling KW	M22 M

Symbols  outlet  inlet  length

Suttner spray guns

ST-2700



Professional gun with patented LTF technology.
Stainless steel.
Gun for industrial cleaning applications.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 500	1/4" F	3/8" F

ST-2715



Professional gun with patented LTF technology.
Stainless steel. Ceramic ball, chemically resistant
valve and acid-resistant stainless steel sealing
seat. Gun for industrial cleaning applications with
abrasive mediums.
Max. 350 bar / 45 l/min / 150 °C

R+M Nr.		
202 715 500	1/4" F	3/8" F



Professional gun with patented LTF technology.
Stainless steel. Ceramic ball, chemically resistant
valve and acid-resistant stainless steel sealing
seat. Gun for industrial cleaning applications with
abrasive mediums.
Max. 350 bar / 45 l/min / 150 °C

R+M Nr.		
202 715 580	M22 M	M22 M swivel

ST-2720



Professional gun with patented LTF technology.
Stainless steel.
Particularly designed for high flow rates.
Suitable for e.g. municipal cleaning applications.
Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 500	1/4" F	3/8" F

Coupling KW



Spare coupling for
ST-2700 with
coupling KW

R+M Nr.
202 700 301

Spare coupling for
ST-2700 with
coupling KW


R+M Nr.
202 700 306



Made out of plastics intended to come into contact with food-
stuffs according to Regulation (EC) No. 1935/2004.
Especially designed for applications in the food industry.



Valves complete

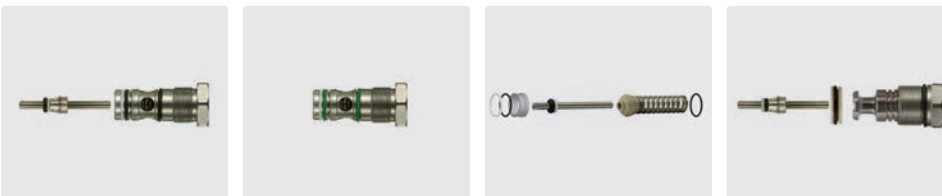

ST-2700

R+M Nr.
202 700 490

ST-2715. Ceramic ball

R+M Nr.
202 700 445


ST-2720

R+M Nr.
202 710 490

ST-2725

R+M Nr.
202 725 490

ST-340 swivel

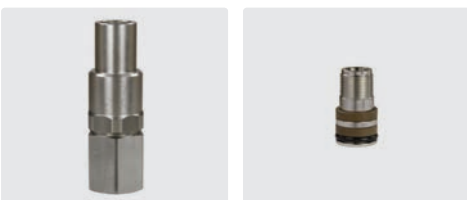

1/4" F : 1/2" F

R+M Nr.
200 340 050

Repair kit ST-340

R+M Nr.
200 340 100

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force
against usual market guns.

Suttner spray guns

ST-2320



Professional gun. Application, e.g. in foam and rinsing applications in the food industry. Stainless steel/brass. Valve piston made of stainless steel. PEEK seat. EPDM seal. Max. 150 bar / 80 l/min. / 150 °C

R+M Nr.		
202 320 565	1/2" F	1/2" F swivel.

ST-2320 with coupling ST-3100



Professional gun with coupling ST-3100. Application, e.g. in foam and rinsing applications in the food industry. Stainless steel/brass. Valve piston made of stainless steel. PEEK seat. EPDM seal. Max. 150 bar / 80 l/min. / 150 °C

R+M Nr.		
202 320 566	coupling ST-3100	1/2" F swivel


ST-2320 with adjustable nozzle ST-51.1



Professional gun with adjustable nozzle ST-51.1. Application, e.g. in foam and rinsing applications in the food industry. Stainless steel/brass. Valve piston made of stainless steel. PEEK seat. EPDM seal. Max. 150 bar / 80 l/min. / 150 °C

R+M Nr.		
202 320 567	nozzle ST-51.1	1/2" F swivel

Repair kit ST-2320

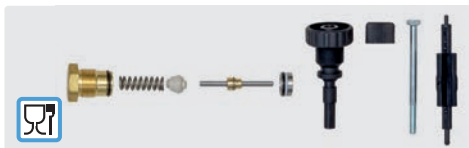

R+M Nr.
202 320 495

How the ST-2320 works with the adjustable nozzle ST-51.1



Made out of plastics intended to come into contact with food-stuffs according to Regulation (EC) No. 1935/2004. Especially designed for applications in the food industry.



Suttner foam guns

ST-2725 with coupling ST-3100



Professional gun with patented LTF technology and progressive closing system. Gun with coupling ST-3100. Field of application: foam and rinsing applications in the food industry etc. Stainless steel. Chemically resistant valve piston stainless steel. PEEK piston. Max. 80 bar / 80 l/min / 150 °C

R+M Nr.		
202 725 550	coupling ST-3100	1/2" F swivel

ST-2725



Professional gun with patented LTF technology and progressive closing system. Field of application: foam and rinsing applications in the food industry etc. Stainless steel. Chemically resistant valve piston stainless steel. PEEK piston. Max. 80 bar / 80 l/min / 150 °C

R+M Nr.		
202 725 535	1/2" F	1/2" F swivel

ST-2720



Professional gun with patented LTF technology. Stainless steel. Suitable for e.g. huge water amounts in the food industry. PEEK valve cone enables use in low pressure. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 530	3/8" F	1/2" F

ST-2720 with coupling ST-3100



Professional gun with patented LTF technology. Gun with coupling ST-3100. Stainless steel. Suitable for e.g. huge water amounts in the food industry. PEEK valve cone enables use in low pressure. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 550	coupling ST-3100	1/2" F swivel

ST-2620



Professional gun with patented LTF technology. Gun with insulated stainless steel lance 300 mm and nozzle 50° 200. Gun brass. Lance stainless steel. Field of application: foam applications in the prewash of vehicles etc. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 620 910	nozzle 50° 200	1/2" F swivel

Wall mount



Stainless steel. Wall mount for Suttner high pressure guns with lance or twin lance

R+M Nr.
040 002 055



Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004. Especially designed for applications in the food industry.



LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Suttner foam guns

ST-3100



Professional gun with progressive closing system. Gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 805	coupling ST-3100	1/2" F swivel



Professional gun with progressive closing system. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 840	3/8" F	1/2" F



Professional gun with progressive closing system. Gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 810	coupling ST-3100	1/2" F

ST-3100



Professional gun with progressive closing system. Gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 820	coupling ST-3100	1/2" F

ST-340



1/2" M : 1/2" F

R+M Nr.
200 340 010



Repair kit ST-340

R+M Nr.
200 340 100


ST-3100



Seal kit

R+M Nr.
203 100 400

ST-3300



Seal kit

R+M Nr.
203 300 490

ST-3300



Professional high-flow gun. Gun with coupling ST-45. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Max. 150 bar / 100 l/min / 150 °C

R+M Nr.		
203 300 500	coupling ST-45	1/2" F



Professional high-flow gun. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Max. 150 bar / 100 l/min / 150 °C

R+M Nr.		
203 300 510	1/2" F	1/2" F

Symbols outlet inlet

Suttner 600 bar ultra high pressure guns

ST-3600



Professional ultra high pressure gun.
Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 545	1/4" F	1/2" F



Professional ultra high pressure gun.
Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 550	1/2" F	1/2" F



Professional ultra high pressure gun.
Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 570	1/2" F	1/2" F swivel



Professional ultra high pressure gun with
coupling ST-45. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 655	coupling ST-45	3/8" F



Professional ultra high pressure gun with
coupling ST-45. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 650	coupling ST-45	1/2" F



ST-3900 shoulder supports. New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N. Variably adjustable ST-3900. Swiveling coupling. Suitable for guns ST-3600 / ST-3500.

R+M Nr.	telescope 	
203 900 500	340 - 500 mm	505 - 675 mm

ST-351 swivel



1/2" M : 1/2" F.
Max. 600 bar

R+M Nr.
200 351 510



Repair kit swivel ST-351

R+M Nr.
200 351 400

Seal kits ST-740



O-ring


R+M Nr.
050 000 408



Back ring

R+M Nr.
050 000 407

Seal kits ST-3600



R+M Nr.
203 600 490


Suttner 600 bar ultra high pressure guns

ST-3600



Professional ultra high pressure gun with extension ST-9.1 380 mm and quick screw coupling ST-740. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 532	M24 F	M24 M swivel

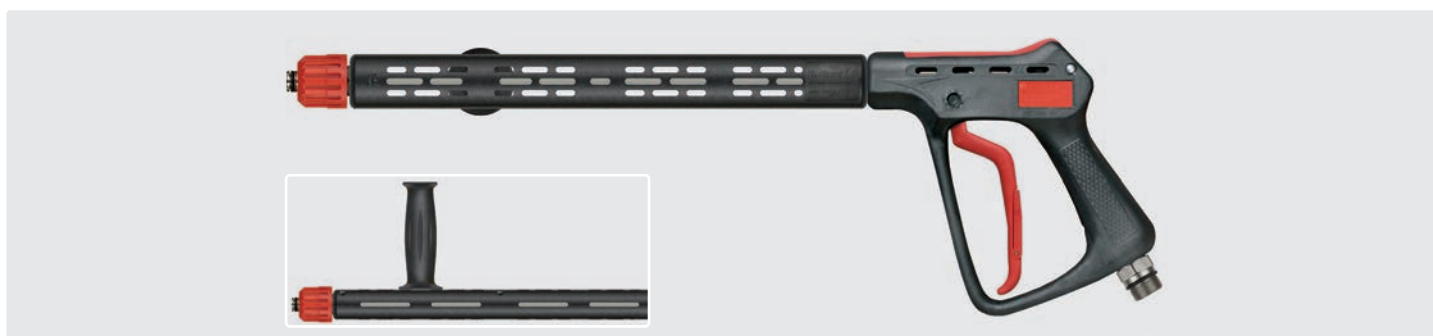

Professional ultra high pressure gun with extension ST-9.1 380 mm and quick screw coupling ST-740. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 530	M24 F	M24 M

Ultra high pressure lances



M24 M. Lance 400 mm with nozzle protector ST-10 without nozzle. Lance for ultra high pressure guns with extension ST-9. Max. 600 bar / 150 °C

R+M Nr.		
203 600 470	1/4" F NPT	M24 M

Symbols  outlet  inlet  length

Suttner 500 bar ultra high pressure guns

ST-3600



Professional ultra high pressure gun.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 556	M22 F	M22 M




Professional ultra high pressure gun.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 555	1/4" F	M22 M



ST-3900 shoulder supports. New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N. Variably adjustable ST-3900. Swiveling coupling. Suitable for guns ST-3600 / ST-3500.


R+M Nr.	telescope 	
203 900 500	340 - 500 mm	505 - 675 mm

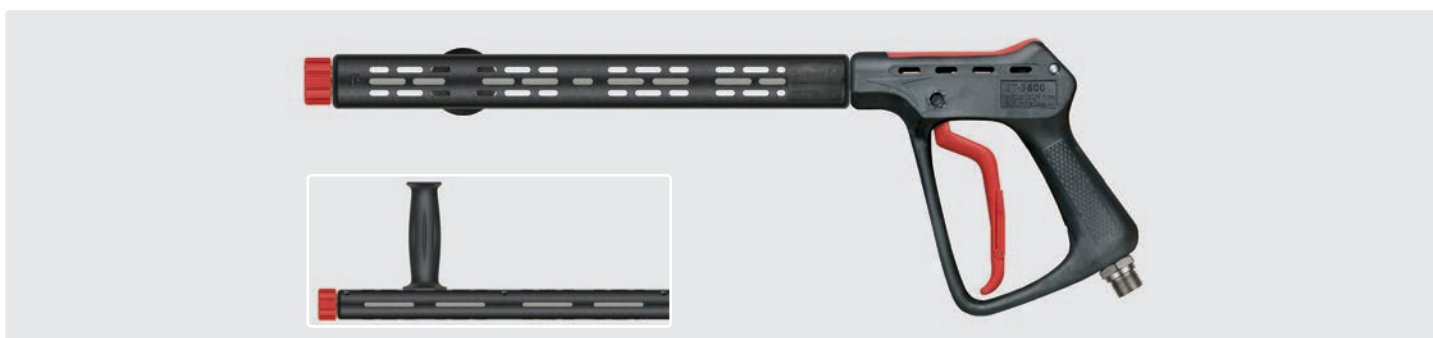

Professional ultra high pressure gun with extension ST-9 380 mm, grip and M22 F. Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 535	M22 F	M22 M


Ultra high pressure lance

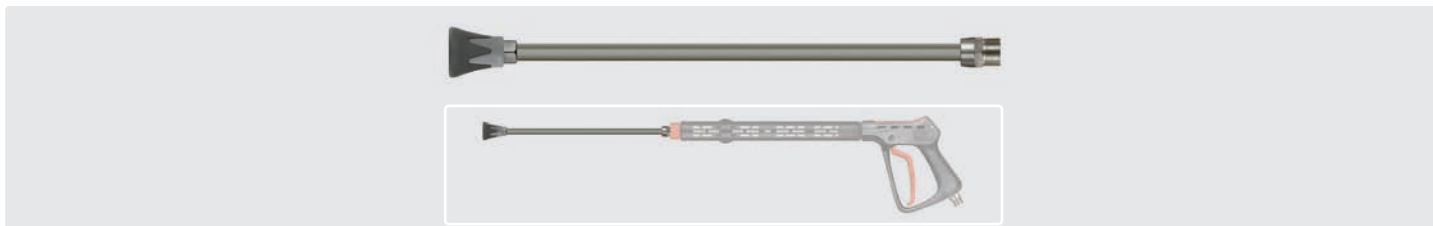

M22 M. Lance 335 mm with nozzle protector ST-10 without nozzle. Lance for ultra high pressure guns with extension ST-9. Max. 500 bar / 150 °C

R+M Nr.		
200 000 231	1/4" F NPT	M22 M

Seal kit ST-3600



R+M Nr.
203 600 490

Symbols  outlet  inlet  length  ISO insulation  material

ST-2750 - the lightweight among the 500 bar spray guns

ST-2750



Professional ultra high pressure gun with patented LTF.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	⊖	⊕
202 750 500	1/4" F	3/8" F



Professional ultra high pressure gun with patented LTF.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	⊖	⊕
202 750 535	M22 F	M22 M



Professional ultra high pressure gun with patented LTF. Gun with insulated outlet suitable for lances with swivel screw coupling.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	⊖	⊕
202 750 570	M22 M	M22 M



Professional ultra high pressure gun with extension ST-9.1 340 mm and quick screw coupling ST-740.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	⊖	⊕
202 750 620	M24 F	3/8" F

Shoulder supports



New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N.

R+M Nr.
202 705 590

ST-2750



Professional ultra high pressure gun with patented LTF and lance with insulation ST-9, side handle and nozzle protector ST-10 without high pressure nozzle. Max. 500 bar / 30 l/min / 150 °C

R+M Nr.	⊖	⊕	ISO	↔	[M]
202 750 900	1/4" F NPT	3/8" F	760 mm	1,000 mm	stainless steel

Valve complete




ST-2750

R+M Nr.
202 750 495

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Ultra high pressure lance

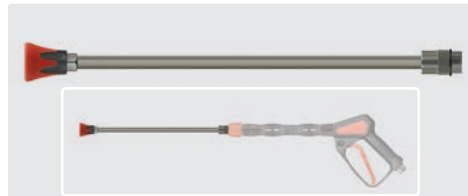

M24 M. Lance 400 mm with nozzle protector ST-10 without nozzle. Lance for ultra high pressure guns with extension ST-9.1.
Max. 600 bar / 150 °C


R+M Nr.	⊖	⊕
203 600 470	1/4" F NPT	M24 M

ST-350 swivel



3/8" M : 3/8" F.
Max. 500 bar

R+M Nr.
200 350 010



Repair kit ST-350

R+M Nr.
200 300 120

kommunal365+

ST-2320



Professional gun.
Max. 150 bar / 80 l/min / 150 °C

R+M Nr.		
202 320 500	1/4" F	1/2" F



Professional gun.
Max. 150 bar / 80 l/min / 150 °C

R+M Nr.		
202 320 510	1/2" F	1/2" F



Professional gun.
Max. 150 bar / 80 l/min / 150 °C

R+M Nr.		
202 320 520	1/2" F	1/2" F swivel

ST-340 swivel



1/4" F : 1/2" F

R+M Nr.
200 340 520



Repair kit ST-340

R+M Nr.
200 340 100

Seal kit



R+M Nr.
202 320 495

Shoulder support



New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N.

R+M Nr.
202 705 590

Suttner high pressure spray guns

ST-2000



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
202 000 500	1/4" F	3/8" F



Professional gun.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
202 000 590	1/4" F	3/8" F swivel

ST-300 swivel



1/4" F : 3/8" F. ST-2000

R+M Nr.
200 300 050



Repair kit ST-300

R+M Nr.
200 300 100

Valve complete



ST-2000

R+M Nr.
202 000 044



ST-2000, resistant to chemicals

R+M Nr.
202 000 054

Suttner high pressure spray guns

ST-3240



Professional In-Line Spray Gun.
Stainless Steel.
Application e.g. municipal cleaning, hydro-excavation, agricultural industry.
Max. 310 bar / 120 l/min / 100 °C

LTF

R+M Nr.		
203 240 500	1/2" F	1/2" F

ST-3500 high-flow spray guns



Professional high-flow gun. Stainless steel.
Industrial high pressure cleaning and jetting gun
for municipal cleaning and other industrial cleaning
tasks. Valve piston hardened stainless steel.
Max. 350 bar / 200 l/min / 150 °C



Professional high-flow gun. Stainless steel.
Industrial high pressure cleaning and jetting gun
for municipal cleaning and other industrial cleaning
tasks. Valve piston hardened stainless steel. Swivel
stainless steel.
Max. 350 bar / 200 l/min / 150 °C

Shoulder support ST-3900



ST-3900 shoulder supports. New European
Union guidelines imperatively prescribe the use
of shoulder supports for cleaning applications
exceeding an operating reaction force of 150 N.
Variably adjustable ST-3900. Swiveling coupling.
Suitable for guns ST-3600 / ST-3500.

R+M Nr.		
203 500 500	1/2" F	1/2" F

R+M Nr.		
203 500 550	1/2" F	1/2" F swivel

R+M Nr.	telescope 	
203 900 500	340 - 500 mm	505 - 675 mm

Longcast nozzle

- » Stainless steel
- » Applications: cleaning of shafts
- » Extremely high impact force
- » Long reach
- » Nozzle protection
- » Max. 500 bar / 150 °C


R+M Nr.		
040 001 963	5 mm	3/4" M

Industrial high-flow gun ST-3500, lance 500 mm with side handle. Long
Cast Nozzle.
Max. 350 bar / 200 l/min / 150 °C

Application:

- » Man hole cleaning
- » Paper Industry. Removal of snow balls during fibre jetting
- » Cleaning Tasks in Off-Shore or Marine Applications

R+M Nr.		
203 500 560	750 mm	1/2" F swivel

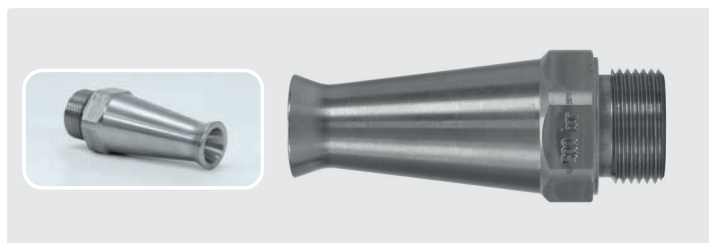

Symbols  outlet  inlet  length  nozzle

Longcast lances



3/8" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2300, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 45 l/min / 100 °C

R+M Nr.		
200 078 510	nozzle protector without nozzle	3/8" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2320, grip aside and nozzle protector made out of plastic without nozzle.
Max. 150 bar / 80 l/min / 100 °C

R+M Nr.		
200 078 520	nozzle protector without nozzle	1/2" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun easyfarm365+, grip aside and nozzle protector made out of plastic without nozzle.
Max. 250 bar / 60 l/min / 100 °C

R+M Nr.		
200 078 530	nozzle protector without nozzle	1/2" F swivel



1/4" M. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 130 l/min / 100 °C

R+M Nr.		
200 078 500	nozzle protector without nozzle	1/4" M


The longcast lance can be connected to a low pressure pump, to a high pressure pump, to the public water system or to the extinguishing water network.

The lance works in the medium pressure range. By means of its very good solidity, good handling and compactness the lance is especially suitable for the intensive use.

The lateral hand grip makes a stepless adjustment of the water jet during the operation possible. A long casting point jet or a progressive, conical spray jet can be set.

In order to realize ideal cleaning results the nozzle size needs to be adapted to the pump performance (pressure and flow rate).


Nozzles for longcast lances



M15x1 M. Stainless steel

R+M Nr.	D
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 418	1.8 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm
200 078 440	4.0 mm
200 078 445	4.5 mm
200 078 450	5.0 mm
200 078 470	7.0 mm

functioning of longcast lance

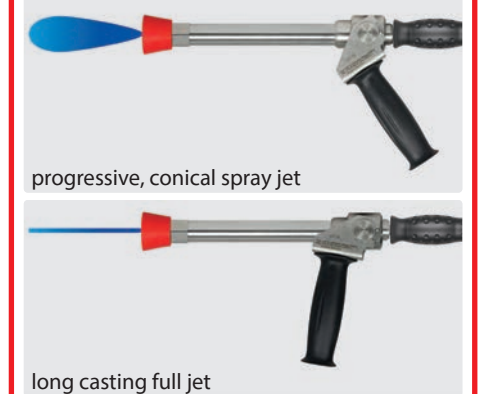

progressive, conical spray jet

long casting full jet




easywash365+® spray guns by Suttner

Freeze stop valves in **easywash365+®** spray guns and freeze stop spray guns

The valves are made entirely of non-rusting materials.

Contrary to all commercially available freeze stop valves, the actual internal valve body is made of a very wear-resistant, partially crystalline thermoplastic. This difference significantly increases the robustness, reliability as well as preciseness in switching.

What is the difference between the versions freeze stop and weep?

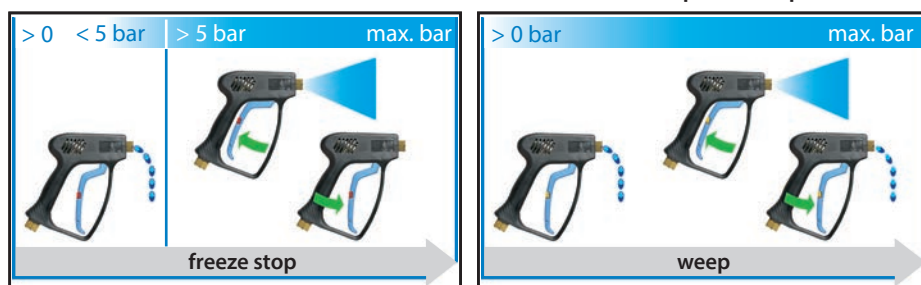

easywash365+® standard



LTF

Professional gun. Standard.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 518	1/4" F	3/8" F swivel

easywash365+® weep



LTF

Professional gun. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 528	1/4" F	3/8" F swivel

easywash365+® freeze stop



LTF

Professional gun. Freeze stop version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 538	1/4" F	3/8" F swivel

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

easywash365+® standard



LTF

Professional gun with lance swivel ST-345.
Standard.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 802	1/4" F	3/8" F swivel

easywash365+® weep



LTF

Professional gun with lance swivel ST-345. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 803	1/4" F	3/8" F swivel

easywash365+® freeze stop



LTF

Professional gun with lance swivel ST-345. Freeze stop version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⊖	⊕
202 600 804	1/4" F	3/8" F swivel

Valves complete - easywash365+®



Standard

R+M Nr.
202 300 490



Weep

R+M Nr.
202 300 491



Freeze stop

R+M Nr.
202 300 457

ST-301 swivel - easywash365+®



1/4" F : 3/8" F

R+M Nr.
200 301 050



Repair kit ST-301

R+M Nr.
200 300 100

Symbols ⊖ outlet ⊕ inlet ⊔ nozzle

easywash365+® spray guns with swivels running in ball bearings by Suttner

- » High-quality, integrated maintenance-free swivel joint, corrosion-resistant and very smooth-running.
- » Extra-long service life of connected hoses guaranteed by the swivel protecting the hoses from twisting.
- » Convenient 360° handling in any cleaning application.
- » Max. 310 bar / 45 l/min / 150 °C.
- » Gun inlet: 3/8" F, swivelling, gun outlet: 1/4" F.
- » All guns with integrated ball-bearing swivel also feature the proven Low Trigger Force technology and are available with weep and freeze stop option or as standard version.


easywash365+® standard


Professional gun.
Standard.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⌀	Ⓒ
202 600 514	1/4" F	3/8" F swivel

easywash365+® weep


Professional gun.
Weep version.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⌀	Ⓒ
202 600 524	1/4" F	3/8" F swivel

easywash365+® freeze stop


Professional gun.
Freeze stop version.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	⌀	Ⓒ
202 600 534	1/4" F	3/8" F swivel

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Valves complete - easywash365+®


Standard

R+M Nr.
202 300 490



Weep

R+M Nr.
202 300 491



Freeze stop

R+M Nr.
202 300 457

easywash365+® - ball bearing swivel ST-303


1/4" F : 3/8" F. Stainless steel / nickel-plated brass

R+M Nr.
200 303 051

Suttner high pressure spray guns for self-service car wash

ST-1100 weep



Professional gun. Weep version.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 535	1/4" F	3/8" F

ST-1100 weep



Professional gun. Weep version.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 530	1/4" F	3/8" F swivel

ST-1100 without trigger



Professional gun without valve.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 570	1/4" F	3/8" F swivel

ST-1100



Repair kit swivel

R+M Nr.
200 300 100

ST-2300 freeze stop



Professional gun. Freeze stop version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 582	1/4" F	3/8" F swivel

ST-2300 weep



Professional gun. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 580	1/4" F	3/8" F

ST-2300 weep



Professional gun. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 581	1/4" F	3/8" F swivel

ST-2600 freeze stop



LTF

Professional gun with patented LTF technology.
Freeze stop version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 536	1/4" F	3/8" F swivel

ST-2600 weep



LTF

Professional gun with patented LTF technology.
Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 544	1/4" F	3/8" F swivel

Symbols  outlet  inlet

Suttner high pressure spray guns

ST-601 linear standard



Standard.

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
200 601 600	1/4" F	3/8" F

ST-601 linear freeze stop



limited stock

Freeze stop version.

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
200 601 601	1/4" F	3/8" F

ST-601 linear standard



limited stock

Standard.

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
200 601 661	1/4" F	M22x1.5 M swivel

ST-1500 freeze stop



Professional gun. Freeze stop version.

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 580	1/4" F	3/8" F

ST-1500 freeze stop



Professional gun. Freeze stop version.

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 581	1/4" F	3/8" F swivel

ST-1500 weep



Professional gun. Weep version.

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 620	1/4" F	3/8" F

ST-1500 without trigger



Professional gun without trigger.

Max. 275 bar / 45 l/min / 150 °C

ST-1500C



Professional gun. Ceramic ball, chemical resistant valve and acid and alkali resistant PEEK sealing seat.

FKM seals.

Stainless steel in- and outlet.


By using PEEK as sealing seat material, the gun is also particularly suitable for pre-spray and pre-wash applications in vehicle washing

Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 750	1/4" F	3/8" F

R+M Nr.		
201 500 572	1/4" F	3/8" F

ST-300 swivel

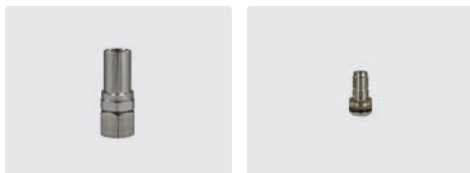


1/4" F : 3/8" F. ST-1500

Repair kit ST-300

R+M Nr.
200 300 050

R+M Nr.
200 300 100

ST-301 swivel

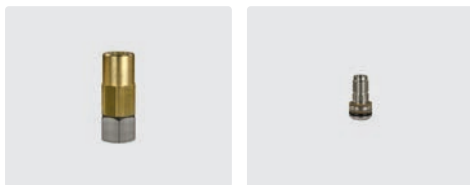


1/4" F : 3/8" F. ST-2300

Repair kit ST-301

R+M Nr.
200 301 050

R+M Nr.
200 300 100

Valves



ST-601



ST-2300. Freeze stop




ST-2300. Weep



ST-1500. Freeze stop



ST-1500. Weep



ST-1500C. ST-601 Resistant to chemicals

R+M Nr.
202 000 044

R+M Nr.
202 300 457

R+M Nr.
202 300 491

R+M Nr.
202 000 101

R+M Nr.
202 000 045

R+M Nr.
202 000 054

easywash365+® handles by Suttner



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 650	1/4" F	1/4" M



Stainless steel. Handle 20° bended.
easywash365+® blue. Max. 350 bar / 150 °C

R+M Nr.		
200 009 655	1/4" F	1/4" M



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 665	1/4" F	1/4" M



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 657	1/4" F	M18 M (CEL)



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 659	M18 F (DKOL)	M18 M (CEL)



Stainless steel. Retrofit kit.
M18 F (DKOL) : 1/4" M

R+M Nr.
200 009 480

easywash365+® lance swivels ST-345 by Suttner

The **easywash365+®** lance swivel guarantees improved ergonomics in the professional car wash and in the cleaning industry. The lance swivel is mounted between the brush lance or spray lance and the high pressure gun or the brush grip.



1/4" F : 1/4" M. 350 bar. Stainless.
RAL 5005

R+M Nr.
200 345 520



1/4" F : 1/4" M. 350 bar. Stainless

R+M Nr.
200 345 530



1/4" F : 1/4" M. 350 bar. Stainless

R+M Nr.
200 345 500



1/4" F : 1/4" M. 350 bar. Stainless.
easywash365+® blue

R+M Nr.
200 345 510

High pressure spray guns

RL22



Max. 310 bar / 40 l/min / 160 °C

R+M Nr.		
500 522 00	1/4" F	3/8" F



Max. 310 bar / 40 l/min / 160 °C

R+M Nr.		
500 522 01	1/4" F	3/8" F swivel

ST-550 foot valves



Housing stainless steel. Valve stainless steel. Rubber feet.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
200 550 600	1/4" F	1/4" F



Housing stainless steel. Valve stainless steel. Rubber feet.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
200 550 620	M22 F	M22 M

ST-540 foot valves



Incl. HP-gun ST-2605. Material housing powdercoated steel. Rubber feet.
Max. 350 bar / 45 l/min / 150 °C

R+M Nr.		
200 540 500	1/4" M	3/8" F



Incl. HP-gun ST-2750. Material housing powdercoated steel. Rubber feet.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
200 540 550	1/4" M	3/8" F

Symbols  outlet  inlet

Half-shell kits: Makeover of your gun



With effect from today, we enlarge the range of colours for our gun family ST-2300, ST-2600, and ST-2700. You can choose from green, blue, red, and yellow!

By means of our half-shell kits, it is possible to adapt the guns individually to your company's colour or to the one of your customers. By using different colours, the affiliation to a certain unit (e.g. rental business), user, or application is possible in an easy way, too.

Moreover, the guns can be used for allocation to different areas within the scope of the HACCP directive. In this respect, we offer further interesting products in different colours for lance clips, nozzle protectors, and plugs for rotating nozzles in Chapter 13, HACCP. This product range now features coloured insulated handles for lances with a length of 900 mm.

What would you like to mark in your colour? Select your appropriate half-shell kit, here!

If you like to have your corporate logo on the logo plate, please follow the instructions given on the following page: "Design your own Suttner gun".

Kit contains half shells, logo plate, trigger and trigger lock



R+M Nr.
202 300 473



R+M Nr.
202 300 474




R+M Nr.
202 300 471



R+M Nr.
202 300 472

Create your individual Suttner spray gun

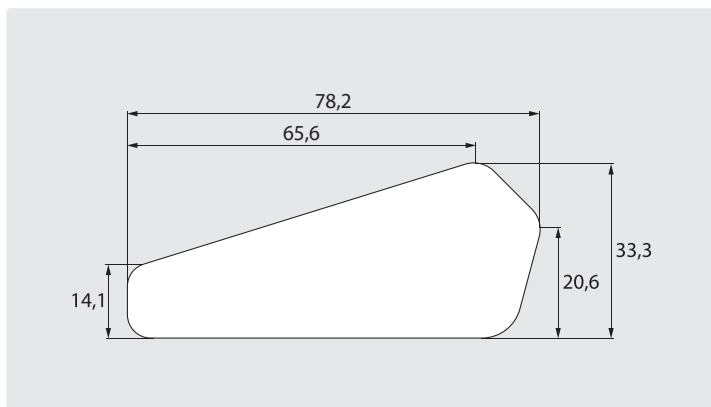

If you are honest with yourselves, will you not appreciate seeing your company's logo on your Suttner spray gun? Or do you prefer having the telephone number of your favourite restaurant or the web site of your football team on your spray gun? It's up to you. We will certainly let your dream come true.

In the following passage we show you how that works. These six steps have to be made:

Step 1 choose your model: ST-2300 or ST-2600

Step 2 determine your desired version

Step 3 state your favourite colour

Step 4 fill in the file with the label and return it to R+M. Please provide us your logo in one of the most common kinds of file (BMP, FES, GIF) and inform us about the typeface and typesize which you have used


Step 5 release the processed logo in writing

Step 6 Order injection moulding tool, incl. 250 signs for the price of only € 400

Spray guns without sign



R+M Nr.	TYP	☺	☺	VPE
202 600 501	ST-2600	1/4" F	3/8" F	50
202 600 549	ST-2600	coupling KW	3/8" F swivel	35
202 600 557	ST-2600	1/4" F	3/8" F swivel	50

R+M Nr.	TYP	☺	☺	VPE
202 300 501	ST-2300	1/4" F	3/8" F	50
202 300 521	ST-2300	1/4" F	M 22 M	50
202 300 551	ST-2300	1/4" F	3/8" F swivel	50
202 300 571	ST-2300	coupling KW	3/8" F swivel	35

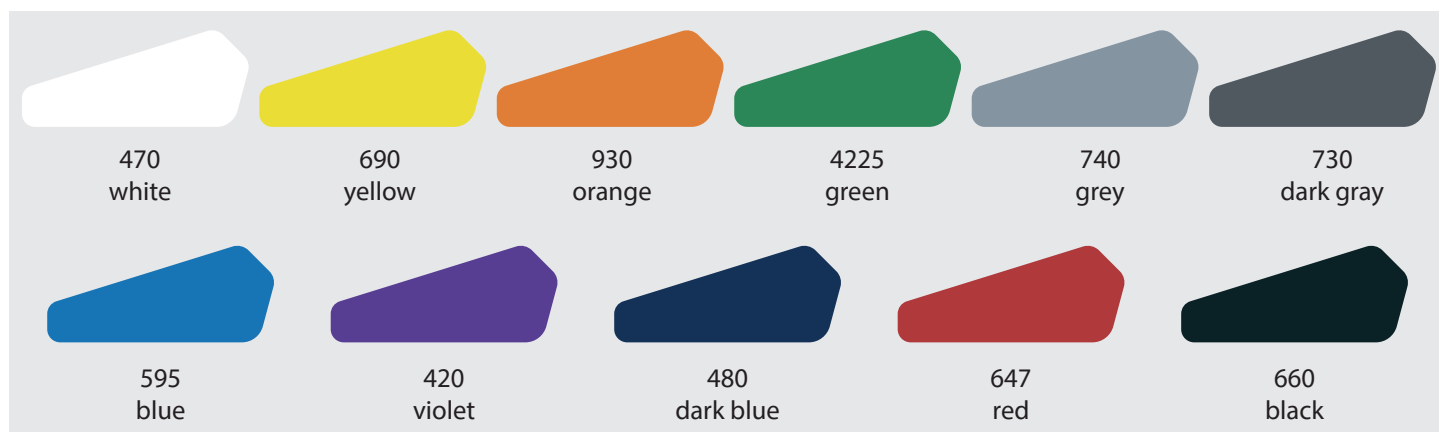

Symbols TYP type ☺ outlet ☺ inlet VPE packing unit

Create your individual Suttner vented handle

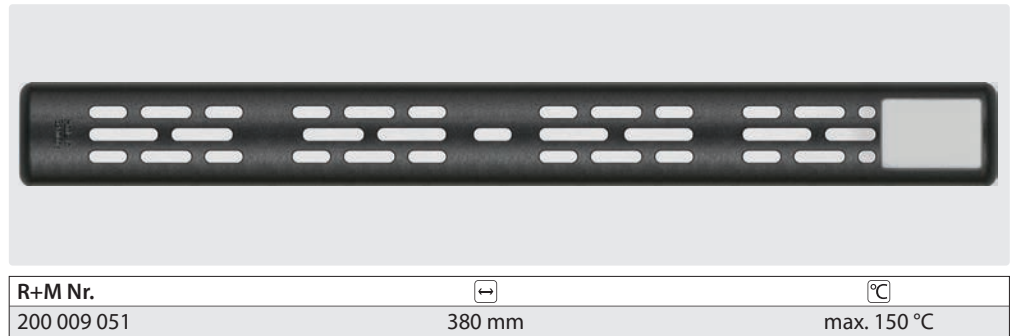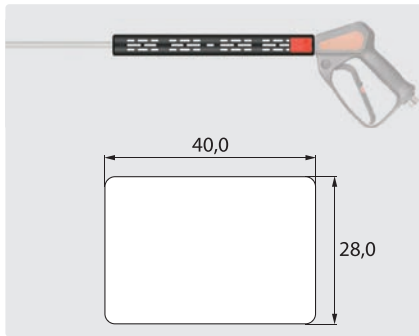

With effect from today we offer you the possibility to combine your personal spray guns ST-2300 and ST-2600 with your individual vented handle ST-9. It is suitable for all 1/4" lances and if required, a grip can be mounted on the side at any time. Furthermore, the vented handle can be pushed over the outlet of all Suttner spray guns so that both products form an aesthetic whole. In case of hot water applications the user is steadily protected.

Try to determine your favourite colour of your personal label and already start thinking about what you would like to have written on it or which emblem you would like to see on it. It is really up to you as you can give free rein to your creativity. We will certainly let your dream come true. By means of labelling your personal ST-9 you succeed in enhancing the product itself and also in making your company and brand better known.

Get to your personal vented handle ST-9 in only 4 steps!

Step 1 determine your favourite colour

Step 2 fill in the file with the label and return it to R+M. Please provide us your logo in one of the most common kinds of files (BMP, FES, GIF) and inform us about the typeface and type size which you have used


Step 3 release the processed label in writing

Step 4 Order injection moulding tool, incl. 240 signs for the price of only € 400




Gun exit connections


Plugs for spray guns with coupling KW

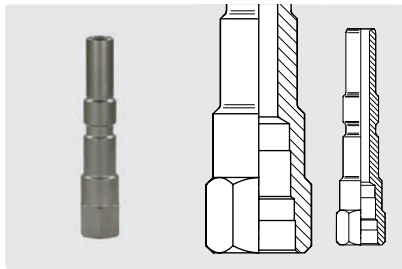

KW : 1/4" F. Stainless steel. SW 17.
For lances with vented handle

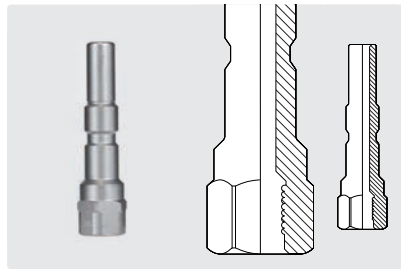

KW : 1/4" F. Stainless steel. SW 19.
Plug for moulded handles

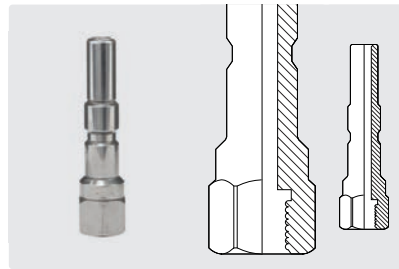

KW : 1/4" F. Polished stainless steel. SW 19.
For moulded handles. Plug for aluminium washer



Aluminium washer
for 1/4" F. $\varnothing$ 11 mm

R+M Nr.
040 003 080

R+M Nr.
040 001 255

R+M Nr.
040 001 248

R+M Nr. VPE
781 130 841 100



KW : M21 M.
Stainless steel. Brass.
Lances with quick
screw coupling



KW : M22 M.
Stainless steel. Brass.
Lances with quick
screw coupling



KW : M22 F.
Stainless steel. Brass.




Plug KW : 1/4" M.
stainless steel



KW : 1/4" M.
Polished stainless
steel



Plug KW : 1/4" F
with thread SW17.
Stainless steel

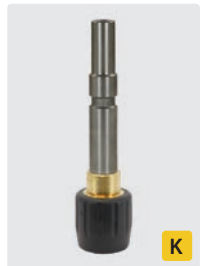

Nozzle protector
with plug KW.
Without tip. K

R+M Nr.
559 101

R+M Nr.
559 103

R+M Nr.
559 104

R+M Nr.
040 001 256

R+M Nr.
040 001 258

R+M Nr.
040 001 290

R+M Nr.
559 105

Coupling KW for spray guns



KW : 1/4" M.
Brass



KW : 1/4" M.
Stainless steel



KW : 1/4" M.
Stainless steel



KW : 1/4" F.
Brass



KW : M22 F.
Brass



KW : M22 M.
Brass



KW : M22 F.
Brass K

R+M Nr.
559 26

R+M Nr.
202 700 350

R+M Nr.
202 700 355

R+M Nr.
202 300 483

R+M Nr.
559 262

R+M Nr.
559 263

R+M Nr.
202 300 488

Coupling KW with ST-52.1 Variopress



Coupling KW :
Variopress 1/4" M.
Brass

R+M Nr.
559 264

O-ring



O-ring for coupling KW

Lip seals



Tool for assembly of lip seal



Lip seal for coupling KW

R+M Nr.
050 000 248

R+M Nr.
202 300 365

R+M Nr.
050 000 249

Bajonet adapter



1/4" F

M22 F long

HV M22 short

M22 M

R+M Nr.
200 000 440

R+M Nr.
559 980 500

R+M Nr.
559 980 505

R+M Nr.
559 980 510

Wall mount



Stainless steel. Wall mount for Suttner high pressure spray guns with lance or twin lance

R+M Nr.
040 002 055

Half lance exit connections

Connections for hobby half lances



Plug K : 1/4" F

Plug K : M22 F

Plug K : M22 M

Plug K : 1/4" F.
Plastic with brass
thread

Plug K : M22 M.
Plastic with brass
thread

Plug 8.8 :
M22 M. Brass.
Max. 250 bar / 100 °C

R+M Nr.
200 000 435

R+M Nr.
559 93

R+M Nr.
559 94


R+M Nr.
200 000 436

R+M Nr.
559 95

R+M Nr.
559 908 221




Plug Aqua : 1/4" F



Plug KW : 1/4" F




Plug KW : M22 F



Plug K : bayonet KW



M22 M : bayonet KW

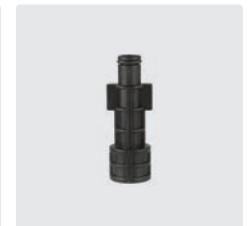

Plug : 1/4" F.
Suitable for Annovi

R+M Nr.
559 21

R+M Nr.
559 20

R+M Nr.
559 201

R+M Nr.
559 55

R+M Nr.
559 56

R+M Nr.
200 000 438




Bayonet KW.
Suitable for Lavor,
Annovi & Alto



Bayonet KW.
Suitable for Faip & Aqua



Plug Pro : 1/4" F



M22 F : M22 M.
Suitable for Servopress



Plug KR-Hobby : 1/4" F.
Stainless steel.
HEX 19.

R+M Nr.
559 58

R+M Nr.
559 59

R+M Nr.
200 000 439

R+M Nr.
565 67

R+M Nr.
040 001 209

Symbols diameter packing unit

Gun extensions



1/4" M. Lance with insulation ST-28 Cool & Compact.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 028 303	1/4" M	300 mm	330 mm	zinc-plated steel



1/4" M. Lance with insulation ST-29 Cool & Compact. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 029 303	1/4" M	300 mm	330 mm	stainless steel



1/4" M. Lance with insulation ST-9.1 and M22 F.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 009 730	M22 F	350 mm	stainless steel	
200 009 731	M22 F	350 mm	zinc-plated steel	



1/4" M. Lance with insulation ST-9.1 and coupling KW.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 009 750	coupling KW	260 mm	stainless steel	



1/4" M. Lance with insulation and M22 F.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
202 300 400	M22 F	340 mm	zinc-plated steel	



1/4" M. Lance with insulation ST-9.9 and M22 F.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 009 945	M22 F	370 mm	zinc-plated steel	



1/4" M. Lance with insulation ST-9.9 and M22 F.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 009 940	M22 F	370 mm	zinc-plated steel	



1/4" M. Lance with moulded handle.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
070 004 340	1/4" M	400 mm	440 mm	stainless steel



1/4" M. Lance with moulded handle.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
070 000 330	1/4" M	300 mm	330 mm	zinc-plated steel
070 000 240	1/4" M	400 mm	440 mm	zinc-plated steel



1/4" M. Lance with moulded handle.

Max. 400 bar / 150 °C

R+M Nr.		ISO		M
070 003 229	1/4" M	300 mm	330 mm	stainless steel
070 004 339	1/4" M	400 mm	440 mm	stainless steel

Gun extensions with handle

1/4" M. Lance with handle and insulation ST-28.2/ST-29.2 Cool & Compact. Max. 400 bar / 150 °C



R+M Nr.		ISO		M
200 028 204	1/4" M	400 mm	430 mm	zinc-plated
200 029 204	1/4" M	400 mm	430 mm	stainless steel



R+M Nr.		ISO		M
200 028 210	1/4" M	400 mm	1,000 mm	zinc-plated
200 029 210	1/4" M	400 mm	1,000 mm	stainless steel

Insulations for lances

Insulations ST-9.9



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 935



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 936


Vented handles ST-9



Vented handle 380 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 510

Adapter for lances



M18 M : TR20 F. K-Lock 8. Brass.
Max. 400 bar / 150° C

R+M Nr.
565 686



Accessories and spare parts for lances and twin lances	293
Accessories for wall cleaner	290
Adapter for lances	296
Complete lances	289
easyturn ST-9.4 – rotatable lances by Suttner	285
easyturn ST-9.7 – colored lances by Suttner	284
easywash365+® lances by Suttner	283, 286-287
Gun extensions	295
Gun extensions with handle	296
High-pressure telescopic lances accessories	291
High-pressure telescopic lances made of carbon	292
High-pressure telescopic lances made of carbon, accessories	292
Insulations for lances	296
Kit ST-85 Push & Pull	281
Lance bender	293
Lance holder	297
Lance holder, two-piece	296
Lances	260-269
Lances with ergonomic swivel screw coupling	270-271
Longcast lances	288
Nozzle protector	293
Nozzle protector and nozzle holder	294-295
Pivotable nozzle holder	290
R+M / Suttner high-pressure telescopic lances	291
Self-service lances	286
Splash guard	290
ST-175 Foam & Clean	278
ST-330 swivel nozzle holder	290
ST-85 Push & Pull lances	279-280
Suttner ultra high pressure lances	281-282
Twin and adjustable nozzle holder	289
Twin lances	272-277
U-lances	263
Ultra high pressure twin lances	281-282
Universal bracket	297
Wall cleaner	290

Lances

Flat jet lances



Kr

M22 M. Lance with nozzle protector ST-10 and nozzle. Max. 400 bar / 150 °C

R+M Nr.	D	↔	(M)
512 903 039	2503	430 mm	stainless steel
512 904 039	2504	430 mm	stainless steel
512 904 539	25045	430 mm	stainless steel
513 103 039	2503	500 mm	stainless steel
513 104 039	2504	500 mm	stainless steel
513 104 539	25045	500 mm	stainless steel
513 107 539	2507	500 mm	stainless steel
513 203 539	25035	600 mm	stainless steel
513 204 039	2504	600 mm	stainless steel
513 204 539	25045	600 mm	stainless steel
513 205 039	2505	600 mm	stainless steel
513 206 039	2506	600 mm	stainless steel
513 207 039	2507	600 mm	stainless steel
513 208 039	2508	600 mm	stainless steel
513 210 039	2510	600 mm	stainless steel
513 211 039	2511	600 mm	stainless steel
513 212 539	25125	600 mm	stainless steel

M22 M. Lance with nozzle protector ST-10 and nozzle. Max. 400 bar / 150 °C

R+M Nr.	D	↔	(M)
512 903 03	2503	430 mm	zinc-plated steel
512 904 03	2504	430 mm	zinc-plated steel
512 904 53	25045	430 mm	zinc-plated steel
513 103 03	2503	500 mm	zinc-plated steel
513 104 03	2504	500 mm	zinc-plated steel
513 104 53	25045	500 mm	zinc-plated steel
513 107 53	2507	500 mm	zinc-plated steel
513 203 53	25035	600 mm	zinc-plated steel
513 204 03	2504	600 mm	zinc-plated steel
513 204 53	25045	600 mm	zinc-plated steel
513 205 03	2505	600 mm	zinc-plated steel
513 206 03	2506	600 mm	zinc-plated steel
513 207 03	2507	600 mm	zinc-plated steel
513 208 03	2508	600 mm	zinc-plated steel
513 210 03	2510	600 mm	zinc-plated steel
513 211 03	2511	600 mm	zinc-plated steel
513 212 53	25125	600 mm	zinc-plated steel



Kr

Plug KW. Lance with protector ST-10 without nozzle.
Max. 400 bar / 150 °C

R+M Nr.	↔	(M)
513 100 079	500 mm	stainless steel
513 200 079	600 mm	stainless steel

Plug KW. Lance with protector ST-10 with nozzle.
Max. 400 bar / 150 °C

R+M Nr.	D	↔	(M)
512 903 049	2503	430 mm	stainless steel

Lances with female thread



1/4" M. Lance with moulded handle Cool & Compact. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊗	ISO	↔	(M)
200 129 140	1/4" F BSP	300 mm	500 mm	stainless steel
200 129 145	1/4" F BSP	400 mm	700 mm	stainless steel
200 129 150	1/4" F BSP	400 mm	800 mm	stainless steel

R+M Nr.




1/4" M. Lance. Max. 400 bar / 150 °C

R+M Nr.	⊗	↔	(M)
070 000 097	1/4" F BSP	100 mm	stainless steel
070 000 098	1/4" F BSP	150 mm	stainless steel
070 000 099	1/4" F BSP	200 mm	stainless steel
070 000 095	1/4" F BSP	250 mm	stainless steel
070 000 101	1/4" F BSP	350 mm	stainless steel

R+M Nr.

Lances

ST-001

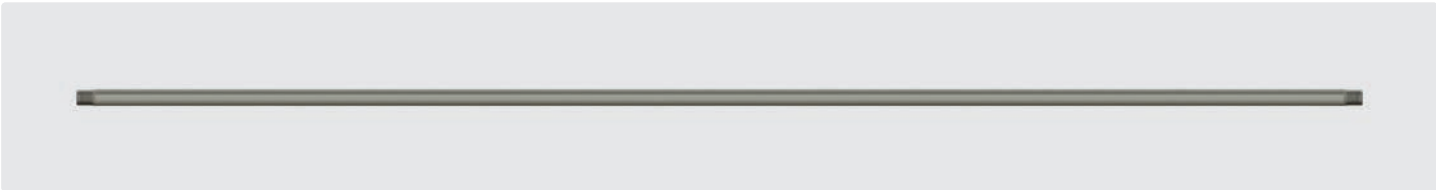

1/4" M. Lance with male thread. Max. 400 bar / 150 °C

R+M Nr.	⊙	↔	(M)
070 004 008	1/4" M	400 mm	stainless steel
070 004 338	1/4" M	433 mm	stainless steel
070 005 008	1/4" M	500 mm	stainless steel
070 006 008	1/4" M	600 mm	stainless steel
070 008 008	1/4" M	800 mm	stainless steel
070 010 008	1/4" M	1,000 mm	stainless steel
070 012 008	1/4" M	1,200 mm	stainless steel
070 015 008	1/4" M	1,500 mm	stainless steel
070 020 008	1/4" M	2,000 mm	stainless steel


R+M Nr.	⊙	↔	(M)
070 000 076	1/4" M	400 mm	zinc-plated steel
070 000 026	1/4" M	431 mm	zinc-plated steel
070 000 030	1/4" M	500 mm	zinc-plated steel
070 000 040	1/4" M	600 mm	zinc-plated steel
070 000 050	1/4" M	800 mm	zinc-plated steel
070 000 060	1/4" M	1,000 mm	zinc-plated steel
070 000 070	1/4" M	1,200 mm	zinc-plated steel
070 000 080	1/4" M	1,500 mm	zinc-plated steel
070 000 090	1/4" M	2,000 mm	zinc-plated steel



M22 M. Lance with nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	↔	(M)
512 903 9	1/4" F NPT	430 mm	stainless steel
513 103 9	1/4" F NPT	500 mm	stainless steel
513 203 9	1/4" F NPT	600 mm	stainless steel
513 303 9	1/4" F NPT	800 mm	stainless steel
513 403 9	1/4" F NPT	1,000 mm	stainless steel

R+M Nr.	⊙	↔	(M)
512 903	1/4" F NPT	430 mm	zinc-plated steel
513 103	1/4" F NPT	500 mm	zinc-plated steel
513 203	1/4" F NPT	600 mm	zinc-plated steel
513 303	1/4" F NPT	800 mm	zinc-plated steel
513 403	1/4" F NPT	1,000 mm	zinc-plated steel

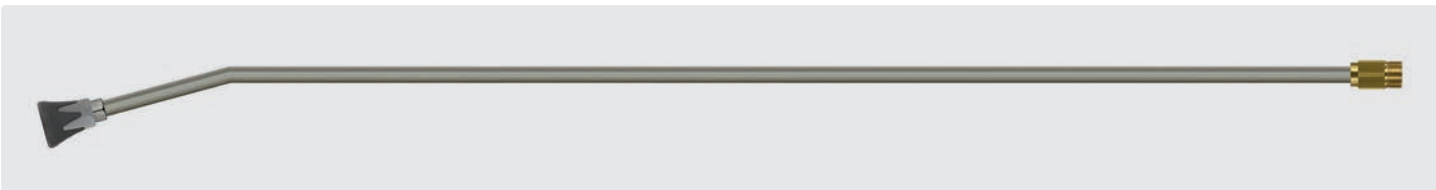


M22 M. Lance with nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	↔	(M)
513 203 91	1/4" F NPT	600 mm	stainless steel
513 303 91	1/4" F NPT	800 mm	stainless steel
513 403 91	1/4" F NPT	1,000 mm	stainless steel

R+M Nr.	⊙	↔	(M)
513 203 1	1/4" F NPT	600 mm	zinc-plated steel
513 303 1	1/4" F NPT	800 mm	zinc-plated steel
513 403 1	1/4" F NPT	1,000 mm	zinc-plated steel

Lances

ST-26 Cool & Soft




Lance with insulation ST-26 Cool & Soft. Comfortable grip and ergonomic shape. Heat-proof insulation. Heat-proof insulation.

Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	[M]
200 026 410	1/4" M	400 mm	1,000 mm	stainless steel


R+M Nr.

ST-28 Cool & Compact



Lance with insulation ST-28 Cool & Compact. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

Surface temperature of the insulations
ST-28, ST-29 and ST-26 at a water temperature of 90 °C.

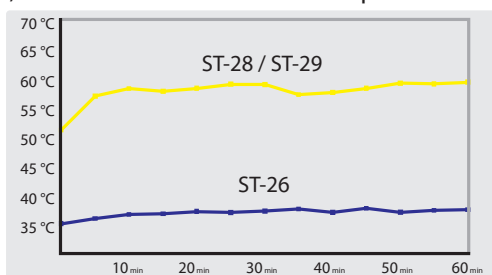

R+M Nr.	⊙	ISO	↔	[M]
200 028 303	1/4" M	300 mm	330 mm	zinc-plated steel
200 028 305	1/4" M	300 mm	500 mm	zinc-plated steel
200 028 306	1/4" M	300 mm	600 mm	zinc-plated steel
200 028 307	1/4" M	300 mm	700 mm	zinc-plated steel
200 028 408	1/4" M	400 mm	800 mm	zinc-plated steel
200 028 309	1/4" M	300 mm	900 mm	zinc-plated steel
200 028 409	1/4" M	400 mm	900 mm	zinc-plated steel
200 028 410	1/4" M	400 mm	1,000 mm	zinc-plated steel
200 028 412	1/4" M	400 mm	1,200 mm	zinc-plated steel

ST-29 Cool & Compact



Lance with insulation ST-29 Cool & Compact green. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	[M]
200 029 317	1/4" M	300 mm	900 mm	stainless steel


R+M Nr.



Lance with insulation ST-29 Cool & Compact blue. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	[M]
200 029 315	1/4" M	300 mm	900 mm	stainless steel


R+M Nr.



Lance with insulation ST-29 Cool & Compact red. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	[M]
200 029 318	1/4" M	300 mm	900 mm	stainless steel

R+M Nr.



Lance with insulation ST-29 Cool & Compact yellow. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	[M]
200 029 316	1/4" M	300 mm	900 mm	stainless steel

R+M Nr.

Symbols ⊙ outlet ↔ length [M] material ISO insulation ⊙ thread

Lances

ST-29 Cool & Compact




Lance with insulation ST-29 Cool & Compact. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
200 029 305	1/4" M	300 mm	500 mm	stainless steel
200 029 306	1/4" M	300 mm	600 mm	stainless steel
200 029 307	1/4" M	300 mm	700 mm	stainless steel
200 029 309	1/4" M	300 mm	900 mm	stainless steel
200 029 410	1/4" M	400 mm	1,000 mm	stainless steel
200 029 412	1/4" M	400 mm	1,200 mm	stainless steel

R+M Nr.


ST-007



1/4" M. Lance with moulded handle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
070 005 010	1/4" M	300 mm	500 mm	stainless steel
070 010 010	1/4" M	400 mm	1,000 mm	stainless steel


R+M Nr.



1/4" M. Lance with moulded handle and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
512 149 3	1/4" F NPT	300 mm	500 mm	stainless steel
512 449 3	1/4" F NPT	400 mm	1,000 mm	stainless steel

R+M Nr.



1/4" M. Lance with moulded handle and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
512 449 31	1/4" F NPT	400 mm	1,000 mm	stainless steel

R+M Nr.

U-lances



1/4" M. Lance with moulded handle. Max. 250 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
070 009 011	2 x 1/4" M	300 mm	900 mm	stainless steel

R+M Nr.



1/4" M. Max. 250 bar / 150 °C

R+M Nr.	⊙	ISO	↔	M
070 009 019	2 x 1/4" M	-	200 mm	stainless steel

Lances

ST-007



1/4" M. Lance with moulded handle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	(M)
070 009 433	1/4" M	300 mm	433 mm	stainless steel
070 005 009	1/4" M	300 mm	500 mm	stainless steel
070 006 009	1/4" M	300 mm	600 mm	stainless steel
070 007 009	1/4" M	300 mm	700 mm	stainless steel
070 008 009	1/4" M	400 mm	800 mm	stainless steel
070 010 009	1/4" M	400 mm	1,000 mm	stainless steel
070 012 009	1/4" M	500 mm	1,200 mm	stainless steel
070 015 009	1/4" M	500 mm	1,500 mm	stainless steel
070 020 009	1/4" M	500 mm	2,000 mm	stainless steel


R+M Nr.	⊙	ISO	↔	(M)
070 000 170	1/4" M	300 mm	500 mm	zinc-plated steel
070 000 180	1/4" M	300 mm	600 mm	zinc-plated steel
070 000 190	1/4" M	400 mm	800 mm	zinc-plated steel
070 000 470	1/4" M	300 mm	900 mm	zinc-plated steel
070 000 200	1/4" M	400 mm	1,000 mm	zinc-plated steel
070 000 210	1/4" M	500 mm	1,200 mm	zinc-plated steel
070 000 220	1/4" M	500 mm	1,500 mm	zinc-plated steel
070 000 230	1/4" M	500 mm	2,000 mm	zinc-plated steel



1/4" M. Lance with moulded handle and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	(M)
512 193	1/4" F NPT	300 mm	500 mm	stainless steel
512 293	1/4" F NPT	300 mm	600 mm	stainless steel
512 393	1/4" F NPT	400 mm	800 mm	stainless steel
512 493	1/4" F NPT	400 mm	1,000 mm	stainless steel
512 593	1/4" F NPT	500 mm	1,200 mm	stainless steel
512 693	1/4" F NPT	500 mm	1,500 mm	stainless steel
512 893	1/4" F NPT	500 mm	2,000 mm	stainless steel

R+M Nr.	⊙	ISO	↔	(M)
512 103	1/4" F NPT	300 mm	500 mm	zinc-plated steel
512 203	1/4" F NPT	300 mm	600 mm	zinc-plated steel
512 303	1/4" F NPT	400 mm	800 mm	zinc-plated steel
512 403	1/4" F NPT	400 mm	1,000 mm	zinc-plated steel
512 503	1/4" F NPT	500 mm	1,200 mm	zinc-plated steel
512 603	1/4" F NPT	500 mm	1,500 mm	zinc-plated steel
512 803	1/4" F NPT	500 mm	2,000 mm	zinc-plated steel




1/4" M. Lance with moulded handle and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	(M)
512 393 1	1/4" F NPT	400 mm	800 mm	stainless steel
512 493 1	1/4" F NPT	400 mm	1,000 mm	stainless steel
512 593 1	1/4" F NPT	500 mm	1,200 mm	stainless steel
512 693 1	1/4" F NPT	500 mm	1,500 mm	stainless steel
512 893 1	1/4" F NPT	500 mm	2,000 mm	stainless steel

R+M Nr.	⊙	ISO	↔	(M)
512 303 1	1/4" F NPT	400 mm	800 mm	zinc-plated steel
512 403 1	1/4" F NPT	400 mm	1,000 mm	zinc-plated steel
512 503 1	1/4" F NPT	500 mm	1,200 mm	zinc-plated steel
512 603 1	1/4" F NPT	500 mm	1,500 mm	zinc-plated steel
512 803 1	1/4" F NPT	500 mm	2,000 mm	zinc-plated steel

Lances


ST-001 with vented handle ST-9

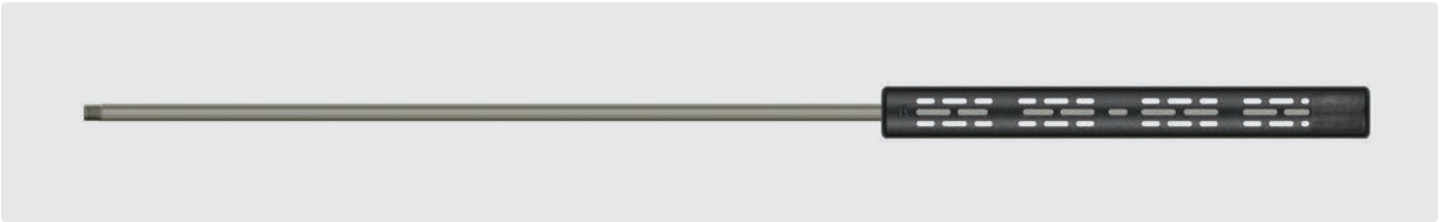

1/4" M. Lance with insulation ST-9. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	(M)
511 29	1/4" M	380 mm	500 mm	stainless steel
511 39	1/4" M	380 mm	600 mm	stainless steel
511 49	1/4" M	380 mm	800 mm	stainless steel
511 59	1/4" M	380 mm	1,000 mm	stainless steel
511 69	1/4" M	380 mm	1,200 mm	stainless steel
511 79	1/4" M	380 mm	1,500 mm	stainless steel
511 719	1/4" M	760 mm	1,500 mm	stainless steel
511 99	1/4" M	760 mm	2,000 mm	stainless steel


R+M Nr.	⊙	ISO	↔	(M)
511 20	1/4" M	380 mm	500 mm	zinc-plated steel
511 30	1/4" M	380 mm	600 mm	zinc-plated steel
511 40	1/4" M	380 mm	800 mm	zinc-plated steel
511 50	1/4" M	380 mm	1,000 mm	zinc-plated steel
511 60	1/4" M	380 mm	1,200 mm	zinc-plated steel
511 70	1/4" M	380 mm	1,500 mm	zinc-plated steel
511 71	1/4" M	760 mm	1,500 mm	zinc-plated steel
511 90	1/4" M	760 mm	2,000 mm	zinc-plated steel

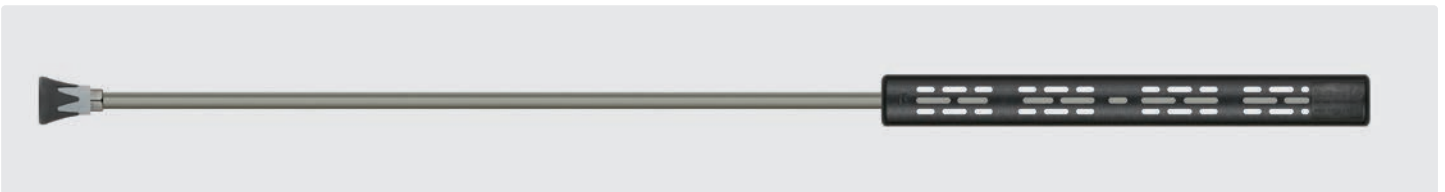

1/4" M. Lance with vented handle ST-9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	⊙	ISO	↔	(M)
511 201 9	1/4" F NPT	380 mm	500 mm	stainless steel
511 301 9	1/4" F NPT	380 mm	600 mm	stainless steel
511 401 9	1/4" F NPT	380 mm	800 mm	stainless steel
511 501 9	1/4" F NPT	380 mm	1,000 mm	stainless steel
511 601 9	1/4" F NPT	380 mm	1,200 mm	stainless steel
511 701 9	1/4" F NPT	760 mm	1,500 mm	stainless steel
511 901 9	1/4" F NPT	760 mm	2,000 mm	stainless steel

R+M Nr.	⊙	ISO	↔	(M)
511 201	1/4" F NPT	380 mm	500 mm	zinc-plated steel
511 301	1/4" F NPT	380 mm	600 mm	zinc-plated steel
511 401	1/4" F NPT	380 mm	800 mm	zinc-plated steel
511 501	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel
511 601	1/4" F NPT	380 mm	1,200 mm	zinc-plated steel
511 701	1/4" F NPT	760 mm	1,500 mm	zinc-plated steel
511 901	1/4" F NPT	760 mm	2,000 mm	zinc-plated steel

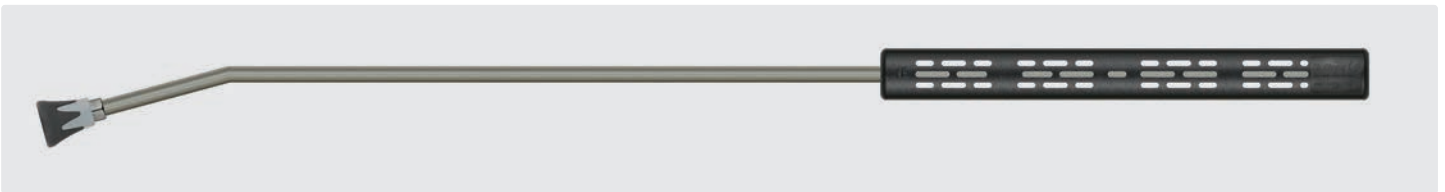

1/4" M. Lance with vented handle ST-9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C


R+M Nr.	⊙	ISO	↔	(M)
511 401 19	1/4" F NPT	380 mm	800 mm	stainless steel
511 501 19	1/4" F NPT	380 mm	1,000 mm	stainless steel
511 601 19	1/4" F NPT	380 mm	1,200 mm	stainless steel
511 701 19	1/4" F NPT	760 mm	1,500 mm	stainless steel
511 901 19	1/4" F NPT	760 mm	2,000 mm	stainless steel

R+M Nr.	⊙	ISO	↔	(M)
511 401 1	1/4" F NPT	380 mm	800 mm	zinc-plated steel
511 501 1	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel
511 601 1	1/4" F NPT	380 mm	1,200 mm	zinc-plated steel
511 701 1	1/4" F NPT	760 mm	1,500 mm	zinc-plated steel
511 901 1	1/4" F NPT	760 mm	2,000 mm	zinc-plated steel

Symbols ⊙ outlet ↔ length (M) material ISO insulation ⊙ thread

Lances

ST-001 with vented handle ST-9

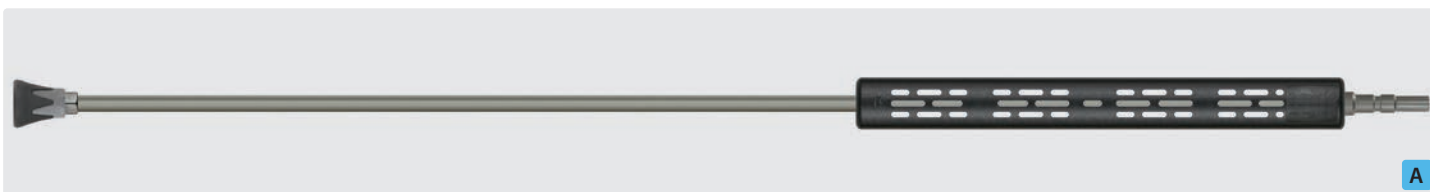


A

Plug KW. Lance with vented handle ST-9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 405 9	1/4" F NPT	380 mm	800 mm	stainless steel
511 505 9	1/4" F NPT	380 mm	1,000 mm	stainless steel

R+M Nr.		ISO		M
511 405	1/4" F NPT	380 mm	800 mm	zinc-plated steel
511 505	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel

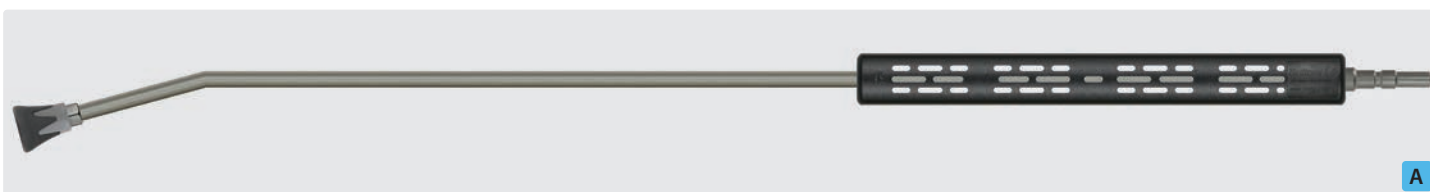

A

Plug KW. Lance with vented handle ST-9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 405 91	1/4" F NPT	380 mm	800 mm	stainless steel
511 505 91	1/4" F NPT	380 mm	1,000 mm	stainless steel

R+M Nr.		ISO		M
511 405 1	1/4" F NPT	380 mm	800 mm	zinc-plated steel
511 505 1	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel



A

Plug KW. Lance with insulation ST-9, grip and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 705 9	1/4" F NPT	760 mm	1,500 mm	stainless steel
511 905 9	1/4" F NPT	760 mm	2,000 mm	stainless steel

R+M Nr.		ISO		M
511 705	1/4" F NPT	760 mm	1,500 mm	zinc-plated steel
511 905	1/4" F NPT	760 mm	2,000 mm	zinc-plated steel



A


Plug KW. Lance with insulation ST-9, grip and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 705 91	1/4" F NPT	760 mm	1,500 mm	stainless steel
511 905 91	1/4" F NPT	760 mm	2,000 mm	stainless steel

R+M Nr.		ISO		M
511 705 1	1/4" F NPT	760 mm	1,500 mm	zinc-plated steel
511 905 1	1/4" F NPT	760 mm	2,000 mm	zinc-plated steel

Lances

ST-001 with insulation ST-9.9

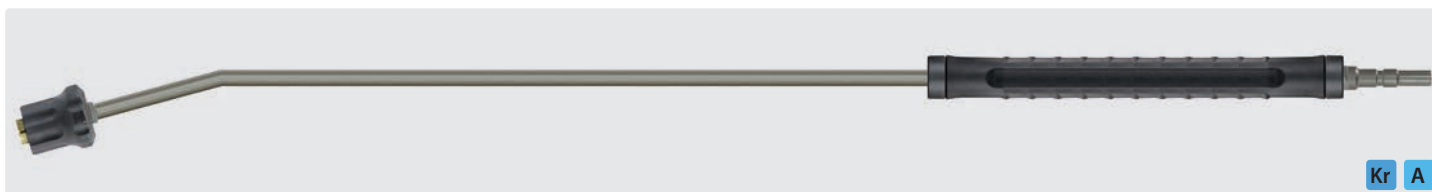


Kr A

Plug KW. Lance with insulation ST-9.9 and ST-51 adjustable nozzle. Max. 250 bar / 150 °C

R+M Nr.		ISO		M
511 505 910	1/4" F	330 mm	1,000 mm	stainless steel

R+M Nr.

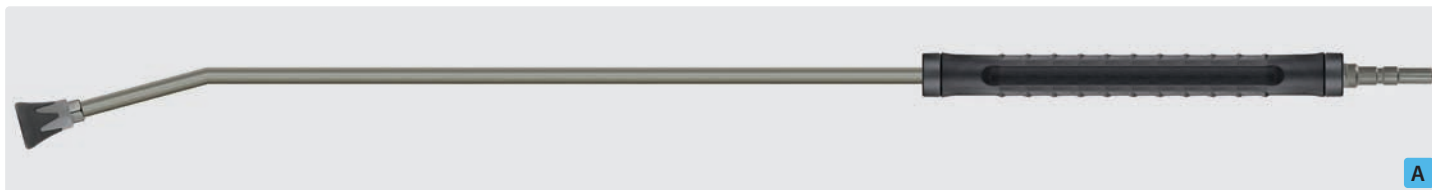


A

Plug KW. Lance with insulation ST-9.9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 505 901	1/8" F NPT	330 mm	1,000 mm	stainless steel

R+M Nr.

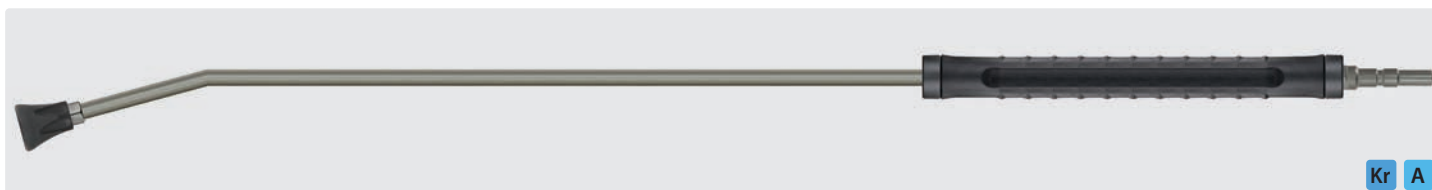


Kr A

Plug KW. Lance with insulation ST-9.9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
511 505 905	1/4" F NPT	330 mm	1,000 mm	stainless steel

R+M Nr.


ST-247 with insulation ST-9.9

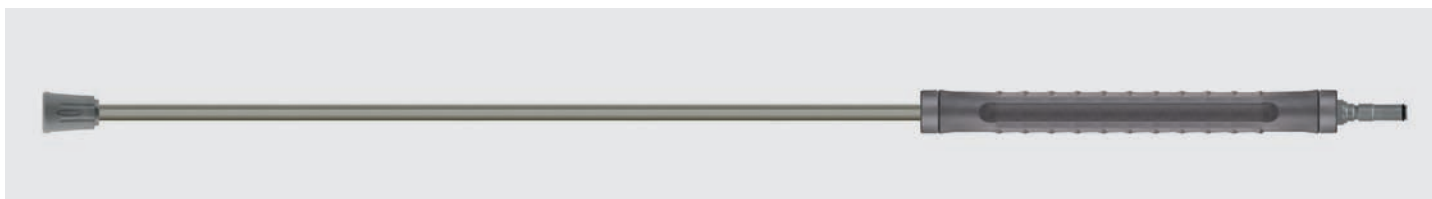

Plug ST-247. Lance with insulation ST-9.9 and **hydroblade**® nozzle protector without **hydroblade**® nozzles. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
514 524 700	hydroblade ®	330 mm	1.000 mm	stainless steel

R+M Nr.

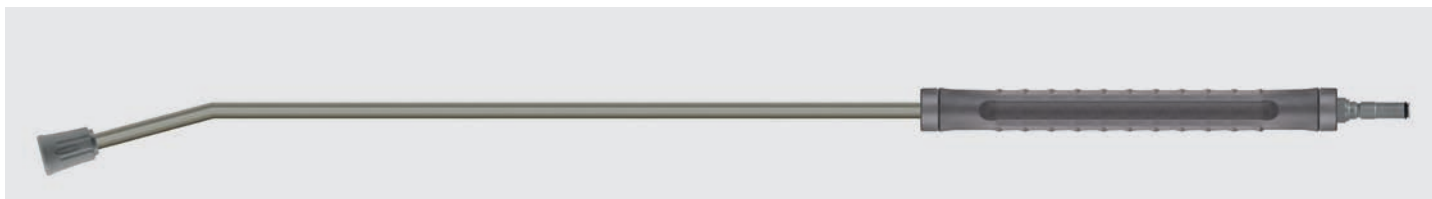


Plug ST-247. Lance with insulation ST-9.9 and **hydroblade**® nozzle protector without **hydroblade**® nozzles. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
514 524 701	hydroblade ®	330 mm	1.000 mm	stainless steel

R+M Nr.

Lances


ST-001 with vented handle ST-9



M22 M. Lance with vented handle ST-9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
511 203 9	1/4" F NPT	380 mm	500 mm	stainless steel
511 503 9	1/4" F NPT	380 mm	1,000 mm	stainless steel
511 703 9	1/4" F NPT	380 mm	1,500 mm	stainless steel
511 803 9	1/4" F NPT	760 mm	2,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	M
511 203	1/4" F NPT	380 mm	500 mm	zinc-plated steel
511 503	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel
511 703	1/4" F NPT	380 mm	1,500 mm	zinc-plated steel
511 803	1/4" F NPT	760 mm	2,000 mm	zinc-plated steel

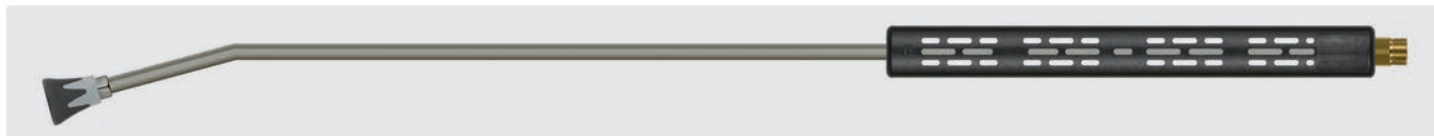


M22 M. Lance with vented handle ST-9 and nozzle protector ST-10 without high pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
511 503 91	1/4" F NPT	380 mm	1,000 mm	stainless steel
511 703 91	1/4" F NPT	380 mm	1,500 mm	stainless steel
511 803 91	1/4" F NPT	760 mm	2,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	M
511 503 1	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel
511 703 1	1/4" F NPT	380 mm	1,500 mm	zinc-plated steel
511 803 1	1/4" F NPT	760 mm	2,000 mm	zinc-plated steel

ST-001 with vented handle ST-9



Plug KW. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
514 594	nozzle protector	380 mm	1,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	M
---------	---	-----	---	---

Nozzle protector




Nozzle protector with M22 F.
Without tip. Max. 400 bar / 150 °C

Nozzle protector with plug KW.
Without tip. Max. 400 bar / 150 °C

R+M Nr.
561 41

R+M Nr.
559 105


Lance K-Lock



TR22 F swivel. Lance with ST-9.9 insulation and Hydroblade nozzle protector without nozzle. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
200 009 980	Nozzle protector	300 mm	1.000 mm	Stainless steel

R+M Nr.



TR22 F. Lance with ST-9.9 insulation and Hydroblade nozzle protector without nozzle. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
200 009 981	Nozzle protector	300 mm	1.000 mm	Stainless steel

R+M Nr.

Lances




K

M22 F. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
514 19	nozzle protector	380 mm	500 mm	stainless steel
514 29	nozzle protector	380 mm	600 mm	stainless steel
514 39	nozzle protector	380 mm	800 mm	stainless steel
514 59	nozzle protector	380 mm	1,000 mm	stainless steel
514 69	nozzle protector	380 mm	1,200 mm	stainless steel
514 79	nozzle protector	380 mm	1,500 mm	stainless steel
514 89	nozzle protector	760 mm	2,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
514 10	nozzle protector	380 mm	500 mm	zinc-plated steel
514 20	nozzle protector	380 mm	600 mm	zinc-plated steel
514 30	nozzle protector	380 mm	800 mm	zinc-plated steel
514 50	nozzle protector	380 mm	1,000 mm	zinc-plated steel
514 60	nozzle protector	380 mm	1,200 mm	zinc-plated steel
514 70	nozzle protector	380 mm	1,500 mm	zinc-plated steel
514 80	nozzle protector	760 mm	2,000 mm	zinc-plated steel



K

M22 F. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
514 391	nozzle protector	380 mm	800 mm	stainless steel
514 591	nozzle protector	380 mm	1,000 mm	stainless steel
514 691	nozzle protector	380 mm	1,200 mm	stainless steel
514 791	nozzle protector	380 mm	1,500 mm	stainless steel
514 891	nozzle protector	760 mm	2,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
514 301	nozzle protector	380 mm	800 mm	zinc-plated steel
514 501	nozzle protector	380 mm	1,000 mm	zinc-plated steel
514 601	nozzle protector	380 mm	1,200 mm	zinc-plated steel
514 701	nozzle protector	380 mm	1,500 mm	zinc-plated steel
514 801	nozzle protector	760 mm	2,000 mm	zinc-plated steel




K

M22 F swivel. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
514 119	nozzle protector	380 mm	500 mm	stainless steel
514 519	nozzle protector	380 mm	1,000 mm	stainless steel
514 719	nozzle protector	380 mm	1,500 mm	stainless steel
514 819	nozzle protector	760 mm	2,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
514 11	nozzle protector	380 mm	500 mm	zinc-plated steel
514 510	nozzle protector	380 mm	1,000 mm	zinc-plated steel
514 71	nozzle protector	380 mm	1,500 mm	zinc-plated steel
514 81	nozzle protector	760 mm	2,000 mm	zinc-plated steel



K

M22 F swivel. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
514 519 1	nozzle protector	380 mm	1,000 mm	stainless steel
514 719 1	nozzle protector	380 mm	1,500 mm	stainless steel
514 819 1	nozzle protector	760 mm	2,000 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
514 511	nozzle protector	380 mm	1,000 mm	zinc-plated steel
514 711	nozzle protector	380 mm	1,500 mm	zinc-plated steel
514 811	nozzle protector	760 mm	2,000 mm	zinc-plated steel

Symbols ☺ outlet ↔ length (M) material ISO insulation

Lances with ergonomic swivel screw coupling

- » Lances suitable for Kärcher spray guns.
- » The lance has an ergonomic and conical swivel screw coupling operating as a connection piece between the lance and the spray gun. The new design offers a smooth transition from the spray gun to the lance.
- » Rotating by 360° under pressure.
- » All materials are rust-free and of premium quality.
- » The hand screw coupling is made out of shock-resistant plastics and equipped with a brazen thread. The internal nipple of the hand screw coupling is made out of stainless steel.
- » Nozzle protector without tip.



spray gun - standard

K



spray gun - servopress

K




ST-2300 - standard

K

ST-2635 - standard

K

Lances with vented handle ST-9




K

M22 F swivel. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	spray gun	ISO	↔	(M)
514 149	standard	380 mm	500 mm	stainless steel
514 249	standard	380 mm	600 mm	stainless steel
514 549	standard	380 mm	1,000 mm	stainless steel
514 749	standard	380 mm	1,500 mm	stainless steel

R+M Nr.	spray gun	ISO	↔	(M)
514 159	servopress	380 mm	500 mm	stainless steel
514 559	servopress	380 mm	1,000 mm	stainless steel



K

M22 F swivel. Lance with vented handle ST-9 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	spray gun	ISO	↔	(M)
514 349 1	standard	380 mm	800 mm	stainless steel
514 549 1	standard	380 mm	1,000 mm	stainless steel
514 649 1	standard	380 mm	1,200 mm	stainless steel
514 749 1	standard	380 mm	1,500 mm	stainless steel

R+M Nr.	spray gun	ISO	↔	(M)
514 559 1	servopress	380 mm	1,000 mm	stainless steel

Lances with insulation ST-22



K

M22 F swivel. Lance with insulation ST-22 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	spray gun	ISO	↔	(M)
514 529	standard	410 mm	1,000 mm	stainless steel

R+M Nr.	spray gun	ISO	↔	(M)
514 539	servopress	410 mm	1,000 mm	stainless steel

Symbols inlet outlet length material insulation

Lances with ergonomic swivel screw coupling

Lances with insulation ST-22



M22 F swivel. Lance with insulation ST-22 and nozzle protector without tip. Max. 400 bar / 150 °C

R+M Nr.	spray gun	ISO		(M)
514 529 1	standard	410 mm	1,000 mm	stainless steel

R+M Nr.	spray gun	ISO		(M)
514 539 1	servopress	410 mm	1,000 mm	stainless steel

Twin lances with moulded handle



M22 F swivel. Lance with moulded handle, valve ST-54 aside and nozzle protector without tip. Max. 310 bar / 150 °C

R+M Nr.

R+M Nr.		ISO		(M)
517 608 5	nozzle protector	300 mm	980 mm	zinc-plated steel



suitable for standard spray guns

M22 F swivel. ST-85 Push & Pull lance with ergonomic swivel screw coupling suitable for standard spray guns. Max. 210 bar / 150 °C

R+M Nr.				(M)
200 085 645	nozzle protector	850 mm	M22 F swivel	stainless steel
200 085 935	nozzle protector	1,000 mm	M22 F swivel	stainless steel
200 085 685	nozzle protector	1,500 mm	M22 F swivel	stainless steel
200 085 687	nozzle protector	2,000 mm	M22 F swivel	stainless steel

R+M Nr.				(M)
200 085 745	nozzle protector	850 mm	M22 F swivel	zinc-plated steel
200 085 925	nozzle protector	1,000 mm	M22 F swivel	zinc-plated steel
200 085 785	nozzle protector	1,500 mm	M22 F swivel	zinc-plated steel



suitable for servopress spray guns

M22 F swivel. ST-85 Push & Pull lance with ergonomic swivel screw coupling suitable for servopress spray guns. Max. 210 bar / 150 °C

R+M Nr.				(M)
200 085 646	nozzle protector	850 mm	M22 F swivel	stainless steel
200 085 936	nozzle protector	1,000 mm	M22 F swivel	stainless steel
200 085 686	nozzle protector	1,500 mm	M22 F swivel	stainless steel
200 085 688	nozzle protector	2,000 mm	M22 F swivel	stainless steel

R+M Nr.				(M)
200 085 746	nozzle protector	850 mm	M22 F swivel	zinc-plated steel
200 085 926	nozzle protector	1,000 mm	M22 F swivel	zinc-plated steel
200 085 786	nozzle protector	1,500 mm	M22 F swivel	zinc-plated steel

Lances with vented handle ST-9



M22 F swivel. Lance with ergonomic swivel screw coupling, vented handle ST-9 & grip and nozzle protector (M20x1) without tip. Max. 650 bar / 150 °C

R+M Nr.				(M)
200 146 550	nozzle protector	700 mm	M22 F swivel	stainless steel

R+M Nr.

Twin lances

Lances with valve ST-54



1/4" F. Lance with valve ST-54 and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
200 054 950	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
200 054 850	1/4" F NPT	-	650 mm	zinc-plated steel



1/4" M. Lance with moulded handle, valve ST-54 and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
200 054 900	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
200 054 800	1/4" F NPT	300 mm	980 mm	zinc-plated steel

Lance with valve ST-54 aside



1/4" F. Lance with valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)

R+M Nr.	☺	ISO	↔	(M)
200 054 580	1/4" F NPT	-	385 mm	zinc-plated steel



1/4" F. Lance with valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
200 054 605	1/4" F NPT	-	650 mm	stainless steel
200 054 680	1/4" F NPT	-	750 mm	stainless steel
200 054 690	1/4" F NPT	-	900 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
517 50	1/4" F NPT	-	650 mm	zinc-plated steel



M22 M. Lance with valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
517 501 9	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)
517 501	1/4" F NPT	-	650 mm	zinc-plated steel

Twin lances

Lance with stainless steel valve ST-54.2 aside



1/4" F. Lance with valve ST-54.2 aside and nozzle protector ST-10 with low pressure nozzle. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
517 054 605	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.	☺	ISO	↔	M



M22 M. Lance with valve ST-54.2 aside and nozzle protector ST-10 with low pressure nozzle. Max.400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
517 054 610	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.	☺	ISO	↔	M



1/4" M. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.2 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
517 054 600	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.	☺	ISO	↔	M



Plug KW. Lance with moulded handle ST-29 Cool & Compact, valve ST-54.2 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
517 054 630	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.	☺	ISO	↔	M

ST-54.2 valve



Stainless steel

R+M Nr.	☺
517 054 492	3 x 1/4" F

Rep. Kit ST-54.2



Stainless steel

R+M Nr.
517 054 450

Symbols ☺ outlet ↔ length M material ISO insulation ☺ thread

Twin lances

Lance with valve ST-54 aside



1/4" M. Lance with moulded handle, valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.		ISO		M
200 054 600	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.		ISO		M
517 60	1/4" F NPT	300 mm	980 mm	zinc-plated steel



M22 F. Lance with moulded handle, valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.		ISO		M
517 601 9	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.		ISO		M
517 601	1/4" F NPT	300 mm	980 mm	zinc-plated steel



Plug KW. Lance with moulded handle, valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.		ISO		M
200 054 630	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.		ISO		M
516 605	1/4" F NPT	300 mm	980 mm	zinc-plated steel

Spare parts are on pages 293 and 294.

Symbols  inlet  outlet  length  material  insulation

Twin lances

Lance with valve ST-54 aside



M22 F swivel. Lance with moulded handle, valve ST-54 aside and nozzle protector without tip. Max. 310 bar / 150 °C

R+M Nr.	ISO	ISO	ISO	M
517 608 5	nozzle protector	300 mm	980 mm	zinc-plated steel

Lance with valve ST-53 on top



1/4" F. Lance with valve ST-53 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO	ISO	M
200 053 610	1/4" F NPT	-	650 mm	stainless steel


R+M Nr.	ISO	ISO	ISO	M
516 10	1/4" F NPT	-	650 mm	zinc-plated steel



1/4" F. Lance with valve ST-53 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" M for rotating nozzles. Lance without rotating nozzle. Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO	ISO	M
200 053 635	1/4" M	-	650 mm	stainless steel

R+M Nr.	ISO	ISO	ISO	M
200 053 535	1/4" M	-	650 mm	zinc-plated steel

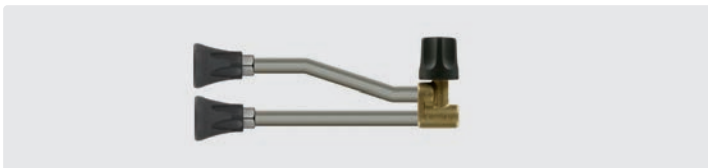

1/4" F. Lance with valve ST-53 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO	ISO	M
200 053 710	1/4" M	-	210 mm	zinc-plated steel



Brass. Incl. low pressure nozzle.
Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO
516 05	plug KW	1/4" F



Brass. Incl. low pressure nozzle.
Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO
516 03	M22 M	1/4" F



Brass. Incl. low pressure nozzle.
Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO
516 061	M22 F swivel	1/4" F



Brass. Incl. low pressure nozzle.
Max. 250 bar / 150 °C

R+M Nr.	ISO	ISO
516 06	M22 F	1/4" F

Twin lances

Lance with valve ST-53 on top



1/4" M. Lance with moulded handle, valve ST-53 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 250 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
200 053 600	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.	☺	ISO	↔	M
516 60	1/4" F NPT	300 mm	980 mm	zinc-plated steel



1/4" M. Lance with insulation ST-9 & grip, valve ST-53 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 250 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
517 109	1/4" F NPT	380 mm	1,000 mm	stainless steel
517 209	1/4" F NPT	380 mm	1,500 mm	stainless steel
517 309	1/4" F NPT	380 mm	2,000 mm	stainless steel


R+M Nr.	☺	ISO	↔	M
517 10	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel
517 20	1/4" F NPT	380 mm	1,500 mm	zinc-plated steel



Plug KW. Lance with insulation ST-9 & grip, valve ST-53 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 250 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
516 105 9	1/4" F NPT	380 mm	1,000 mm	stainless steel
516 155 9	1/4" F NPT	380 mm	1,500 mm	stainless steel

R+M Nr.	☺	ISO	↔	M
516 105	1/4" F NPT	380 mm	1,000 mm	zinc-plated steel

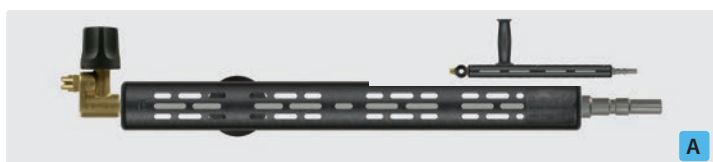

Plug KW. Lance with insulation ST-9 & grip, valve ST-53 on top and low pressure nozzle. Max. 250 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
516 055	1/4" F	380 mm	410 mm	zinc-plated steel

Twin lances

Lance with stainless steel valve ST-53.2 on top



1/4" F. Lance with valve ST-53.2 on top and nozzle protector ST-10 with low pressure nozzle.

Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
517 053 605	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)



M22 M. Lance with valve ST-53.2 on top and nozzle protector ST-10 with low pressure nozzle.

Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
517 053 610	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)



1/4" M. Lance with moulded handle ST-29 Cool & Compact, valve ST-53.2 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F.

Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
517 053 600	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)



Plug KW. Lance with moulded handle ST-29 Cool & Compact, valve ST-53.2 on top and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F.

Max. 400 bar / 150 °C

R+M Nr.	☺	ISO	↔	(M)
517 053 630	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.	☺	ISO	↔	(M)

ST-53.2 valve



Stainless steel

R+M Nr.
517 053 450

Symbols ☺ outlet ↔ length (M) material ISO insulation

ST-175 Foam & Clean

The change-over lance ST-175 Foam & Clean is the ideal accessory for Suttner's foam injector line. The innovative change-over technology allows to direct the full flow into either one or the other outlet pipe just by turning the hand wheel at the inlet.

In one position of the hand wheel the flow is directed thru an ST-75 foam head for foaming. After changing over the full flow is directed thru the other pipe and a regular spray nozzle for rinsing.

Appropriate nozzle sizing at chemical injector and ST-175 allows changing from foaming to rinsing right at the lance. ST -175 Foam & Clean is compatible to ST-160 / ST-164 / ST-166 / ST-167.

Due to ST -175's changeable air injector nozzles the lance can be driven with all pressure washers with flow rates from 5 to 25 l / min.

Nozzles with integrated jet former are required (pages 366, 367).



Twin foam lance with vented handle ST-9 380 mm, change-over valve ST-58, nozzle protector ST-10 without nozzle and foam head ST-75 without nozzle. A foam injector is required.

Max. 350 bar / 45 l/min / 100 °C

R+M Nr.	D	M	G	↔
200 175 400	-	1/4" F	stainless steel	650 mm



Twin foam lance with vented handle ST-9 380 mm, change-over lance with 1/4" M and nozzle protector ST-10 without nozzle.

Max. 350 bar / 45 l/min / 100 °C

R+M Nr.	D	M	G	↔
200 175 510	-	1/4" F	stainless steel	650 mm



Twin foam lance with vented handle ST-9 380 mm, change-over valve ST-58, nozzle protector ST-10 without nozzle and foam head ST-75 with nozzle. A foam injector is required.

Max. 350 bar / 45 l/min / 100 °C

R+M Nr.	D	G	M	↔
200 175 430	1,9	M22 F	stainless steel	650 mm
200 175 431	2,1	M22 F	stainless steel	650 mm



Twin foam lance with vented handle ST-9 205 mm, change-over valve ST-58, ergonomic swivel screw coupling, nozzle protector without tip and foam head ST-75.1 without nozzle. A foam injector is required.

Max. 350 bar / 45 l/min / 100 °C

R+M Nr.	D	G	M	↔
200 175 411	-	M22 F	stainless steel	420 mm



Twin foam lance with vented handle ST-9 205 mm, change-over valve ST-58, nozzle protector ST-10 without nozzle and foam head ST-75.1 without nozzle. A foam injector is required.

Max. 350 bar / 45 l/min / 100 °C


R+M Nr.	D	G	M	↔
200 175 414	-	1/4" F	stainless steel	420 mm

ST-85 Push & Pull lances



- » Variable adjustment of spraying angle from 20 to 140°. Especially designed for cleaning of places which are difficult to access such as container, under vehicles, gutters and roofs.
- » 600 mm version suitable for spray guns with integrated extension
- » Max. 210 bar / 150 °C

Grip for vented handle ST-9

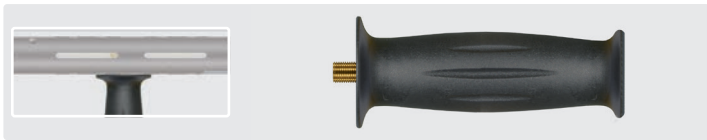

Handle for adjustment and locking. Attachable on both sides

R+M Nr.

200 009 680



Kr IP

M22 M. ST-85 lance with nozzle protector ST-10 without high pressure nozzle. Suitable for guns with integrated extension. Max. 210 bar / 150 °C

R+M Nr.	⊖	↔	Ⓒ	Ⓜ
200 085 270	1/4" F NPT	600 mm	M22 M	stainless steel

R+M Nr.	⊖	↔	Ⓒ	Ⓜ
200 085 220	1/4" F NPT	600 mm	M22 M	zinc-plated steel



1/4" F. ST-85 Push & Pull lance with nozzle protector ST-10 without high pressure nozzle. Max. 210 bar / 150 °C

R+M Nr.	⊖	↔	Ⓒ	Ⓜ
200 085 810	1/4" F NPT	850 mm	1/4" F	stainless steel
200 085 800	1/4" F NPT	1,000 mm	1/4" F	stainless steel
200 085 850	1/4" F NPT	1,500 mm	1/4" F	stainless steel

R+M Nr.	⊖	↔	Ⓒ	Ⓜ
200 085 710	1/4" F NPT	850 mm	1/4" F	zinc-plated steel
200 085 700	1/4" F NPT	1,000 mm	1/4" F	zinc-plated steel
200 085 750	1/4" F NPT	1,500 mm	1/4" F	zinc-plated steel



Kr A

Plug KW. ST-85 Push & Pull lance with nozzle protector ST-10 without high pressure nozzle. Max. 210 bar / 150 °C

R+M Nr.	⊖	↔	Ⓒ	Ⓜ
200 085 260	1/4" F NPT	600 mm	plug KW	stainless steel
200 085 610	1/4" F NPT	850 mm	plug KW	stainless steel
200 085 600	1/4" F NPT	1,000 mm	plug KW	stainless steel
200 085 650	1/4" F NPT	1,500 mm	plug KW	stainless steel

R+M Nr.	⊖	↔	Ⓒ	Ⓜ
200 085 210	1/4" F NPT	600 mm	plug KW	zinc-plated steel
200 085 510	1/4" F NPT	850 mm	plug KW	zinc-plated steel
200 085 500	1/4" F NPT	1,000 mm	plug KW	zinc-plated steel
200 085 550	1/4" F NPT	1,500 mm	plug KW	zinc-plated steel

ST-85 Push & Pull lances



M22 F swivel. ST-85 Push & Pull lance with nozzle protector ST-10 without high pressure nozzle. Max. 210 bar / 150 °C

R+M Nr.	↺	↔	↻	(M)
200 085 713	1/4" F NPT	850 mm	M22 F swivel	zinc-plated steel
200 085 703	1/4" F NPT	1,000 mm	M22 F swivel	zinc-plated steel
200 085 753	1/4" F NPT	1,500 mm	M22 F swivel	zinc-plated steel



K

M22 F. ST-85 Push & Pull lance with nozzle protector without tip. Max. 210 bar / 150 °C

R+M Nr.	↺	↔	↻	(M)
200 085 620 nozzle protector	850 mm	M22 F	stainless steel	
200 085 660 nozzle protector	1,500 mm	M22 F	stainless steel	

R+M Nr.	↺	↔	↻	(M)
200 085 720 nozzle protector	850 mm	M22 F	zinc-plated steel	
200 085 760 nozzle protector	1,500 mm	M22 F	zinc-plated steel	



K

M22 F swivel. ST-85 Push & Pull lance with nozzle protector without tip. Max. 210 bar / 150 °C

R+M Nr.	↺	↔	↻	(M)
200 085 640 nozzle protector	850 mm	M22 F swivel	stainless steel	
200 085 930 nozzle protector	1,000 mm	M22 F swivel	stainless steel	
200 085 680 nozzle protector	1,500 mm	M22 F swivel	stainless steel	

R+M Nr.	↺	↔	↻	(M)
200 085 740 nozzle protector	850 mm	M22 F swivel	zinc-plated steel	
200 085 920 nozzle protector	1,000 mm	M22 F swivel	zinc-plated steel	
200 085 780 nozzle protector	1,500 mm	M22 F swivel	zinc-plated steel	



suitable for standard spray guns

K

M22 F swivel. ST-85 Push & Pull lance with ergonomic swivel screw coupling suitable for standard spray guns. Max. 210 bar / 150 °C

R+M Nr.	↺	↔	↻	(M)
200 085 645 nozzle protector	850 mm	M22 F swivel	stainless steel	
200 085 935 nozzle protector	1,000 mm	M22 F swivel	stainless steel	
200 085 685 nozzle protector	1,500 mm	M22 F swivel	stainless steel	
200 085 687 nozzle protector	2,000 mm	M22 F swivel	stainless steel	

R+M Nr.	↺	↔	↻	(M)
200 085 745 nozzle protector	850 mm	M22 F swivel	zinc-plated steel	
200 085 925 nozzle protector	1,000 mm	M22 F swivel	zinc-plated steel	
200 085 785 nozzle protector	1,500 mm	M22 F swivel	zinc-plated steel	



suitable for servopress spray guns

K

M22 F swivel. ST-85 Push & Pull lance with ergonomic swivel screw coupling suitable for standard spray guns. Max. 210 bar / 150 °C

R+M Nr.	↺	↔	↻	(M)
200 085 646 nozzle protector	850 mm	M22 F swivel	stainless steel	
200 085 936 nozzle protector	1,000 mm	M22 F swivel	stainless steel	
200 085 686 nozzle protector	1,500 mm	M22 F swivel	stainless steel	
200 085 688 nozzle protector	2,000 mm	M22 F swivel	stainless steel	


R+M Nr.	↺	↔	↻	(M)
200 085 746 nozzle protector	850 mm	M22 F swivel	zinc-plated steel	
200 085 926 nozzle protector	1,000 mm	M22 F swivel	zinc-plated steel	
200 085 786 nozzle protector	1,500 mm	M22 F swivel	zinc-plated steel	

Kit ST-85 Push & Pull



- » The kit is suitable for undercar wash of vehicles as well as for roof cleaning.
- » The kit is supplied as version for undercar wash.
- » The add-on kit for roof cleaning can be easily assembled.

R+M Nr.
200 085 400

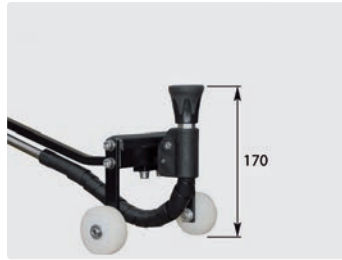

undercar wash



roof cleaning

Suttner ultra high pressure lances

Lances with ergonomic swivel screw coupling



M22 M swivel Lance with ergonomic swivel screw coupling, vented handle ST-9 & grip and nozzle protector (M20x1) without tip.
Max. 650 bar / 150 °C

R+M Nr.	☺	↔	⊗	Ⓜ
200 146 550 nozzle protector		700 mm	M22 F swivel	stainless steel

R+M Nr.

Suttner ultra high pressure lances

ST-002 ultra high pressure lances



1/4" M. Lance with moulded handle. Safety factor 4. Max. 500 bar / 150 °C

R+M Nr.	⊙	ISO	↔	Ⓜ
070 003 502	1/4" M	300 mm	350 mm	stainless steel
070 008 002	1/4" M	500 mm	800 mm	stainless steel
070 012 002	1/4" M	500 mm	1,200 mm	stainless steel

R+M Nr.

Ultra high pressure twin lances

ST-154



1/4" F. Lance with valve ST-154 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 500 bar / 150 °C

R+M Nr.	☺	ISO	↔	Ⓜ
200 154 510	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.



1/4" M. Lance with moulded handle, valve ST-154 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 500 bar / 150 °C

R+M Nr.	☺	ISO	↔	Ⓜ
200 154 500	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.

Symbols ⊗ inlet ☺ outlet ↔ length Ⓜ material ISO insulation ⊙ thread

Ultra high pressure twin lances



M22 M. Lance with moulded handle, valve ST-154 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 500 bar / 150 °C

R+M Nr.		ISO		M	R+M Nr.
200 154 520	1/4" F NPT	300 mm	980 mm	stainless steel	

Suttner ultra high pressure lances

Ultra high pressure lances ST-3600 - 600 bar



1/2" M. Lance with grip. Max. 600 bar / 150 °C

R+M Nr.				M	R+M Nr.
203 600 416	1/2" M	1,500 mm	1/2" M	stainless steel	
203 600 415	1/2" M	2,000 mm	1/2" M	stainless steel	



1/2" M. Lance with grip and sleeve 1/4" F NPT stainless steel without high pressure nozzle. Max. 600 bar / 150 °C

R+M Nr.				M	R+M Nr.
203 600 400	1/4" F NPT	500 mm	1/2" M	stainless steel	
203 600 401	1/4" F NPT	800 mm	1/2" M	stainless steel	
203 600 402	1/4" F NPT	1,000 mm	1/2" M	stainless steel	



1/2" M. Lance with grip for rotating nozzles with 1/4" F without rotating nozzle. Max. 600 bar / 150 °C

R+M Nr.				M	R+M Nr.
203 600 411	1/4" M	500 mm	1/2" M	stainless steel	
203 600 410	1/4" M	800 mm	1/2" M	stainless steel	
203 600 412	1/4" M	1,000 mm	1/2" M	stainless steel	



Plug ST-45. Lance with grip and sleeve 1/4" F NPT stainless steel without high pressure nozzle. Max. 600 bar / 150 °C


R+M Nr.				M	R+M Nr.
203 600 444	1/4" F NPT	500 mm	plug ST-45	stainless steel	



Plug ST-45. Lance with grip for rotating nozzles with 1/4" F without rotating nozzle. Max. 600 bar / 150 °C

R+M Nr.				M	R+M Nr.
203 600 441	1/4" M	800 mm	plug ST-45	stainless steel	

easywash365+® lances by Suttner

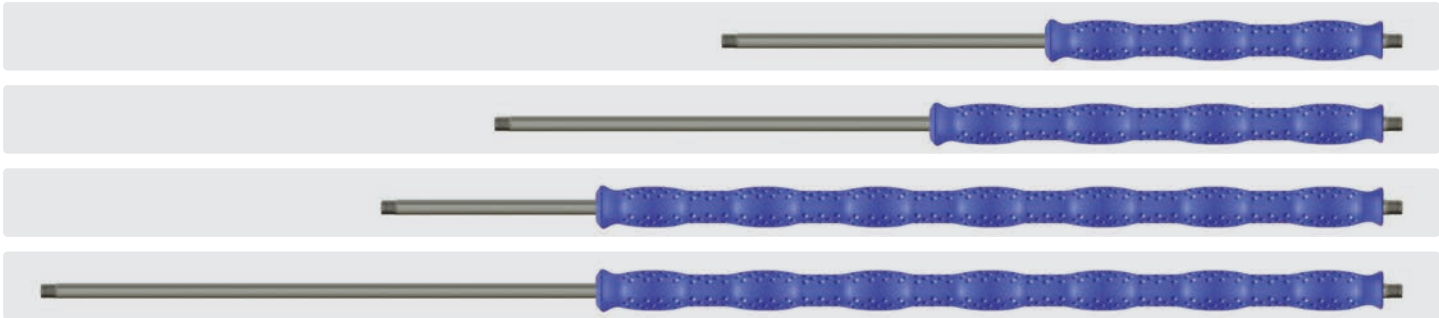

Stainless steel. Lance with moulded handle Cool & Compact. Max. 400 bar / 150 °C

R+M Nr.	ISO			
200 129 306	300 mm	1/4" M	600 mm	1/4" M
200 129 408	400 mm	1/4" M	800 mm	1/4" M
200 129 709	700 mm	1/4" M	900 mm	1/4" M
200 129 712	700 mm	1/4" M	1,200 mm	1/4" M



Stainless steel. Lance with moulded handle. Max. 400 bar / 150 °C

R+M Nr.	ISO			
200 029 709	700 mm	1/4" M	900 mm	1/4" M

easyturn ST-9.7 – colored lances by Suttner

- » Ideal for virtually all cleaning tasks and applications
- » Specially designed for carwash applications
- » Easy handling
- » Stainless steel version
- » Design: Cool & Compact insulation grip elements.
- Length 100 mm
- » Max. 400 bar / 150 °C



Lances with grip elements



R+M Nr.	blue	ISO	☺	↔	☺
510 033 100 100	■ ■ ■	300 mm	1/4" M	330 mm	1/4" M
510 053 100 100	■ ■ ■	330 mm	1/4" M	500 mm	1/4" M
510 063 100 100	■ ■ ■	330 mm	1/4" M	600 mm	1/4" M
510 074 100 200	■ ■ ■ ■	430 mm	1/4" M	700 mm	1/4" M
510 104 100 200	■ ■ ■ ■	430 mm	1/4" M	1,000 mm	1/4" M



R+M Nr.	red	ISO	☺	↔	☺
510 033 102 000	■ ■ ■	300 mm	1/4" M	330 mm	1/4" M
510 053 102 000	■ ■ ■	330 mm	1/4" M	500 mm	1/4" M
510 063 102 000	■ ■ ■	330 mm	1/4" M	600 mm	1/4" M
510 074 102 100	■ ■ ■ ■	430 mm	1/4" M	700 mm	1/4" M
510 104 102 100	■ ■ ■ ■	430 mm	1/4" M	1,000 mm	1/4" M

Symbols ☺ inlet ☺ outlet ↔ length ISO insulation

easyturn ST-9.4 – rotatable lances by Suttner


- » Rotatable insulation for an ergonomic handling. The coloured handles can be freely rotated around their own axis. Black handles are firmly fixed
- » Specially designed for carwash applications
- » Stainless steel version
- » Design: Cool & Compact insulation grip elements.
- Length 100 mm
- » Max. 400 bar / 150 °C



Lances with grip elements, rotatable




R+M Nr.	blue rotatable	ISO	⌀	↔	Ⓒ
510 033 000 100	■ ■ ■	330 mm	1/4" M	370 mm	1/4" M
510 053 000 100	■ ■ ■	330 mm	1/4" M	500 mm	1/4" M
510 063 000 100	■ ■ ■	330 mm	1/4" M	600 mm	1/4" M
510 074 000 200	■ ■ ■ ■	430 mm	1/4" M	700 mm	1/4" M
510 104 000 200	■ ■ ■ ■	430 mm	1/4" M	1,000 mm	1/4" M
510 097 000 500	■ ■ ■ ■ ■ ■	730 mm	1/4" M	900 mm	1/4" M

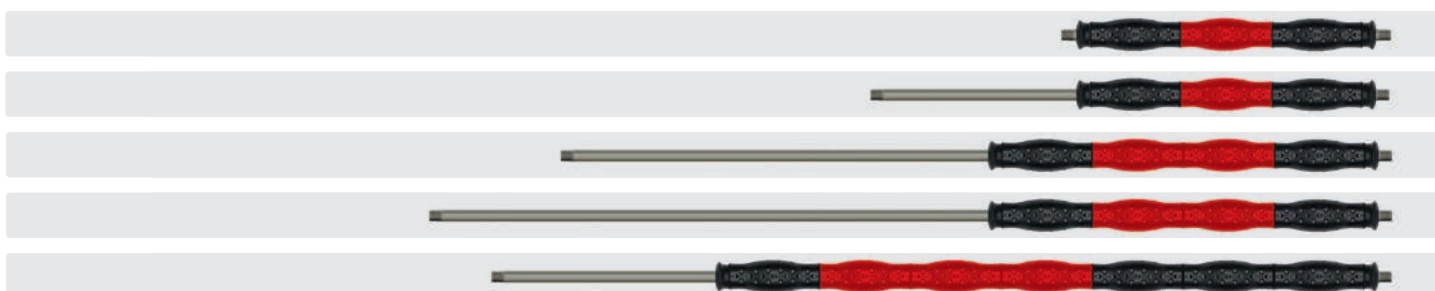

R+M Nr.	red rotatable	ISO	⌀	↔	Ⓒ
510 033 002 000	■ ■ ■	330 mm	1/4" M	370 mm	1/4" M
510 053 002 000	■ ■ ■	330 mm	1/4" M	500 mm	1/4" M
510 063 002 000	■ ■ ■	330 mm	1/4" M	600 mm	1/4" M
510 074 002 100	■ ■ ■ ■	430 mm	1/4" M	700 mm	1/4" M
510 104 002 100	■ ■ ■ ■	430 mm	1/4" M	1,000 mm	1/4" M
510 097 002 400	■ ■ ■ ■ ■ ■	730 mm	1/4" M	900 mm	1/4" M

easywash365+® lances by Suttner




Stainless steel. Lance with easywash365+® handle and nozzle protector ST-10 without nozzle. Max. 350 bar / 45 l/min / 150 °C

R+M Nr.			
515 65	1/4" F NPT	500 mm	1/4" M



Lance with moulded handle Cool & Compact, easywash365+® handle, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	ISO			
200 009 670	700 mm	wash brush	900 mm	1/4" M
200 009 675	700 mm	wash brush	1,200 mm	1/4" M

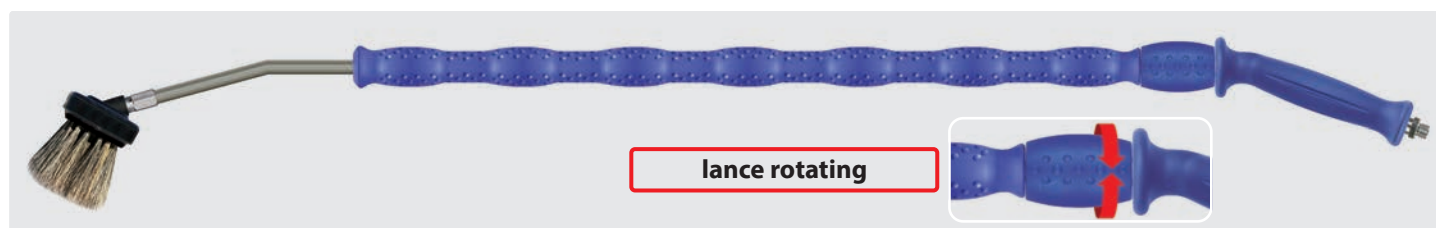

Lance with moulded handle Cool & Compact, easywash365+® handle, easywash365+® lance swivel, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	ISO			
200 009 673	700 mm	wash brush	900 mm	1/4" M
200 009 678	700 mm	wash brush	1,200 mm	1/4" M

Self-service lances



Self-service lances with brush longitudinal. Brush with nozzle protector for nozzle 1/8" M. Without high pressure nozzle

R+M Nr.	
523 960	1/8" M
523 961	1/4" M
523 962	M22 F long nipple
523 963	M22 M




Original Vorwerk. Brush hog hair. A= 260. B= 230 x 80 mm.

R+M Nr.	C
523 72	60 mm

A = appr. width B = frame for brush C = appr. length of bristles

Symbols  inlet  outlet  length  insulation

easywash365+® lances by Suttner

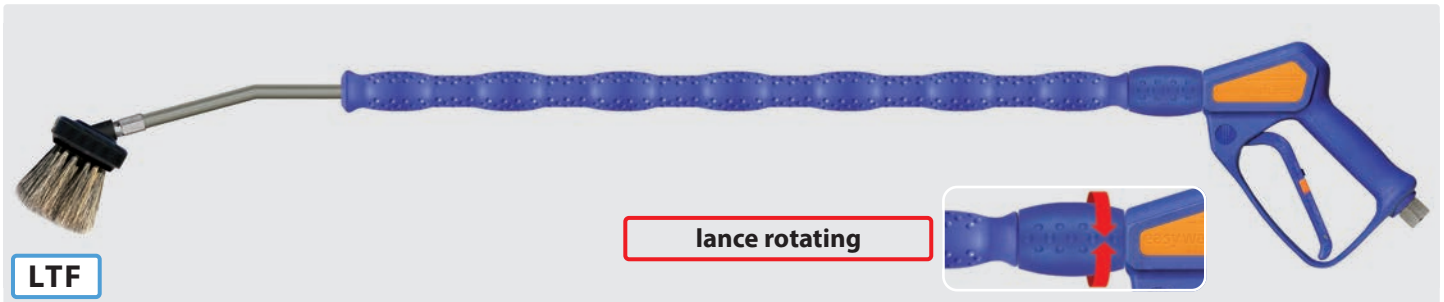

Lance with moulded handle Cool & Compact, **easywash365+®** spray gun, **easywash365+®** lance swivel, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	spray gun	ISO	↺	↔	↻
202 600 957	standard	700 mm	wash brush	900 mm	3/8" F swivel
202 600 972	weep	700 mm	wash brush	900 mm	3/8" F swivel
202 600 987	freeze stop	700 mm	wash brush	900 mm	3/8" F swivel
202 600 962	standard	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 977	weep	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 993	freeze stop	700 mm	wash brush	1,200 mm	3/8" F swivel



Lance with moulded handle Cool & Compact, **easywash365+®** spray gun, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	spray gun	ISO	↺	↔	↻
202 600 955	standard	700 mm	wash brush	900 mm	3/8" F swivel
202 600 970	weep	700 mm	wash brush	900 mm	3/8" F swivel
202 600 985	freeze stop	700 mm	wash brush	900 mm	3/8" F swivel
202 600 960	standard	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 975	weep	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 990	freeze stop	700 mm	wash brush	1,200 mm	3/8" F swivel

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.



Lance with moulded handle Cool & Compact, **easywash365+®** spray gun and nozzle protector ST-10 without nozzle. Max. 310 bar / 150 °C

R+M Nr.	spray gun	ISO mm	↺	↔ mm	↻
202 600 950	standard	300	1/4" F NPT	600	3/8" F swivel
202 600 966	weep	700	1/4" F NPT	900	3/8" F swivel
202 600 965	weep	300	1/4" F NPT	600	3/8" F swivel
202 600 980	freeze stop	300	1/4" F NPT	600	3/8" F swivel

R+M Nr.	spray gun	ISO mm	↺	↔ mm	↻
202 600 950 1	standard	300	1/4" F NPT	600	3/8" F swivel
202 600 966 1	weep	700	1/4" F NPT	900	3/8" F swivel
202 600 965 1	weep	300	1/4" F NPT	600	3/8" F swivel
202 600 980 1	freeze stop	300	1/4" F NPT	600	3/8" F swivel

Longcast lances



3/8" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2300, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 45 l/min / 100 °C

R+M Nr.		
200 078 510	nozzle protector without nozzle	3/8" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2320, grip aside and nozzle protector made out of plastic without nozzle.
Max. 150 bar / 80 l/min / 100 °C

R+M Nr.		
200 078 520	nozzle protector without nozzle	1/2" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun easyfarm365+, grip aside and nozzle protector made out of plastic without nozzle.
Max. 250 bar / 60 l/min / 100 °C

R+M Nr.		
200 078 530	nozzle protector without nozzle	1/2" F swivel



1/4" M. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 130 l/min / 100 °C

R+M Nr.		
200 078 500	nozzle protector without nozzle	1/4" M


The longcast lance can be connected to a low pressure pump, to a high pressure pump, to the public water system or to the extinguishing water network.

The lance works in the medium pressure range. By means of its very good solidity, good handling and compactness the lance is especially suitable for the intensive use.

The lateral hand grip makes a stepless adjustment of the water jet during the operation possible. A long casting point jet or a progressive, conical spray jet can be set.

In order to realize ideal cleaning results the nozzle size needs to be adapted to the pump performance (pressure and flow rate).


Nozzles for longcast lances



M15x1 M. Stainless steel

R+M Nr.	D
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 418	1.8 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm
200 078 440	4.0 mm
200 078 445	4.5 mm
200 078 450	5.0 mm
200 078 470	7.0 mm

functioning of longcast lance

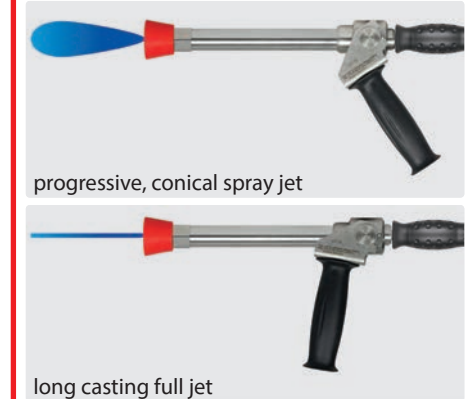

Twin and adjustable nozzle holder

ST-56 twin nozzle holder



R+M Nr.	⊖	⊕	(M)
200 056 500	2 x 1/4" F	1/4" F	brass

ST-56 twin nozzle holder




R+M Nr.	⊖	⊕
656 51	2 x 1/4" F	M18 F

Functional principle of a twin nozzle holder



high pressure phase



low pressure phase

ST-52.1 Variopress



Stainless steel axle.
Max. 350 bar/150° C

R+M Nr.	⊖	⊕
200 052 605	1/4" F	1/4" M

Coupling with ST-52.1 Variopress



Coupling KW : 1/4" M.
Brass / stainless steel

R+M Nr.
559 264




TR22 M : 1/4" M.
Brass / stainless steel

R+M Nr.
200 052 615

ST-58 change-over valves



R+M Nr.	⊖	⊕
200 058 600	1/4" F	1/4" F



Rep. Kit

R+M Nr.
200 058 300

Mini adjustable nozzles



R+M Nr.	⊖	⊕
657 20	1/4" F	1/4" F

R+M adjustable nozzles




R+M Nr.	⊖	⊕
657 30	1/4" F	1/4" F

ST-51 adjustable nozzles




R+M Nr.	⊖	⊕
200 051 530	1/4" F	1/4" F

Functional principle of a adjustable nozzle



high pressure phase



low pressure phase

Adjustable nozzle ST-51.1



Stainless steel/plastic. 80 l/min. Max. 150 bar/100 °C

R+M Nr.	⊕
200 051 700	3/8" M
200 051 750	1/2" M

Functional principle of adjustable nozzle ST-51.1



Conical spray jet



Long-range pencil jet

Complete lances

90° bended lances



Lance with nozzle protector ST-10 without hp nozzle. Height 190 mm

R+M Nr.	⊖	⊕	⊕	(M)
515 01	1/4" F NPT	900 mm	M22 F	zinc-plated steel

WC / gutter lances



Lance with adjustable nozzle without high pressure nozzle

R+M Nr.	⊖	⊕	⊕	(M)
513 112	1/4" F	500 mm	M22 F	zinc-plated steel

Symbols ⊕ inlet ⊖ outlet ⊕ length ⊕ nozzle (M) material

ST-330 swivel nozzle holder

- » Swivel it easily!
- » Used for cleaning of places which are difficult to access such as container e.g. feeding troughs and gutters.
- » Effortless and variable shifting of the swivel direction.
- » Made out of stainless steel.
- » Capable of swivelling by up to 240°.



Stainless steel.
Max. 310 bar / 45 l/min / 150 °C



Stainless steel.
Fixable.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	↺	↻
200 330 500	1/4" F NPT	1/4" F
200 330 510	1/4" M	1/4" F

R+M Nr.	↺	↻
200 330 501	1/4" F NPT	1/4" F
200 330 511	1/4" M	1/4" F



Stainless steel.
Fixable.
Max. 310 bar / 45 l/min / 150 °C



Stainless steel.
Max. 310 bar / 45 l/min / 150 °C

Pivotal nozzle holder

Pivotal nozzle holder. Stainless steel. Max. 40 l/min / 90 °C



R+M Nr.	↺	↻	P
200 330 540	1/4" F NPT	1/4" M NPT	350 bar
200 330 530	1/4" F NPT	1/4" M BSP	350 bar


Wall cleaner



- » Rotating wall cleaner TurboDevil® suitable for telescopic lances
- » Splash guard stainless steel with rubberlip or brush strips
- » Splash guard ⌀ 300 mm
- » Without nozzles. 2 nozzles 1/4" M with 15° spray angle are required
- » Max. 250 bar / 90 °C

R+M Nr.	↻	TYP	Ⓢ
521 032 251	M22 M	rubberlip	1,9 kg
521 032 254	M22 M	brush strips	1,9 kg
521 032 256	M18 F	rubberlip	1,9 kg
521 032 255	M18 F	brush strips	1,9 kg
521 032 258	1/4" F	rubberlip	1,9 kg
521 032 257	1/4" F	brush strips	1,9 kg


Splash guard

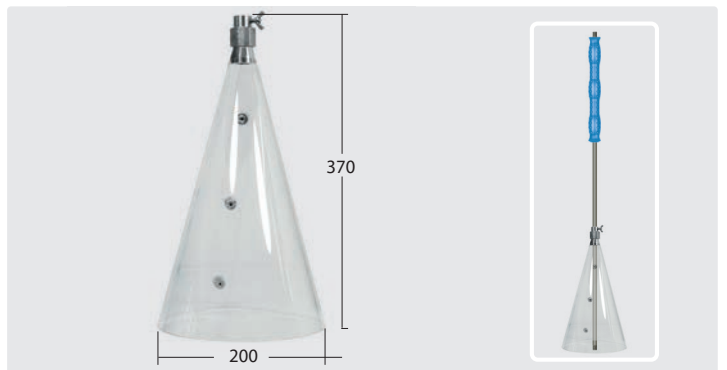

PVC splash guard, with thumb screw adjustable stainless steel holder for attachment to lances.
Max. 80 °C

R+M Nr.	⌀
200 029 351	200 mm

Accessories for wall cleaner

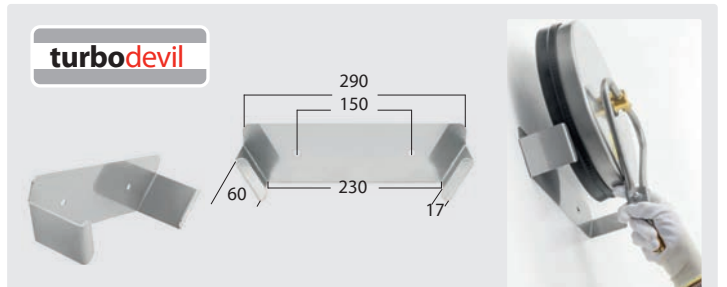

Wall bracket for wall cleaner TurboDevil®.

R+M Nr.	M	Ⓢ
710 400 098	stainless steel 2 mm	502 gr

Symbols ↺ outlet ↻ inlet ↻ length Ⓢ weight TYP type 🚚 shipment by truck M material

R+M / Suttner high-pressure telescopic lances

- » Light and handy. Infinitely extendable.
- » **Non-slip foam material insulation, 530 mm.**
- » Length easily adjustable. Adjustable from 2.3 m to 7.4 m.
- » Lance with embedded high pressure hose and mounted Suttner gun **ST-602**. Lance without high pressure nozzle.
- » Max. 275 bar / 100 °C

Safe handling thanks to the integrated pole holder
on the ST-602 spray gun and long soft handle
for a comfortable hold with insulation.



Nozzle guard with angled extension tube



ST-10 / 1/4" F NPT with extension tube angled




1/4" M with extension tube; Length 150 mm




R+M Nr.	⊞	M	⊞	↔	⊞
525 087 105	2.8 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 3.80 m	M22 M
525 087 110	2.8 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 3.80 m	3/8" F
525 087 115	2.7 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 3.70 m	3/8" F



R+M Nr.	⊞	M	⊞	↔	⊞
525 087 205	3.4 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 5.75 m	M22 M
525 087 210	3.4 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 5.75 m	3/8" F
525 087 215	3.3 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 5.65 m	3/8" F

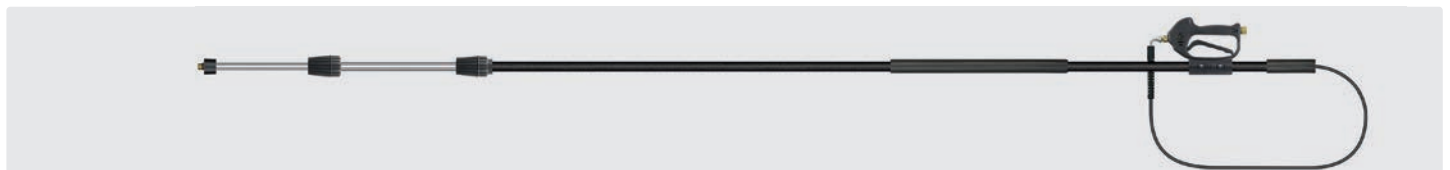

R+M Nr.	⊞	M	⊞	↔	⊞
525 087 305	4.1 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	3.20 - 7.80 m	M22 M
525 087 310	4.1 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.80 m	3/8" F
525 087 315	4.0 kg	Aluminum / Fiberglass	1/4" M with extension	3.10 - 7.70 m	3/8" F

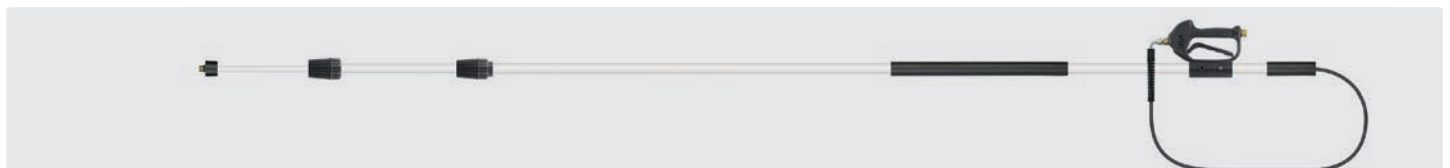

R+M Nr.	⊞	M	⊞	↔	⊞
525 087 405	4.0 kg	Aluminum	Nozzle protector without tip nozzle with angled extension	3.20 - 7.55 m	M22 M
525 087 410	4.0 kg	Aluminium	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.55 m	3/8" F
525 087 415	3.9 kg	Aluminium	1/4" M with extension	3.10 - 7.45 m	3/8" F

High-pressure telescopic lances accessories

Nozzle tube



For gutter cleaning, 250 mm.
M22 M : M18 M

R+M Nr.
513 002 502

Screw connections



1/4" F. Nozzle protector complete without nozzle tip.

R+M Nr.
519 601

Belt support kit



R+M Nr.
525 922

Telescopic lances are on page 35.

High-pressure telescopic lances made of carbon

- » Two latest-generation carbon telescopic lances for efficient cleaning of roofs and facades with a wide range of applications.
- » The innovative design made of high-quality carbon gives it a special lightness while maintaining stability.
- » For the removal of moss, lichen and algae as well as for the cleaning of solar systems.
- » Stable and infinitely extendable.
- » Lance with internally guided high-pressure hose, Flexy and attached Suttner gun ST-602 or ST-2600.
- » Lance is delivered without high pressure nozzles.
- » Max. 275 bar / 100 °C

Safe handling thanks to the integrated tube holder on the ST-602 or ST-2600 gun for a comfortable grip.



R+M Nr.	P	☺	↔	Ⓒ	Ⓢ
710 086 900	275 bar	1/4" F	2.0 m – 11.5 m	3/8" F	6.5 kg



LTF

R+M Nr.	P	☺	↔	Ⓒ	Ⓢ
710 086 905	300 bar	1/4" F	2.0 m – 11.5 m	3/8" F swivel	6.5 kg

High-pressure telescopic lances made of carbon, accessories




Nozzle protector without nozzle with 15° angled extension tube. For nozzle tips without thread, nozzle protector "K". Inlet 1/4" F, stainless steel / brass, 150 °C / 400 bar. Length 150 mm

R+M Nr.
513 002 501



Nozzle protector ST-10 / 1/4" female NPT with 15° angled extension pipe. For high-pressure nozzles with 1/4" male NPT thread. Inlet 1/4" F, stainless steel, 150 °C / 400 bar. Length 150 mm

R+M Nr.
513 002 500



1/4" male thread with extension tube; Length 100 mm. For high-pressure nozzles with 1/4" female BSP thread. Inlet 1/4" F, stainless steel 150 °C / 400 bar. Length 100 mm

R+M Nr.
070 000 097

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.


With lower holding and trigger force: LTF technology in the ST-2600.



Symbols ☺ outlet Ⓒ inlet ↔ length Ⓢ weight P pressure shipment by truck Ⓒ color

Accessories and spare parts for lances and twin lances


Grips for lances




ST-007




Lance 1/4"

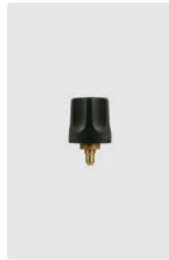Vented handle
ST-9Valve on top.
Max. 250 bar /
150 °C

Repair kit ST-53

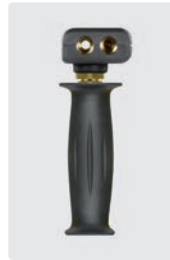Valve aside.
Max. 310 bar /
150 °C

Repair kit ST-54

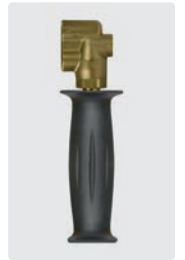Valve.
Max. 310 bar /
150 °C

R+M Nr.
200 009 700

R+M Nr.
200 009 600

R+M Nr.
200 009 680

R+M Nr.
120 000 010

R+M Nr.
120 000 005

R+M Nr.
200 054 492

R+M Nr.
200 054 450

R+M Nr.
200 054 480

ST-154


Valve aside.
Max. 500 bar /
150 °C

Repair kit ST-154

R+M Nr.
200 154 491

R+M Nr.
200 154 400

Low pressure nozzle



1/4" M. Nozzle 40° 30. Brass

R+M Nr.
623 10

Space holder




R+M Nr.
517 00

Lance bender




Stainless steel. Lance bender for 1/4" M lances without nozzle protector

R+M Nr.
040 003 600

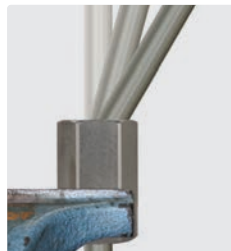

Nozzle protector

Nozzle protector ST-11

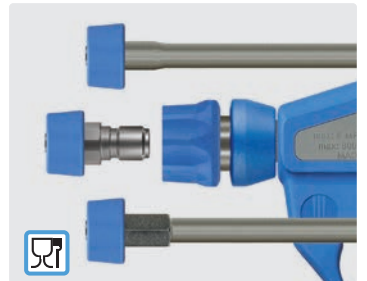

- » The nozzle protector ST-11 is suitable for nozzles 1/4" M.
- » Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004.
- » Especially designed for applications in the food industry.
- » It is clamped undetachably between the nozzle and the nozzle sleeve.

R+M Nr.	C
020 001 124	white
020 001 149	blue
020 001 121	red
020 001 122	green

R+M Nr.	C
020 001 123	yellow
020 001 157	grey
020 001 158	black

Nozzle protector and nozzle holder

2-component nozzle protector ST-10

The ST-10 is the ideal combination made out of hard and soft plastics. The nozzle protector is suitable for cold and hot water applications in the car wash, agriculture and food industry. The ST-10 is unimpeachable, protects your nozzles and preserves the surfaces to be cleaned at the same time. Suitable for nozzles 1/4" M NPT. Zinc-plated steel max. 400 bar. Stainless steel max. 500 bar



Plastic. Zinc-plated steel

R+M Nr.
200 010 500



Plastic. Zinc-plated steel

R+M Nr.
200 010 510



Plastic. Zinc-plated steel

R+M Nr.
200 010 520



Plastic. Zinc-plated steel

R+M Nr.
200 010 530



Plastic. Stainless steel

R+M Nr.
200 010 770



Plastic. Stainless steel

R+M Nr.
200 010 760



For nozzles with filter. Plastic. Stainless steel.

R+M Nr.
200 010 745



For nozzles with filter. Plastic. Stainless steel.

R+M Nr.
200 010 725



Plastic. Stainless steel

R+M Nr.
200 010 700



Plastic. Stainless steel

R+M Nr.
200 010 710



Plastic. Stainless steel

R+M Nr.
200 010 720



Plastic. Stainless steel

R+M Nr.
200 010 730



Plastic. Stainless steel

R+M Nr.
200 010 755



Plastic. Stainless steel

R+M Nr.
200 010 740

For nozzles 1/4" M NPT



ST-005. Plastic. Zinc-plated steel

R+M Nr.
200 000 003



ST-005. Plastic. Stainless steel

R+M Nr.
200 000 008



Rubber. Zinc-plated steel

R+M Nr.
519 05



ST-12. Plastic. Zinc-plated steel

R+M Nr.
200 012 500



Socket 1/4" F NPT : 3/8" F. Stainless steel.


R+M Nr.
710 101 350



Socket. Round. Stainless steel

R+M Nr.
040 004 100

For nozzles 1/4" M BSP



Socket. Brass. Quadrangle

R+M Nr.
518 00

For nozzles 1/8" M



ST-005. Plastic. Zinc-plated steel

R+M Nr.
200 000 004



Socket. Hexagon. Stainless steel

R+M Nr.
518 70



Socket. Plastic. For nozzle with hexagon 13 + 14

R+M Nr.
519 32



2-component nozzle protector ST-10. Plastic. Stainless steel

R+M Nr.
200 010 830

For tip nozzles



1/4" F : M18 M. Nozzle holder EG. Brass

R+M Nr.
010 000 043



O-ring. Nozzle holder EG

R+M Nr.
790 25



M18 F. Nozzle holder EG. Stainless steel

R+M Nr.
040 000 041



M18 F. Nozzle protector

R+M Nr.
519 60

Adaptor lances 500 bar




1/4" M : M20 F. Stainless steel

R+M Nr.
519 714 209



1/4" F. Nozzle protector complete without nozzle tip.

R+M Nr.
519 601



1/4" F : M18 F. Adaptor. Brass

R+M Nr.
519 40



1/4" M : M18 F. Adaptor 2 pieces

R+M Nr.
519 70



3/8" M : M18 F. Adaptor. Stainless steel

R+M Nr.
040 001 125

Symbols outlet ISO insulation length M material

Nozzle protector and nozzle holder

Nozzle holder and protector hydroblade®



1/4" F : M20 M.
Nozzle holder.
Stainless steel

R+M Nr.
200 088 127



M20x1 F.
Nozzle protector.
Brass

R+M Nr.
020 000 085

Gun extensions



1/4" M. Lance with insulation ST-28 Cool & Compact.
Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	(M)
200 028 303	1/4" M	300 mm	330 mm	zinc-plated steel



1/4" M. Lance with insulation ST-9.9 and M22 F.
Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
200 009 945	M22 F	370 mm	zinc-plated steel



1/4" M. Lance with insulation ST-29 Cool & Compact.
Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	(M)
200 029 303	1/4" M	300 mm	330 mm	stainless steel



1/4" M. Lance with insulation ST-9.9 and M22 F.
Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
200 009 940	M22 F	370 mm	zinc-plated steel



1/4" M. Lance with insulation ST-9.1 and M22 F.
Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
200 009 730	M22 F	350 mm	stainless steel
200 009 731	M22 F	350 mm	zinc-plated steel



1/4" M. Lance with moulded handle.
Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	(M)
070 004 340	1/4" M	400 mm	440 mm	stainless steel



1/4" M. Lance with insulation ST-9.1 and coupling KW.
Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
200 009 750	coupling KW	260 mm	stainless steel



1/4" M. Lance with moulded handle.
Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	(M)
070 000 330	1/4" M	300 mm	330 mm	zinc-plated steel
070 000 240	1/4" M	400 mm	440 mm	zinc-plated steel



1/4" M. Lance with insulation and M22 F.
Max. 400 bar / 150 °C

R+M Nr.	⊖	↔	(M)
202 300 400	M22 F	340 mm	zinc-plated steel



1/4" M. Lance with moulded handle.
Max. 400 bar / 150 °C

R+M Nr.	⊖	ISO	↔	(M)
070 003 229	1/4" M	300 mm	330 mm	stainless steel

Gun extensions with handle

1/4" M. Lance with handle and insulation ST-28.2/ST-29.2 Cool & Compact. Max. 400 bar / 150 °C



R+M Nr.	☺	ISO	↔	(M)
200 028 204	1/4" M	400 mm	430 mm	zinc-plated
200 029 204	1/4" M	400 mm	430 mm	stainless steel



R+M Nr.	☺	ISO	↔	(M)
200 028 210	1/4" M	400 mm	1,000 mm	zinc-plated
200 029 210	1/4" M	400 mm	1,000 mm	stainless steel

Insulations for lances

Insulations ST-9.9



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 935



Insulation 330 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 936


Vented handles ST-9



Vented handle 380 mm. Suitable for 1/4" lances. Max. 150 °C

R+M Nr.
200 009 510

Adapter for lances

	M18 M : TR20 F. K-Lock 8. Brass. Max. 400 bar / 150° C	
	<table><tr><th>R+M Nr.</th></tr><tr><td>565 686</td></tr></table>	R+M Nr.
R+M Nr.		
565 686		

Lance holder, two-piece



Stainless steel. For lances with R+M / Suttner insulation and connection: Plug nipple or male thread.

R+M Nr.
105 610 050



Stainless steel. For all lances with R+M / Suttner insulation. With 4 lance fixations for mounting for connection: hand screw coupling or female thread

R+M Nr.
105 610 055




Stainless steel. Lance fixation for lances with screw coupling or female thread. For individual retrofitting

R+M Nr.
105 610 004


Symbols ☺ outlet ISO insulation ↔ length (M) material

Lance holder

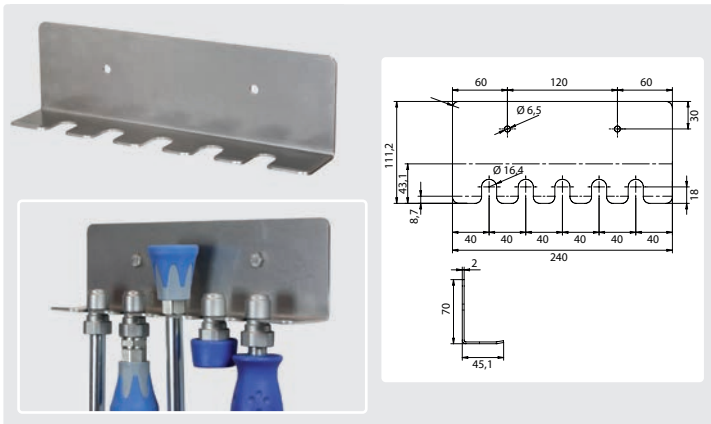

Stainless steel. Wall mount for 5 lances


R+M Nr.
040 003 830

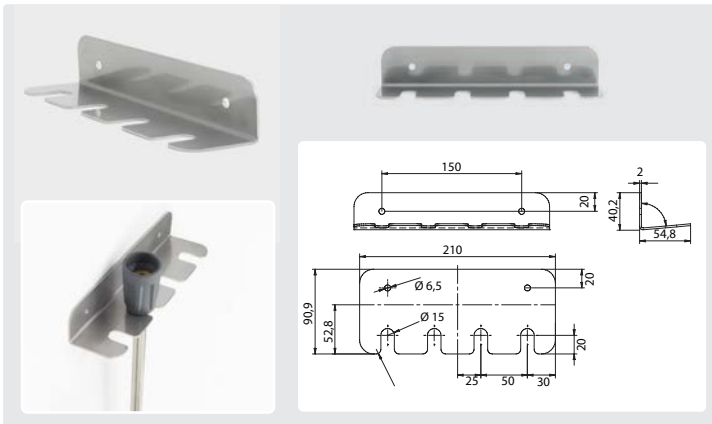

Stainless steel. Wall mount for 4 lances with coupling KW

R+M Nr.
040 008 545

Universal bracket

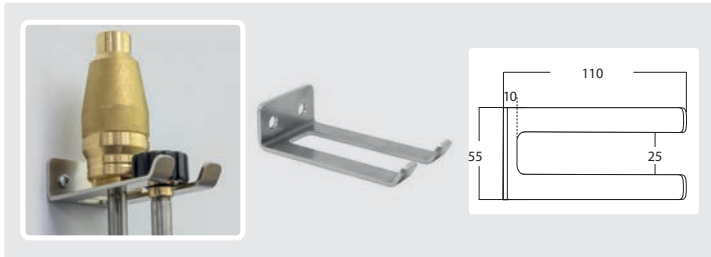

Stainless steel bracket for wall mounting

R+M Nr.
710 400 097

Lance holder



Wall mount for 3 lances 1/4"

R+M Nr.
020 000 970



Accessories for wall cleaner	328
Accessories quick connect spray nozzles	318
Accessories wash brushes	324
Adjustable nozzle ST-51.1	316
Adjustable nozzles	316
Brush holder	325
Ceramic high pressure nozzles	301
Cleantecs rotating nozzles with carbide insert	314
Coupling-system ST-245	319
easywash365+® brush holder	325
easywash365+® wash brushes - large areas are completely clean from now on!	322
Flat jet lances	317
Further information about high pressure nozzles	304-305
High pressure nozzles	300-301
High-pressure telescopic lances accessories	328
High-pressure telescopic lances made of carbon	330
High-pressure telescopic lances made of carbon, accessories	330
Hydroblade® Nozzle System	302
Hydroblade® Nozzles	301
Lance clips	310
Mud suckers	320
Nozzle protector and nozzle holder	303
Quick connect nozzle set by Suttner	318
R+M / Suttner high-pressure telescopic lances	329
Rotating brushes	324
Rotating nozzles	315
Sandblast kits	326
Sandblast kits	327
Spray width depending on spray angle and distance	305
ST-33 High Pressure Filter	308
ST-559 Suttner rotating nozzles with carbide insert	307
Suttner rotating nozzles in different colours	308
Suttner rotating nozzles with ceramic insert	306-307, 309-314
Suttner rotating nozzles without plastic cap	308
Telescopic lances and easyclean365+® wash brushes	321
Tip cleaner	300
Universal bracket	316
Vario nozzles and triple nozzles	315-316
Vorwerk lances & wash brushes	323
Wall cleaner	328
Wash brushes	322-323

High pressure nozzles

1/4" M NPT



Impact = 100 %

	0°	15°	25°	40°	65°
[D]	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
02	610 05	613 05	617 50	620 30	625 20
025	610 07	613 07	617 65	620 35	625 25
03	610 10	613 10	617 70	621 00	625 30
034		613 20	617 80		625 35
035	610 20		617 85	621 20	
04	610 30	613 30	617 90	621 30	625 40
045	610 40	613 40	618 00	621 40	625 50
05	610 50	613 50	618 10	621 50	625 60
055	610 60	613 60	618 20	621 60	625 70
06	610 70	613 70	618 30	621 70	625 80
065	610 80	613 80	618 40	621 80	625 90
07	610 90	613 90	618 50	621 90	626 00
075	611 00	614 00	618 60	622 00	
08	611 10	614 10	618 70	622 10	626 10
085	611 20	614 20	618 80	622 20	
09	611 30	614 30	618 90	622 30	626 20
10	611 40	614 40	619 00	622 40	626 30
11	611 50	614 50	619 10	622 50	
12	611 60	614 60	619 20	622 60	
13	611 70	614 70	619 30	622 70	
14	611 75	614 75	619 35		
15	611 80	614 80	619 40	622 80	626 50
20	611 90	614 90	619 50	622 90	626 60
25	612 00	615 00	619 60	623 00	
30	612 10	615 10	619 70	623 20	626 70
35	612 50	615 20	619 75	623 25	
40	612 15	615 25	619 80	623 30	
50	612 20	615 35	619 90	623 32	

1/4" M NPT - VVSS



Impact = 100 %

	40°	65°	80°		
[D]	R+M Nr.	R+M Nr.	R+M Nr.		
01	620 20	625 10	627 000 1		
015	620 25	625 15	627 00		
02	620 29		627 02		
03			627 03		

1/8" M NPT - VVSS



Impact = 100 %

	40°	65°			
[D]	R+M Nr.	R+M Nr.			
01	638 01	639 55 *			
015		639 56			
02		639 57			
03		639 58			

* brass

Symbols [D] nozzle

1/8" M NPT



Impact = 100 %

	0°	15°	25°	40°	65°
[D]	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
02	630 08	632 05	635 00		
03	630 10	632 10	635 10	638 10	
035		632 15	635 15		
04	630 20	632 20	635 20	638 20	639 591
045	630 30	632 30	635 30	638 30	
05	630 40	632 40	635 40	638 40	639 60
055	630 50	632 50	635 50	638 50	
06	630 60	632 60	635 60	638 60	639 61
065	630 70	632 70	635 70	638 70	
07	630 80	632 80	635 80	638 80	
075	630 90	632 85	635 90	638 90	
08	631 00	633 00	636 00	639 00	
085	631 10	633 10	636 10	639 10	
09	631 20	633 20	636 20	639 20	
10	631 30	633 30	636 30	639 30	639 65
11	631 40		636 40		
12	631 50			639 50	
15		633 60	636 80		

High pressure nozzles

Tip nozzle



Impact = 100 %

	0°	15°	25°	40°	65°
[D]	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
02	600 02	602 40	604 90	607 40	609 052
025		602 45	604 95		609 052
03	600 05	602 50	605 00	607 50	609 053
034	600 06	602 55	605 05		609 34
04	600 10	602 60	605 10	607 60	609 10
045	600 20	602 70	605 20	607 70	
05	600 30	602 80	605 30	607 80	609 30
055	600 40	602 90	605 40	607 90	609 305
06	600 50	603 00	605 50	608 00	
065	600 60	603 10	605 60	608 10	
07	600 70	603 20	605 70	608 20	
075	600 75	603 25	605 75	608 25	
08	600 80	603 30	605 80	608 30	609 008
085	600 90	603 40	605 90		
09	601 00	603 50	606 00	608 40	
10	601 10	603 60	606 10	608 60	609 100
12		603 70	606 20	608 66	
13	601 30	603 80	606 30	608 70	
15	601 40	603 90	606 40	608 80	
20	601 50		606 50	609 00	609 200

Tip cleaner



High speed steel (HSS) with aluminum shaft. ⌀ 42 mm

R+M Nr.	⊗
200 049 042	0.5

High pressure nozzles

Power 1/4" M NPT - PMEG



Impact = 250 %

	15°	25°			
D	R+M Nr.	R+M Nr.			
04	613 305	617 905			
045	613 405	618 005			
05	613 505	618 105			
055	613 605	618 205			
06	613 705	618 305			
065	613 805	618 405			

Power 1/8" M NPT - PMEG



Impact = 250 %

	15°	25°
D	R+M Nr.	R+M Nr.
04	632 205	635 205
045	632 305	635 305
05	632 405	635 405
055	632 505	635 505
06	632 605	635 605
065	632 705	635 705

Nozzle filter VV



Brass. Max. 70 bar

R+M Nr.	nozzle
649 90	1/4"
649 95	1/8"

Ceramic high pressure nozzles

1/4" M NPT



Impact = 100 %. Max. 300 bar / 125 °C

	15°	25°	40°		
D	R+M Nr.	R+M Nr.	R+M Nr.		
02					
025	613 076	617 656	620 356		
03	613 106	617 706	621 006		
035	613 206	617 806			
04	613 306	617 906	621 306		
045	613 406	618 006	621 406		
05	613 506	618 106	621 506		
055	613 606	618 206	621 606		
06		618 306			
065		618 406	621 806		
07		618 506			
08					
11					
15					



- » Ceramic inserts provide up to 10 times the life of stainless steel inserts, maximizing your return of investment and decreasing downtime for nozzle replacement.
- » Extra long life ceramic orifice is nearly diamond-hard to resist wear.
- » The used ceramic is specially designed for high pressure and elevated temperature.
- » The extremely hard ceramic insert guarantees a more precise and stronger spray pattern than with conventional stainless steel nozzles.
- » Wedge-shaped orifice insert seats tightly as spray pressure increases.
- » The external body made out of stainless steel V2A / AISI 304 has a polished surface which is resistant to rust and slight damages.
- » The nozzles are equipped with a 1/4" M NPT connection.

Hydroblade® Nozzles

Nozzles and O-rings

Hydroblade®

Max. 400 bar / 150 °C

- » Strong and uniform flat jet with extraordinarily narrow jet depth
- » Application: High pressure and steam jet cleaning
- » Suitable for existing systems
- » Stainless steel



	0°	15°	25°	40°
D	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
034		127 015 034	127 025 034	
040	127 100 040	127 015 040	127 025 040	127 040 040
045	127 100 045	127 015 045	127 025 045	127 040 045
050	127 100 050	127 015 050	127 025 050	127 040 050
055	127 100 055	127 015 055	127 025 055	127 040 055
060	127 100 060	127 015 060	127 025 060	127 040 060
065			127 025 065	
070	127 100 070	127 015 070	127 025 070	127 040 070
075		127 015 075	127 025 075	
080		127 015 080	127 025 080	
090			127 025 090	
100			127 025 100	

Hydroblade® Nozzle System

Set consists of nozzle holder,
6 equal nozzles and O-rings.
Max. 400 bar / 150 °C

- » Strong and uniform flat jet with extraordinarily narrow jet depth
- » Application: High pressure and steam jet cleaning
- » Suitable for existing systems
- » Stainless steel



0°



15°

25°

40°

D	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
034		126 015 034	126 025 034	
040	126 100 040	126 015 040	126 025 040	126 040 040
045	126 100 045	126 015 045	126 025 045	126 040 045
050	126 100 050	126 015 050	126 025 050	126 040 050
055	126 100 055	126 015 055	126 025 055	126 040 055
060	126 100 060	126 015 060	126 025 060	126 040 060
065			126 025 065	
070		126 015 070	126 025 070	126 040 070
075	126 100 075	126 015 075	126 025 075	
080		126 015 080	126 025 080	
090			126 025 090	
100			126 025 100	

Hydroblade® Benchmark

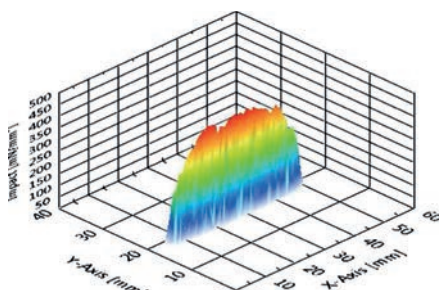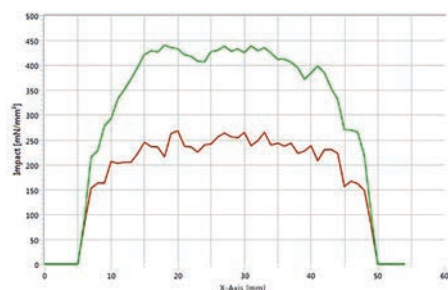

Hydroblade® flat jet nozzles feature a homogenous liquid and pressure distribution. Highly efficient jets are achieved with spray angles of up to 40°. Thanks to the flow geometry of the nozzles, a compact and controlled jet is generated.



The Hydroblade® set consists of nozzle holder, 6 equal nozzles, and corresponding O-rings.



1/4" F : M20 M.
Nozzle holder.
Stainless steel

R+M Nr.
200 088 127



M20x1 F.
Nozzle protector.
Brass


R+M Nr.
020 000 085

Symbols nozzle

Nozzle protector and nozzle holder

2-component nozzle protector ST-10

The ST-10 is the ideal combination made out of hard and soft plastics. The nozzle protector is suitable for cold and hot water applications in the car wash, agriculture and food industry. The ST-10 is unimpeachable, protects your nozzles and preserves the surfaces to be cleaned at the same time. Suitable for nozzles 1/4" M NPT. Zinc-plated steel max. 400 bar. Stainless steel max. 500 bar

							
Plastic. Zinc-plated steel	Plastic. Zinc-plated steel	Plastic. Zinc-plated steel	Plastic. Zinc-plated steel	Plastic. Stainless steel	Plastic. Stainless steel	For nozzles with filter. Plastic. Stainless steel.	For nozzles with filter. Plastic. Stainless steel.
R+M Nr. 200 010 500	R+M Nr. 200 010 510	R+M Nr. 200 010 520	R+M Nr. 200 010 530	R+M Nr. 200 010 770	R+M Nr. 200 010 760	R+M Nr. 200 010 745	R+M Nr. 200 010 725
							
Plastic. Stainless steel	Plastic. Stainless steel	Plastic. Stainless steel	Plastic. Stainless steel	Plastic. Stainless steel	Plastic. Stainless steel		
R+M Nr. 200 010 700	R+M Nr. 200 010 710	R+M Nr. 200 010 720	R+M Nr. 200 010 730	R+M Nr. 200 010 755	R+M Nr. 200 010 740		

For nozzles 1/4" M NPT

					
ST-005. Plastic. Zinc-plated steel	ST-005. Plastic. Stainless steel	Rubber. Zinc-plated steel	ST-12. Plastic. Zinc-plated steel	Socket 1/4" F NPT : 3/8" F. Stainless steel.	Socket. Round. Stainless steel
R+M Nr. 200 000 003	R+M Nr. 200 000 008	R+M Nr. 519 05	R+M Nr. 200 012 500	R+M Nr. 710 101 350	R+M Nr. 040 004 100

For nozzles 1/4" M BSP

	Socket. Brass. Quadrangle
	R+M Nr. 518 00


For nozzles 1/8" M

			
ST-005. Plastic. Zinc-plated steel	Socket. Hexagon. Stainless steel	Socket. Plastic. For nozzle with hexagon 13 + 14	2-component nozzle protector ST-10. Plastic. Stainless steel
R+M Nr. 200 000 004	R+M Nr. 518 70	R+M Nr. 519 32	R+M Nr. 200 010 830

Adaptor lances 500 bar


	1/4" M : M20 F. Stainless steel
K	R+M Nr.
	519 714 209

For tip nozzles

			
1/4" F : M18 M. Nozzle holder EG. Brass	O-ring. Nozzle holder EG	M18 F. Nozzle holder EG. Stainless steel	M18 F. Nozzle protector
R+M Nr. 010 000 043	R+M Nr. 790 25	R+M Nr. 040 000 041	R+M Nr. 519 60
			
1/4" F. Nozzle protector complete without nozzle tip.	1/4" F : M18 F. Adaptor. Brass	1/4" M : M18 F. Adaptor 2 pieces	3/8" M : M18 F. Adaptor. Stainless steel
R+M Nr. 519 601	R+M Nr. 519 40	R+M Nr. 519 70	R+M Nr. 040 001 125

Further information about high pressure nozzles

Output in l/min depends on pressure in bar

		Pressure in bar											
		3	10	20	30	40	50	60	70	80	90	100	110
D	Ø*												
01	0.59	0.4	0.7	1.0	1.3	1.4	1.6	1.7	1.8	2.0	2.1	2.2	2.3
015	0.71	0.6	1.0	1.5	1.8	2.1	2.4	2.6	2.8	3.0	3.2	3.4	3.6
02	0.84	0.8	1.4	2	2.5	2.8	3.2	3.5	3.7	4.0	4.2	4.5	4.7
025	0.94	1.0	1.6	2.5	3.1	3.5	4.0	4.3	4.7	5.0	5.3	5.6	5.9
03	1.03	1.2	2.0	3.1	3.7	4.3	4.8	5.3	5.7	6.1	6.3	6.8	7.1
035	1.10	1.4	2.5	3.6	4.2	4.9	5.5	6.0	6.5	7.0	7.4	7.8	8.2
04	1.21	1.6	2.8	4.1	5.2	5.9	6.6	7.3	7.8	8.4	8.9	9.4	9.8
045	1.26	1.8	3.1	4.5	5.5	6.4	7.1	7.8	8.4	9.0	9.6	10.2	10.5
05	1.33	2.0	3.5	5.1	6.2	7.1	8.0	8.7	9.4	10.0	10.7	11.3	11.8
055	1.39	2.1	3.9	5.6	6.8	7.8	8.7	9.6	10.3	11.1	11.8	12.4	13.0
06	1.46	2.4	4.1	6.1	7.4	8.6	9.6	10.4	11.3	12.1	12.8	13.6	14.3
065	1.52	2.6	4.5	6.6	8.0	9.3	10.4	11.3	12.3	13.2	14.0	14.7	15.4
07	1.57	2.8	5.0	7.1	8.6	10.0	11.2	12.2	13.2	14.1	15.0	15.8	16.6
075	1.63	3.0	5.3	7.6	9.3	10.7	12.0	13.1	14.2	15.2	16.1	16.9	17.7
08	1.68	3.1	5.6	8.2	9.8	11.3	12.7	14.0	15.1	16.1	17.1	18.0	18.9
085	1.73	3.3	6	8.7	10.4	12.1	13.5	14.8	16.0	17.1	18.1	19.1	20.0
09	1.78	3.5	6.5	9.2	11.1	12.8	14.3	15.7	17.0	18.0	19.2	20.2	21.2
10	1.88	3.9	7.0	10.2	12.3	14.2	16.0	17.4	18.9	20.1	21.4	22.5	23.6
11	1.96	4.3	7.8	11.2	13.4	15.5	17.3	19.0	20.5	22.0	23.3	24.5	25.7
12	2.05	4.7	8.4	12.3	14.6	16.9	18.9	20.8	22.4	24.0	25.4	26.8	28.1
13	2.13	5.1	9.5	13.3	15.9	18.3	20.5	22.5	24.3	26.0	27.5	29.0	30.4
14	2.21	5.5	10.2	14.3	17.1	19.7	22.1	24.2	26.1	28.0	29.6	31.3	32.8
15	2.30	5.9	10.8	15.3	18.5	21.3	23.9	26.1	28.3	30.2	32.1	33.8	35.3
20	2.66	7.9	14	20.5	24.7	28.5	31.9	34.9	37.8	40.3	42.7	45.1	47.2
30	3.25	11.8	21.1	30.5	37.0	42.7	47.8	52.4	56.6	60.5	64.2	67.6	70.9
40	3.76	15.6	28.0	40.5	49.4	57.0	63.7	69.8	75.4	80.7	85.5	90.2	94.6
50	4.28	19.5	35.3	50.5	61.50	71.00	79.50	87.00	94.00	101.00	107.00	112.50	118.00

Choosing the suitable nozzle is most important for output and smooth function of the high pressure cleaner:

Nozzle too small = machine permanently switches into bypass or off.


Nozzle too wide = machine has a small output, lower pressure.

How to choose the suitable nozzle?

Attention: pressure and flow of the high pressure cleaner must be known e.g. 15 l/min (900 l/h) - working pressure of 150 bar.

1. In the first line (pressure in bar) please go to column "150".
2. Follow column "150" down to find l/min: take "15.2" (nearest to 15).
3. Turn left in line "15.2" until the first column and stop at nozzle type "055".
4. The size you need is "055"
5. On pages 300-301 please select type of nozzle and spray angle.
6. In line "055" please find the R+M Nr. of the nozzle you need.


Important for excellent high pressure cleaning is the impact of the spray jet which is made up of 4 features.




water flow




water pressure




spray angle



spray distance

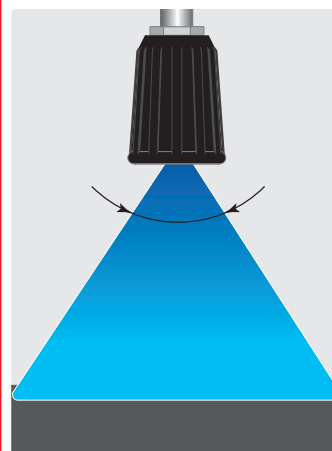

low impact
=
high surface efficiency

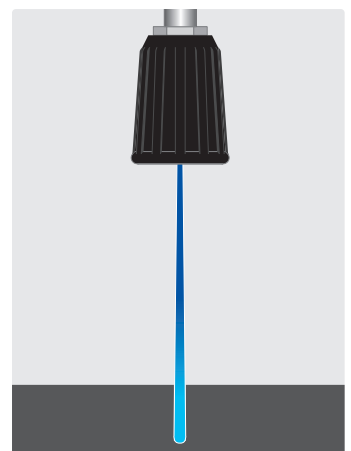

high impact
=
small surface efficiency

* hole diameter in mm

Further information about high pressure nozzles

Output in l/min depends on pressure in bar

Pressure in bar													
		120	130	140	150	160	175	200	225	250	300	400	500
D	Ø	1	1	1	1	1	1	1	1	1	1	1	1
01	0.59	2.4	2.5	2.6	2.7	2.8	2.9	3.1	3.3	3.5	3.8	4.4	4.9
015	0.71	3.7	3.8	4.0	4.2	4.3	4.5	4.8	5.1	5.4	5.9	6.7	7.5
02	0.84	4.8	5.0	5.3	5.4	5.6	5.9	6.3	6.7	7.0	7.7	8.9	9.9
025	0.94	6.1	6.4	6.6	6.9	7.1	7.5	8.0	8.5	9.0	9.9	11.4	12.7
03	1.03	7.4	7.7	8.0	8.3	8.6	9.0	9.6	10.2	10.7	11.8	13.5	15.1
035	1.10	8.6	8.9	9.2	9.5	9.8	10.3	11.0	11.7	12.3	13.8	15.5	17.8
04	1.21	10.3	10.7	11.1	11.5	11.9	12.4	13.3	14.1	14.8	16.3	18.7	20.9
045	1.26	10.9	11.4	11.8	12.2	12.6	13.2	14.1	15.0	15.8	17.4	19.9	22.3
05	1.33	12.4	12.9	13.4	13.8	14.3	14.9	16.0	16.9	17.9	19.7	22.6	25.3
055	1.39	13.6	14.1	14.7	15.2	15.7	16.4	17.5	18.6	19.6	21.7	25.0	28.0
06	1.46	14.9	15.5	16.0	16.7	17.2	18.0	19.2	20.4	21.5	23.7	27.1	30.3
065	1.52	16.1	16.8	17.4	18.0	18.6	19.4	20.8	22.0	23.2	25.6	29.3	32.7
07	1.57	17.3	18.0	18.7	19.3	20.0	20.9	22.3	23.7	25.0	27.1	31.3	35.0
075	1.63	18.5	19.3	20.0	20.7	21.4	22.4	23.9	25.3	26.7	29.4	33.7	37.7
08	1.68	19.7	20.5	21.3	22.0	22.8	23.8	25.5	27.0	28.5	31.4	35.9	40.2
085	1.73	20.9	21.8	22.6	23.4	24.1	25.3	27.0	28.6	30.2	34.5	39.8	44.5
09	1.78	22.1	23.0	23.9	24.7	25.5	26.7	28.6	30.3	31.9	35.1	40.2	45.0
10	1.88	24.6	25.6	26.6	27.6	28.5	29.8	31.8	33.7	35.6	39.2	44.9	50.2
11	1.96	26.9	28.0	29.1	30.1	31.1	32.5	34.7	36.8	38.8	43.4	50.1	56.0
12	2.05	29.4	30.6	31.7	32.8	33.9	35.4	37.9	40.2	42.4	46.7	53.4	59.8
13	2.13	31.8	33.1	34.4	35.6	36.7	38.4	41.1	43.6	45.9	50.5	57.8	64.7
14	2.21	34.2	35.6	37.0	38.3	39.5	41.4	44.3	46.9	49.4	55.0	63.5	71.0
15	2.30	36.9	38.4	39.9	41.3	42.6	44.6	47.7	50.6	53.3	58.7	67.2	75.2
20	2.66	49.3	51.3	53.2	55.1	56.9	59.5	63.6	67.5	71.1	78.2	89.6	100.0
30	3.25	74.0	77.1	80.0	82.8	85.5	89.4	95.6	101.0	107.0	118.0	136.0	151.0
40	3.76	98.8	103.0	107.0	110.0	114.0	119.0	127.0	135.0	143.0	156.0	180.0	202.0
50	4.28	123.00	128.00	133.00	138.00	142.50	149.00	159.00	168.50	178.00	195.00	224.50	251.00

Spray width depending on spray angle and distance

Distance in cm											
Angle	1	2	3	5	7	10	20	30	50	70	100
°											
5°	0.09	0.17	0.26	0.44	0.61	0.87	1.75	2.62	4.37	6.11	8.73
10°	0.17	0.35	0.52	0.87	1.22	1.75	3.50	5.25	8.75	12.25	17.50
15°	0.26	0.53	0.79	1.32	1.84	2.63	5.27	7.90	13.17	18.43	26.33
20°	0.35	0.71	1.06	1.76	2.47	3.53	7.05	10.58	17.63	24.69	35.27
25°	0.44	0.89	1.33	2.22	3.10	4.43	8.87	13.30	22.17	31.04	44.34
40°	0.73	1.46	2.18	3.64	5.10	7.28	14.56	21.84	36.40	50.96	72.79
65°	1.27	2.55	3.82	6.37	8.92	12.74	25.48	38.22	63.71	89.19	127.41
80°	1.68	3.36	5.03	8.39	11.75	16.78	33.56	50.35	83.91	117.47	167.82
110°	2.86	5.71	8.57	14.28	19.99	28.56	57.13	85.69	142.81	199.94	285.63

Symbols  diameter  nozzle  flow

Suttner rotating nozzles with ceramic insert

ST-357.1



1/4" F. Spray angle 20°.
100 - 250 bar. Max. 100 °C

R+M Nr.	D
200 357 530	03
200 357 535	035
200 357 540	04
200 357 545	045
200 357 550	05
200 357 555	055
200 357 560	06
200 357 565	065
200 357 570	07
200 357 580	08
200 357 590	09
200 357 510	100



M18 F. Spray angle 20°.
100 - 250 bar. Max. 100 °C

R+M Nr.	D
200 357 330	03
200 357 335	035
200 357 340	04
200 357 345	045
200 357 350	05
200 357 355	055
200 357 360	06
200 357 365	065
200 357 370	07
200 357 380	08
200 357 390	09
200 357 310	100



1/8" M. Spray angle 20°.
100 - 250 bar. Max. 100 °C


R+M Nr.	D
200 357 430	03
200 357 435	035
200 357 440	04
200 357 445	045
200 357 450	05
200 357 455	055
200 357 460	06
200 357 465	065
200 357 470	07
200 357 480	08
200 357 490	09
200 357 410	100



Kit ST-357.1

R+M Nr.
200 357 232
200 357 237
200 357 242
200 357 247
200 357 252
200 357 257
200 357 262
200 357 267
200 357 272
200 357 282
200 357 292
200 357 212

TR20 adapter

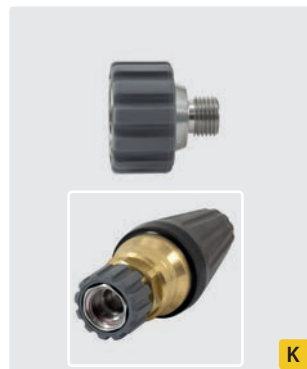

TR20 F : 1/4" M.
Stainless steel.
Max. 400 bar / 150° C

R+M Nr.
565 685 19

ST-458.1



1/4" F. Spray angle 20°.
200 - 400 bar. Max. 100 °C

R+M Nr.	D
200 458 630	03
200 458 635	035
200 458 640	04
200 458 645	045
200 458 650	05
200 458 655	055
200 458 660	06
200 458 665	065
200 458 670	07
200 458 680	08
200 458 690	09
200 458 610	100



M18 F. Spray angle 20°.
200 - 400 bar. Max. 100 °C

R+M Nr.	D
200 458 331	03
200 458 335	035
200 458 340	04
200 458 345	045
200 458 350	05
200 458 355	055
200 458 360	06
200 458 365	065
200 458 370	07
200 458 380	08
200 458 390	09
200 458 310	100



1/8" M. Spray angle 20°.
200 - 400 bar. Max. 100 °C

R+M Nr.	D
200 458 430	03
200 458 435	035
200 458 440	04
200 458 445	045
200 458 450	05
200 458 455	055
200 458 460	06
200 458 465	065
200 458 470	07
200 458 480	08
200 458 490	09
200 458 410	100



Kit ST-458.1

R+M Nr.
200 458 130
200 458 135
200 458 140
200 458 145
200 458 150
200 458 155
200 458 160
200 458 165
200 458 170
200 458 180
200 458 190
200 458 110

Colour coding of Suttner rotating nozzles

03 yellow	035 purple	04 brown	045 light green	05 black	055 light blue	06 red	065 nature	07 pink	08 orange	09 green	10 grey



Symbols nozzle

Suttner rotating nozzles with ceramic insert

ST-456



1/4" F. Spray angle 20°. 200 - 350 bar. Max. 100 °C

R+M Nr.	D
200 456 530	03
200 456 535	035
200 456 540	04
200 456 545	045
200 456 550	05
200 456 555	055
200 456 560	06
200 456 565	065
200 456 570	07
200 456 580	08



Kit ST-456

R+M Nr.	D
200 456 230*	
200 456 235*	
200 456 140	
200 456 245*	
200 456 250*	
200 456 255*	
200 456 260	
200 456 265	
200 456 170	
200 456 180	




M18 F. Spray angle 20°. 200 - 350 bar. Max. 100 °C

R+M Nr.	D
200 456 630	03
200 456 635	035
200 456 640	04
200 456 645	045
200 456 650	05
200 456 655	055
200 456 660	06
200 456 665	065
200 456 670	07
200 456 680	08



Kit ST-456

R+M Nr.	D
200 456 130	
200 456 135	
200 456 140	
200 456 145	
200 456 150	
200 456 155	
200 456 260	
200 456 265	
200 456 170	
200 456 180	

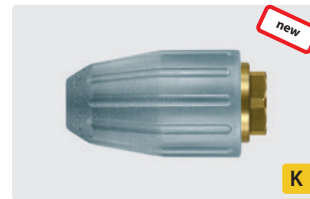

TR 20 F. Spray angle 20°. Max. 300 bar / 100 °C

R+M Nr.	D
200 456 835	035
200 456 840	04
200 456 845	045
200 456 850	05
200 456 855	055
200 456 865	065
200 456 870	07



Kit ST-456

R+M Nr.	D
200 456 235	
200 456 240	
200 456 245	
200 456 250	
200 456 255	
200 456 265	
200 456 270	

ST-458.1



1/4" F. Spray angle 20°. 120 - 250 bar. Max. 100 °C

R+M Nr.	D
200 458 811	110
200 458 812	120
200 458 813	130
200 458 815	150
200 458 818	180
200 458 820	200
200 458 825	250
200 458 830	300



Kit ST-458.1

R+M Nr.	D
200 458 311	
200 458 312	
200 458 313	
200 458 315	
200 458 318	
200 458 320	
200 458 325	
200 458 330	



1/2" F. Spray angle 20°. 120 - 250 bar. Max. 100 °C

R+M Nr.	D
200 458 712	120
200 458 715	150
200 458 720	200
200 458 730	300



Kit ST-458.1

R+M Nr.	D
200 458 312	
200 458 315	
200 458 320	
200 458 330	



1/2" F. Spray angle 20°. 120 - 250 bar. Max. 100 °C

R+M Nr.	D
200 458 745	045
200 458 755	055
200 458 770	07
200 458 791	09



Kit ST-458.1

R+M Nr.	D
200 458 245	
200 458 255	
200 458 270	
200 458 190	

ST-559 Suttner rotating nozzles with carbide insert

ST-559



1/4" F. 300 - 600 bar. Max. 90 °C

R+M Nr.	D
200 559 520	02
200 559 530	03
200 559 540	04
200 559 550	05
200 559 555	055
200 559 560	06



M20x1 F. 300 - 600 bar. Max. 90 °C

R+M Nr.	D
200 559 320	02
200 559 330	03
200 559 340	04



Kit ST-559

R+M Nr.	D
200 559 120	
200 559 130	
200 559 140	
200 559 150	
200 559 155	
200 559 160	

Suttner rotating nozzles without plastic cap

ST-357.1



1/4" F. Spray angle 20°.
100 - 250 bar. Max. 100 °C



Kit ST-357.1

ST-458.1



1/4" F. Spray angle 20°.
200 - 400 bar. Max. 100 °C



Kit ST-458.1

R+M Nr.	D
200 357 632	03
200 357 637	035
200 357 642	04
200 357 647	045
200 357 652	05
200 357 657	055
200 357 662	06
200 357 667	065
200 357 672	07
200 357 682	08
200 357 692	09
200 357 612	100

R+M Nr.	
200 357 130	
200 357 135	
200 357 140	
200 357 145	
200 357 150	
200 357 155	
200 357 160	
200 357 165	
200 357 170	
200 357 280	
200 357 290	
200 357 110	

R+M Nr.	D
200 458 632	03
200 458 637	035
200 458 642	04
200 458 647	045
200 458 652	05
200 458 657	055
200 458 662	06
200 458 667	065
200 458 672	07
200 458 682	08
200 458 692	09
200 458 612	100

R+M Nr.	
200 458 230	
200 458 235	
200 458 240	
200 458 245	
200 458 250	
200 458 255	
200 458 260	
200 458 265	
200 458 270	
200 458 280	
200 458 190	
200 458 110	

ST-33 High Pressure Filter



Brass with stainless steel filter. Bidirectional.
Max. 400 bar / 40 l/min. / 150 °C

R+M Nr.	I	⊙	⊙
200 033 855	45.6 mm	1/4" M	1/4" F

Suttner rotating nozzles in different colours

With effect from today we enlarge the choice of colours of the plastic plugs for our rotating nozzles ST-357, ST-456 and ST-458.

In addition to the standard colour black, you are invited to take the nozzle in blue, red, yellow and green, now. The decision is up to you as it is possible now to adapt the rotating nozzles individually to your company's colour or to the one of your customers.

By using different colours the affiliation to a certain unit (rental business), user or application is possible in an easy way. Moreover, classifications regarding different areal divisions within the HACCP can be realized.

What would you like to mark? Please find it out and test it!



Plastic caps for rotating nozzles ST-357

R+M Nr.	C
020 007 405	black
020 007 406	blue
020 007 409	yellow
020 007 411	green
020 007 412	red

Plastic caps for rotating nozzles ST-456

R+M Nr.	C
020 001 022	black
020 001 041	blue
020 001 046	yellow
020 001 047	green
020 001 048	red

Plastic caps for rotating nozzles ST-458

R+M Nr.	C
020 001 025	black
020 001 026	blue
020 001 029	yellow
020 001 031	green
020 001 032	red

Symbols D nozzle I height ⇄ length ⊙ thread C colour coding M material

Suttner rotating nozzles with ceramic insert




M22 F. Lance with rotating nozzle ST-357.1. Spray angle 20°. 100 - 250 bar. Max. 100 °C

R+M Nr.	D	↔	(M) *
653 030 04	03	430 mm	zinc-plated steel
653 035 04	035	430 mm	zinc-plated steel
653 040 04	04	430 mm	zinc-plated steel
653 045 04	045	430 mm	zinc-plated steel
653 050 04	05	430 mm	zinc-plated steel
653 055 04	055	430 mm	zinc-plated steel
653 060 04	06	430 mm	zinc-plated steel
653 065 04	065	430 mm	zinc-plated steel
653 070 04	07	430 mm	zinc-plated steel

M22 F. Lance with rotating nozzle ST-357.1. Spray angle 20°. 100 - 250 bar. Max. 100 °C

R+M Nr.	D	↔	(M) *
653 030 049	03	430 mm	stainless steel
653 035 049	035	430 mm	stainless steel
653 040 049	04	430 mm	stainless steel
653 045 049	045	430 mm	stainless steel
653 050 049	05	430 mm	stainless steel
653 055 049	055	430 mm	stainless steel
653 060 049	06	430 mm	stainless steel
653 065 049	065	430 mm	stainless steel
653 070 049	07	430 mm	stainless steel



M22 F. Lance with vented handle ST-9 380 mm and rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	(M) *
653 835 012	035	1.000 mm	zinc-plated steel
653 840 012	04	1.000 mm	zinc-plated steel
653 845 012	045	1.000 mm	zinc-plated steel
653 850 012	05	1.000 mm	zinc-plated steel
653 855 012	055	1.000 mm	zinc-plated steel
653 860 012	06	1.000 mm	zinc-plated steel
653 865 012	065	1.000 mm	zinc-plated steel
653 870 012	07	1.000 mm	zinc-plated steel
653 880 012	08	1.000 mm	zinc-plated steel

M22 F. Lance with vented handle ST-9 380 mm and rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	(M) *
653 835 021	035	1.000 mm	stainless steel
653 840 021	04	1.000 mm	stainless steel
653 845 021	045	1.000 mm	stainless steel
653 850 021	05	1.000 mm	stainless steel
653 855 021	055	1.000 mm	stainless steel
653 860 021	06	1.000 mm	stainless steel
653 865 021	065	1.000 mm	stainless steel
653 870 021	07	1.000 mm	stainless steel
653 880 021	08	1.000 mm	stainless steel

Colour coding of Suttner rotating nozzles

03 yellow	035 purple	04 brown	045 light green	05 black	055 light blue	06 red	065 nature	07 pink	08 orange	09 green	10 grey



* lance

Suttner rotating nozzles with ceramic insert



K

Plug K. Lance with rotating nozzle ST-357.1. Spray angle 20°. 100 - 250 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 030 011	03	430 mm	zinc-plated steel
653 035 011	035	430 mm	zinc-plated steel
653 040 011	04	430 mm	zinc-plated steel
653 045 011	045	430 mm	zinc-plated steel
653 050 011	05	430 mm	zinc-plated steel
653 055 011	055	430 mm	zinc-plated steel
653 060 011	06	430 mm	zinc-plated steel
653 065 011	065	430 mm	zinc-plated steel
653 070 011	07	430 mm	zinc-plated steel

Plug K. Lance with rotating nozzle ST-357.1. Spray angle 20°. 100 - 250 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 030 019	03	430 mm	stainless steel
653 035 019	035	430 mm	stainless steel
653 040 019	04	430 mm	stainless steel
653 045 019	045	430 mm	stainless steel
653 050 019	05	430 mm	stainless steel
653 055 019	055	430 mm	stainless steel
653 060 019	06	430 mm	stainless steel
653 065 019	065	430 mm	stainless steel
653 070 019	07	430 mm	stainless steel



Kr

M22 M. Lance with rotating nozzle ST-357.1. Spray angle 20°. 100 - 250 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 030 03	03	430 mm	zinc-plated steel
653 035 03	035	430 mm	zinc-plated steel
653 040 03	04	430 mm	zinc-plated steel
653 045 03	045	430 mm	zinc-plated steel
653 050 03	05	430 mm	zinc-plated steel
653 055 03	055	430 mm	zinc-plated steel
653 060 03	06	430 mm	zinc-plated steel
653 065 03	065	430 mm	zinc-plated steel
653 070 03	07	430 mm	zinc-plated steel

M22 M. Lance with rotating nozzle ST-357.1. Spray angle 20°. 100 - 250 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 030 039	03	430 mm	stainless steel
653 035 039	035	430 mm	stainless steel
653 040 039	04	430 mm	stainless steel
653 045 039	045	430 mm	stainless steel
653 050 039	05	430 mm	stainless steel
653 055 039	055	430 mm	stainless steel
653 060 039	06	430 mm	stainless steel
653 065 039	065	430 mm	stainless steel
653 070 039	07	430 mm	stainless steel

Lance clips

The lance clips are easily clamped onto every 1/4" lance thus informing the user about the nozzle size or the affiliation to a certain unit, user or application.

Moreover, classifications regarding different areal divisions within the HACCP can be realized. The marking of various spray angles is also possible.

The lance clips suitable for all 1/4" lances are made out of polypropylene which is intended to come into contact with foodstuffs.



R+M Nr.	[C]
020 004 230	yellow
020 004 235	purple
020 004 240	brown
020 004 245	light green
020 004 250	black
020 004 255	light blue
020 004 260	red
020 004 265	nature
020 004 270	pink
020 004 280	orange
020 004 290	green
020 004 300	grey

* lance

Symbols D nozzle ↔ length [M] material [C] colour coding

Suttner rotating nozzles with ceramic insert



Kr

M22 M. Lance with rotating nozzle ST-456. Spray angle 20°. 200 - 350 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 135 018	035	600 mm	zinc-plated steel
653 140 018	04	600 mm	zinc-plated steel
653 145 018	045	600 mm	zinc-plated steel
653 150 018	05	600 mm	zinc-plated steel
653 155 018	055	600 mm	zinc-plated steel
653 160 018	06	600 mm	zinc-plated steel
653 165 018	065	600 mm	zinc-plated steel
653 170 018	07	600 mm	zinc-plated steel
653 180 018	08	600 mm	zinc-plated steel

M22 M. Lance with rotating nozzle ST-456. Spray angle 20°. 200 - 350 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 135 018 9	035	600 mm	stainless steel
653 140 018 9	04	600 mm	stainless steel
653 145 018 9	045	600 mm	stainless steel
653 150 018 9	05	600 mm	stainless steel
653 155 018 9	055	600 mm	stainless steel
653 160 018 9	06	600 mm	stainless steel
653 165 018 9	065	600 mm	stainless steel
653 170 018 9	07	600 mm	stainless steel
653 180 018 9	08	600 mm	stainless steel



Kr

M22 M. Lance with rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar.
Max. 100 °C

R+M Nr.	D	↔	[M] *
653 835 016	035	430 mm	zinc-plated steel
653 840 016	04	430 mm	zinc-plated steel
653 845 016	045	430 mm	zinc-plated steel
653 850 016	05	430 mm	zinc-plated steel
653 855 016	055	430 mm	zinc-plated steel
653 860 016	06	430 mm	zinc-plated steel
653 865 016	065	430 mm	zinc-plated steel
653 870 016	07	430 mm	zinc-plated steel
653 880 016	08	430 mm	zinc-plated steel

M22 M. Lance with rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar.
Max. 100 °C


R+M Nr.	D	↔	[M] *
653 835 019	035	430 mm	stainless steel
653 840 019	04	430 mm	stainless steel
653 845 019	045	430 mm	stainless steel
653 850 019	05	430 mm	stainless steel
653 855 019	055	430 mm	stainless steel
653 860 019	06	430 mm	stainless steel
653 865 019	065	430 mm	stainless steel
653 870 019	07	430 mm	stainless steel
653 880 019	08	430 mm	stainless steel

Colour coding of Suttner rotating nozzles

03 yellow	035 purple	04 brown	045 light green	05 black	055 light blue	06 red	065 nature	07 pink	08 orange	09 green	10 grey



Suttner rotating nozzles with ceramic insert



M22 M. Lance with vented handle ST-9 380 mm and rotating nozzle
ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	[M] *
653 835 015	035	1.000 mm	zinc-plated steel
653 840 015	04	1.000 mm	zinc-plated steel
653 845 015	045	1.000 mm	zinc-plated steel
653 850 015	05	1.000 mm	zinc-plated steel
653 855 015	055	1.000 mm	zinc-plated steel
653 860 015	06	1.000 mm	zinc-plated steel
653 865 015	065	1.000 mm	zinc-plated steel
653 870 015	07	1.000 mm	zinc-plated steel
653 880 015	08	1.000 mm	zinc-plated steel

M22 M. Lance with vented handle ST-9 380 mm and rotating nozzle
ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	[M] *
653 835 020	035	1.000 mm	stainless steel
653 840 020	04	1.000 mm	stainless steel
653 845 020	045	1.000 mm	stainless steel
653 850 020	05	1.000 mm	stainless steel
653 855 020	055	1.000 mm	stainless steel
653 860 020	06	1.000 mm	stainless steel
653 865 020	065	1.000 mm	stainless steel
653 870 020	07	1.000 mm	stainless steel
653 880 020	08	1.000 mm	stainless steel



Plug KW. Lance with rotating nozzle ST-357.1. Spray angle 20°.
100 - 250 bar. Max. 100 °C

R+M Nr.	D	↔	[M] *
653 030 17	03	430 mm	zinc-plated steel
653 035 17	035	430 mm	zinc-plated steel
653 040 17	04	430 mm	zinc-plated steel
653 045 17	045	430 mm	zinc-plated steel
653 050 17	05	430 mm	zinc-plated steel
653 055 17	055	430 mm	zinc-plated steel
653 060 17	06	430 mm	zinc-plated steel
653 065 17	065	430 mm	zinc-plated steel
653 070 17	07	430 mm	zinc-plated steel

Plug KW. Lance with rotating nozzle ST-357.1. Spray angle 20°.
100 - 250 bar. Max. 100 °C

R+M Nr.	D	↔	[M] *
653 030 179	03	430 mm	stainless steel
653 035 179	035	430 mm	stainless steel
653 040 179	04	430 mm	stainless steel
653 045 179	045	430 mm	stainless steel
653 050 179	05	430 mm	stainless steel
653 055 179	055	430 mm	stainless steel
653 060 179	06	430 mm	stainless steel
653 065 179	065	430 mm	stainless steel
653 070 179	07	430 mm	stainless steel

* lance

Symbols D nozzle ↔ length [M] material

Suttner rotating nozzles with ceramic insert



A Kr

Plug KW. Lance with rotating nozzle ST-456. Spray angle 20°. 200 - 350 bar. Max. 100 °C

R+M Nr.	D	↔	M)*
653 135 017	035	600 mm	zinc-plated steel
653 140 017	04	600 mm	zinc-plated steel
653 145 017	045	600 mm	zinc-plated steel
653 150 017	05	600 mm	zinc-plated steel
653 155 017	055	600 mm	zinc-plated steel
653 160 017	06	600 mm	zinc-plated steel
653 165 017	065	600 mm	zinc-plated steel
653 170 017	07	600 mm	zinc-plated steel
653 180 017	08	600 mm	zinc-plated steel

Plug KW. Lance with rotating nozzle ST-456. Spray angle 20°. 200 - 350 bar. Max. 100 °C

R+M Nr.	D	↔	M)*
653 135 017 9	035	600 mm	stainless steel
653 140 017 9	04	600 mm	stainless steel
653 145 017 9	045	600 mm	stainless steel
653 150 017 9	05	600 mm	stainless steel
653 155 017 9	055	600 mm	stainless steel
653 160 017 9	06	600 mm	stainless steel
653 165 017 9	065	600 mm	stainless steel
653 170 017 9	07	600 mm	stainless steel
653 180 017 9	08	600 mm	stainless steel



A Kr

Plug KW. Lance with rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	M)*
653 835 024	035	600 mm	zinc-plated steel
653 840 024	04	600 mm	zinc-plated steel
653 845 024	045	600 mm	zinc-plated steel
653 850 024	05	600 mm	zinc-plated steel
653 855 024	055	600 mm	zinc-plated steel
653 860 024	06	600 mm	zinc-plated steel
653 865 024	065	600 mm	zinc-plated steel
653 870 024	07	600 mm	zinc-plated steel
653 880 024	08	600 mm	zinc-plated steel

Plug KW. Lance with rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C


R+M Nr.	D	↔	M)*
653 835 025	035	600 mm	stainless steel
653 840 025	04	600 mm	stainless steel
653 845 025	045	600 mm	stainless steel
653 850 025	05	600 mm	stainless steel
653 855 025	055	600 mm	stainless steel
653 860 025	06	600 mm	stainless steel
653 865 025	065	600 mm	stainless steel
653 870 025	07	600 mm	stainless steel
653 880 025	08	600 mm	stainless steel

Colour coding of Suttner rotating nozzles

03 yellow	035 purple	04 brown	045 light green	05 black	055 light blue	06 red	065 nature	07 pink	08 orange	09 green	10 grey



Suttner rotating nozzles with ceramic insert



A Kr

Plug KW. Lance with vented handle ST-9 380 mm and rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	M)*
653 835 014	035	1.000 mm	zinc-plated steel
653 840 014	04	1.000 mm	zinc-plated steel
653 845 014	045	1.000 mm	zinc-plated steel
653 850 014	05	1.000 mm	zinc-plated steel
653 855 014	055	1.000 mm	zinc-plated steel
653 860 014	06	1.000 mm	zinc-plated steel
653 865 014	065	1.000 mm	zinc-plated steel
653 870 014	07	1.000 mm	zinc-plated steel
653 880 014	08	1.000 mm	zinc-plated steel

Plug KW. Lance with vented handle ST-9 380 mm and rotating nozzle ST-458.1. Spray angle 20°. 200 - 400 bar. Max. 100 °C

R+M Nr.	D	↔	M)*
653 835 023	035	1.000 mm	stainless steel
653 840 023	04	1.000 mm	stainless steel
653 845 023	045	1.000 mm	stainless steel
653 850 023	05	1.000 mm	stainless steel
653 855 023	055	1.000 mm	stainless steel
653 860 023	06	1.000 mm	stainless steel
653 865 023	065	1.000 mm	stainless steel
653 870 023	07	1.000 mm	stainless steel
653 880 023	08	1.000 mm	stainless steel

Cleantecs rotating nozzles with carbide insert

HM 500



K

Kit
HM 500



G 9/16" F. Spray angle 20°. Max. 500 bar / 90 °C

R+M Nr.	D
655 500 630	03

R+M Nr.
655 500 130

HM 500



K

Kit
HM 500



M20x1. Spray angle 20°. Max. 500 bar / 90 °C

R+M Nr.	D
655 500 640	028

R+M Nr.
655 500 130

HM 500



K

Kit
HM 500



M20x1. Spray angle 20°. Max. 500 bar / 90 °C

R+M Nr.	D
655 500 650	05

R+M Nr.
655 500 150

HM 500



1/4" F. Spray angle 20°. Max. 500 bar / 90 °C

Kit
HM 500



R+M Nr.	D
655 500 520	02
655 500 525	025
655 500 530	03
655 500 535	035
655 500 540	04
655 500 545	045
655 500 550	05
655 500 555	055
655 500 560	06
655 500 570	07

R+M Nr.
655 500 120
655 500 125
655 500 130
655 500 135
655 500 140
655 500 145
655 500 150
655 500 155
655 500 160
655 500 170

HM 700



1/4" F. Spray angle 20°. Max. 700 bar / 90 °C. Delivery time of approx. 1 week

Kit
HM 700



R+M Nr.	D
655 700 520	02
655 700 525	025
655 700 530	03
655 700 535	035
655 700 540	04
655 700 545	045
655 700 550	05
655 700 555	055
655 700 560	06
655 700 570	07

R+M Nr.
655 700 120
655 700 125
655 700 130
655 700 135
655 700 140
655 700 145
655 700 150
655 700 155
655 700 160
655 700 170

HM 1000



1/4" F. Spray angle 20°. Max. 1,000 bar / 90 °C. Delivery time of approx. 1 week

Kit
HM 1000



R+M Nr.	D
655 100 520	02
655 100 525	025
655 100 530	03
655 100 535	035
655 100 540	04
655 100 545	045
655 100 550	05
655 100 555	055
655 100 560	06
655 100 570	07

R+M Nr.
655 100 120
655 100 125
655 100 130
655 100 135
655 100 140
655 100 145
655 100 150
655 100 155
655 100 160
655 100 170

* lance

Rotating nozzles

R+M 150



1/4" F. Spray angle 17°. 50 - 150 bar. Max. 60 °C

R+M Nr.	D
653 325	025
653 330	03
653 335	035
653 340	04
653 345	045

IP ROTOMAX




1/4" F. Housing black. Nozzle and seal kit ceramic. Adjustable spray angle. 100 - 250 bar. Max. 80 °C

R+M Nr.	DN	↔
996 050 01	1,4 mm	10 - 16 l/min
996 050 02	1,6 mm	12 - 18 l/min
996 050 03	2,0 mm	14 - 21 l/min

Vario nozzles and triple nozzles

Vario nozzles

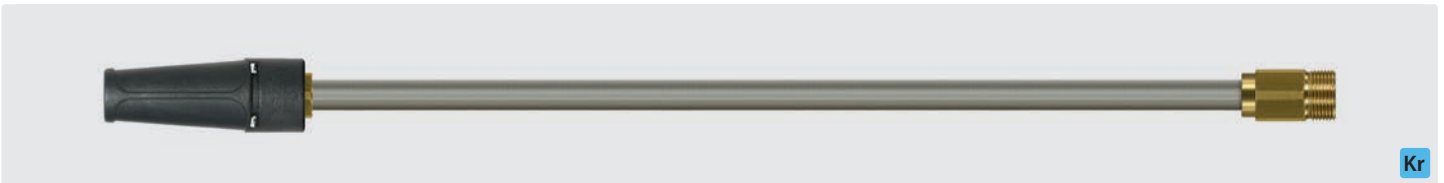

M22 M. Lance with vario nozzle. Zinc-plated steel.
Max. 200 bar / 150 °C

R+M Nr.	D	↔	M*
658 103 03	03	430 mm	zinc-plated steel
658 103 53	035	430 mm	zinc-plated steel
658 104 03	04	430 mm	zinc-plated steel
658 104 53	045	430 mm	zinc-plated steel
658 105 03	05	430 mm	zinc-plated steel
658 105 53	055	430 mm	zinc-plated steel
658 106 03	06	430 mm	zinc-plated steel

M22 M. Lance with vario nozzle. Stainless steel.
Max. 200 bar / 150 °C

R+M Nr.	D	↔	M*
658 103 039	03	430 mm	stainless steel
658 103 539	035	430 mm	stainless steel
658 104 039	04	430 mm	stainless steel
658 104 539	045	430 mm	stainless steel
658 105 039	05	430 mm	stainless steel
658 105 539	055	430 mm	stainless steel
658 106 039	06	430 mm	stainless steel



1/4" F. Housing black. Max. 200 bar / 150 °C

R+M Nr.	D
658 103 0	03
658 103 5	035
658 104 0	04
658 104 5	045
658 105	05
658 105 5	055
658 106	06



M18 F. Housing black. Max. 200 bar / 150 °C

R+M Nr.	D
658 103 04	03
658 103 54	035
658 104 04	04
658 104 54	045
658 105 04	05
658 105 54	055
658 106 04	06

* lance

Functional principle vario nozzles



high pressure zero angle



high pressure broad angle



low pressure broad angle

Symbols **D** nozzle **↔** length **M** material **DN** nominal diameter **↔** flow

Vario nozzles and triple nozzles



1/4" F. Housing black. Max. 250 bar / 80 °C

R+M Nr.	D
657 545	045
657 555	055
657 560	06



K

M18 F. Housing black. Max. 250 bar / 80 °C

R+M Nr.	D
657 545 1	045
657 555 1	055
657 560 1	06

Functional principle triple nozzles



high pressure zero angle



high pressure broad angle 25°



low pressure broad angle 40°

Adjustable nozzles

Mini adjustable nozzles



R+M Nr.	⌚	Ⓒ
657 20	1/4" F	1/4" F

R+M adjustable nozzles




R+M Nr.	⌚	Ⓒ
657 30	1/4" F	1/4" F

ST-51 adjustable nozzles




R+M Nr.	⌚	Ⓒ
200 051 530	1/4" F	1/4" F

Functional principle of an adjustable nozzle

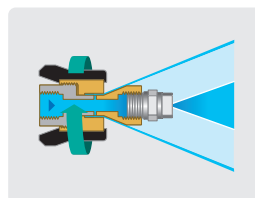

High pressure phase



Low pressure phase

Adjustable nozzle ST-51.1



R+M Nr.	P	°C	⌚	Ⓒ
200 051 700	150 bar	100 °C	80 l/min	3/8" M
200 051 750	150 bar	100 °C	80 l/min	1/2" M

Functional principle of the adjustable nozzle ST-51.1




Conical spray jet



Long-range pencil jet

Universal bracket

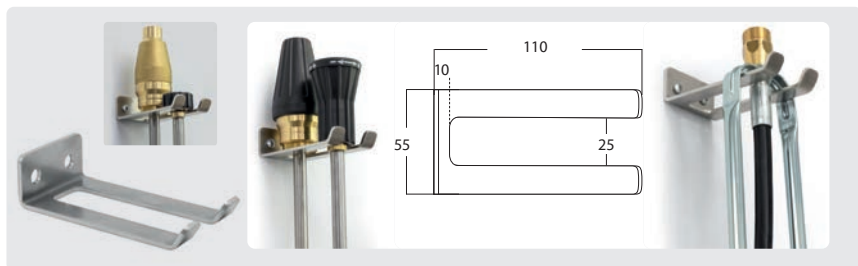

R+M Nr.
710 400 097

Stainless steel bracket for wall mounting

Flat jet lances



Kr

M22 M. Lance with nozzle protector ST-10 and nozzle. Max. 400 bar / 150 °C

R+M Nr.	D	↔	(M)*
512 903 03	2503	430 mm	zinc-plated steel
512 904 03	2504	430 mm	zinc-plated steel
512 904 53	25045	430 mm	zinc-plated steel
513 103 03	2503	500 mm	zinc-plated steel
513 104 03	2504	500 mm	zinc-plated steel
513 104 53	25045	500 mm	zinc-plated steel
513 107 53	2507	500 mm	zinc-plated steel
513 203 53	25035	600 mm	zinc-plated steel
513 204 03	2504	600 mm	zinc-plated steel
513 204 53	25045	600 mm	zinc-plated steel
513 205 03	2505	600 mm	zinc-plated steel
513 206 03	2506	600 mm	zinc-plated steel
513 207 03	2507	600 mm	zinc-plated steel
513 208 03	2508	600 mm	zinc-plated steel
513 210 03	2510	600 mm	zinc-plated steel
513 211 03	2511	600 mm	zinc-plated steel
513 212 53	25125	600 mm	zinc-plated steel

M22 M. Lance with nozzle protector ST-10 and nozzle. Max. 400 bar / 150 °C

R+M Nr.	D	↔	(M)*
512 903 039	2503	430 mm	stainless steel
512 904 039	2504	430 mm	stainless steel
512 904 539	25045	430 mm	stainless steel
513 103 039	2503	500 mm	stainless steel
513 104 039	2504	500 mm	stainless steel
513 104 539	25045	500 mm	stainless steel
513 107 539	2507	500 mm	stainless steel
513 203 539	25035	600 mm	stainless steel
513 204 039	2504	600 mm	stainless steel
513 204 539	25045	600 mm	stainless steel
513 205 039	2505	600 mm	stainless steel
513 206 039	2506	600 mm	stainless steel
513 207 039	2507	600 mm	stainless steel
513 208 039	2508	600 mm	stainless steel
513 210 039	2510	600 mm	stainless steel
513 211 039	2511	600 mm	stainless steel
513 212 539	25125	600 mm	stainless steel



A Kr

Plug KW. Lance with protector ST-10 without nozzle.
Max. 400 bar / 150 °C

R+M Nr.	↔	(M)*
513 100 07	500 mm	zinc-plated steel
513 200 07	600 mm	zinc-plated steel

Plug KW. Lance with protector ST-10 without nozzle.
Max. 400 bar / 150 °C

R+M Nr.	↔	(M)*
513 100 079	500 mm	stainless steel
513 200 079	600 mm	stainless steel


* lance

Symbols D nozzle G inlet S outlet P pressure °C temperature ↔ flow ↔ length M material

Accessories quick connect spray nozzles



Coupling 1/4" F NPT

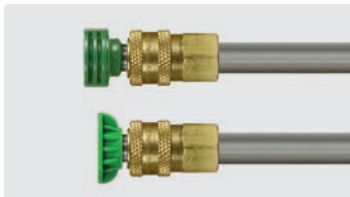

Nipple 1/4" M NPT

Nozzle holder for quick connect spray nozzles.
Suitable for 1/4" lances. Without accessories

R+M Nr.

550 001 40

R+M Nr.

550 011 40

R+M Nr.

020 002 510

Quick connect nozzle set by Suttner

- » Consisting of:
colored plastic holder inclusive:
1 x Low pressure nozzle. Brass,
1 x Flushing nozzle. Stainless steel,
1 x Chiseling nozzle. Stainless steel,
1 x Blasting nozzle. Stainless steel
- » High strength plastic. Highly impact resistant
- » Stainless steel nozzles: long lifetime and excellently thermal and chemical stability, resistant to mineral acids and alkaline solutions.
- » Connection ST-245 coupling, $\odot$ 1/4" F, R+M Nr. 200 245 500
- » Suitable for applications requiring a frequent and quick change of the spraying angle
- » Max. 350 bar



D	R+M Nr.	$\odot$
030	125 852 030	ST-245
035	125 852 035	ST-245
040	125 852 040	ST-245
045	125 852 045	ST-245

Colour coding of Suttner nozzle set holder
according to nozzle size030
yellow035
purple040
brown045
green

65°



Low pressure nozzle.
Brass.
Designed for prespraying detergents on all kinds of surfaces. Low pressure rinsing.

40°



Flushing nozzle.
Stainless steel.
Best suited for flushing dirt, mud and grime.

15°



Chiseling nozzle.
Stainless steel. The spray should be directed at a 45° angle to the surface and used like a scraper to remove paint, grease and dirt.

0°



Blasting nozzle. Stainless steel. Delivers a very concentrated stream of water. **Care should be used to avoid gouging wood or damaging fragile surfaces.**

Coupling-system ST-245

Nipple ST-245



☞ 1/4" M.
Stainless steel.
Max. 350 bar

R+M Nr.	☞
040 005 447	27.5




☞ 1/4" M.
Stainless steel.
Max. 350 bar

R+M Nr.	☞
040 005 446	33.5



☞ 1/4" M. Stainless
steel. Max. 350 bar.
For wear cone

R+M Nr.	☞
040 005 445	3 42.0

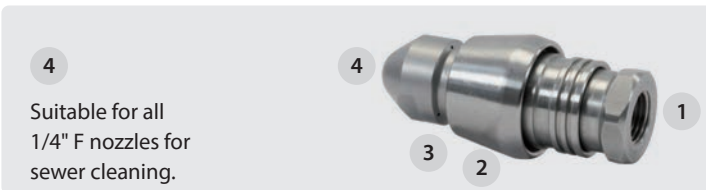


ST-245 Coupling / wear cone ST-245



R+M Nr.	☞
200 245 500	1 1/4" F



R+M Nr.	☞
200 245 510	1 3/8" M



Stainless steel.
For 040 005 445

R+M Nr.	☞
040 005 431	2



POM. Red.
For 040 005 445

R+M Nr.	☞
020 005 432	2




POM. Black.
For 040 005 445

R+M Nr.	☞
020 005 431	2

Mud suckers

The high-performance mud sucker for all standard pressure washers

extracts stones (up to 20 mm), mud, dirt, sand, algae & sediment.
Operating pressure min. 80 bar at 7 l/min. Suction power of approx. 8,000 to 18,000 l/h. Spiral hose: DN 38 mm, length 5 m

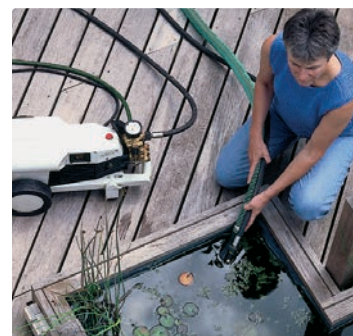

M22 M

M21 M

1/2" M

M18 M

Plug KW

D	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
04	545 504 0	545 514 0	545 524 0	545 534 0
045	545 504 5	545 514 5	545 524 5	545 534 5
05	545 505 0	545 515 0	545 525 0	545 535 0
055	545 505 5	545 515 5	545 525 5	545 535 5
06	545 506 0	545 516 0	545 526 0	545 536 0
065	545 506 5	545 516 5	545 526 5	545 536 5
07	545 507 0	545 517 0	545 527 0	545 537 0
08	545 508 0	545 518 0	545 528 0	545 538 0
10	545 501 0			

R+M Nr.	D	HP hose
545 545 5	055	5 m
545 546 0	06	5 m

Performance chart

high pressure cleaner		capacity of mud sucker	
P	←	capacity	capacity
100 bar	10 l/min	ca. 170 l/min	ca. 10,000 l/h
150 bar	12 l/min	ca. 220 l/min	ca. 13,000 l/h
200 bar	15 l/min	ca. 300 l/min	ca. 18,000 l/h

Symbols nozzle length pressure flow thread packing unit

Telescopic lances and easyclean365+® wash brushes

Fiberglass lances with coarse thread



Telescopic lances made of fiberglass with coarse thread. Extendable without water flow

R+M Nr.	
525 050 10	1,020 - 1,800 mm
525 070 10	1,920 - 3,600 mm

Aluminum lances with coarse thread



Telescopic lance made of aluminum with cord thread. Ergonomic handle with insulated grip area and ball valve. Extendable with water flow

R+M Nr.		
525 300 10	1,500 - 3,500 mm	coupler plug «universal»

easyclean365+® washing brushes with coarse thread and water passage



Bristles 60mm. Soft. 250 x 80mm

R+M Nr.	VPE
525 000 10	1



Bristles 60mm. Hard. 250 x 80mm

R+M Nr.	VPE
525 010 10	1

Accessories for telescopic lances with coarse thread

Angle adaptor (without water flow)



Cord thread F : cord thread M

R+M Nr.	
525 040 10	115 mm



Ball valve



3/4" F : 3/4" M. Brass

R+M Nr.
726 420

easywash365+® wash brushes - large areas are completely clean from now on!


By means of a very wide work surface of approx. 260 x 80 mm the **easywash365+®** wash brush is especially designed for the efficient cleaning of large areas such as railway carriages, tramcars, omnibuses, caravans, trucks, boats and ships, facades, greenhouses as well as vehicles, motorcycles and many more.

Fine and extremely soft natural bristles with split ends ensure an especially gentle cleaning of sensitive surfaces such as windows and car finish. The solid body of the **easywash365+®** wash brush consists of 152 bristle bundles which are attached undetachably by means of multi-component synthetic resin.

Our **easywash365+®** wash brush convinces all users working in the self-service foam- and prewash of an ideal and very easy handling. The soft coating of the body made out of thermoplastic elastomer demonstrably protects sensitive surfaces from damages.

The inlet of the **easywash365+®** wash brush is equipped with a brass insert with 1/4" female thread which is fixed in the body. By means of an additional grub screw the high pressure lances available at self-service bays are safe from twisting and theft. Therefore, the grub screw needs to be screwed to the lance tube. **Further fastening plates or protection against theft are not required.**

13 outlet ports at the bottom of the **easywash365+®** wash brush enable the required water flow and guarantee a convincingly good foam quality at the same time.

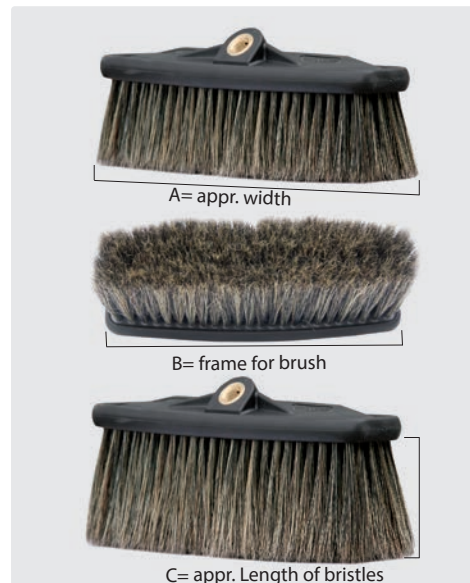

Wash brushes



A= 270. B= 260 x 80 mm. Hog hair.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓢ
200 023 550	60 mm	1/4" F



A= 270. B= 260 x 80 mm. Hog hair.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓢ
200 023 650	90 mm	1/4" F



A= 270. B= 260 x 80 mm. Hog hair / synthetic.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓢ
200 023 660	90 mm	1/4" F

Wash brushes

Wash brushes



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C
200 023 500	60 mm
200 023 600	90 mm

Wash brush with cover



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	Ⓢ
200 023 710	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
With stainless steel frame.
Max. 50 °C

R+M Nr.	C	Ⓢ
200 023 735	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
With stainless steel frame.
Max. 50 °C

R+M Nr.	C	Ⓢ
200 023 736	90 mm	1/4" F

Covers



Cover suitable as theft protection for wash brushes. Plastic.
Max. 50 °C

R+M Nr.	B
020 001 540	230 mm

Frames for wash brushes



Frame with fixing bolts. Stainless steel. Max. 60 °C

R+M Nr.	B	Ⓢ
200 023 560	230 mm	1/4" F



Frame. Stainless steel.
Max. 60 °C

R+M Nr.	B	Ⓢ
200 023 570	230 mm	1/4" F

Wash brushes



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	
523 703	60 mm	1/8" M



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	
200 023 700	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair. With stainless steel frame. Max. 50 °C

R+M Nr.	C	
200 023 730	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	
523 701	60 mm	M18 x 1.5 F

The original

Vorwerk lances & wash brushes



Extension pipe with water flow

R+M Nr.			
523 790 1	1,000 mm	1/4" M	1/4" F
523 790 2	1,500 mm	1/4" M	1/4" F
523 790 3	2,000 mm	1/4" M	1/4" F

Vorwerk wash brushes



A= 300. B= 300 x 100 mm. Nylon

R+M Nr.	C	
523 780	60 mm	1/4" F



A= 240. B= 230 x 80 mm. Hog hair

R+M Nr.	C	
523 70	60 mm	1/4" F
523 75	90 mm	1/4" F

Adaptor



Adaptor for telescopic lance 525 300 10.
Coarse thread : 1/4" M

R+M Nr.
010 003 610



Brush. A= 260. B= 230 x 80 mm.
Hog hair

R+M Nr.	C
523 72	60 mm
523 73	90 mm



Frame. 260 mm.
Aluminium

R+M Nr.	
523 76	1/4" F

Air injector



1/4" F : 1/4" M.
Flow at 100 bar

R+M Nr.		
108 290 60	13 l/min	1.5
108 290 20	34 l/min	2.5

Symbols inlet outlet length flow diameter

Rotating brushes

Brushes without hinge



1/4" M. Natural. Max. 50 bar / 50 °C

R+M Nr.

522 10



1/4" M. Nylon. Max. 50 bar / 50 °C

R+M Nr.

522 30



M18 F. Natural. Max. 50 bar / 50 °C

R+M Nr.

522 20



M18 F. Nylon. Max. 50 bar / 50 °C

R+M Nr.

522 40

Brushes with hinge



1/4" F. Natural. Max. 50 bar / 50 °C

R+M Nr.

522 50



1/4" F. Nylon. Max. 50 bar / 50 °C

R+M Nr.

522 60



M18 F. Natural. Max. 50 bar / 50 °C

R+M Nr.

523 001

Brushes with hinge and lance



R+M Nr.

522 504



M22 M

lance

430 mm

Replacement brushes



Natural

R+M Nr.

524 10



Nylon

R+M Nr.

524 20

Accessories wash brushes

Brush with air injector turbofoam365+



Retrofit kit for lances. Air injector turbofoam365+ and brush with cover plate.
20-150 bar. Max. 50 °C

Bristles 60 mm

R+M Nr.			
500 023 101	1/4" F		1.20
500 023 102	1/4" F		1.35
500 023 105	1/4" F		1.60

Bristles 90 mm

R+M Nr.			
500 023 201	1/4" F		1.20
500 023 202	1/4" F		1.35
500 023 205	1/4" F		1.60

Air injector



1/4" F : 1/4" M. l/min at 100 bar

R+M Nr.

108 290 60 13 l/min 1.5

108 290 20 34 l/min 2.5

Brush holder



With snap fit. Only works with nozzle holder 108 290 18 + 108 290 19

R+M Nr.

108 290 15 1/4" M

Nozzle holder



For brush holder 108 290 15

R+M Nr.

108 290 18 1/8" F

108 290 19 1/4" F

Symbols inlet outlet length nozzle flow diameter thread material

Brush holder



Suitable for all brushes. Hole spacing 202 mm.

H x W x D = 90 x 250 x 100 mm

R+M Nr.	(M)
108 290 30	stainless steel

easywash365+® brush holder




Container with overflow and lateral drain for cleaning. For wall and floor mounting. H x W x D = 670 x 340 x 143 mm

R+M Nr.	(M)
105 810	stainless steel

Wash brush holder, two-piece. For floor mounting and positioning for different length of lances. Pipe Ø 42 mm




R+M Nr.	(M)
105 820	stainless steel

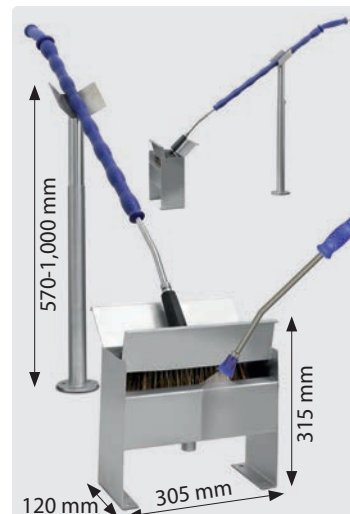


Sandblast kits

Principle of function sandblast kit

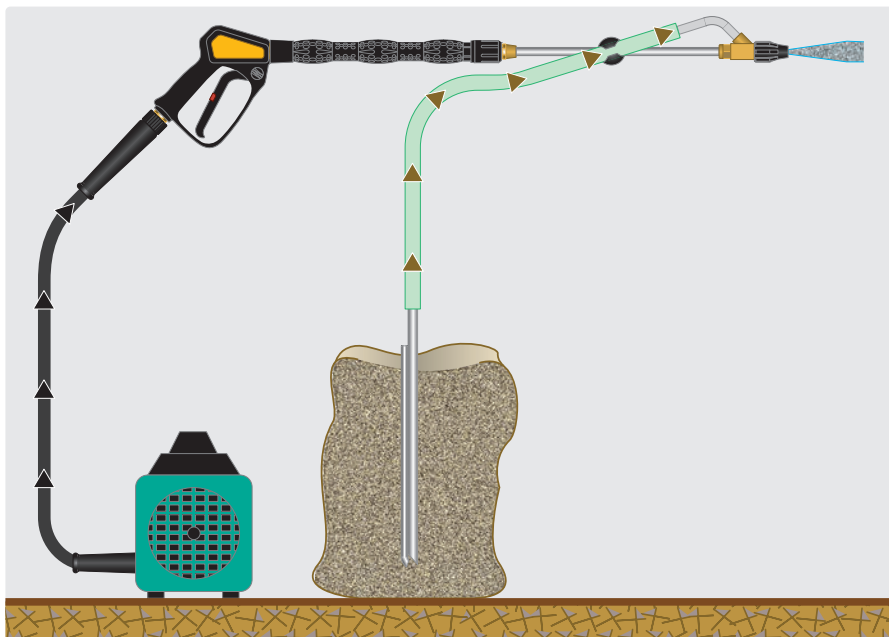


ST-355 hobby

Grain size of the sand 0.2 - 0.8 mm. Lance 300 mm.
Suction hose 3 m.
Max. 150 bar

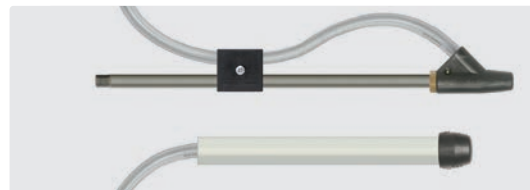


R+M Nr.	
200 355 500	1/4" m

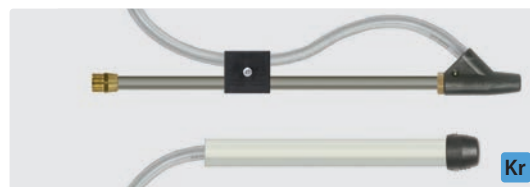

R+M Nr.	
520 93	M22 M

Sandblaster ST-555

M22 M. Stainless steel. Grain size of the sand 0.4 - 0.8 mm for DN 12 and 0.6 - 1.2 mm for DN 19.
Pipe with suction quantity control and hose 4 m.
Max. 500 bar / 100 °C

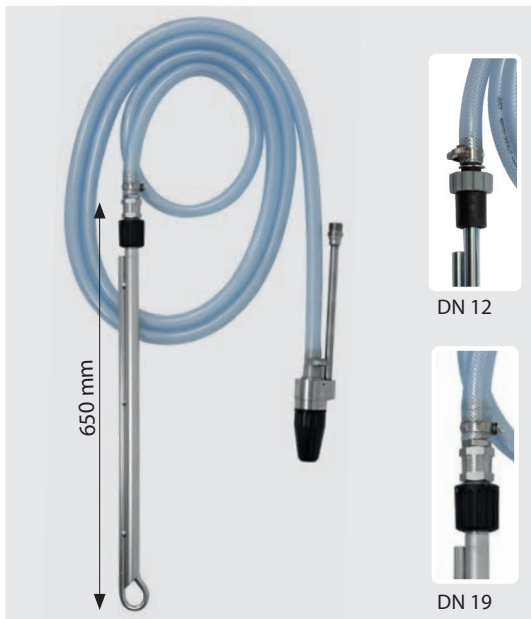

Rep. kits Sandblaster ST-555



3 nozzles M4. Stainless steel

D	R+M Nr.
03	200 555 430
04	200 555 440
055	200 555 455
065	200 555 465
075	200 555 475

Sand blasting nozzle



R+M Nr.
200 555 410



R+M Nr.		
561 922 200	M20 F	M22 F



R+M Nr.		
561 922 220	M22 F	M22 F

One tool, six blasting agents, numerous applications:

The sandblaster is suitable for dust-free blasting of the following solids with a grain size ranging from 0.4 to 1.2 mm:

- » **Glass beads**
for cleaning of copper and bronze as well as polishing of stainless steel
- » **Glass powder**
for cleaning of stainless steel and natural stone or for removal of graffiti from light surfaces
- » **Slag (fine)**
for cleaning of sandstone or brick as well as removal of graffiti from dark surfaces
- » **Slag (coarse)**
removal of rust from metals or of old coatings and paintings. cleaning and grinding of concrete surfaces
- » **Sodium carbonate (water-soluble)**
cleaning of sensitive surfaces such as aluminium, glass, plastics, stainless steel
- » **Mineral blasting agent (sand)**
removal of rust from metals or of old coatings and paintings. Cleaning and grinding of concrete surfaces. Varnish removal.



R+M Nr.	Ø	D	l
200 555 530	12	03	2.3
200 555 540	12	04	2.3
200 555 555	12	055	2.3
200 555 565	12	065	2.3
200 555 575	12	075	2.3
200 555 630	19	03	3.1
200 555 640	19	04	3.1
200 555 655	19	055	3.1
200 555 665	19	065	3.1
200 555 675	19	075	3.1

Sandblast kits

Blasting material barrel and suction kit for Sandblaster ST-555

Ideal for cleaning machines, systems, facades and masonry

- » Blasting material storage in the barrel
- » Mobile work with heavy blasting material
- » Protection from rain and moisture
- » Easy connection
- » Quick installation using a template

Suction kit for blasting material container/barrel



Stainless steel. Easy installation with drilling template. Ball valve included

R+M Nr.

200 555 493

Blasting material barrel with integrated suction kit



Commercially available, 80 litre PVC barrel with mounted stainless steel blasting media suction kit

R+M Nr.

520 800 801

Sandblast head ST-55 with regulator

Sand nozzle ST-55



Hardened stainless steel

R+M Nr.

200 055 495

Grain size of the sand
0.2 - 0.8 mm.
Lance 500 / 600 mm.
Suction hose 4 / 5 m.
With or without grip aside.
Max. 200 bar



	1/4" M lance 500 mm without grip hose 4 m	1/4" M lance 600 mm with grip hose 5 m	M22 F lance 600 mm with grip hose 5 m	M21 F lance 600 mm with grip hose 5 m	M22 M lance 600 mm with grip hose 5 m	Plug KW lance 600 mm with grip hose 5 m	M22 M lance 430 mm without grip hose 5 m	M18 F without lance without grip hose 5 m
D	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
04		520 824 0	520 844 0	520 834 0	520 814 0	520 874 0	520 804 0	520 854 0
045		520 824 5	520 844 5	520 834 5	520 814 5	520 874 5	520 804 5	520 854 5
05		520 825 0	520 845 0	520 835 0	520 815 0	520 875 0	520 805 0	520 855 0
055		520 825 5	520 845 5	520 835 5	520 815 5	520 875 5	520 805 5	520 855 5
06	200 055 606	520 826 0	520 846 0	520 836 0	520 816 0	520 876 0	520 806 0	520 856 0
065		520 826 5	520 846 5 K	520 836 5 W	520 816 5	520 876 5 A	520 806 5 Kr	520 856 5 K

Symbols inlet outlet thread nozzle diameter weight

High-pressure telescopic lances accessories

Nozzle tube



For gutter
cleaning,
250 mm.
M22 M : M18 M

R+M Nr.
513 002 502

Screw connections



1/4" F. Nozzle
protector com-
plete without
nozzle tip.

R+M Nr.
519 601

Belt support kit



R+M Nr.
525 922




Wall cleaner

WW 301




- » Rotating wall cleaner suitable for telescopic lances
- » Splash guard stainless steel with rubberlip or brush strips
- » Splash guard $\varnothing$ 300 mm
- » Without nozzles. 2 nozzles 1/4" M BSP with 15° spray angle are required
- » Max. 200 bar / 90 °C

R+M Nr.	Ⓒ	TYP	Ⓢ
521 032 251	M22 M	rubberlip	1.9 kg
521 032 254	M22 M	brush strips	1.9 kg
521 032 256	M18 F	K rubberlip	1.9 kg
521 032 255	M18 F	K brush strips	1.9 kg
521 032 258	1/4" F	rubberlip	1.9 kg
521 032 257	1/4" F	brush strips	1.9 kg



Accessories for wall cleaner

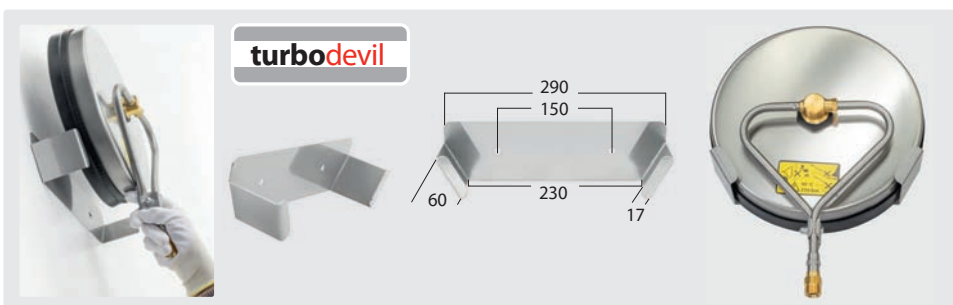

Wall bracket for wall cleaner **turbodevil**

R+M Nr.	M	Ⓢ
710 400 098	stainless steel 2 mm	502 gr

Symbols Ⓒ inlet Ⓢ outlet TYP type $\varnothing$ diameter Ⓢ weight M material $\leftrightarrow$ length shipment by truck

R+M / Suttner high-pressure telescopic lances

- » Light and handy. Infinitely extendable.
- » **Non-slip foam material insulation, 530 mm.**
- » Length easily adjustable. Adjustable from 2.3 m to 7.4 m.
- » Lance with embedded high pressure hose and mounted Suttner gun **ST-602**. Lance without high pressure nozzle.
- » Max. 275 bar / 100 °C

Safe handling thanks to the integrated pole holder
on the ST-602 spray gun and long soft handle
for a comfortable hold with insulation.



Nozzle guard with angled extension tube



ST-10 / 1/4" F NPT with extension tube angled




1/4" M with extension tube; Length 150 mm




R+M Nr.					
525 087 105	2.8 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 3.80 m	M22 M
525 087 110	2.8 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 3.80 m	3/8" F
525 087 115	2.7 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 3.70 m	3/8" F



R+M Nr.					
525 087 205	3.4 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	2.55 - 5.75 m	M22 M
525 087 210	3.4 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	2.55 - 5.75 m	3/8" F
525 087 215	3.3 kg	Aluminum / Fiberglass	1/4" M with extension	2.45 - 5.65 m	3/8" F

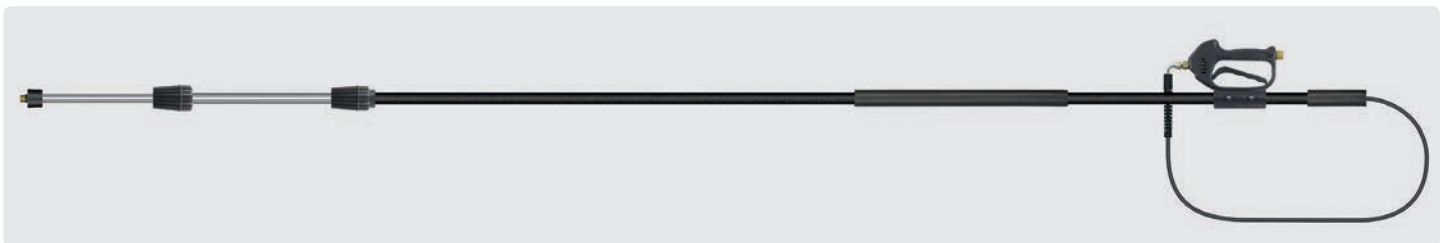

R+M Nr.					
525 087 305	4.1 kg	Aluminum / Fiberglass	Nozzle protector without tip nozzle with angled extension	3.20 - 7.80 m	M22 M
525 087 310	4.1 kg	Aluminum / Fiberglass	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.80 m	3/8" F
525 087 315	4.0 kg	Aluminum / Fiberglass	1/4" M with extension	3.10 - 7.70 m	3/8" F

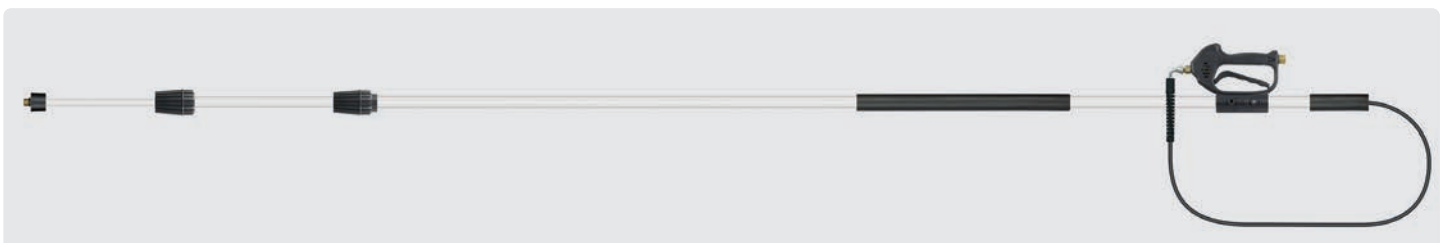


R+M Nr.					
525 087 405	4.0 kg	Aluminum	Nozzle protector without tip nozzle with angled extension	3.20 - 7.55 m	M22 M
525 087 410	4.0 kg	Aluminium	Nozzle protector ST-10 / 1/4" F NPT with extension tube angled	3.20 - 7.55 m	3/8" F
525 087 415	3.9 kg	Aluminium	1/4" M with extension	3.10 - 7.45 m	3/8" F

High-pressure telescopic lances made of carbon

- » Two latest-generation carbon telescopic lances for efficient cleaning of roofs and facades with a wide range of applications.
- » The innovative design made of high-quality carbon gives it a special lightness while maintaining stability.
- » For the removal of moss, lichen and algae as well as for the cleaning of solar systems.
- » Stable and infinitely extendable.
- » Lance with internally guided high-pressure hose, Flexy and attached Suttner gun ST-602 or ST-2600.
- » Lance is delivered without high pressure nozzles.
- » Max. 275 bar / 100 °C

Safe handling thanks to the integrated tube holder on the ST-602 or ST-2600 gun for a comfortable grip.

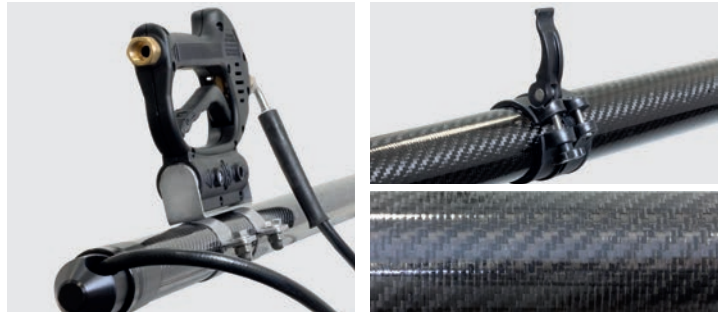

R+M Nr.	P	☺	↔	Ⓒ	Ⓢ
710 086 900	275 bar	1/4" F	2.0 m – 11.5 m	3/8" F	6.5 kg



LTF

R+M Nr.	P	☺	↔	Ⓒ	Ⓢ
710 086 905	300 bar	1/4" F	2.0 m – 11.5 m	3/8" F swivel	6.5 kg

High-pressure telescopic lances made of carbon, accessories




Nozzle protector without nozzle with 15° angled extension tube. For nozzle tips without thread, nozzle protector "K". Inlet 1/4" F, stainless steel / brass, 150 °C / 400 bar. Length 150 mm

R+M Nr.
513 002 501



Nozzle protector ST-10 / 1/4" female NPT with 15° angled extension pipe. For high-pressure nozzles with 1/4" male NPT thread. Inlet 1/4" F, stainless steel, 150 °C / 400 bar. Length 150 mm

R+M Nr.
513 002 500



1/4" male thread with extension tube; Length 100 mm. For high-pressure nozzles with 1/4" female BSP thread. Inlet 1/4" F, stainless steel 150 °C / 400 bar. Length 100 mm

R+M Nr.
070 000 097

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

With lower holding and trigger force: LTF technology in the ST-2600.



Symbols Ⓒ inlet ☺ outlet P pressure ↔ length Ⓢ weight shipment by truck



Cleaning head TRS, Mosmatic	345
Floor cleaner Floater 520 / Driver 520	339
Floor cleaner heart shape	338
Floor cleaner Mosmatic	343
High pressure nozzles	337, 341
Long-cast nozzle holders for rotor arms	345
Retrofit kit Venturi suction ST-36	340
Rotor arms Mosmatic	345
ST-550 foot valves	345
Surface cleaner Aqua Pro with integrades water recovery system, Mosmatic.	344
Surface cleaner TD 420 with suction	340
Surface cleaner with air recovery system and integrated gum remover, Mosmatic.	344
Surface cleaner with recovery system for steam generator, Mosmatic	345
TurboDevil® - our new TurboDevil® floor cleaner series	334-337
Wall & floor cleaner	342
Wall cleaner	341
Wall cleaner Mosmatic	342
WEED DEVIL® - Our new device for weed control	346

TurboDevil® - our new TurboDevil® floor cleaner series

TurboDevil® – BASIC

- » Especially designed for professional cleaning applications
- » Max. 60 °C. 1,000 r.p.m. at 3 - 60 °C
- » Completely stainless design
- » Heat-resistant all around protection ensures a safe handling by protection against splashes and stones
- » The precision rotor arm is counterbalanced, precisely equilibrated and welded by robots
- » Low vibration and reliable running
- » Suitable for applications up to about 150 annual operation hours are guaranteed

Surface cleaner TD 300 BASIC

Surface cleaner TD 410 BASIC



Surface cleaner with a newly developed swivel with pivoting inlet for high revolutions per minute. The bending of the swivel is variably adjustable thus making an easy cleaning of floors and walls possible. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 1,800 l/h / 60 °C. Max. 275 bar

R+M Nr.	Ø	Ⓒ	R+M Nr.	Ø	Ⓒ
521 030 300	300 mm	1/4" F	521 042 300	410 mm	1/4" F

Surface cleaner TD 410 BASIC



Swivel:
With triple bearing system

ST-2600
LTF

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. Swivel with triple bearing system. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 1,800 l/h / 60 °C. Max. 275 bar

R+M Nr.	Ø	Ⓒ	P
521 042 350	410 mm	1/4" F	max. 275 bar

Symbols Ⓒ inlet Ø diameter P pressure



Newly developed:

Swivel for high revolutions with pivoting inlet



3 or 4 industrial castors (60 mm):

Easy and flexible steering



Precision rotor:

Welded by robots



Surface cleaner TD 520 BASIC



Swivel:
With triple bearing system

ST-2600
LTF

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. Swivel with triple bearing system. 4 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 2,400 l/h / 60 °C

R+M Nr.	Ø	Ⓒ	P	incl.
521 052 300	520 mm	1/4" F	max. 275 bar	–
521 052 301	520 mm	3/8" F	max. 275 bar	ST-2600
521 052 304	520 mm	3/8" F	max. 275 bar	ST-2600 swivel
521 052 302	520 mm	M22 F	max. 275 bar	–
521 052 303	520 mm	Plug KW	max. 275 bar	–

TurboDevil® - our new TurboDevil® floor cleaner series

TurboDevil® - agriculture cleaner Big Wheel

easyfarm365+®

LTF

We recommend using the gun **easyfarm365+®** with patented LTF technology.





Always at hand:
Lance holder for attachment at the fork



Lug:
The underside of the connecting tube remains on the handle



Space-saving:
Divisible fork




Large wheels:
For good grip



Carefully chosen:
With 30 mm well equipped for slatted floors



Clean solution:
Extra thick rubber bristles for splashback



Extra robust:
Swivel with carbide sealings





Surface cleaner with foldable handle bar Swivel with carbide sealings. Front-mounted castor (30 mm) ideal on slatted floors. 2 large big wheels. 2 nozzles 1/4" M are required. Max. 275 bar / 1.800 l/h / 120 °C

R+M Nr.	Ø	G	P
521 052 900	520 mm	1/4" IG	max. 275 bar

TurboDevil® – INDUSTRIAL

Surface cleaner TD 410 INDUSTRIAL

Newly developed:
Swivel for high revolutions with pivoting inlet









- » Especially designed for industrial cleaning applications
- » **For hot water use of up to 120 °C. 2.000 r.p.m. at 5 - 120 °C**
- » Heat-resistant all around protection ensures a safe handling by protection against splashes and stones
- » The precision rotor arm is counterbalanced, precisely equilibrated and welded by robots
- » Low vibration and reliable running are guaranteed
- » Suitable for applications of up to 500 annual operation hours
- » Use of a especially high quality, **3-ball bearing swivel joint with ceramic sealing elements** for high durability and extremely long stress
- » **Castors are made out of stainless steel**

Surface cleaner with a newly developed swivel with pivoting inlet for high revolutions per minute. The bending of the swivel is variably adjustable thus making an easy cleaning of floors and walls possible. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required. Max. 1,800 l/h / 120 °C

R+M Nr.	Ø	G	P
521 042 400	410 mm	1/4" F	max. 275 bar

TurboDevil® - our new TurboDevil® floor cleaner series

Surface cleaner TD 410 INDUSTRIAL with suction system



ST-2600

LTF

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. **Very robust swivel with triple bearing system and tungsten carbide sealing elements.** 3 stainless steel industrial castors (60 mm). 2 nozzles 1/4" M are required.

R+M Nr.	Ø	C	P
521 042 500	410 mm	1/4" F	max. 275 bar

Precision rotor: Welded by robots



Suction system: The splash guard is specially designed for the best suction.



Swivel: With triple bearing system



Surface cleaner TD 410 INDUSTRIAL



Swivel:
With triple bearing system



3 industrial castors (60 mm): Easy and flexible steering

ST-2600

LTF

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. Swivel with triple bearing system. 3 industrial castors (60 mm). 2 nozzles 1/4" M are required.

Max. 1,800 l/h / 120 °C. Max. 275 bar

R+M Nr.	Ø	C	P
521 042 450	410 mm	1/4" F	max. 275 bar


Surface cleaner TD 520 INDUSTRIAL



turbo devil
INDUSTRIAL



4 large industry castors: To move with ease



Fork angle:
Variable settings

ST-2600

LTF

We recommend using the gun ST-2600 with patented LTF technology.

Surface cleaner with foldable handle bar for space saving and reasonable transport. High performance swivel, stainless steel.

4 industrial castors (60 mm).


2 nozzles 1/4" M are required.

Max. 2,400 l/h / 120 °C

R+M Nr.	Ø	C	P
521 052 400	520 mm	1/4" F	max. 275 bar

TurboDevil® - our new TurboDevil® floor cleaner series

Surface cleaner TD 750 INDUSTRIAL

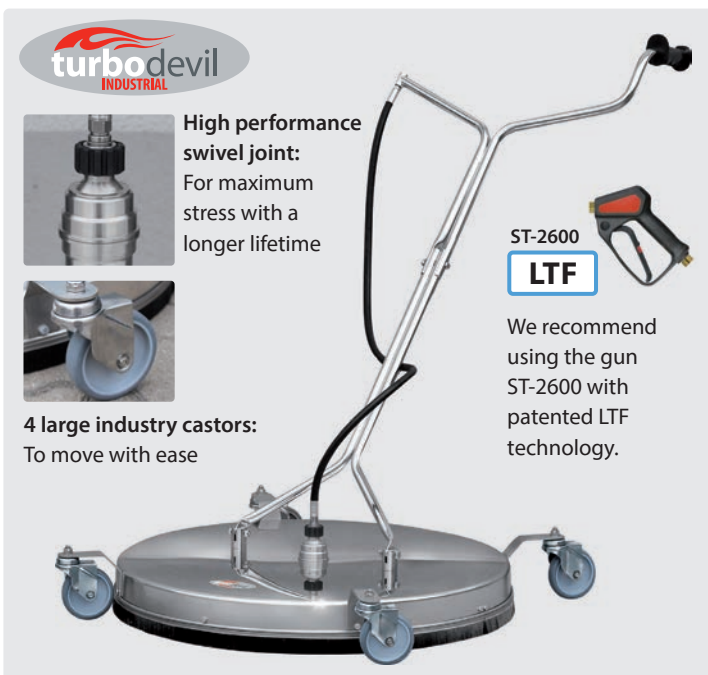

turbo devil
INDUSTRIAL

High performance swivel joint:
For maximum stress with a longer lifetime



4 large industry castors:
To move with ease

ST-2600


LTF

We recommend using the gun ST-2600 with patented LTF technology.



Completely stainless steel. With reinforced hood and divisible fork. High performance swivel, stainless steel. Precision rotor arm welded by robots. 4 industrial castors (100 mm). 3 nozzles 1/4" M are required. Max. 2,400 l/h / 120 °C

R+M Nr.	Ø	C	P	incl.
521 075 300	750 mm	1/4" F	max. 275 bar	–
521 075 301	750 mm	3/8" F	max. 275 bar	ST-2600
521 075 302	750 mm	M22 F	max. 275 bar	–
521 075 303	750 mm	Plug KW	max. 275 bar	–




Lug: The underside of the connecting tube remains on the handle



Space-saving:
Divisible fork

Accessories for TD 300 & TD 410 & TD 410 INDUSTRIAL



A

Lance ST-007. 1/4" M : Plug KW.
Stainless steel 1,000 mm

R+M Nr.

512 495 90



K

Adapter. 1/4" M : M18 F.
Stainless steel

R+M Nr.

519 70

High pressure nozzles

1/4" M NPT, 15 °



Impact = 100 %

D	R+M Nr.
02	613 05
025	613 07
03	613 10
04	613 30
045	613 40
05	613 50



Kr IP

Lance extension. 1/4" M : M22 M.
Stainless steel 500 mm

R+M Nr.

513 129

Symbols C inlet Ø diameter P pressure D nozzle

Floor cleaner heart shape



ST-2605

LTF

We recommend using the gun ST-2605 with patented LTF technology.



www.rm-suttner.com



R+M Nr.					
710 100 122	1/4" F	min. 150 bar / max. 350 bar	90°	36 kg	




ST-45/600 coupling included



ST-2750

LTF

We recommend using the gun ST-2705 with patented LTF technology.

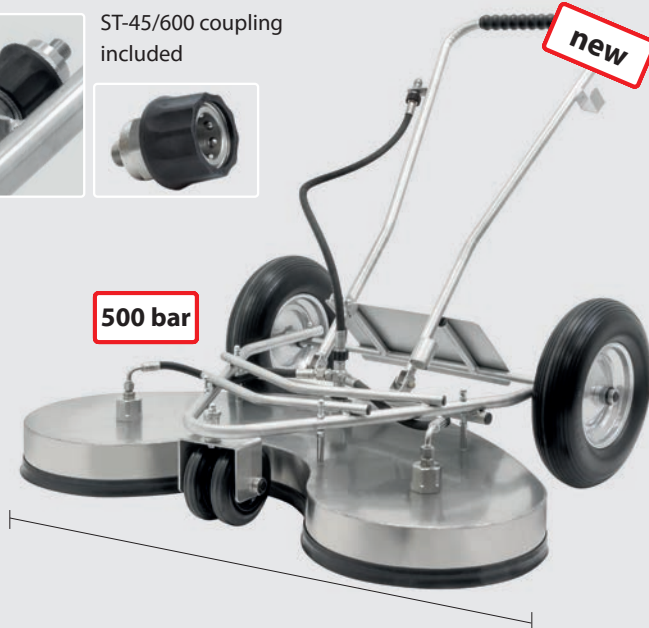

R+M Nr.					
710 100 123	ST-45/600 coupling	min. 150 bar / max. 500 bar	90°	36 kg	

turbo**devil**

- » High-quality stainless steel version with lance holder at the push handle
- » **Working width 1,200 mm**
- » 3 variable rotary swivel bars with two spray nozzles each
- » 2 big industrial castors ø 400 mm and 1 double guide roll ø 160 mm
- » The integrated screen filter prevents that the nozzles get clogged
- » 6 nozzles 1/4" M BSP are required
- » Min. 150 bar / max. 350 bar
- » Min. 30 l/min. / max. 60 l/min.
- » Max. 90 °C



- » High-quality stainless steel version with lance holder at the push handle
- » **Working width 1,200 mm**
- » 3 variable rotary swivel bars with two spray nozzles each
- » 2 big industrial castors ø 400 mm and 1 double guide roll ø 160 mm
- » The integrated screen filter prevents that the nozzles get clogged
- » includes ST-45/600 coupling
- » 6 nozzles 1/4" M BSP are required
- » Min. 150 bar / **max. 500 bar**
- » Min. 30 l/min. / max. 60 l/min.
- » Max. 90 °C

We recommend using the gun ST-2705 with patented LTF technology.



Symbols inlet diameter pressure temperature weight

Floor cleaner Floater 520 / Driver 520

turbodevil


- » High-quality stainless steel design with robust ABS cover
- » Easy handling
- » Working width 520 mm
- » Robust swivel bearing system
- » 2 nozzles 1/4" M BSP are required
- » Max. 275 bar
- » Max. 22 l/min
- » Max. 90 °C



Space-saving storage:
Simply fold it up



Clean solution:
The integrated screen filter prevents that the nozzles get clogged



ABS plastic:
Particularly robust cover with additional stainless steel re-inforcement plate



Robust swivel:
Bearing system

We recommend using the gun **ST-2600** with patented LTF technology




LTF



Suitable wall bracket:
R+M Nr. 710 400 156, see page 532

Floor cleaner Floater 520

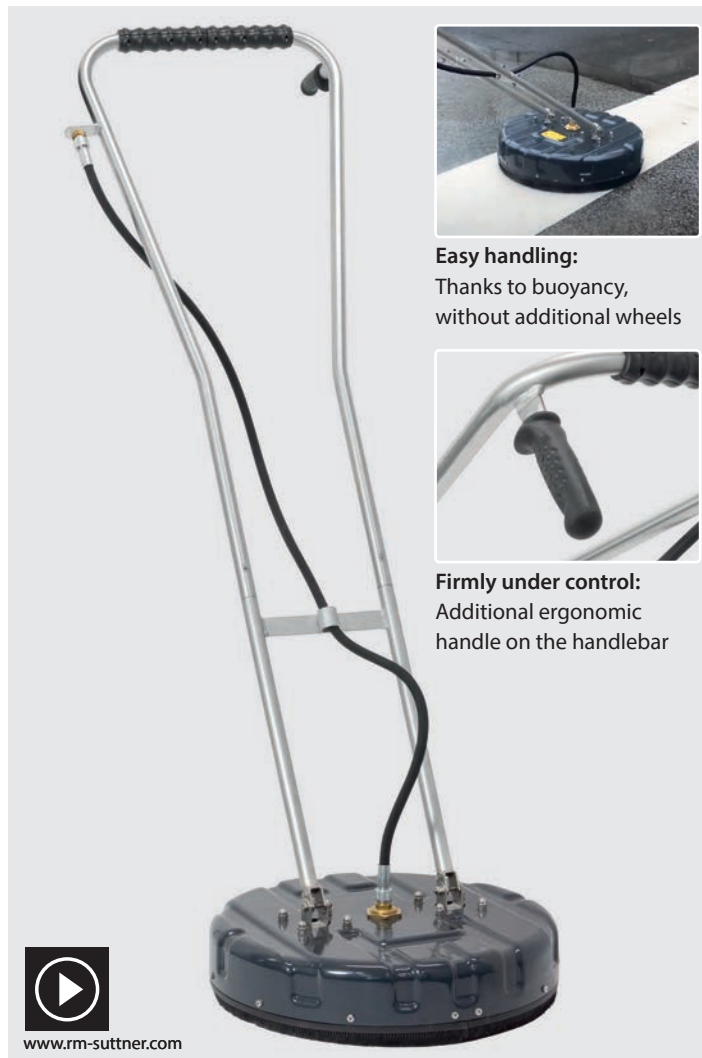


Easy handling:
Thanks to buoyancy, without additional wheels



Firmly under control:
Additional ergonomic handle on the handlebar

Floor cleaner Driver 520

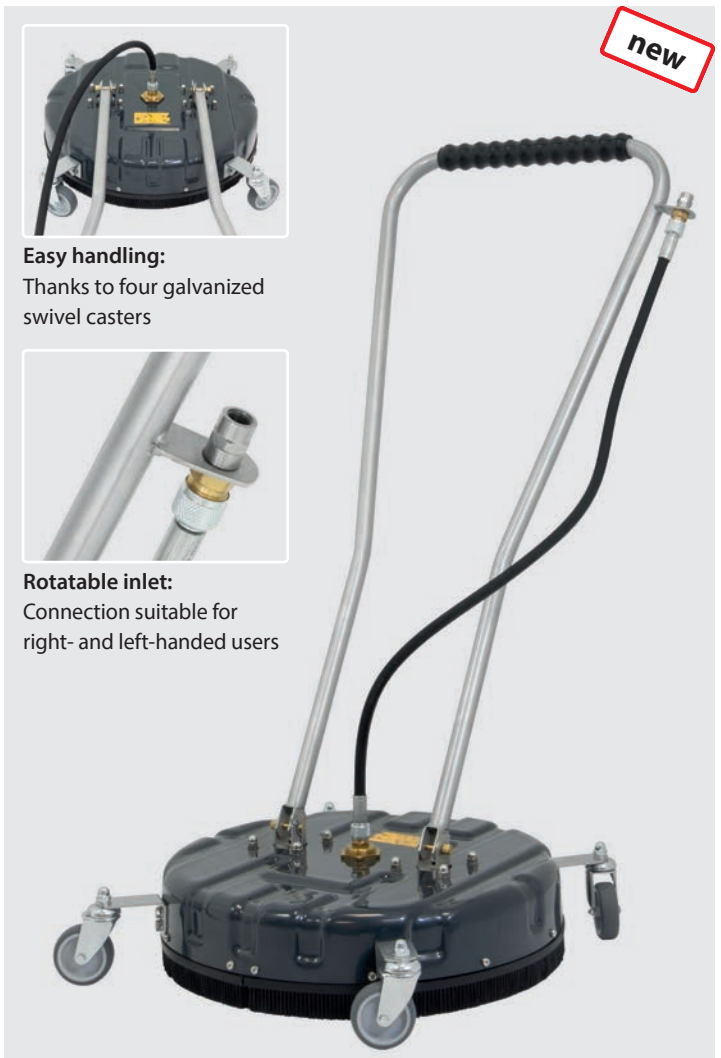

Easy handling:
Thanks to four galvanized swivel casters



Rotatable inlet:
Connection suitable for right- and left-handed users

Max. 250 bar, min. 175 bar. Max. 22 l/min, min. 20 l/min.

R+M Nr.	Ⓒ	°C	Ⓚ
710 520 151	1/4" F	90°	9 kg

Max. 250 bar. Max. 22 l/min.

R+M Nr.	Ⓒ	°C	Ⓚ
710 520 200	1/4" F	90°	9 kg

Surface cleaner TD 420 with suction

ST-2605

LTF

We recommend using the gun ST-2605 with our patented LTF technology.



Easy height adjustment:
Guarantees the best possible distance from the ground.



For vacuum hose connection sleeves: The connector has an outside diameter of 50 mm and an inside diameter of 45 mm.



Male thread: For 1/4" connection.

turbo**devil**

- » High-quality stainless steel design with suction connection for connection to a vacuum cleaner
- » 75 mm castors with easy height adjustment
- » Working width 400 mm
- » High performance swivel, suitable for applications of up to 500 annual operation hours
- » 2 NPT nozzles 1/4" male are required
- » Max. 350 bar / 90° C / 1.800 l/h



Swivels 110 degrees

High-performance swivel joint:
For the highest demands with a long service life.
Triple ball bearings with extremely high-quality carbide sealing elements.



R+M Nr.	Ⓒ	P	°C	Ⓔ
710 100 450	1/4" F	max. 350 bar	90 °C	13 kg

Retrofit kit Venturi suction ST-36



www.rm-suttner.com



Stainless steel design. Includes reducing angle pieces (45° / 90°) and adapter for ID 40.
Easy installation for TurboDevil® surface cleaner with suction

R+M Nr.	Ⓒ
200 036 600	M22x1.5


Wall cleaner

WW 301

- » Rotating wall cleaner suitable for telescopic lances
- » Splash guard stainless steel with rubberlip or brush strips
- » Splash guard $\varnothing$ 300 mm
- » Without nozzles. 2 nozzles 1/4" M BSP with 15° spray angle are required
- » Max. 200 bar / 90 °C




R+M Nr.	Ⓒ	TYP	Ⓔ
521 032 251	M22 M	rubberlip	1.9 kg
521 032 254	M22 M	brush strips	1.9 kg
521 032 256	M18 F K	rubberlip	1.9 kg
521 032 255	M18 F K	brush strips	1.9 kg
521 032 258	1/4" F	rubberlip	1.9 kg
521 032 257	1/4" F	brush strips	1.9 kg

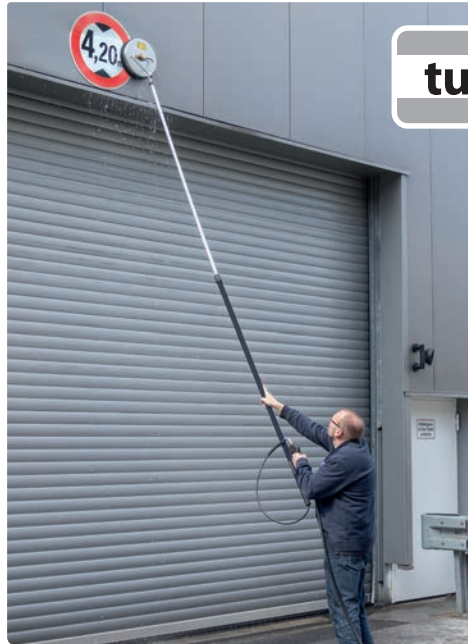

turbodevil

Wall bracket for wall cleaner TurboDevil® WW 301

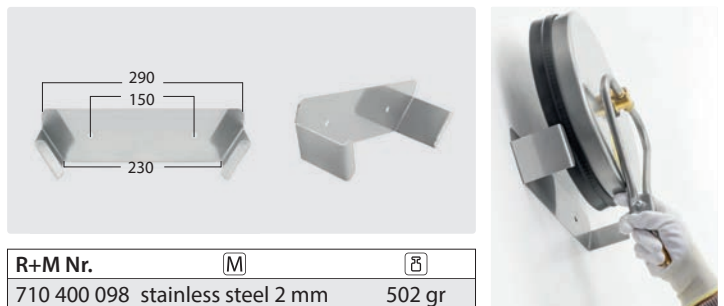

WW 160



- » Rotating wall cleaner
- » Splash guard stainless steel with brush strips
- » Splash guard $\varnothing$ 160 mm
- » Without nozzles. 2 nozzles 1/4" M BSP with 15° spray angle are required
- » Max. 350 bar / 90 °C

R+M Nr.	Ⓒ	Ⓔ
710 100 160	M22 M	1.3 kg



turbodevil

High pressure nozzles

1/4" M BSP

Impact = 100 %



Ⓓ	R+M Nr.
02	613 052
025	613 072
03	613 102
04	613 302
045	613 402
05	613 502

Symbols Ⓒ inlet $\varnothing$ diameter Ⓟ pressure °C temperature Ⓔ weight Ⓢ thread TYP type Ⓜ material Ⓓ nozzle

Wall cleaner Mosmatic

FL-ABB 200



Stainless steel. 2 flat jet nozzles 15°, 1/8" M are required.
Min. 18 l/min / 150 bar.
Max. 350 bar / 120 °C

- » Wall cleaner - graffiti removing by means of suction system
- » Field of application: graffiti removing, restoration of different surfaces, maintenance of buildings and exclusively designed for applications with high water pressure
- » Suitable for applications from the outside e.g. concrete, brick, lime stone buildings or wooden surfaces
- » Suitable for 50 mm suction hose
- » Our spray gun ST-2605 (202 605 500) equipped with the patented LTF system is recommended for effortless cleaning applications
- » The high pressure gun and nozzles are excluded

R+M Nr.	Ø	G	Ⓜ
108 780 35	200 mm	1/4" F	2.7 kg

FL-EB 200



Stainless steel. 2 flat jet nozzles 15°, 1/8" M are required.
Max. 275 bar / 120 °C

- » Wall cleaner - economy
- » This multifunction floor cleaner is especially designed for all applications such as brick-lined walls, boat walls, bases, stairs, sidewalks, windows etc.
- » Our spray gun ST-2605 (202 605 500) equipped with the patented LTF system is recommended for effortless cleaning applications
- » The high pressure gun and nozzles are excluded

R+M Nr.	Ø	G	Ⓜ
108 780 02	200 mm	1/4" F	2.7 kg

Wall & floor cleaner

ST-97 floor cleaner



Stainless steel. Variable pressure regulation.
Low pressure phase for chemical suction.
4 nozzles 80° 015 included. Width 400 mm.
Max. 250 bar / 21 l/min / 80 °C

R+M Nr.	Ø
200 097 500	1/4" M

Symbols G inlet Ø diameter Ⓜ weight ○ thread P pressure

Floor cleaner Mosmatic

Surface cleaner FL-AHY 520 Mosmatic



Completely stainless steel. Surface cleaner with an additional frame for highest stability. A height adjustable housing including a device for extraction. Foldable handle bar for space saving and reasonable transport. 2 nozzles are required. Suitable for 50 mm suction hose. 4 industrial castors (100 mm). Max. 2,400 l/h / 120 °C

R+M Nr.	Ø	G	P
108 809 71	520 mm	1/4" F	max. 500 bar

Surface cleaner FL-SAR 300 Mosmatic



Surface cleaner AQUA with recovery. Complete with integrated suction system, spray gun and nozzles. Recovery Port: 40 mm
Designed for 150 bar / 15 l / min. The black anodized aluminum suction device collects the dirty water via a Venturi and double housing system. It can then be led away via a commercially available suction hose. The use of a vacuum system is no longer needed.
Max. 275 bar / 120 °C.
Not suitable for paved areas.

R+M Nr.	Ø	G	P
108 782 43	300 mm	3/8" F	max. 275 bar

Roof cleaner DR-520 Mosmatic



Completely stainless steel. Roof cleaner with an additional frame for highest stability. Adjustable in width of up to 90 mm and in height of up to 33 mm. Including a safety loop for the safety rope with clippers. The use of the ST-550 foot valve is recommended. 4 industrial castors (125 mm).
Max. 2,400 l/h / 120 °C

R+M Nr.	Ø	G	P
108 809 72	520 mm	3/8" F	max. 350 bar
108 809 73	520 mm	3/8" F	max. 500 bar

The accident prevention regulations of the Employer's Liability Insurance Association regarding "the use of high pressure cleaner" (BGV D15) & "tasks with liquid jets" (BGV D26) in addition to DIN EN 60335-2-79 and DIN EN 1829-1 prescribe that manually guided spray units (like roof cleaners) shall be provided with a manually-actuated control for release of the cleaning solution.

Surface and underbody cleaner Hurricane Flip, 2 - in - 1 Mosmatic


The Mosmatic Hurricane Flip can be used as surface cleaner and underbody wash, all in one unit.
The Hurricane Flip can be converted from a floor cleaner to an undercarriage cleaner in just a few simple steps. The proven toggle joint makes easy and effortless cleaning possible. Positioned on the side of the housing, this special design enables cleaning under the vehicle.
With 3 stainless steel castors ø 60 mm.
Incl. 2 high-pressure nozzles ex works for e.g. 15 l / min. at 130 bar or 18 l/min. at 175 bar.
Max. 275 bar / 120 °C.



Toggle joint:
Thanks to the low profile, the vehicle does not need to be lifted on a platform to be cleaned.

R+M Nr.	Ø	G	P
108 786 02	300 mm	3/8" F	max. 275 bar

Surface cleaner Aqua Pro with integrated water recovery system, Mosmatic

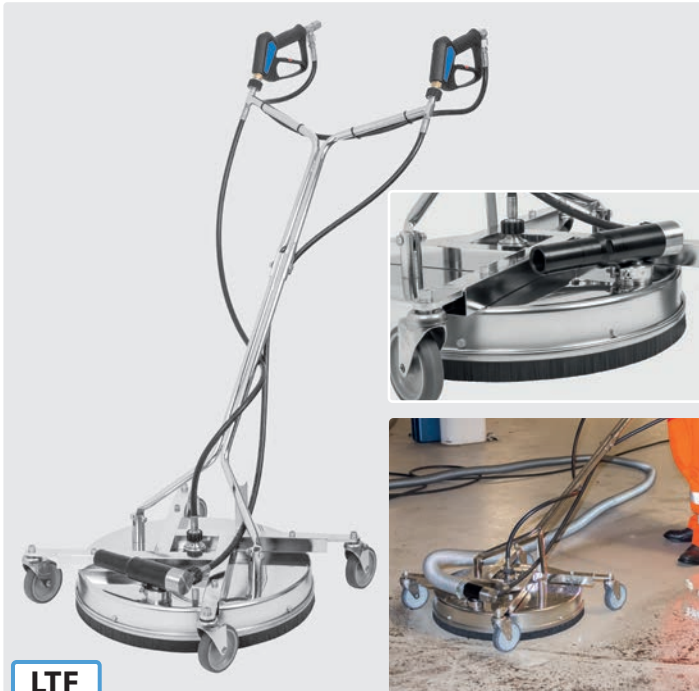

LTF

- » The new Mosmatic Aqua Pro with an integrated water recovery system. This surface cleaner does not require an external industrial vacuum. Thanks to the venturi nozzle that is attached directly to the housing, waste water can be discharged with a standard vac hose. The Aqua Pro can clean and recover individually, or both at the same time.
- » Integrated recovery: The black anodized aluminum suction device collects the wastewater via the Venturi and double housing principal. Mount your export hose on the suction device and place it into the desired port to drain the water. The use of a vacuum system is no longer needed.
- » Stainless steel swivel castors: (Premium Quality) Four 4" stainless steel swivel castors with custom mounting brackets, ensure easy maneuvering even in confined spaces.
- » 2 spray guns ST-2605 equipped with the patented LTF technology
- » Incl. 2+1 high-pressure nozzles ex works, size 03 for 180 bar with 25 l/min. Optionally available on request: 2+1 high-pressure nozzles, size 02 as a set for 170 bar with 15 l/min.
- » Max. 350 bar / 120° C. **Not suitable for paved areas.**

R+M Nr.	Ø	C	P
108 807 69	520 mm	3/8" F	max. 350 bar

Surface cleaner with air recovery system and integrated gum remover, Mosmatic



LTF



- » Such as the other devices of the FL-AH series the new FL-AH-KAU is a record performance regarding quality, finish and excellent cleaning result. We do not know anybody who has not yet seen places such as railway stations, stadiums, schools and many more which are covered with hundreds of chewing gums. This development is the best solution against this appearance!
- » In order to ensure an effective removal of the gums the special nozzle is positioned behind the stainless steel cap. The surface is cleaned in a conventional way by means of the gun which is mounted at the right side. In case of removing stubborn dirt e.g. chewing gums the special nozzle is switched on by the gun mounted at the left side. The gums are cut up and totally removed by the hp jets and finally sucked in.
- » By means of four 100 mm plastic rolls the surface cleaner can be easily moved.
- » The frame as well as all mounting parts made out of stainless steel offer additional stability. Best cleaning results are achieved due to the height adjustable housing.
- » The swivel has reinforced self-lubricating stainless steel ball bearings and a dual spring based carbide seal system especially designed for higher revs. This combination guarantees a very long durability.
- » 2 spray guns ST-2605 equipped with the patented LTF technology, 2 hp nozzles 15° 03 and a special nozzle for the removal of chewing gums are included. Further nozzle sizes are available on request.
- » Suitable for 50 mm suction hose. Suction hose is excluded.
- » Max. 350 bar / 120 °C. Min. 15 l/min / 250 bar

R+M Nr.	Ø	C	W
108 809 61	520 mm	3/8" F	20 kg

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Rotor arms Mosmatic

- » Completely made out of stainless steel. Light, rugged and welded by robots. Available as part or surface cleaner.
- » Further versions are available on request.
- » Inlet 3/8" F. Outlet: 1/4" F
- » Max. 250 bar / 120 °C

R+M Nr.	Ø
108 827 05	100 mm
108 827 07	200 mm
108 827 09	300 mm
108 827 11	400 mm
108 829 75	470 mm
108 827 13	500 mm
108 827 15	600 mm



Long-cast nozzle holders for rotor arms

Using the Venturi principle, the Mosmatic wide jet nozzles can be used to clean surfaces from a great distance and with virtually constant impact force. Without nozzles. Max. 170 bar / 120 °C

- » Good cleaning performance at a distance
- » Venturi principle

R+M Nr.	Ø
108 149 35	1/8" NPT
108 149 39	1/4" NPT



ST-550 foot valves



Housing stainless steel. Valve stainless steel.
Rubber feet. Max. 500 bar / 80 l/min / 150 °C

R+M Nr.	Ø	Ø
200 550 600	1/4" F	1/4" F
200 550 620	M22 F	M22 M

Cleaning head TRS, Mosmatic

- » If water pressure is produced the rotor arms start turning by themselves. The arm rotates by means of the repulsive force of the water jet and does not need any additional drive.

- » Completely made out of stainless steel, with swivel DYT.
- » Nozzles are excluded. 4 EG nozzle tips are required.



Inlet 3/8" F.
Max. 170 bar / 120 °C

R+M Nr.
108 819 19

Surface cleaner with recovery system for steam generator, Mosmatic

The surface cleaner FL-DAR is the newest innovation from Mosmatic. It is possible to clean walls and other surfaces with steam and keep them dry. Save time! Steam cleaning is a great way to disinfect, sterilize or degrease surfaces. By using this cleaner you are able to clean 4-5 times quicker than by using a lance. The FL-DAR can be used with steam up to 180 °C and a Ø

200 mm hand held model or a Ø 300 mm floor model with wand are available. Both cleaner are equipped with nozzles. The complete stainless steel construction makes them perfect for the medical and food industry. Best performance with 10 kW steam generator.

Delivery: 2 - 3 weeks

FL-DAR 200



PA castors

The castors allow free movement in any direction while having the same distance from the nozzles to the surface. The castors are made out of PA thus being suitable for the food industry.



Splash protection

The plastic rim guard prevents over spray and flying debris. It is extremely effective due to the wavy design.

R+M Nr.	Ø	Ø	Ø
108 780 91	200 mm	M22 x 1.5	2.5 kg

FL-DAR 300



High quality swivel:

The heart of a Mosmatic surface cleaner is the swivel which is reinforced with self-lubricating, stainless steel ball bearings and a high temperature sealing system.



R+M Nr.	Ø	Ø	Ø
108 781 91	300 mm	M22 x 1.5	4.0 kg

Symbols inlet outlet diameter weight pressure

WEED DEVIL® – Our new device for weed control

- » Ideal for professional service provider in the garden-, municipal and building cleaning industry
- » Completely made out of stainless steel
- » **For hot water use of up to 120 °C, 0 - 350 bar**
- » Suitable for low and high pressure applications
- » A working width of 400 mm
- » 1/4" nozzles have the ideal spraying angle of 65°
- » swivelling application on sloping and vertical areas is possible

weeddevil®**Completely
chemical-free!**

- » Completely made out of stainless steel
- » **For hot water use of up to 120 °C**
- » For use in **low pressure application**
- » Working width 150 mm
- » Extremely robust and lightweight with 0.52 kg
- » Ideal for individual treatment



At the underside: concentrated and well-directed hot water without any temperature loss by an optimally designed housing having a perfect cleaning distance.



Our spray gun ST-2605 with the patented LTF technology is recommended for effortless working.



4 nozzles 1/4" M NPT are required. 2 robustly industrial castors (260 mm).
Max. 120 °C

R+M Nr.	(M)	castors (Ø)	working- (↔)	(C)	(⇌)	(P)	(°C)	(B)	(I) / (↔)
200 097 700	stainl. steel	260 mm	400 mm	1/4" F	4 x 1/4" F	max. 350 bar	120 °C	7.4 kg	1,250 / 530 mm

Accessories thermometer

Easy mounting with counter plate and screws (incl.), or with back spring. 0 - 120 °C

R+M Nr.	tube- (Ø)
200 097 420	16 mm (WEED DEVIL®)
200 097 425	13 mm (1/4")

Accessories flow restrictor

Flow restrictor for water reduction. Incl. adapter and nozzles (1.0 / 1.1 / 1.2 / 1.3 / 1.4)

R+M Nr.	(C)	(⇌)
200 097 750	1/4" M	1/4" M / M22 F

Symbols (C) inlet (⇌) outlet (I) height (mm) (↔) width (mm) (Ø) diameter (mm) (°C) temperature (B) weight (M) material





Accessories for sprayer and foamer	396-397	foamblaster ST-76	368
Accessories injectors	381-385	Foamer with pressure tank	396-397
Adapter connection ST-160.	372	foodjet365+® - food hose with textile meshwork	363
Assembly scheme easyfoam365+® bypass injectors ST-167		foodjet365+® 1500 - food hose with textile meshwork	363
without compressed air module	387	HACCP - Colour Coding Concept.	399
Assembly scheme easyfoam365+® bypass injectors ST-168		Hose clamps.	362, 375
with compressed air module	389	Intake filter for chemicals	376
Assembly scheme easyfoam365+® injectors ST-164		Intake manifold.	380
with compressed air module	391	Lance holder	352
Assembly scheme easyfoam365+® injectors ST-164		Long cast foam head ST-75.2	368
without compressed air module	391	Low pressure foam head ST-75.3.	367
Ball valves	365	Metering valves	357
blufood® - food hose	362	Micro Droplets Nozzle Holder	368
Carwash low pressure foam lances.	370	Nozzle protector ST-11	354
Chemical spray guns ST-510 & lances	398	Pressure regulating valve-set.	375
Couplings "B"	356	PURClean365+® - 40 food hoses with automatic hose reel and	
Disinfection cold fog device ST-83.1 / ST-83.2.	395	ST-3225 - Food Special Set.	361
easyfoam365+® bypass injectors ST-167		PURClean365+® - 65 food hoses with the professional flat	
without compressed air module	386	ST-3225	360
easyfoam365+® bypass injectors ST-168		PURClean365+® - food hose	359-360
with compressed air module	388	PURClean365+® Power and 150 - food hose	358
easyfoam365+® foam and disinfectant units ST-164	390	Reference list manufacturer number to R+M number	378
easyfoam365+® foam injector ST-160.2	379	Rinsing lances	364
easyfoam365+® foam injector ST-160.3	379	Rubber protected ball valves	364
easyfoam365+® Injector ST-162 panel mount version		Sprayer with pressure tank	396-397
of ST-167/168.	388	ST-175 Foam & Clean.	369
easyfoam365+® injectors.	378	ST-230	
easyfoam365+® injectors by Suttner	376-377	Suttner chemical suction set	375
easyfoamer ST-73.1 foam injector lances	392-393	Suttner foam guns	351-353
easyfoamer ST-73.2 foam injector lances	393	Suttner foam injectors	375-376
easywash365+® foam lances	371	Suttner high pressure quick couplings ST-3100.	356
easywash365+® foam sets.	372-373	Suttner spray guns.	350
Foam Chart	348	Triple nozzle.	357
Foam gun	394	turbofoam365+ lances by Suttner	374
Foam head ST-75	366	Wall brackets	377
Foam head ST-75.1 without foam pad.	367	Wall mount.	351
Foam injector lances	394	Water reduction stainless steel	357
Foam lances	354-365		


Foam Chart

Determine the foam components you need!

1. INJECTOR UNIT WITHOUT COMPRESSED AIR

	name	food grade	chemical	flow rate	bypass rinse option	adjustable metering	other options	page
	ST-60.1	–		6-20 l/min	–			376
	ST-160	✓		6-60 l/min	–			377
	ST-160 ST-161	✓		6-60 l/min	–			377
	ST-166	✓		6-60 l/min	–			377
	ST-167	✓		6-80 l/min				386
	ST-167	✓		6-80 l/min			suitable for extreme conditions	386
	ST-167 ST-161	✓		6-80 l/min				386
	ST-164	✓		6-80 l/min				390

1. COMPRESSED AIR INJECTOR

	ST-160.2	✓		4-80 l/min	–			379
	ST-160.3	✓		4-120 l/min	–			379
	ST-168	✓		4-80 l/min				388
	ST-168 ST-161	✓		4-80 l/min				388
	ST-164	✓		4-80 l/min				390
	ST-164	✓		4-80 l/min			water inlet pressure - sensitive air intake	382, 390
	ST-167 ST-168	✓		4-80 l/min				388

2. FOAM UNIT WITHOUT COMPRESSED AIR

	name	food grade	under 25 l/min.	above 25 l/min.	foam lance	LTF technology	page
	ST-2300	–	✓	–		–	220, 365
	ST-2600	–	✓	–		LTF	221, 365
	ST-2600	–	✓	–		LTF	366, 371
	ST-2620	–	–	✓		LTF	228, 365
	ST-3500	–	–	✓		–	243, 368
	ST-2700	✓	✓	–		LTF	234, 366
	ST-3300	✓	–	–		–	237, 368
	ST-515	–	✓	–		–	18, 367

2. FOAM UNIT FOR FOAMING WITH COMPRESSED AIR

	name	food grade	under 15 l/min.	above 15 l/min.	foam lance	LTF technology	page
	ST-2720	✓	✓	–		LTF	351, 354
	ST-2725	✓	✓	–		LTF	351, 354
	ST-3300	✓	✓	–		–	352, 354
	ST-3100	✓	✓	–		–	352, 354
	ST-3225	✓	✓	–		LTF	353, 354
	ST-515	–	✓	✓		–	18, 367

3. FOAM LANCES (WITHOUT COMPRESSED AIR)

	Name	Food Grade	Below 25 l/min.	Above 25 l/min.	Page
	ST-73.1	–	✓	✓	392
	ST-73.2 ohne Pad	–	✓	✓	393
	ST-75	–	✓	–	366
	ST-75.1 ohne Pad	–	✓	–	367
	ST-75.1 ohne Pad	–	✓	–	367
	ST-75	✓	✓	–	366
	ST-75 SS	✓	✓	–	366
	ST-75.3	–	✓	–	367
	ST-75.2	–	✓	✓	368
	ST-76	–	–	✓	368
	ST-72	–	✓	–	365
	ST-175	–	✓	–	369

LTF - Low Trigger Force

90 % reduced holding force and
40 % reduced trigger force against usual
market guns.



foaming agent



foaming agent and disinfectant



very aggressive chemical

Suttner spray guns

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 560	coupling KW	3/8" F

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 575	coupling KW	3/8" F swivel

ST-2700 KW



Professional gun with patented LTF technology. Stainless steel. Gun with coupling KW. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 565	coupling KW	M22 M

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

ST-2700



Professional gun with patented LTF technology. Stainless steel. Gun for industrial cleaning applications. Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 700 500	1/4" F	3/8" F

ST-2715



Professional gun with patented LTF technology. Stainless steel. Ceramic ball, chemically resistant valve and acid-resistant stainless steel seal seat. Gun for industrial cleaning applications with abrasive mediums. Max. 350 bar / 45 l/min / 150 °C

R+M Nr.		
202 715 500	1/4" F	3/8" F

ST-2720



Professional gun with patented LTF technology. Stainless steel. Particularly designed for high flow rates. Suitable for e.g. municipal cleaning applications. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 500	1/4" F	3/8" F



Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004. Especially designed for applications in the food industry.



Valves complete



ST-2700

R+M Nr.
202 700 490



ST-2715. Ceramic ball

R+M Nr.
202 700 445



ST-2720

R+M Nr.
202 710 490



ST-2725

R+M Nr.
202 725 490

ST-340 swivels



1/4" F : 1/2" F

R+M Nr.
200 340 050



Repair kit ST-340

R+M Nr.
200 340 100

Symbols outlet inlet

Suttner foam guns

ST-2725 with coupling ST-3100



Professional gun with patented LTF technology and progressive closing system. Gun with coupling ST-3100. Field of application: foam and rinsing applications in the food industry etc. Stainless steel. Chemically resistant valve piston stainless steel. PEEK piston. Max. 80 bar / 80 l/min / 150 °C

R+M Nr.		
202 725 550	coupling ST-3100	1/2" F swivel

ST-2725



Professional gun with patented LTF technology and progressive closing system. Field of application: foam and rinsing applications in the food industry etc. Stainless steel. Chemically resistant valve piston stainless steel. PEEK piston. Max. 80 bar / 80 l/min / 150 °C

R+M Nr.		
202 725 535	1/2" F	1/2" F swivel

ST-2720



Professional gun with patented LTF technology. Stainless steel. Suitable for e.g. huge water amounts in the food industry. PEEK valve cone enables use in low pressure. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 530	3/8" F	1/2" F

ST-2720 with coupling ST-3100



Professional gun with patented LTF technology. Gun with coupling ST-3100. Stainless steel. Suitable for e.g. huge water amounts in the food industry. PEEK valve cone enables use in low pressure. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 720 550	coupling ST-3100	1/2" F swivel

ST-2620



Professional gun with patented LTF technology. Gun with insulated stainless steel lance 300 mm and nozzle 50° 200. Gun brass. Lance stainless steel. Field of application: foam applications in the prewash of vehicles etc. Max. 125 bar / 80 l/min / 150 °C

R+M Nr.		
202 620 910	nozzle 50° 200	1/2" F swivel

Wall mount



Stainless steel. Wall mount for Suttner high pressure guns with lance or twin lance

R+M Nr.
040 002 055



Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004. Especially designed for applications in the food industry.



LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Suttner foam guns

ST-3100



Professional gun with progressive closing system. Gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 805	coupling ST-3100	1/2" F swivel



Professional gun with progressive closing system. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 840	3/8" F	1/2" F



Professional gun with progressive closing system. Gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 810	coupling ST-3100	1/2" F

ST-3100



Professional gun with progressive closing system. Gun with coupling ST-3100. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Industry standard. Max. 60 bar / 100 l/min / 150 °C

R+M Nr.		
203 100 820	coupling ST-3100	1/2" F

ST-340



1/2" M : 1/2" F

R+M Nr.
200 340 010



Repair kit ST-340

R+M Nr.
200 340 100


ST-3100



Seal kit

R+M Nr.
203 100 400

ST-3300



Seal kit

R+M Nr.
203 300 490

ST-3300



Professional high-flow gun. Gun with coupling ST-45. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Max. 150 bar / 100 l/min / 150 °C


R+M Nr.		
203 300 500	coupling ST-45	1/2" F



Professional high-flow gun. Stainless steel. Field of application: foam and rinsing applications in the food industry etc. Max. 150 bar / 100 l/min / 150 °C

R+M Nr.		
203 300 510	1/2" F	1/2" F

Lance holder

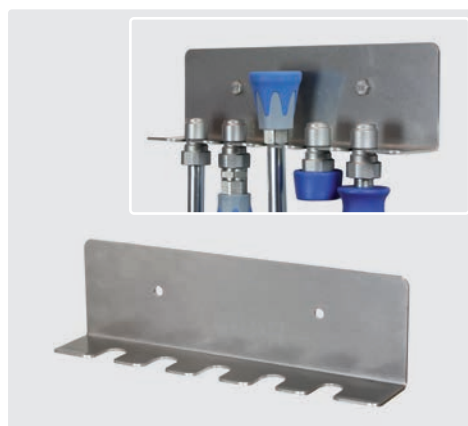

Stainless steel. Wall mount for 5 lances

R+M Nr.
040 003 830

Symbols  outlet  inlet

Suttner foam guns

ST-3225 HP



Professional hp gun with progressive closing system and coupling ST-3100. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 60 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 550	coupling ST-3100	1/2" F swivel



Professional hp gun with progressive closing system. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 60 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 545	1/2" F	1/2" F swivel

ST-3225 LP



Professional gun with progressive closing system, locking in opened position and coupling ST-3100. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 24.5 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 650	coupling ST-3100	1/2" F swivel



Professional gun with progressive closing system and locking in opened position. Stainless steel.
Field of application: foam and rinsing applications in the food industry etc. Industry standard.
Max. 24.5 bar / 120 l/min / 100 °C

R+M Nr.		
203 225 645	1/2" F	1/2" F swivel



Foam lances

ST-74 foam lances with air injector



1/4" F. Foam lance stainless steel with air injector and stainless steel socket with nozzle 40° 150. Max. 90 °C

R+M Nr.	D	air injector	Ø	M	↔
200 074 505*	2.1 mm		0.8 kg	stainless steel	530 mm
200 074 500	2.3 mm		0.8 kg	stainless steel	530 mm

Foam Nozzle Polypropylene

Max. 45 bar / 60 °C. 75 mm



R+M Nr.	D	Ø	G	C
203 100 910	50° 200	0.42 kg	1/2" M	white

Foam lance ST-3100




Plug ST-3100. Foam lance stainless steel 300 mm with foam nozzle 50° 200

R+M Nr.	D	ISO	M	↔
203 100 630	50° 200	-	stainless steel	300 mm



R+M Nr.	D	Ø	G	C
203 100 920	50° 200	0.43 kg	plug ST-3100	white
203 100 955	50° 200	0.43 kg	plug ST-3100	blue
203 100 965	50° 200	0.43 kg	plug ST-3100	green
203 100 975	50° 200	0.43 kg	plug ST-3100	red
203 100 985	50° 200	0.43 kg	plug ST-3100	yellow

Nozzle protector ST-11



- » The nozzle protector ST-11 is suitable for nozzles 1/4" M.
- » Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004.
- » It is clamped undetachably between the nozzle and the nozzle sleeve.

R+M Nr.	C
020 001 124	white
020 001 149	blue
020 001 121	red
020 001 122	green

R+M Nr.	C
020 001 123	yellow
020 001 157	grey
020 001 158	black

* limited stock

Symbols inlet nozzle height length weight material insulation colour thread packing unit thickness mm


Foam lances

Spare parts ST-3100




Plug ST-3100 with foam nozzle 50° 200

R+M Nr.
502 808

Plug : 1/2" F.
Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
040 005 661	47 mm

1/2" M. Brass. Foam
nozzle

R+M Nr.	D
502 803 1	50° 200
626 304	65° 100

1/2" M BSP. Stainless
steel. Foam nozzle

R+M Nr.	D
500 101 3	50° 200

1/2" M NPT. Stainless
steel. Foam nozzle

R+M Nr.	D
502 803 19	50° 200



Nozzle protector

R+M Nr.
020 001 148

Spare parts nozzle head

3/8" F : 1/4" F. Nozzle
head without nozzle.
Stainless steel

R+M Nr.
200 072 491

3/8" M.
Stainless steel

R+M Nr.	D
623 401 509	40° 150

3/8" M. For lances ST-
72.1 / 72. Stainless steel.

R+M Nr.	D
120 501 204	50° 120

Splash guard

ST-29 Cool & Compact with splash guard

Lance with insulation ST-29 Cool & Compact. Pleasantly ergonomic shaped
handle. Closed surface. With splash guard, adjustable with thumbscrew.
Max. 400 bar / 80 °C

R+M Nr.	ISO	ISO	ISO	M
200 029 350	1/4" M	300 mm	900 mm	stainless steel

Chemistry Glove Solvex®

Category III -Protection Glove AlphaTec® Solvex®37-675.
Very durable nitrile glove for use with hazardous chemicals. The reversed
lozenge finish further enhances levels of grip. Cotton-flock liner to the
glove

R+M Nr.	VPE	size	size
956 067 511	1 pair	0.38	11 330 mm
956 167 511	12 pairs	0.38	11 330 mm
956 267 511	144 pairs	0.38	11 330 mm

PVC splash guard, with
thumb screw adjustable
stainless steel holder for
attachment to lances.
Max. 80 °C

R+M Nr.	200 mm
200 029 351	200 mm

Spare parts

Plastic.
Stainless steel

R+M Nr.
200 010 740

2 x 1/4" F : 1/4" F. ST-58
change-over valve.
Max. 350 bar / 45 l/min

R+M Nr.
200 058 600

1/4" F : 1/4" F. S
stainless steel. Socket

R+M Nr.
040 004 100

1/4" F NPT : 3/8" F.
Stainless steel. Socket

R+M Nr.
710 101 350

Plug ST-3100. Plug with nozzle protector ST-10
and nozzle 40° 30

R+M Nr.
502 807

Suttner high pressure quick couplings ST-3100

Couplings and plug ST-3100



Coupling : F. Stainless steel.
Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	12
1/2"	12

R+M Nr.	I
203 100 466	44 mm
203 100 461	44 mm
203 100 460	44 mm



Coupling : F. Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
203 100 456	50 mm
203 100 455	50 mm



Coupling : M. Stainless steel.
60° cone. Max. 250 bar / 150 °C


R+M Nr.	I
203 100 474	50 mm
203 100 655	45 mm



Coupling : M. Stainless steel.
60° cone. Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	12
1/2"	12

R+M Nr.	I
203 100 652	53 mm
203 100 473	55 mm
203 100 656	54 mm



Plug : F. Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
040 005 665	35 mm
040 005 667	41 mm
040 005 661	47 mm



Plug : M. Stainless steel. 60° cone.
Max. 250 bar / 150 °C

R+M Nr.	I
040 005 668	47 mm
040 005 662	47 mm



Plug : F. Hardened stainless steel.
Max. 250 bar / 150 °C

⊙	DN
1/4"	10
3/8"	12
1/2"	12

R+M Nr.	I
040 005 465	35 mm
040 005 467	41 mm
040 005 461	47 mm



Plug : M. Hardened stainless steel.
60° cone. Max. 250 bar / 150 °C

R+M Nr.	I
040 005 459	47 mm
040 005 462	47 mm



Plug : F. Stainless steel. For moulded
handles. Max. 250 bar / 150 °C

R+M Nr.	I
040 005 664	40 mm



Plug : F. Stainless steel + brass.
Max. 250 bar / 150 °C

⊙	DN
M22	10

R+M Nr.	I
203 100 665	56 mm



Coupling : M. Stainless steel.
Max. 250 bar / 150 °C

R+M Nr.	I
203 100 660	57 mm



O-ring large EPDM

R+M Nr.	VPE
050 000 196	1
791 552 610	100



Plug : F. Stainless steel + brass.
Max. 250 bar / 150 °C



Coupling : M. Stainless steel.
Max. 250 bar / 150 °C



O-ring large EPDM

R+M Nr.	VPE
050 000 664	1
791 821 01	100


Couplings "B"



Coupling : F. Stainless steel.
Max. 150 bar / 90 °C

⊙	DN
1/2"	11

R+M Nr.	I
710 247 212 000	35 mm

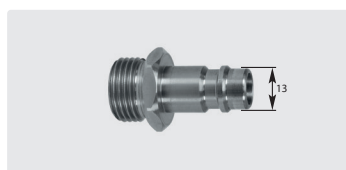

Plug : M. Stainless steel.
Max. 150 bar / 90 °C

R+M Nr.	I
710 247 112 100	44 mm




O-ring. 13x2

R+M Nr.	I
791 32	


Metering valves

ST-66 with check valve



S = barb to pump, S1 = input barb 1, S2 = input barb 2

ST-66 without check valve



S = barb to pump, S1 = input barb 1, S2 = input barb 2

R+M Nr.	TYP
200 066 500	knob black
200 066 501	knob red

R+M Nr.	TYP
200 066 515	without knob

Water reduction stainless steel




R+M Nr.	P	°C	O	⊠
710 000 000 500	400 bar	150° C	1/2" M : 1/2" F	55 mm
710 000 000 550	400 bar	150° C	3/4" M : 3/4" F	55 mm



Water reduction inserts, stainless steel

R+M Nr.	D	Ø *
710 000 000 027	20	2.7
710 000 000 031	25	3.1
710 000 000 033	30	3.3
710 000 000 038	40	3.8
710 000 000 048	60	4.8

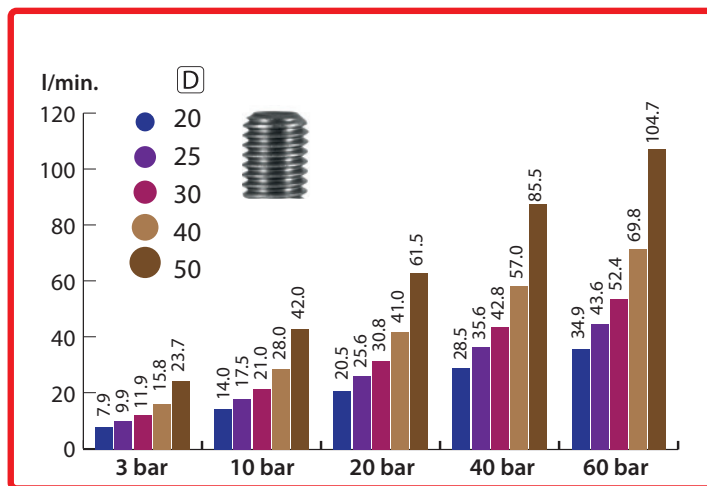

* hole diameter in mm

Triple nozzle



Triple nozzle holder stainless steel. By easily turning the head there are 3 nozzles selectable: foam, rinsing and disinfection for the food industry. Max. 200 bar

- 1 foam nozzle 50° 150
- 2 rinsing nozzle 25° 15
- 3 disinfection nozzle 60° 30

R+M Nr.	Ⓒ
657 650 0	1/2" M

Symbols Ⓒ inlet ○ thread DN nominal diameter ⊠ height ⊠ length ⊠ diameter VPE packing unit TYP type P pressure °C temperature D nozzle


PURClean365+® Power and 150 - food hose

PURClean365+® Power DN 8

- » PURClean365+® Power - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006.
- » 3-layer plastic hose with a smooth cover.
- » Particularly pressure-stable and flexible up to a maximum of **200 bar** working pressure.
- » Area of application: high-pressure cleaning hose in the food industry.
- » Suitable for water and water mixes of usual cleaning detergents.
- » Suitable for contact with liquid food products
- » Increased 1-layer rot-proof textile mesh.


-40 °C - +60 °C. Fittings stainless steel

Female thread DKR 3/8"




R+M Nr.	↔
478 054 610 9	10.0 m
478 054 615 9	15.0 m
478 054 620 9	20.0 m
478 054 625 9	25.0 m

Male thread AGR 3/8"



R+M Nr.	↔
478 044 610 9	10.0 m
478 044 615 9	15.0 m
478 044 620 9	20.0 m
478 044 625 9	25.0 m

M22 Quick screw couplings



R+M Nr.	↔
478 000 610 9	10.0 m
478 000 615 9	15.0 m
478 000 620 9	20.0 m
478 000 625 9	25.0 m



PURClean365+® Power per metre


R+M Nr.	DN	↔	↘	P	BP	Ø	⊞
303 672 00	8	100 m	3.8 mm	200 bar	>800 bar	15.3 mm	0.15 kg

PURClean365+® 150, DN 11

- » PURClean365+® 150 - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006.
- » 3-layer plastic hose with a smooth cover.
- » Particularly pressure-stable and flexible up to a maximum of **150 bar** working pressure.
- » Area of application: high-pressure cleaning hose in the food industry, also suitable for foam and spray cleaning.
- » Suitable for water and water mixes of usual cleaning detergents.
- » Suitable for contact with liquid food products
- » Increased 1-layer rot-proof textile mesh.


-40 °C - +60 °C. Fittings stainless steel

Female thread DKR 1/2"



R+M Nr.	↔
479 056 602 59	2.5 m
479 056 610 9	10.0 m
479 056 615 9	15.0 m
479 056 620 9	20.0 m
479 056 625 9	25.0 m
479 056 630 9	30.0 m
479 056 635 9	35.0 m
479 056 640 9	40.0 m

DKR 1/2" : AGR 1/2"



R+M Nr.	↔
479 057 602 59	2.5 m
479 057 610 9	10.0 m
479 057 615 9	15.0 m
479 057 620 9	20.0 m
479 057 625 9	25.0 m
479 057 630 9	30.0 m
479 057 635 9	35.0 m
479 057 640 9	40.0 m

Male thread (AGR) 1/2"



R+M Nr.	↔
479 046 602 59	2.5 m
479 046 610 9	10.0 m
479 046 615 9	15.0 m
479 046 620 9	20.0 m
479 046 625 9	25.0 m
479 046 630 9	30.0 m
479 046 635 9	35.0 m
479 046 640 9	40.0 m

Female thread DKR 3/8"



R+M Nr.	↔
479 054 602 59	2.5 m
479 054 610 9	10.0 m
479 054 615 9	15.0 m
479 054 620 9	20.0 m
479 054 625 9	25.0 m
479 054 630 9	30.0 m
479 054 635 9	35.0 m
479 054 640 9	40.0 m

DKR 3/8" : AGR 3/8"



R+M Nr.	↔
479 055 602 59	2.5 m
479 055 610 9	10.0 m
479 055 615 9	15.0 m
479 055 620 9	20.0 m
479 055 625 9	25.0 m
479 055 630 9	30.0 m
479 055 635 9	35.0 m
479 055 640 9	40.0 m

Male thread (AGR) 3/8"



R+M Nr.	↔
479 044 602 59	2.5 m
479 044 610 9	10.0 m
479 044 615 9	15.0 m
479 044 620 9	20.0 m
479 044 625 9	25.0 m
479 044 630 9	30.0 m
479 044 635 9	35.0 m
479 044 640 9	40.0 m



PURClean365+® 150 per metre

R+M Nr.	DN	↔	↘	P	BP	Ø	⊞
303 681 50	11	100 m	5.0 mm	150 bar	>550 bar	20.5 mm	0.27 kg

PURClean365+® - food hose

PURClean365+® - Food hose according to (EC) 1935/2004, (EC) 10/2011 and (EC) 2023/2006. Designed for industrial foam applications

- » Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products
- » Suitable for water and water mixes of usual cleaning detergents
- » PVC hose with three layers and a smooth cover
- » Increased 1-layer rot-proof textile mesh.
- » **About 20 % lighter and more flexible than comparable hose types**

**PURClean365+® 65**


-10 °C - +100 °C. Fittings stainless steel

**Female thread
DKR 1/2"**


R+M Nr.	↔
476 056 602 59	2.5 m
476 056 610 9	10.0 m
476 056 615 9	15.0 m
476 056 620 9	20.0 m
476 056 625 9	25.0 m
476 056 630 9	30.0 m
476 056 635 9	35.0 m
476 056 640 9	40.0 m

**Male thread
(AGR) 1/2"**


R+M Nr.	↔
476 046 602 59	2.5 m
476 046 610 9	10.0 m
476 046 615 9	15.0 m
476 046 620 9	20.0 m
476 046 625 9	25.0 m
476 046 630 9	30.0 m
476 046 635 9	35.0 m
476 046 640 9	40.0 m

**Female thread
DKR 1/2"**


R+M Nr.	↔
476 356 402 59	2.5 m
476 356 410 9	10.0 m
476 356 415 9	15.0 m
476 356 420 9	20.0 m
476 356 425 9	25.0 m
476 356 430 9	30.0 m
476 356 435 9	35.0 m
476 356 440 9	40.0 m

**Male thread
(AGR) 1/2"**


R+M Nr.	↔
476 346 402 59	2.5 m
476 346 410 9	10.0 m
476 346 415 9	15.0 m
476 346 420 9	20.0 m
476 346 425 9	25.0 m
476 346 430 9	30.0 m
476 346 435 9	35.0 m
476 346 440 9	40.0 m

**Female thread
DKR 1/2"**

R+M Nr.	↔
476 456 202 59	2.5 m
476 456 210 9	10.0 m
476 456 215 9	15.0 m
476 456 220 9	20.0 m
476 456 225 9	25.0 m
476 456 230 9	30.0 m
476 456 235 9	35.0 m
476 456 240 9	40.0 m

**Male thread
(AGR) 1/2"**

R+M Nr.	↔
476 446 202 59	2.5 m
476 446 210 9	10.0 m
476 446 215 9	15.0 m
476 446 220 9	20.0 m
476 446 225 9	25.0 m
476 446 230 9	30.0 m
476 446 235 9	35.0 m
476 446 240 9	40.0 m

Female thread DKR 1/2"

R+M Nr.	↔
476 256 702 59	2.5 m
476 256 710 9	10.0 m
476 256 715 9	15.0 m
476 256 720 9	20.0 m
476 256 725 9	25.0 m
476 256 730 9	30.0 m
476 256 735 9	35.0 m
476 256 740 9	40.0 m

Male thread (AGR) 1/2"

R+M Nr.	↔
476 246 702 59	2.5 m
476 246 710 9	10.0 m
476 246 715 9	15.0 m
476 246 720 9	20.0 m
476 246 725 9	25.0 m
476 246 730 9	30.0 m
476 246 735 9	35.0 m
476 246 740 9	40.0 m

PURClean365+® 65 blue per metre

R+M Nr.	DN	↔	↗	P 20 °C	P 70 °C	BP 20 °C	⊗
303 660 401 12	10 - 100 m	4.0	100 bar	65 bar	> 300 bar	0.25 kg	

PURClean365+® 65 yellow per metre

R+M Nr.	DN	↔	↗	P 20 °C	P 70 °C	BP 20 °C	⊗
303 660 411 12	10 - 100 m	4.0	100 bar	65 bar	> 300 bar	0.25 kg	

PURClean365+® 65 green per metre

R+M Nr.	DN	↔	↗	P 20 °C	P 70 °C	BP 20 °C	⊗
303 660 421 12	10 - 100 m	4.0	100 bar	65 bar	> 300 bar	0.25 kg	

PURClean365+® 65 red per metre

R+M Nr.	DN	↔	↗	P 20 °C	P 70 °C	BP 20 °C	⊗
303 660 431 12	10 - 100 m	4.0	100 bar	65 bar	> 300 bar	0.25 kg	

Symbols ↔ length DN nominal diameter ↗ wall thickness P pressure BP burst pressure ⊗ weight ⊗ diameter

PURClean365+® - food hose**Screw fittings for PURClean365+®**

1/2" M with 60° cone. Stainless steel. Max. 50 bar



1/2" F with 60° cone. Stainless steel. Max. 50 bar



1/2" F. Stainless steel. Max. 50 bar. Flat sealing

R+M Nr.	DN
329 412 129	12

R+M Nr.	DN
329 512 129	12

R+M Nr.	DN
329 612 129	12

PURClean365+® - 65 food hoses with the professional flat ST-3225**Food Special SET**

Professional ST-3225 gun with progressive closing system and coupling ST-3100. Inlet 1/2" F swivel. Stainless steel. Max. 24.5 bar or 60 bar. Max. 120 l/min / 100 °C. with PURClean365+® 65 food hose 1/2" male thread AGR. 65 bar working pressure at 70° C

ST-3225 / PURClean365+® 65 blue**ST-3225 / PURClean365+® 65 yellow****ST-3225 / PURClean365+® 65 green****ST-3225 / PURClean365+® 65 red**


R+M Nr.	ST-3225	P	↔
476 046 620 91	24.5 bar	20 m	
476 046 625 91	24.5 bar	25 m	
476 046 630 91	24.5 bar	30 m	
476 046 620 92	60 bar	20 m	
476 046 625 92	60 bar	25 m	
476 046 630 92	60 bar	30 m	

R+M Nr.	ST-3225	P	↔
476 346 420 91	24.5 bar	20 m	
476 346 425 91	24.5 bar	25 m	
476 346 430 91	24.5 bar	30 m	
476 346 420 92	60 bar	20 m	
476 346 425 92	60 bar	25 m	
476 346 430 92	60 bar	30 m	

R+M Nr.	ST-3225	P	↔
476 446 220 91	24.5 bar	20 m	
476 446 225 91	24.5 bar	25 m	
476 446 230 91	24.5 bar	30 m	
476 446 220 92	60 bar	20 m	
476 446 225 92	60 bar	25 m	
476 446 230 92	60 bar	30 m	

R+M Nr.	ST-3225	P	↔
476 246 720 91	24.5 bar	20 m	
476 246 725 91	24.5 bar	25 m	
476 246 730 91	24.5 bar	30 m	
476 246 720 92	60 bar	20 m	
476 246 725 92	60 bar	25 m	
476 246 730 92	60 bar	30 m	

Symbols inlet outlet length DN nominal diameter wall thickness mm P pressure BP burst pressure weight °C temperature TYP type marking

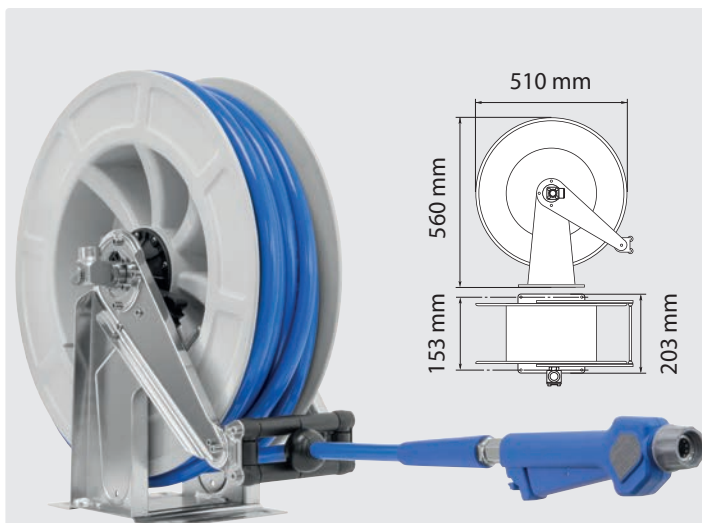PUReClean365+® - food hoses with automatic hose reel and ST-3225 - Food Special Set

In our online shop you will find further combinations of high-pressure hose reels with pre-assembled, high-pressure hoses!

Hose reel:

Frame made of stainless steel V2A / AISI 304. Drum made of particularly impact-resistant ABS plastic. With automatic spring return and strain relief. Equipped with the high-quality Suttner swivel joint ST-322

°C	G	F	★
90 °C	1/2" F	1/2" F	▲

Spray gun ST-3225:

Professional flat spray gun ST-3225 for the food industry with progressive closing system and coupling ST-3100

P	TYP	G	F
24,5 bar with locking in opened position	1/2" IG	Kupplung ST-3100	
60 bar no locking in opened position	1/2" IG	Kupplung ST-3100	

PUReClean365+® 65 - high pressure food hose:

- Conform to EG-regulation Nr. 1935/2004 nd Nr. 10/2011
- Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products
- Suitable for water and water mixes of usual cleaning detergents
- PVC hose with three layers and a smooth surface
- Increased 1-layer rot-proof textile mesh.
- About 20 % lighter and more flexible than comparable hose types

DN	P	↔
12	65 bar / 70 °C	24 m

PUReClean365+® blue

R+M Nr.	F	P
763 532 001	1/2" M	65 bar

PUReClean365+® yellow

R+M Nr.	F	P
763 532 003	1/2" M	65 bar

PUReClean365+® green

R+M Nr.	F	P
763 532 004	1/2" M	65 bar

PUReClean365+® red

R+M Nr.	F	P
763 532 002	1/2" M	65 bar



R+M Nr.	P gun	P
763 532 005	24.5 bar	24.5 bar
763 532 009	60 bar	60 bar



R+M Nr.	P gun	P
763 532 006	24.5 bar	24.5 bar
763 532 010	60 bar	60 bar



R+M Nr.	P gun	P
763 532 007	24.5 bar	24.5 bar
763 532 011	60 bar	60 bar



R+M Nr.	P gun	P
763 532 008	24.5 bar	24.5 bar
763 532 012	60 bar	60 bar

blufood® - food hose

blufood® - Food hose according to (EC)2002/72, (EC) 10/2011, (EC) 1935/2004 and (EG) 2023/2006. Designed for industrial foam applications


» Field of application: foam hose and pre-spraying hose in the food industry. Suitable for contact with liquid food products

» Suitable for water and water mixes of usual cleaning detergents

» PVC hose with five layers and a smooth cover


» Reinforcing by twofold textile meshwork

» -20 °C - +80 °C

Female thread DKR 1/2"


Fittings stainless steel

R+M Nr.	
475 056 602 59	2.5 m
475 056 610 9	10.0 m
475 056 615 9	15.0 m
475 056 620 9	20.0 m
475 056 625 9	25.0 m
475 056 630 9	30.0 m
475 056 635 9	35.0 m
475 056 640 9	40.0 m

Male thread (AGR) 1/2"

Fittings stainless steel

R+M Nr.	
475 046 602 59	2.5 m
475 046 610 9	10.0 m
475 046 615 9	15.0 m
475 046 620 9	20.0 m
475 046 625 9	25.0 m
475 046 630 9	30.0 m
475 046 635 9	35.0 m
475 046 640 9	40.0 m

ST-3100 Coupling : Plug

Coupling ST-3100 : plug ST-3100


R+M Nr.	
475 012 262 09	20 m
475 012 262 59	25 m
475 012 263 09	30 m

blufood® per metre

R+M Nr.	DN			P 23 °C	P 80 °C	BP 20 °C	
303 70	12	10 - 100 m	5	80 bar	50 bar	≥ 240 bar	0.32 kg
303 700 019	19	10 - 60 m	6	50 bar	12 bar	≥ 200 bar	0.61 kg


Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004.

Especially designed for applications in the food industry.

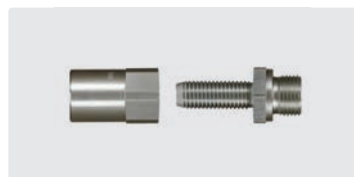Screw fittings for blufood365+®

1/2" M with 60° cone.
Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 012 129	12



1/2" F with 60° cone.
Stainless steel.
Max. 50 bar

R+M Nr.	DN
329 112 129	12



Detachable fitting.
3/4" F. Stainless steel.
Max. 15 bar

R+M Nr.	DN
574 734 009	19



Hose barb 3/4" M.
60° cone. Stainless steel.
Max. 15 bar

R+M Nr.	DN
711 341 909	19

Hose clamps**Heavy duty clamp**

Heavy duty clamp completely stainless steel X5CrNi1810. According to DIN 1.4301/AISI 304



Clamp with hexagon bolt. W4. $\bar{I}$ 20 mm

R+M Nr.	VPE	Ø
736 029 401	1	29 - 31 mm

R+M Nr.	VPE	Ø
736 032 401	1	32 - 35 mm

Symbols $\overline{DN}$ nominal diameter $\bar{I}$ length $\bar{X}$ wall thickness $\overline{P}$ pressure $\overline{BP}$ burst pressure $\bar{G}$ weight $\overline{VPE}$ packing unit $\bar{\varnothing}$ diameter

foodjet365+® - food hose with textile meshwork

foodjet365+® - High pressure hose according to DIN EN 854, **FDA compliant**. Particularly resistant to animal fats


- » Field of application: Cleaning hose for food processing plants
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent
- » Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and

weatherproof.

- » Interior synthetic, oil-resistant rubber
- » 2 high-tensile textile braids
- » **Max. 125 bar.** Burst pressure > 375 bar.
- 40 °C - +150 °C


Female thread DKR**Male thread (AGR)****Male thread (AGR) : DKR****foodjet365+® per metre**

1/2" : 1/2"




Fittings stainless steel

R+M Nr.	
490 056 002 59	2.5 m
490 056 010 9	10.0 m
490 056 015 9	15.0 m
490 056 020 9	20.0 m
490 056 025 9	25.0 m
490 056 030 9	30.0 m
490 056 035 9	35.0 m
490 056 040 9	40.0 m



Fittings stainless steel

R+M Nr.	
490 046 002 59	2.5 m
490 046 010 9	10.0 m
490 046 015 9	15.0 m
490 046 020 9	20.0 m
490 046 025 9	25.0 m
490 046 030 9	30.0 m
490 046 035 9	35.0 m
490 046 040 9	40.0 m



Fittings stainless steel

R+M Nr.	
490 057 002 59	2.5 m
490 057 610 9	10.0 m
490 057 615 9	15.0 m
490 057 620 9	20.0 m
490 057 625 9	25.0 m
490 057 630 9	30.0 m
490 057 635 9	35.0 m
490 057 640 9	40.0 m

DN 12

R+M Nr.	
303 601	10 - 100 m

**foodjet365+® 1500 - food hose with textile meshwork**

Foodjet 1500 - High pressure hose according to DIN EN 854. Particularly resistant to animal and poultry fats


- » Field of application: cleaning hose designed for the poultry processing industry
- » Suitable for: oil, water, water-in-oil emulsion and water mixes with up to 50 % detergent

» Surface synthetic rubber. Particularly abrasion-, oil-, ozone-resistant and weatherproof.

- » Interior synthetic, oil-resistant rubber
- » 2 high-tensile textile braids
- » **Max. 125 bar.** Burst pressure > 375 bar.
- 40 °C - +150 °C


Female thread DKR**Male thread (AGR)****Male thread (AGR) : DKR****foodjet365+® 1500 per metre**

1/2" : 1/2"




Fittings stainless steel

R+M Nr.	
490 445 660 259	2.5 m
490 445 661 09	10.0 m
490 445 661 59	15.0 m
490 445 662 09	20.0 m
490 445 662 59	25.0 m
490 445 663 09	30.0 m
490 445 663 59	35.0 m
490 445 664 09	40.0 m



Fittings stainless steel

R+M Nr.	
490 444 660 259	2.5 m
490 444 661 09	10.0 m
490 444 661 59	15.0 m
490 444 662 09	20.0 m
490 444 662 59	25.0 m
490 444 663 09	30.0 m
490 444 663 59	35.0 m
490 444 664 09	40.0 m



Fittings stainless steel

R+M Nr.	
490 445 760 259	2.5 m
490 445 761 09	10.0 m
490 445 761 59	15.0 m
490 445 762 09	20.0 m
490 445 762 59	25.0 m
490 445 763 09	30.0 m
490 445 763 59	35.0 m
490 445 764 09	40.0 m

DN 12

R+M Nr.	
303 601 500	70 - 100 m

Fittings zinc-plated steel

R+M Nr.	
490 445 660 25	2.5 m
490 445 661 0	10.0 m
490 445 661 5	15.0 m
490 445 662 0	20.0 m
490 445 662 5	25.0 m
490 445 663 0	30.0 m
490 445 663 5	35.0 m
490 445 664 0	40.0 m

Fittings zinc-plated steel

R+M Nr.	
490 444 660 25	2.5 m
490 444 661 0	10.0 m
490 444 661 5	15.0 m
490 444 662 0	20.0 m
490 444 662 5	25.0 m
490 444 663 0	30.0 m
490 444 663 5	35.0 m
490 444 664 0	40.0 m

Fittings zinc-plated steel

R+M Nr.	
490 445 760 25	2.5 m
490 445 761 0	10.0 m
490 445 761 5	15.0 m
490 445 762 0	20.0 m
490 445 762 5	25.0 m
490 445 763 0	30.0 m
490 445 763 5	35.0 m
490 445 764 0	40.0 m

Rinsing lances

Rinsing lance with insulated grip



ST-3100 connector. 280 mm rinsing lance made of stainless steel with 100 mm insulation and nozzle protection ST-11 with nozzle.

Max. 250 bar / 150 °C

R+M Nr.	D	ISO	M	
200 129 183	15° 20	100 mm	stainless steel	280 mm

Rinsing lance, bended with insulated grip



ST-3100 connector. 280 mm bended rinsing lance made of stainless steel with 100 mm insulation and nozzle protection ST-11 with nozzle

Max. 250 bar / 150 °C

R+M Nr.	D	ISO	M	
200 129 184	15° 20	100 mm	stainless steel	280 mm


Lances with female thread



1/4" M. Lance with moulded handle Cool & Compact. Comfortable grip and ergonomic shape. Heat-proof insulation. Max. 400 bar / 150 °C

R+M Nr.		ISO		M
200 129 140	1/4" F BSP	300 mm	500 mm	stainless steel
200 129 145	1/4" F BSP	400 mm	700 mm	stainless steel
200 129 150	1/4" F BSP	400 mm	800 mm	stainless steel

R+M Nr.



1/4" M. Lance. Max. 400 bar / 150 °C

R+M Nr.			M
070 000 097	1/4" F BSP	100 mm	stainless steel
070 000 098	1/4" F BSP	150 mm	stainless steel
070 000 099	1/4" F BSP	200 mm	stainless steel
070 000 095	1/4" F BSP	250 mm	stainless steel
070 000 101	1/4" F BSP	350 mm	stainless steel

R+M Nr.

Rubber protected ball valves



Stainless steel.
Max. 60 bar / 95 °C

R+M Nr.		
500 155	1/2" F	ST-3100



Stainless steel.
Max. 60 bar / 95 °C

R+M Nr.		
500 150	1/2" F	1/2" F



Stainless steel.
Max. 60 bar / 95 °C

R+M Nr.		
500 160	1/2" F	1/2" F



ST-3100. Stainless steel.
Max. 60 bar / 95 °C

R+M Nr.		
203 100 250	1/2" F	1/2" F



ST-3100. Stainless steel.
Max. 60 bar / 95 °C

R+M Nr.		
203 100 260	1/2" F	ST-3100

Ball valves



Ball valve with safety guard. Stainless steel.
Max. 140 bar / 80 °C

R+M Nr.		
203 100 200	1/2" F	ST-3100



Ball valve with safety guard. Stainless steel.
Max. 140 bar / 80 °C

R+M Nr.		
203 100 210	ST-3100	ST-3100

Foam lances

ST-72 foam lances with air injector



1/4" M. Foam lance stainless steel with air injector, vented handle ST-9 380 mm, grip and stainless steel socket with nozzle. A foam injector is required.
Max. 250 bar / 80 °C

R+M Nr.	D *		C **	
200 072 500	2.0 mm	< 15 l/min	green	600 mm
200 072 510	2.3 mm	< 20 l/min	yellow	600 mm
200 072 520	3.2 mm	> 26 l/min	red	600 mm

R+M Nr.	D *		C **	
200 072 610	2.3 mm	< 20 l/min	yellow	1200 mm
200 072 620	3.2 mm	> 26 l/min	red	1200 mm

ST-72.1 foam lances with air injector



1/4" M. Foam lance stainless steel with air injector, vented handle ST-9.9 330 mm, grip and stainless steel socket with nozzle. A foam injector is required.
Max. 250 bar / 80 °C

R+M Nr.	D *		C **	
200 072 633	2.0 mm	< 15 l/min	green	600 mm
200 072 625	2.3 mm	< 20 l/min	yellow	600 mm
200 072 627	2.7 mm	< 26 l/min	blue	600 mm
200 072 629	3.2 mm	> 26 l/min	red	600 mm

R+M Nr.	D *		C **	
200 072 634	2.0 mm	< 15 l/min	green	1.200 mm
200 072 626	2.3 mm	< 20 l/min	yellow	1.200 mm

* air injector
** nozzle protector clip

Symbols inlet outlet length D nozzle flow C colour ISO insulation M material

Foam head ST-75

By means of the foam head ST-75 different foam applications are possible as the air injector nozzle is easily exchangeable and adaptable. The maximum flow is dependent on the chosen nozzle size. By means of the integrated air injector in the foam head the air is sucked in on the face side. Independent of the length of the lance a constant foam quality is guaranteed.

The spraying result is especially even as a high quality foam nozzle insert is used.

Max. 350 bar / 100 °C



Stainless steel. ST-75 with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 514	1.60	1/4" F
200 075 515	1.90	1/4" F
200 075 517	2.10	1/4" F
200 075 518	2.30	1/4" F



Brass. ST-75** with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 578	1.05	1/4" F
200 075 579	1.10	1/4" F
200 075 574	1.20	1/4" F
200 075 576	1.35	1/4" F
200 075 577	1.45	1/4" F
200 075 572	1.60	1/4" F
200 075 575	1.75	1/4" F
200 075 573	1.90	1/4" F
200 075 580	2.10	1/4" F




Brass. ST-75** with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 559	1.05	1/4" F
200 075 554	1.20	1/4" F
200 075 555	1.35	1/4" F
200 075 556	1.45	1/4" F
200 075 552	1.60	1/4" F
200 075 558	1.70	1/4" F
200 075 553	1.90	1/4" F



Brass. ST-75** with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 564	1.35	1/4" F
200 075 562	1.60	1/4" F
200 075 563	1.90	1/4" F



Stainless steel. ST-75 with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 512	1.60	M18 F
200 075 513	1.90	M18 F



Brass. ST-75** with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 570	1.60	M18 F
200 075 571	1.90	M18 F



Brass. ST-75** with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 550	1.60	M18 F
200 075 551	1.90	M18 F



Brass. ST-75** with nozzle.
Max. 350 bar / 100 °C

R+M Nr.	Ø *	⊕
200 075 560	1.60	M18 F
200 075 561	1.90	M18 F




Air injector nozzle

R+M Nr.	Ø *	⊕
200 075 401	1.05	03
200 075 402	1.10	035
200 075 403	1.20	04
200 075 405	1.35	05
200 075 425	1.40	055
200 075 406	1.45	06
200 075 409	1.50	065
200 075 427	1.55	07
200 075 407	1.60	075
200 075 408	1.70	08
200 075 410	1.90	10
200 075 413	2.10	13
200 075 415	2.30	15
200 075 420	2.65	20



Foam pad

R+M Nr	⊕
540 500 09	1
540 500 10	10
540 500 11	100



1/4" F : M18 M. Nozzle holder EG.

R+M Nr.	⊕
010 000 043	Brass
040 000 041	Stainless steel



O-ring. 10x2. Viton

R+M Nr.	⊕
790 20	1
790 201 00	100

Foam head ST-75.1 without foam pad

By means of the foam head ST-75 different foam applications are possible as the air injector nozzle is easily exchangeable and adaptable. The maximum flow is dependent on the chosen nozzle size. By means of the integrated air injector in the foam head the air is sucked in on the face side. Independent of the length of the lance a constant foam quality is guaranteed. The spraying result is especially even as a high quality foam nozzle insert is used.
Max. 350 bar / 100 °C



Air injector nozzle

R+M Nr.	Ø *	D
200 075 401	1.05	03
200 075 402	1.10	035
200 075 403	1.20	04
200 075 405	1.35	05
200 075 425	1.40	055
200 075 406	1.45	06
200 075 409	1.50	065
200 075 427	1.55	07
200 075 407	1.60	075
200 075 408	1.70	08
200 075 410	1.90	10
200 075 413	2.10	13
200 075 415	2.30	15
200 075 420	2.65	20



Stainless steel.
ST-75.1** with nozzle.
Max. 350 bar / 60 °C

R+M Nr.	Ø *	G
200 075 602	1.60	1/4" F
200 075 603	1.90	1/4" F




1/4" F. Stainless steel.
ST-75.1 without nozzle.
Max. 350 bar / 60 °C

R+M Nr.	G
200 075 519	1/4" F




Brass.
ST-75.1** without nozzle.
Max. 350 bar / 60 °C

R+M Nr.	G
200 075 482	M 18 F
200 075 493	1/4" F



1/4" F : M18 M.
Nozzle holder EG.

R+M Nr.	M
010 000 043	Brass
040 000 041	Stainless steel

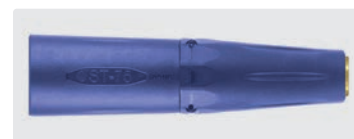

Brass.
ST-75.1** without nozzle.
Max. 350 bar / 60 °C

R+M Nr.	G
200 075 486	M18 F



O-ring. 10x2.
Viton

R+M Nr.	VPE
790 20	1
790 201 00	100

Low pressure foam head ST-75.3

ST-75.3 foam head with jet adjustment for foam application

- » **Active:** the foam head itself sucks in air, mixes it with a water-chemical mixture and delivers the resulting foam..
- » The shape of the emerging liquid stream is infinitely adjustable.
- » All components that come into contact with the media are made of corrosion-resistant materials.
- » The housing is made of impact-resistant plastic.

» By turning the adjustment head, the following jet shapes can be created:

- funnel-shaped foam jet
- funnel-shaped water jet
- point-shaped water jet

- (> ø 20; injector in suction mode)
- (< ø 20; e.g. for rinsing – NO injector operation)
- (< ø 20; e.g. for rinsing – NO injector operation)



R+M Nr.	P	°C	l/min	G
200 075 900	3-25 bar	80 °C	25 l/min	1/2" M

* hole diameter in mm

** The flat spray nozzle can be infinitely adapted from the vertical position to the horizontal one.



How it works ST-75.3 foam head



Symbols G inlet Ø diameter D nozzle VPE packing unit M material P pressure °C temperature l/min flow

Long cast foam head ST-75.2



With adjustable air-intake. Max. 150 bar / 90 °C

R+M Nr.	Ø *	Ⓒ	l/min.
200 075 800 001	1.55	1/4" F	11
200 075 800 002	1.60	1/4" F	12-14
200 075 800 003	1.90	1/4" F	14-17
200 075 800 004	2.10	1/4" F	18-20
200 075 800 005	2.30	1/4" F	21-22
200 075 800 006	2.30	1/4" F	23-27
200 075 800 007	2.65	1/4" F	28-30
200 075 810 001	2.65	1/4" F	31-40



foamblaster ST-76

The foamblaster ST-76 is designed for applications in agriculture, industry, municipal cleaning and fire fighting technology.

There are injector nozzles with diameters of up to 2.8 mm for high flow rates available for all **easyfoam365+**® stainless steel injectors ST-160, ST-164, ST-166 and ST-167.

Material: stainless steel / plastic.

Min. 70 bar for use in combination with an **easyfoam365+**® injector unit.

Min. 30 bar for use with water / foamagent premix.

Max. 250 bar / 20 - 60 l/min / 100 °C

R+M Nr.	D **	Ⓒ
200 076 615	2.3	1/2" F
200 076 618	2.6	1/2" F
200 076 621	2.8	1/2" F
200 076 600	2.9	1/2" F
200 076 624	3.0	1/2" F
200 076 630	3.3	1/2" F
200 076 633	3.5	1/2" F



Micro Droplets Nozzle Holder


Fields of application:

Disinfection, humidification, cooling, dust suppression, decontamination, odor control in agricultural, food and construction industry, defence and firefighting technology, car washing and detailing



ST-78. Stainless steel

R+M Nr.	Ⓒ
200 078 830	1/4" F

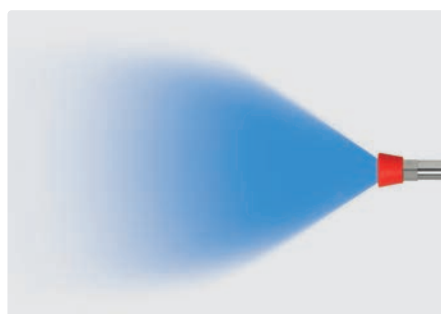functioning
of Micro Droplets Nozzle Holder

progressive, conical spray jet

Nozzles for Micro Droplets Nozzle Holder



M15x1 M. Stainless steel

R+M Nr.	D
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm

Symbols Ⓒ inlet D nozzle ⇄ length Ø diameter

ST-175 Foam & Clean

The change-over lance ST-175 Foam & Clean is the ideal accessory for Suttner's foam injector line. The innovative change-over technology allows to direct the full flow into either one or the other outlet pipe just by turning the hand wheel at the inlet.

In one position of the hand wheel the flow is directed thru an ST-75 foam head for foaming. After changing over the full flow is directed thru the other pipe and a regular spray nozzle for rinsing. Appropriate nozzle sizing at chemical injector and ST-175 allows changing from foaming to rinsing right at the lance. ST -175 Foam & Clean is compatible to ST-160 / ST-164 / ST-166 / ST-167.

Due to ST -175's changeable air injector nozzles the lance can be driven with all pressure washers with flow rates from 5 to 25 l /min. Nozzles with integrated jet former are required (pages 366, 367).



Twin foam lance with vented handle ST-9 380 mm, change-over valve ST-58, nozzle protector ST-10 without nozzle and foam head ST-75 without nozzle. A foam injector is required.
Max. 350 bar / 45 l/min / 100 °C

R+M Nr.			
200 175 400	1/4" F	-	650 mm



Twin foam lance with vented handle ST-9 205 mm, change-over valve ST-58, ergonomic swivel screw coupling, nozzle protector without tip and foam head ST-75.1 without nozzle. A foam injector is required.
Max. 350 bar / 45 l/min / 100 °C

R+M Nr.			
200 175 411	M22 F	-	420 mm



Twin foam lance with vented handle ST-9 380 mm, change-over lance with 1/4" M and nozzle protector ST-10 without nozzle. A foam injector is required.
Max. 350 bar / 45 l/min / 100 °C

R+M Nr.			
200 175 510	1/4" F	-	650 mm



Twin foam lance with vented handle ST-9 205 mm, change-over valve ST-58, nozzle protector ST-10 without nozzle and foam head ST-75.1 without nozzle. A foam injector is required.
Max. 350 bar / 45 l/min / 100 °C

R+M Nr.			
200 175 414	1/4" F	-	420 mm



Twin foam lance with vented handle ST-9 380 mm, change-over valve ST-58, nozzle protector ST-10 without nozzle and foam head ST-75 with nozzle. A foam injector is required.
Max. 350 bar / 45 l/min / 100 °C

R+M Nr.			
200 175 430	M22 F	1.9	650 mm
200 175 431	M22 F	2.1	650 mm

* hole diameter in mm
** nozzle size in mm

Carwash low pressure foam lances



LTF

Professional low pressure foam lance with patented LTF technology. Gun ST-2620 with 300 mm insulated lance and nozzle protection ST-10 with low-pressure nozzle 9040. Max. 125 bar / 80 l / min / 150 ° C

R+M Nr.		TYP	
202 620 906	Low pressure nozzle 9040	Standard	1/2" F swivel





LTF

Professional low pressure foam lance with patented LTF technology. Gun ST-2620 with 300 mm insulated lance and nozzle protection ST-10 with low-pressure nozzle 9040. Max. 125 bar / 80 l / min / 150 ° C

R+M Nr.		TYP	
202 620 905	Low pressure nozzle 9040	Weep	1/2" F swivel

Sample application Carwash low pressure Foam lance:

4 bar water pressure
3 bar compressed air addition
and 3% foam cleaning
chemicals via dosing pump

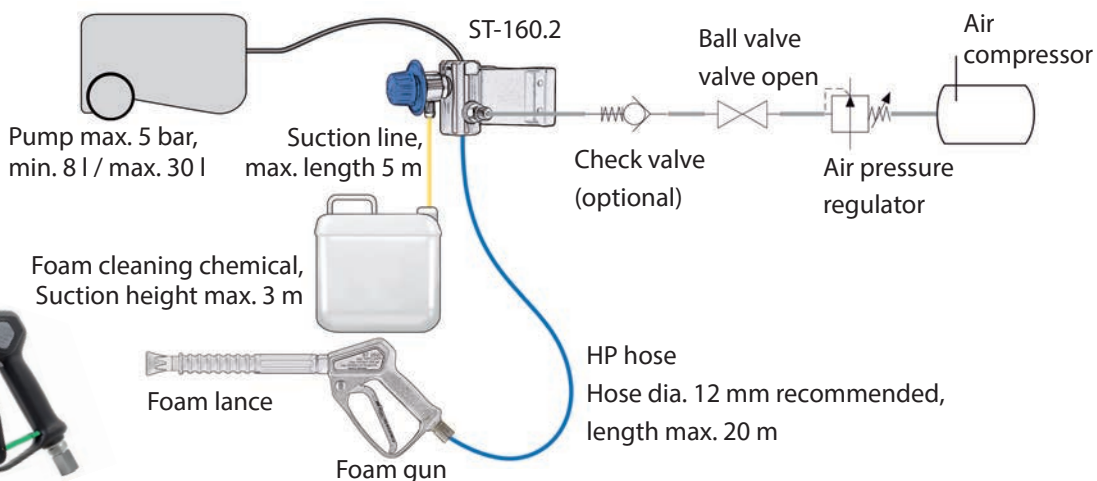

easywash365+® foam lances

LTF



Foam lance with easywash365+® gun standard, lance with extension ST-9.1 245 mm and foam head ST-75. Max. 310 bar / 25 l/min / 150 °C

R+M Nr.		TYP	
202 600 918	foam head ST-75 (1.9 mm)	standard	3/8" F swivel

LTF



Foam lance with easywash365+® gun, lance with extension ST-9.1 245 mm and foam head ST-75. Max. 310 bar / 25 l/min / 150 °C

R+M Nr.		TYP	
202 600 911	foam head ST-75 (1.05 mm)	weep version	3/8" F swivel
202 600 949	foam head ST-75 (1.20 mm)	weep version	3/8" F swivel
202 600 909	foam head ST-75 (1.35 mm)	weep version	3/8" F swivel
202 600 917	foam head ST-75 (1.90 mm)	weep version	3/8" F swivel

LTF



Foam lance with easywash365+® gun, lance with extension ST-9.1 245 mm and foam head ST-75. Max. 310 bar / 25 l/min / 150 °C

R+M Nr.		TYP	
202 600 963	foam head ST-75 (1.05 mm)	freeze stop version	3/8" F swivel.
202 600 929	foam head ST-75 (1.20 mm)	freeze stop version	3/8" F swivel.
202 600 930	foam head ST-75 (1.35 mm)	freeze stop version	3/8" F swivel
202 600 995	foam head ST-75 (1.70 mm)	freeze stop version	3/8" F swivel
202 600 919	foam head ST-75 (1.90 mm)	freeze stop version	3/8" F swivel

Valves complete - easywash365+®



Standard



Weep



Freeze stop

ST-301 swivels

1/4" F : 3/8" F.
easywash365+® guns

Repair kit ST-301

R+M Nr.
202 300 490

R+M Nr.
202 300 491

R+M Nr.
202 300 457

R+M Nr.
200 301 050

R+M Nr.
200 300 100

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Symbols inlet outlet TYP type

easywash365+® foam sets

By introducing the universally applicable **easywash365+®** foam sets we succeeded in enlarging the application possibility of our foam injector family.

The stainless steel injector with high pressure foam lance which is installed via a T-piece between the outlet of the high pressure unit and the original spraying unit is especially designed for the professional cleaning of trucks of shipping or food companies as well as for applications in the industrial foam cleaning.

The connection from injector unit to the high pressure foam lance is realized by an optionally high pressure hose of up to a length of 40 m. The already existing spraying unit is used for cleaning and rinsing

works. Enormous savings of both cleaning agent and time can be achieved as the foam lance has cleaning agent immediately available without switching at the unit or change of equipment.

It is possible to simplify the handling of the construction and to boost efficiency at the same time by integrating two hose reels. This set is suitable for all common high pressure cleaning units for up to 310 bar and max. 90 °C.




easywash365+® foam set: **easywash365+®** foam lance standard with foam head ST-75, injector ST-160 (M22 F and 2 x M22 M) with metering valve ST-161, suction hose 1000 mm and suction filter ST-32. Max. 310 bar / 90 °C

R+M Nr.		
200 160 720	foam head ST-75 (1.9 mm)	3/8" F swivel



easywash365+® foam set: **easywash365+®** foam lance standard with foam head ST-75, injector ST-160 (Coupling ST-45-250 nickel-plated brass, plug ST-45-250 zinc-plated steel and M22 M) with metering valve ST-161, suction hose 1000 mm and suction filter ST-32. Max. 250 bar / 90 °C

R+M Nr.		
200 160 725	foam head ST-75 (1.9 mm)	3/8" F swivel

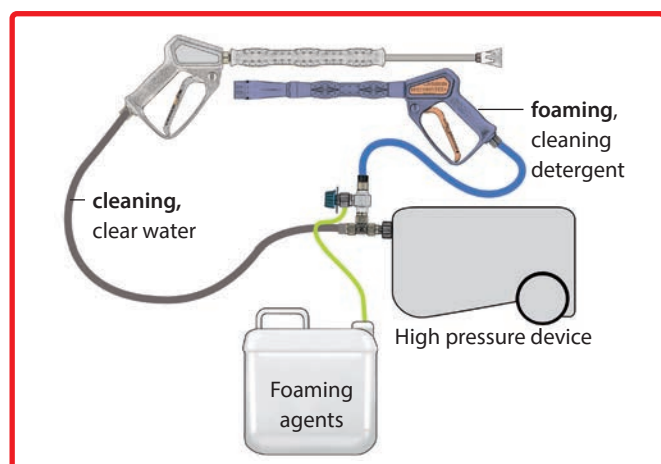


Adapter connection ST-160



Brass. For connecting the ST-160 to the pump head for hobby high-pressure cleaner with hose reel

R+M Nr.		
010 003 080	1/4" F	M18 M

easywash365+® foam sets

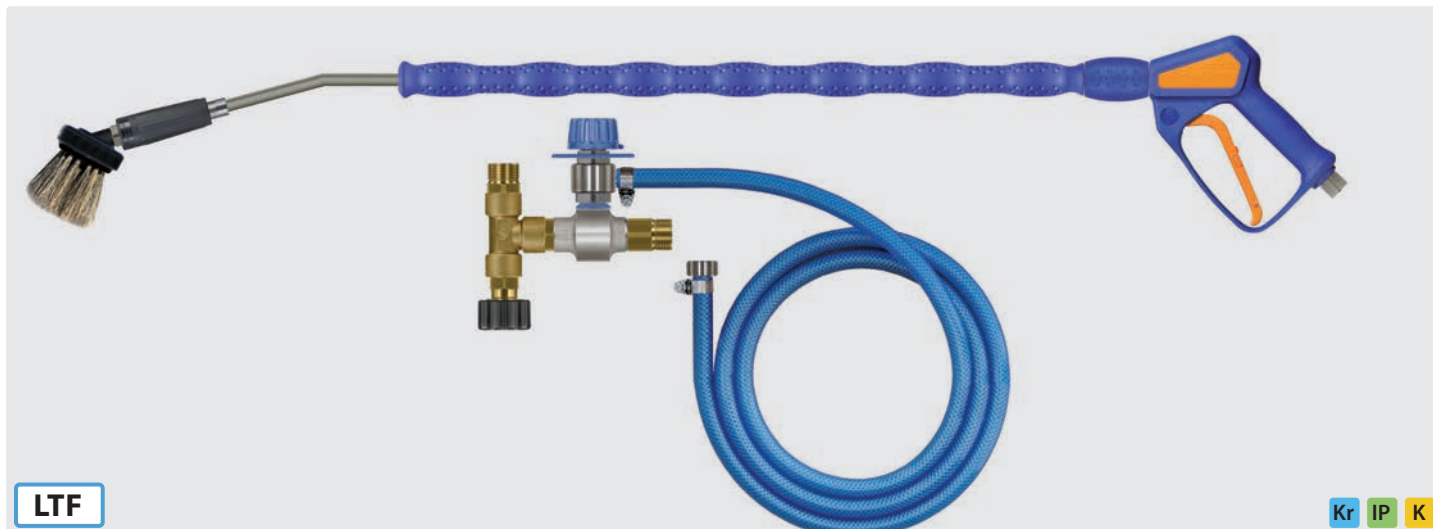

easywash365+® foam set: **easywash365+®** spray gun, lance and brush with **turbofoam365+** air injector by Suttner and injector ST-160 (M22 F and 2 x M22 M) with metering valve ST-161, suction hose 1,000 mm and suction filter ST-32. Max. 310 bar / 90 °C

R+M Nr.		lance and brush	
502 600 100 000	lance and brush with turbofoam365+ air injector (1.9 mm)	900 mm	3/8" F swivel
502 601 100 000	lance and brush with turbofoam365+ air injector (1.9 mm)	1,200 mm	3/8" F swivel

**The following Dynaflex365+® hoses
are highly recommended for easywash365+®
foam sets**

Hoses with one braid of high tensile steel wire and *smooth cover*

TYP	DN	P	°C	↔	R+M Nr.
1SC	8	280 bar	150 °C	10 m	392 210 036 10
				15 m	392 210 036 15
				20 m	392 210 036 20
				30 m	392 210 036 30
1SC	10	280 bar	150 °C	10 m	392 310 036 10
				15 m	392 310 036 15
				20 m	392 310 036 20
				30 m	392 310 036 30

QSC : male
thread

M22 : 3/8"



Symbols inlet outlet thread length TYP type DN nominal diameter P pressure °C temperature

turbofoam365+ lances by Suttner

easywash365+® spray gun, lance and brush with
turbofoam365+ air injector by Suttner

- » Especially soft cleaning with very soft hog bristles with forked ends
- » Cool & Compact insulation for a comfortable use
- » Ergonomic handling by means of the well-tried **easywash365+®** spray gun with LTF-technology
- » Available in 2 length: 900 and 1,200 mm
- » Brush with injector is also available as retrofit kit
- » **easywash365+®** spray gun is obtainable as standard, weep or freeze stop version
- » Lance swivel ST-345 is optionally available
- » Not suitable for powder chemicals




Retrofit kit for lances. Air injector **turbofoam365+** and brush with cover plate.
20-150 bar. Max. 50 °C

Bristles 60 mm

R+M Nr.	Ⓒ	Ⓓ
500 023 101	1/4" F	1.20
500 023 102	1/4" F	1.35
500 023 105	1/4" F	1.60

Bristles 90 mm

R+M Nr.	Ⓒ	Ⓓ
500 023 201	1/4" F	1.20
500 023 202	1/4" F	1.35
500 023 205	1/4" F	1.60

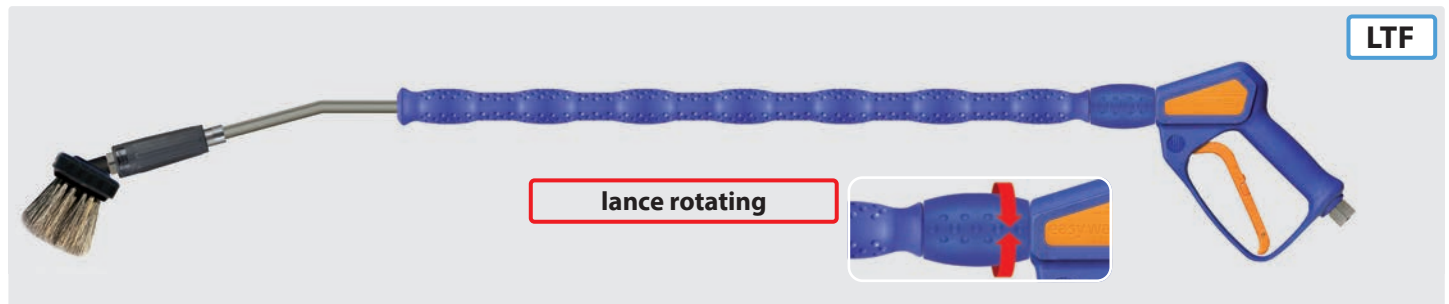

Lance with moulded insulation Cool & Compact, **easywash365+®** spray gun, **easywash365+®** lance swivel, air injector **turbofoam365+** and brush (bristles 60 mm). 20-150 bar. Max. 50 °C

R+M Nr.	spray gun	Ⓓ	ISO	Ⓔ	↔	Ⓒ
502 600 100 05	standard	1.6	700 mm	brush	900 mm	3/8" F swivel
502 610 100 05	weep	1.6	700 mm	brush	900 mm	3/8" F swivel
502 620 100 05	freeze stop	1.6	700 mm	brush	900 mm	3/8" F swivel
502 601 100 05	standard	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 611 100 05	weep	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 621 100 05	freeze stop	1.6	700 mm	brush	1,200 mm	3/8" F swivel




Lance with moulded insulation Cool & Compact, **easywash365+®** spray gun, air injector **turbofoam365+** and brush (bristles 60 mm). 20-150 bar. Max. 50 °C

R+M Nr.	spray gun	Ⓓ	ISO	Ⓔ	↔	Ⓒ
502 600 000 05	standard	1.6	700 mm	brush	900 mm	3/8" F swivel
502 610 000 05	weep	1.6	700 mm	brush	900 mm	3/8" F swivel
502 620 000 05	freeze stop	1.6	700 mm	brush	900 mm	3/8" F swivel
502 601 000 05	standard	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 611 000 05	weep	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 621 000 05	freeze stop	1.6	700 mm	brush	1,200 mm	3/8" F swivel

ST-230**Pressure regulating valve-set**

ST-230 with connection, ball valve, stainless steel lance 400 mm and hose 1,000 mm.
Max. 250 bar / 30 l/min / 95 °C

R+M Nr.	Ⓒ	Ⓓ
530 404 1	M22 M	M22 F

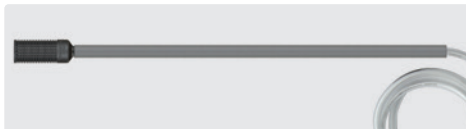Suttner chemical suction set


Suction set with suction hose 1,500 mm, suction filters ST-31 and chemical-resistant plastic tube 320 mm. The tube keeps the suction filter at the deepest point.

R+M Nr.	TYP	DN
200 031 500	clear PVC hose	6 mm
200 031 510	reinforced PVC hose blue	9 mm
200 031 520	reinforced PVC hose yellow	9 mm
200 031 530	reinforced PVC hose clear	9 mm



Suction set with filter check valve ST-32 and stainless steel tube 350 mm.

R+M Nr.	DN
200 032 601	6 mm
200 032 602	8 mm
200 032 603	10 mm

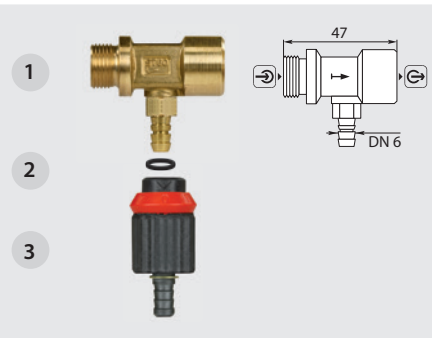Suttner foam injectors

Max. 250 bar / 60 °C.

Mixing of chemicals approx. 0 - 11.5 %

R+M Nr.	TYP	D	Ⓒ	Ⓓ
200 060 700	1	ST-60.1	1.6	3/8" M 3/8" F
200 060 710	1	ST-60.1	1.8	3/8" M 3/8" F
050 000 370	2	o-ring		
200 061 500	3	metering valve	hose tail	⌀ 6 mm

Repair kits

Chemical check valve. Hose tail 6 mm

R+M Nr.
200 060 725

Hose clamps

1.4016 stainless steel housing and band.
Hexagon screw zinc-plated. Worm gear high tension.
Flat tape inner sides with turned up rims.
According to DIN 3017, W2



Clamps with hexagon screw. 1 9 mm

R+M Nr.	VPE	DN
735 10	1	6 mm
735 20	1	8 mm
735 30	1	9/10 mm

R+M Nr.	VPE	DN
735 101 00	100	6 mm
735 201 00	100	8 mm
735 301 00	100	9/10 mm

**W4 and W5 completely rust-free,
is available on request**

Suttner foam injectors

ST-60.1



Coupling ST-45-250 : plug ST-45-250. Injector with metering valve, suction hose 1,000 mm and suction filter ST-31. Max. 250 bar / 60 °C

R+M Nr.	D
200 060 750	1.6 mm

Metering valves



Valve for Suttner injector. Hose tail 6 mm

R+M Nr.
050 000 370 1
200 061 500 2

ST-60.1



Injector without metering valve. Max. 250 bar / 60 °C

R+M Nr.	⊗	⊗	D
200 060 700	3/8" M	3/8" F	1.6 mm
200 060 710	3/8" M	3/8" F	1.8 mm

Repair kits



Chemical check valve. Hose tail 6 mm

R+M Nr.
200 060 725

ST-60.1



M22 F : M22 M. Injector with metering valve, suction hose 1,000 mm and suction filter ST-31. Max. 250 bar / 60 °C

R+M Nr.	D
200 060 760	1.6 mm

The suitable foam lances are presented on pages 354- 355 and 364 - 365.

Intake filter for chemicals



DN 6 mm. ST-32. Brass

R+M Nr.	⊗	I
200 032 800	20	32



DN 6 - 8 mm. ST-32. Stainless steel

R+M Nr.	⊗	I
200 032 600	19	39



DN 6 - 8 mm. ST-31 without check valve. Plastic. Brass weight

R+M Nr.	⊗	I
200 031 600	20	75



DN 6 - 8 mm. ST-31 without check valve. Plastic. Stainless steel weight

R+M Nr.	⊗	I
200 031 615	20	75



DN 6 - 8 mm. ST-31R with check valve. Plastic. Brass weight

R+M Nr.	⊗	I
200 031 610	20	75



DN 6 - 8 mm. ST-31R with check valve. Plastic. Stainless steel weight

R+M Nr.	⊗	I
200 031 611	20	75

easyfoam365+® injectors by Suttner

easyfoam365+® injector unit ST-160



M22 M : M22 M. Injector ST-160 with metering valve ST-162. including chemical suction set comprising of suction hose DN 8 blue. 1.500 mm. suction filter ST-31 and chemical-resistant plastic tube. 320 mm. Lockable in sturdy stainless steel box. Max. 350 bar / 90° C

R+M Nr.	D
105 160 100	1.1 mm
105 160 101	1.2 mm
105 160 102	1.3 mm
105 160 103	1.4 mm
105 160 104	1.5 mm
105 160 105	1.6 mm
105 160 106	1.7 mm
105 160 107	1.8 mm
105 160 108	1.9 mm
105 160 109	2.1 mm
105 160 110	2.3 mm
105 160 111	2.8 mm

Symbols ⊗ outlet ⊗ inlet D nozzle size I height ⊗ diameter ⊗ weight

easyfoam365+® injectors by Suttner

Injectors ST-160



3/8" F : 3/8" M : hose tail 9 mm. Injector for applications with chemicals and foam. The chemical dosing is adjusted by 10 exchangeable nozzle inserts (0.5 - 2.0 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 498	1.1 mm
200 160 499	1.2 mm
200 160 500	1.3 mm
200 160 505	1.4 mm
200 160 510	1.5 mm
200 160 515	1.6 mm
200 160 520	1.7 mm
200 160 525	1.8 mm
200 160 530	1.9 mm
200 160 535	2.0 mm
200 160 540	2.1 mm
200 160 545	2.2 mm
200 160 550	2.3 mm
200 160 560	2.5 mm
200 160 575	2.8 mm



3/8" F : 3/8" M : hose tail 9 mm.
Injector ST-160 with metering valve ST-161.
Max. 350 bar / 90 °C

R+M Nr.	D
200 160 599	1.1 mm
200 160 600	1.2 mm
200 160 601	1.3 mm
200 160 602	1.4 mm
200 160 603	1.5 mm
200 160 604	1.6 mm
200 160 605	1.7 mm
200 160 606	1.8 mm
200 160 607	1.9 mm
200 160 608	2.0 mm
200 160 609	2.1 mm
200 160 610	2.2 mm
200 160 611	2.3 mm
200 160 613	2.5 mm
200 160 614	2.8 mm


Injectors ST-166



3/8" F : 3/8" M : 2 hose tails 9 mm. Injector for applications with chemicals and foam. The injector sucks in/admixes up to two chemicals at the same time. The chemical dosing is adjusted by 2 x 10 exchangeable nozzle inserts (0.5 - 2.0 mm).
Max. 350 bar / 90 °C

R+M Nr.	D
200 166 500	1.3 mm
200 166 510	1.6 mm
200 166 530	1.9 mm

Valve lock

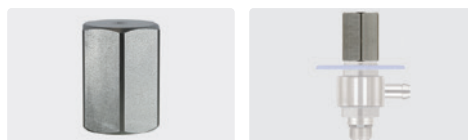

Valve lock for metering valve ST-161

R+M Nr.
040 003 566

Wall brackets



Wall brackets for canisters



Stainless steel.
Mounting holes $\varnothing$ 8.5 mm

R+M Nr.	H x W x D	D
105 000 001	160 x 250 x 210	1.2
105 000 002	200 x 285 x 310	2.0

ST-160 wall mount

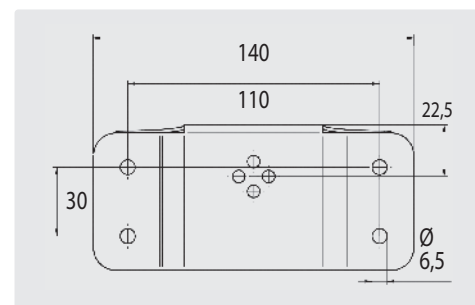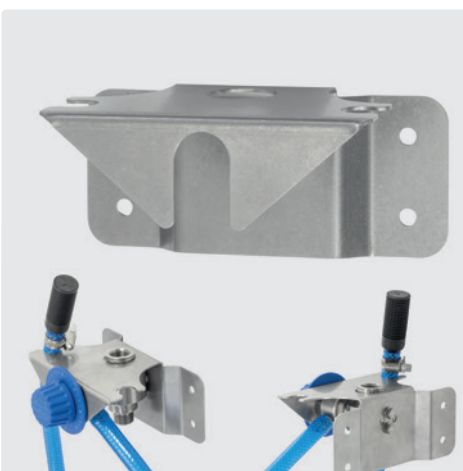

Stainless steel. Incl. fastening material for the injector.

Fits for ST-160+161 and 166

R+M Nr.
200 160 160

Wall brackets for canisters



Stainless steel. Two-part with cover.
4 mounting holes for wall mounting, $\varnothing$ 8.5 mm.
Delivery without lock.
H/W/D = 320/198/180 mm.
2 kg

R+M Nr.
105 000 018

easyfoam365+® injectors

Injectors ST-160 with metering valve ST-161



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 846	1.3 mm
200 160 847	1.4 mm
200 160 848	1.5 mm
200 160 849	1.6 mm
200 160 850	1.7 mm
200 160 851	1.8 mm
200 160 854	2.1 mm
200 160 855	2.2 mm
200 160 856	2.3 mm



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 zinc-plated steel. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 861	1.3 mm
200 160 862	1.4 mm
200 160 863	1.5 mm
200 160 864	1.6 mm
200 160 865	1.7 mm
200 160 866	1.8 mm
200 160 869	2.1 mm
200 160 870	2.2 mm
200 160 871	2.3 mm



M22 F : M22 M. Injector with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31.

Max. 350 bar / 90 °C

R+M Nr.	D
200 160 804	1.3 mm
200 160 800	1.4 mm
200 160 801	1.5 mm
200 160 802	1.6 mm
200 160 805	1.7 mm
200 160 806	1.8 mm
200 160 809	2.1 mm
200 160 810	2.2 mm
200 160 811	2.3 mm

Injectors ST-160



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 stainless steel. Injector ST-160 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 90 °C

R+M Nr.	D
200 160 616	1.8 mm : 2.3 mm
200 160 615	1.7 mm : 2.3 mm
200 160 617	2.2 mm : 2.8 mm

easyfoam365+® bypass injectors ST-167



Coupling ST-45-250 stainless steel : plug ST-45-250 stainless steel. Injector ST-167 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 100 °C

R+M Nr.	D
200 167 855	1.8 mm : 2.3 mm



Coupling ST-45-250 nickel-plated brass : plug ST-45-250 stainless steel. Injector ST-167 with metering valve ST-161, suction hose 2,000 mm and suction filter ST-31. Max. 250 bar / 100 °C

R+M Nr.	D
200 167 850	1.8 mm : 2.3 mm
200 167 860	1.8 mm : 2.8 mm

Reference list manufacturer number to R+M number A

Manufacturer Nr.	R+M Nr.
640 124 4	200 160 616
640 124 4	200 160 615
640 124 6	200 160 617
640 124 2	200 167 850
640 124 3	200 167 855
640 124 7	200 167 860

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use (e.g. invoices addressed to end users). In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Symbols D nozzle size

easyfoam365+® foam injector ST-160.2

In order to produce foam with the ST-160.2 a foam lance without air intake is absolutely required. The air quantity needed for foaming is supplied by an additional connection positioned at the injector. The use of a spray gun with large cross section areas such as for example ST-2720, ST-2725, ST-3100 or ST-3300 with suitable lances and foam hoses (bluflood) is recommended.

The injector is especially designed for low and medium pressure applications from a water inlet pressure of 5 bar and it generates an excellent foam when being provided with the required quantity of compressed air.

Injector chemically resistant stainless steel 1.4305 / AISI 304. Injector with metering valve ST-161, compressed air connection and wall bracket. Inlet / outlet 1/2" F. Max. 350 bar / 90 °C

**easyfoam365+**

R+M Nr.	Ø	Ø
200 160 650	30	1.2 mm
200 160 651	35	1.3 mm
200 160 652	40	1.4 mm
200 160 653	45	1.5 mm
200 160 654	55	1.6 mm
200 160 655	60	1.7 mm
200 160 656	70	1.8 mm
200 160 657	80	1.9 mm
200 160 658	85	2.0 mm
200 160 659	90	2.1 mm
200 160 660	100	2.2 mm
200 160 661	110	2.3 mm
200 160 662	120	2.4 mm
200 160 663	125	2.5 mm
200 160 664	140	2.6 mm
200 160 665	150	2.7 mm
200 160 666	180	2.8 mm

easyfoam365+® foam injector ST-160.3**ST-160.3 – injector for large water quantities and high dosages**

The stainless steel injector features three pairs of injector and nozzle in one housing which can be configured independently. This enables numerous metering and foam applications.

Since each pair of nozzles has its own chemical inlet, different chemicals can also be mixed in different ratios.

In the low-pressure range, flow rates of up to 20 l/min can be realised. This is why, the injector is suitable for quick and easy filling of scrubber dryer while up to 5 l/min of cleaning agent can be added.

In the high-pressure range, water quantities of more than 100 l/min can be realised without any problems. For example, fixed or mobile foam arches, such as required for cleaning the inside of tunnels, can be operated with a large number of foam nozzles.

In order to produce large foam quantities in the low-pressure range, the injector is provided with an compressed air connection.

Injector chemically resistant stainless steel 1.4305 / AISI 304. Injector with compressed air connection and wall bracket. Inlet / outlet 1/2" F. Max. 350 bar / 90 °C

**easyfoam365+**

R+M Nr.	Ø	Ø
200 160 301	75	3 x 1.1 mm
200 160 302	90	3 x 1.2 mm
200 160 303	105	3 x 1.3 mm
200 160 304	120	3 x 1.4 mm
200 160 305	135	3 x 1.5 mm
200 160 306	165	3 x 1.6 mm
200 160 307	180	3 x 1.7 mm
200 160 308	210	3 x 1.8 mm
200 160 309	240	3 x 1.9 mm
200 160 310	255	3 x 2.0 mm
200 160 311	270	3 x 2.1 mm
200 160 312	300	3 x 2.2 mm
200 160 313	330	3 x 2.3 mm
200 160 314	360	3 x 2.4 mm
200 160 315	375	3 x 2.5 mm
200 160 316	420	3 x 2.6 mm
200 160 317	450	3 x 2.7 mm
200 160 318	540	3 x 2.8 mm

Intake manifold

easyfoam365+® Intake manifold ST-163.1



Intake manifold for **easyfoam365+®** injectors.
4 color-coded suction options.
Control by turning the rotating part.
Including O-ring and 4 sets of dosing nozzles

R+M Nr.	D
200 163 185	4 sets of dosing nozzles



Repair-Kit



R+M Nr.
200 163 187

Intake manifold ST-163.1 accessories



Stainless steel wall bracket for intake manifold

R+M Nr.
040 004 013




Stainless steel hose barb for intake manifold.
Also for mounting on the wall bracket

R+M Nr.
040 003 590


Sample application intake manifold:

Here the control for the chemical suction.
The intake manifold can be installed horizontally, vertically and in any position.

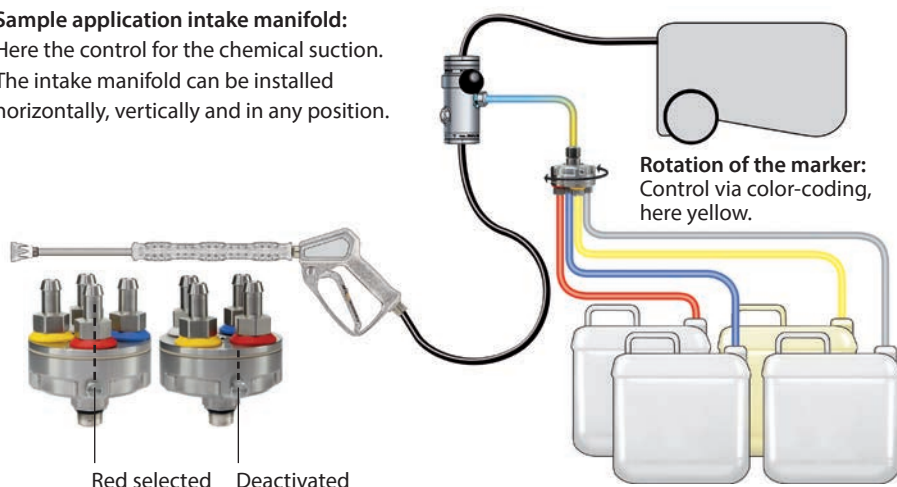

Red selected Deactivated

Deactivation of the suction when the marking is in the middle between two nozzles.

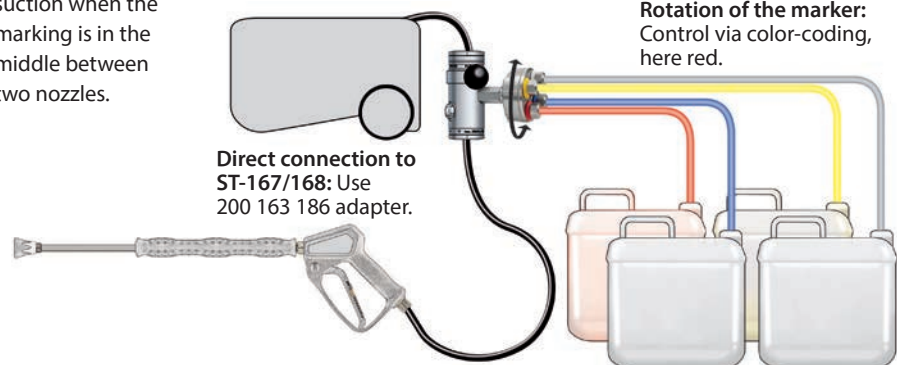

Direct connection to ST-167/168: Use 200 163 186 adapter.

Rotation of the marker:
Control via color-coding, here red.



Stainless steel adapter for intake manifold.
Incl. O-ring. For mounting on the **easyfoam365+®** injectors ST-167 / ST-168

R+M Nr.
200 163 186

Symbols D nozzle C inlet S outlet

Accessories injectors

Return valves



Hose tail : M14 M. V2A.
With o-ring

R+M Nr.

200 163 350



1/4" M : M14 M. V2A.
With o-ring

R+M Nr.

200 163 356



1/4" M : M18 M. (ST-164).
With o-ring

R+M Nr.

200 164 366

0

0

O-rings

R+M Nr.

050 000 264

2.9 x 1.78

050 000 300

10.82 x 1.78



Hose tail 9 mm : M14 M.
V4A Extreme.
Highest chemical resistance.
With o-ring

R+M Nr.

200 163 351



1/4" M : M14 M. V4A Extreme.
Highest chemical resistance.
With o-ring

R+M Nr.

200 163 352

0

0

O-rings.
Highest chemical resistance

R+M Nr.

050 001 450

2.9 x 1.78

050 000 302

10.82 x 1.78

Plug



M14 M. Compressed air connection
(ST-160.2/ST-160.3/ST-162/ST-167/
ST-168).

Without o-ring

R+M Nr.

040 003 625



M18 M. Compressed air connection
(ST-164).

With o-ring

R+M Nr.

200 164 345

Ultra High Pressure Filter



40 mm



Stainless steel with brass mesh holder and stainless steel strainer. Suitable
as inlet water filter for ST-164.

Max. 400 bar / 100 °C

R+M Nr.

200 163 100



M 22 M



3/8" M

Two component inlet



M14 M. : M14 F : M14 F. V2A. (ST-160/ST-160.2/ST-160.3/ST-162/ST-164/
ST-166/ST-167/ST-168). With o-rings

R+M Nr.

200 164 355



00 00

Rep. Kit. 2 x 2 O-rings

R+M Nr.

200 164 365

Accessories injectors

Metering valves ST-161



Hose tail 9 mm : M14 M. Metering valve ST-161 suitable for being refitted in **easyfoam365+®** injectors (ST-160/ST-162/ST-164/ST-166/ST-167/ST-168)

R+M Nr.	C
200 161 500	blue (FKM)



Hose tail 9 mm : M14 M. Metering valve ST-161 suitable for being refitted in **easyfoam365+®** injectors (ST-160/ST-162/ST-164/ST-166/ST-167/ST-168)

R+M Nr.	C
200 161 515	grey (EPDM)



Hose tail 9 mm : hose tail 9 mm. Panel mount is possible

R+M Nr.	C
200 161 510	blue (FKM)

Compressed air module ST-164



1/4" F : M18 M. Compressed-air module (ST-164) for automatic shut-off of compressed-air supply when water supply is switched off

Compressed air module ST-163



Hose tail 9 mm : 1/2" M swivel : 1/2" F. Stainless steel. For injection of compressed air. Max. 350 bar / 60 °C

R+M Nr.
200 163 450



1/4" M : 1/2" M swivel : 1/2" F. Stainless steel. For injection of compressed air. Max. 350 bar / 60 °C

R+M Nr.
200 163 451

R+M Nr.
200 164 370

Ring for suction marking



Plastic. For compressed air

R+M Nr.	C
020 005 108	grey



Plastic. For foaming agents

R+M Nr.	C
020 005 101	red



Plastic. For foaming agents

R+M Nr.	C
020 005 100	blue



Plastic. For disinfectant

R+M Nr.	C
020 005 105	yellow

Accessories injectors

Exchangeable nozzle inserts



Stainless steel V2A. Excl. o-rings

R+M Nr.	D	VPE
040 004 705	0.5 mm	1
040 004 706	0.6 mm	1
040 004 707	0.7 mm	1
040 004 708	0.8 mm	1
040 004 709	0.9 mm	1
040 004 710	1.0 mm	1
040 004 711	1.1 mm	1
040 004 712	1.2 mm	1
040 004 713	1.3 mm	1
040 004 714	1.4 mm	1
040 004 715	1.5 mm	1
790 041 010	o-rings	10



Stainless steel V4A. Excl. o-rings

R+M Nr.	D	VPE
040 004 803	0.30 mm	1
040 004 813	0.35 mm	1
040 004 804	0.40 mm	1
040 004 805	0.50 mm	1
050 001 450	o-ring	1

Plastic. 10 nozzle inserts
(0.5 - 2.0 mm).
Incl. o-rings

R+M Nr.
200 163 340

Plastic. 9 nozzle inserts (0.5 - 1.5 mm).
Incl. o-rings.
Incl. 1 insert without hole

R+M Nr.
200 163 335

Diffusor nozzles



Stain. steel. Diffusor nozzle screwable

R+M Nr.	D
040 003 514	1.4
040 003 517	1.7
040 003 521	2.0
040 003 523	2.3
040 003 528	2.8
040 003 532	3.2

Metering valves

Hose tail 9 mm: 1/4" F. V4A extreme.
Highest resistance to chemistry

R+M Nr.
200 163 300

Injector nozzles



Stain. steel. Injector nozzle screwable

R+M Nr.	D
040 003 641	1.1
040 003 642	1.2
040 003 643	1.3
040 003 644	1.4
040 003 645	1.5
040 003 646	1.6
040 003 647	1.7
040 003 648	1.8
040 003 649	1.9
040 003 650	2.0
040 003 651	2.1
040 003 652	2.2
040 003 653	2.3
040 003 654	2.4
040 003 655	2.5
040 003 656	2.6
040 003 657	2.7
040 003 658	2.8



Stain. steel. Injector nozzle plug-in

R+M Nr.	D
040 003 534	1.2
040 003 535	1.3
040 003 536	1.4
040 003 537	1.5
040 003 538	1.6
040 003 539	1.7
040 003 541	1.8
040 003 542	1.9
040 003 543	2.0
040 003 544	2.1
040 003 546	2.2
040 003 547	2.3
040 003 548	2.4
040 003 531	2.5
040 003 549	2.8

Pressure regulator

1/4" F. 0.5 - 10 bar. 1/8" F pressure
gauge. Connection for compressed
air (ST-164 and ST-168)

R+M Nr.
150 008 010

Operating cylinder



ST-167 / ST-168. Stainless steel

R+M Nr.
200 168 491

Seal kit for operating cylinder



Operating cylinder. FEPM

R+M Nr.
200 168 489

Repair Kit ST-164



For ST-164

R+M Nr.
200 164 490

Repair Kit ST-164



Kit for stopper ST-164

R+M Nr.
200 164 485

Accessories injectors

Reinforced PVC hoses clear



For compressed air or chemicals. Max. 60 °C

Per metre

R+M Nr.	DN		
306 55	9		3

Complete rolls

R+M Nr.	DN		
306 550 50	9	50 m	3

Reinforced PVC hoses blue



For foaming agent. Blue. Max. 60 °C

Per metre

R+M Nr.	DN		
080 000 310	9		3

Complete rolls

R+M Nr.	DN		
306 560 50	9	50 m	3

Reinforced PVC hoses yellow



For disinfectant. Yellow. Max. 60 °C


Per metre

R+M Nr.	DN		
080 000 320	9		3

Complete rolls

R+M Nr.	DN		
306 570 50	9	50 m	3

Wall bracket for injectors

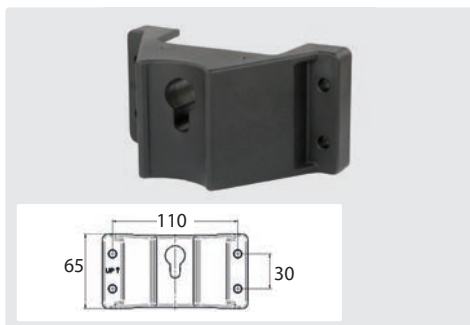

for ST-164, ST-167, ST-168, ST-160.2, ST-160.3, ST-162 panelversion

R+M Nr.
200 168 420

Wall brackets for canisters



Stainless steel. Mounting holes 8.5 mm

R+M Nr.	H x W x D	
105 000 001	160 x 250 x 210	1.2
105 000 002	200 x 285 x 310	2.0

Symbols DN nominal diameter ↔ length ↗ wall thickness Ⓢ weight (kg)

Accessories injectors

Trolley



- » Multifunctional trolley for foam and disinfection units
- » Stainless steel. Trolley with two grey and non-fading wheels
- » Manoeuvrable and easy to handle such as a sack truck
- » Open space for placing the canister, thus ensuring an unhindered discharge of spilled liquids
- » Ergonomic plastic handle strip which is easily unscrewable for the food industry
- » Two laterally attached lance holder
- » Sufficient space for 2 container with chemicals comprising up to 25 kg each.
- » H x W x D 1,150 x 540 x 620 mm

R+M Nr.	14,0
710 000 163 389	



- » Multifunctional trolley for foam and disinfection units
- » Stainless steel. Trolley with foot brake and 4 non-marking stainless steel wheels
- » Equipped with swivel castors at the front
- » Open space for placing the canister, thus ensuring an unhindered discharge of spilled liquids
- » Ergonomic plastic handle strip which is easily unscrewable for the food industry
- » Two laterally attached lance holder
- » Space for two 10-liter canisters or one 30-liter canister
- » H x W x D 1,200 x 400 x 500 mm

R+M Nr.	11,1
710 100 750	



- » Trolley for foam units
- » Stainless steel. Trolley with two grey and non-fading wheels as well as one grey guide roll.
- » Two laterally attached lance holder
- » Space for two container with chemicals comprising up to 30 kg each.
- » H x W x D 1,080 x 680 x 760 mm

R+M Nr.	20,5
200 163 389	

easyfoam365+® bypass injectors ST-167 without compressed air module

easyfoam365+® product line has been enlarged

The injectors completely made out of stainless steel make it possible to open two cross section areas (50 mm² each) in order to guarantee a smooth use without drop in pressure when washing/rinsing. This ensures that the injector can be permanently kept in the high pressure line, also at the time when large water quantities are used e.g. in the agriculture or food industry. The cleaning capacity when cleaning and rinsing is not affected at all. A lever makes it possible to change from the cleaning and rinsing mode into injector operation. When using the cleaning mode, there are two bore holes guiding the high pressure water parallel to the injector (bypass mode). When using the injector the available water quantity is guided through the injection area.

In combination with a foam lance (ST-72, ST-74 oder ST-75), an adjustable or a triple nozzle the **easyfoam365+®** injector ST-167 can suck in chemicals by means of the integrated check valve made out of stainless steel. It depends on the chosen nozzle whether the chemical can also be sprayed on or foamed. The foaming covers large areas and a long exposure time

is guaranteed. One further advantage of the foam cleaning is that already covered surfaces are easily seen.

The **easyfoam365+®** injector which is available in the nozzle size of 1.2 - 2.8 mm meets the requirements in every field of application in the professional cleaning industry. The dosing is adjusted by one of the 10 nozzle inserts which are included in the consignment. As an alternative there are also versions with the infinitely variable dosing unit ST-161 available.

The connection for chemicals equipped with an integrated check valve and an intake for the nozzle inserts has a hose tail for chemical suction hoses being 9 mm in diameter in order to suck in especially viscous fluids. The direction of flow is marked with arrows to guarantee a smooth installation.

easyfoam365+® bypass injectors ST-167



1/2" F : 1/2" F : hose tail 9 mm. The chemical dosing is adjusted by 10 exchangeable nozzle inserts (0.5 - 2.0 mm).

Max. 350 bar / 100 °C



1/2" F : 1/2" F : hose tail 9 mm. Injector ST-167 with metering valve ST-161.

Max. 350 bar / 100 °C



1/2" F : 1/2" F : hose tail 9 mm. Injector ST-167 with metering valve extreme.

Max. 350 bar / 100 °C

R+M Nr.	D
200 167 500	1.2 mm
200 167 501	1.3 mm
200 167 502	1.4 mm
200 167 503	1.5 mm
200 167 504	1.6 mm
200 167 505	1.7 mm
200 167 506	1.8 mm
200 167 507	1.9 mm
200 167 508	2.0 mm
200 167 509	2.1 mm
200 167 510	2.2 mm
200 167 511	2.3 mm
200 167 512	2.4 mm
200 167 513	2.5 mm
200 167 516	2.8 mm

R+M Nr.	D
200 167 500 5	1.2 mm
200 167 501 5	1.3 mm
200 167 502 5	1.4 mm
200 167 503 5	1.5 mm
200 167 504 5	1.6 mm
200 167 505 5	1.7 mm
200 167 506 5	1.8 mm
200 167 507 5	1.9 mm
200 167 508 5	2.0 mm
200 167 509 5	2.1 mm
200 167 510 5	2.2 mm
200 167 511 5	2.3 mm
200 167 512 5	2.4 mm
200 167 513 5	2.5 mm
200 167 516 5	2.8 mm

R+M Nr.	D
200 167 600	1.2 mm
200 167 601	1.3 mm
200 167 602	1.4 mm
200 167 603	1.5 mm
200 167 604	1.6 mm
200 167 605	1.7 mm
200 167 606	1.8 mm
200 167 607	1.9 mm
200 167 608	2.0 mm
200 167 609	2.1 mm
200 167 610	2.2 mm
200 167 611	2.3 mm
200 167 612	2.4 mm
200 167 613	2.5 mm
200 167 616	2.8 mm

R+M Nr.	D
200 167 630	1.2 mm
200 167 631	1.3 mm
200 167 632	1.4 mm
200 167 633	1.5 mm
200 167 634	1.6 mm
200 167 635	1.7 mm
200 167 636	1.8 mm
200 167 637	1.9 mm
200 167 638	2.0 mm
200 167 639	2.1 mm
200 167 640	2.2 mm
200 167 641	2.3 mm
200 167 642	2.4 mm
200 167 643	2.5 mm
200 167 644	2.8 mm



Symbols  nozzle size

Assembly scheme easyfoam365+® bypass injectors ST-167 without compressed air module


easyfoam365+® bypass injector ST-167 with hose tail 9 mm



easyfoam365+® bypass injector ST-167 with metering valve ST-161 and hose tail 9 mm

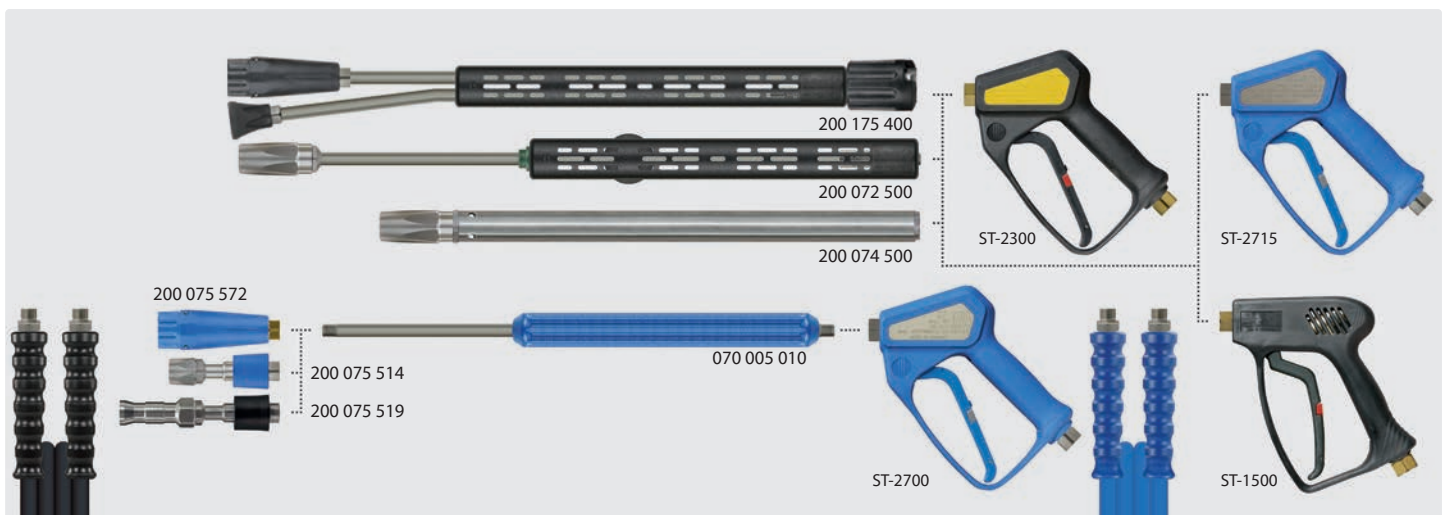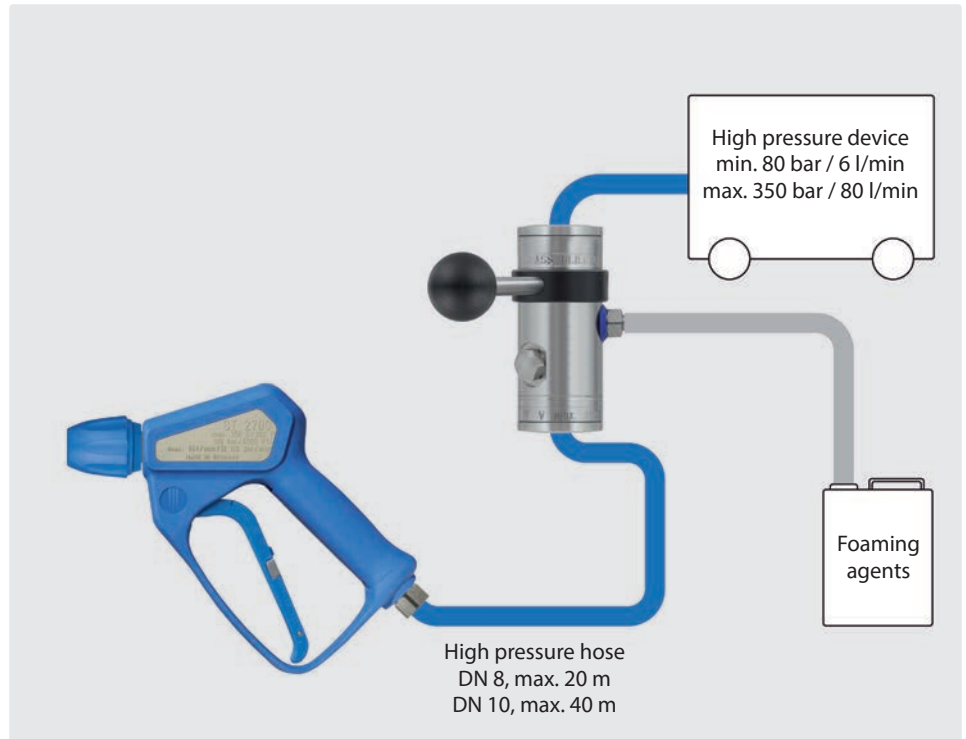

easyfoam365+® bypass injectors ST-168 with compressed air module

easyfoam365+® product line has been enlarged

The injectors completely made out of stainless steel make it possible to open two cross section areas (50 mm² each) in order to guarantee a smooth use without drop in pressure when washing/rinsing. This ensures that the injector can be permanently kept in the high pressure line, also at the time when large water quantities are used e.g. in the agriculture or food industry. The cleaning capacity when cleaning and rinsing is not affected at all. A lever makes it possible to change from the cleaning and rinsing mode into injector operation. When using the cleaning mode, there are two bore holes guiding the high pressure water parallel to the injector (bypass mode). When using the injector the available water quantity is guided through the injection area.

In order to produce foam a foam lance without air intake is absolutely required. The air quantity needed for foaming is supplied by an additional connection positioned at the injector. The use of a spray gun with large cross section areas such as for example ST-2720, ST-2725, ST-3100 or ST-3300 with suitable lances

and foam hoses (blufood) is recommended. The injector ST-168 is especially designed for low and medium pressure applications from a water inlet pressure of 5 bar and it generates an excellent foam when being provided with the required quantity of compressed air.

The easyfoam365+® injector which is available in the nozzle size of 1.2 - 2.8 mm meets the requirements in every field of application in the professional cleaning industry. The dosing is adjusted by one of the 10 nozzle inserts which are included in the consignment. As an alternative there are also versions with the infinitely variable dosing unit ST-161 available.

The connection for chemicals equipped with an integrated check valve and an intake for the nozzle inserts has a hose connector for chemical suction hoses being 9 mm in diameter in order to suck in especially viscous fluids. The direction of flow is marked with arrows to guarantee a smooth installation.

easyfoam365+® bypass injectors ST-168



1/2" F : 1/2" F.
Injector ST-168 with
hose tail 9 mm and
compressed air module
(hose tail 9 mm).
The chemical dosing is
adjusted by 10 exchan-
geable nozzle inserts
(0.5 - 2.0 mm).
Max. 350 bar / 100 °C



1/2" F : 1/2" F.
Injector ST-168 with
metering valve ST-161
and compressed air
module (hose tail 9
mm).
Max. 350 bar / 100 °C

R+M Nr.	D
200 168 500	1.2 mm
200 168 505	1.3 mm
200 168 515	1.4 mm
200 168 525	1.5 mm
200 168 535	1.6 mm
200 168 545	1.7 mm
200 168 555	1.8 mm
200 168 605	1.9 mm
200 168 615	2.0 mm
200 168 625	2.1 mm
200 168 635	2.2 mm
200 168 645	2.3 mm
200 168 650	2.4 mm
200 168 655	2.5 mm
200 168 660	2.8 mm

R+M Nr.	D
200 168 600	1.2 mm
200 168 601	1.3 mm
200 168 602	1.4 mm
200 168 603	1.5 mm
200 168 604	1.6 mm
200 168 613	1.7 mm
200 168 606	1.8 mm
200 168 607	1.9 mm
200 168 608	2.0 mm
200 168 609	2.1 mm
200 168 610	2.2 mm
200 168 611	2.3 mm
200 168 612	2.4 mm
200 168 616	2.5 mm
200 168 617	2.8 mm

easyfoam365+® Injector ST-162 panel mount version of ST-167/168



3/8" F: 1/2" F.
Hose tail 9 mm.
Injector ST-162 incl. 10
exchangeable nozzle
inserts (0.5 - 2.0 mm) for
regulation of chemical
dosing.
Improved foam charac-
teristics due to symme-
tric air blow-in around
the diffusor nozzle.
Max. 350 bar / 100 °C

R+M Nr.	D
200 162 500	1.2 mm
200 162 501	1.3 mm
200 162 502	1.4 mm
200 162 503	1.5 mm
200 162 504	1.6 mm
200 162 505	1.7 mm
200 162 506	1.8 mm
200 162 507	1.9 mm
200 162 508	2.0 mm
200 162 509	2.1 mm
200 162 510	2.2 mm
200 162 511	2.3 mm
200 162 512	2.4 mm
200 162 513	2.5 mm
200 162 514	2.8 mm



Assembly scheme easyfoam365+® bypass injectors ST-168 with compressed air module



Bypass injector ST-168 with hose tail 9 mm and compressed air module (hose tail 9 mm).



Bypass injector ST-168 with metering valve ST-161 & compressed air module (hose tail 9 mm).

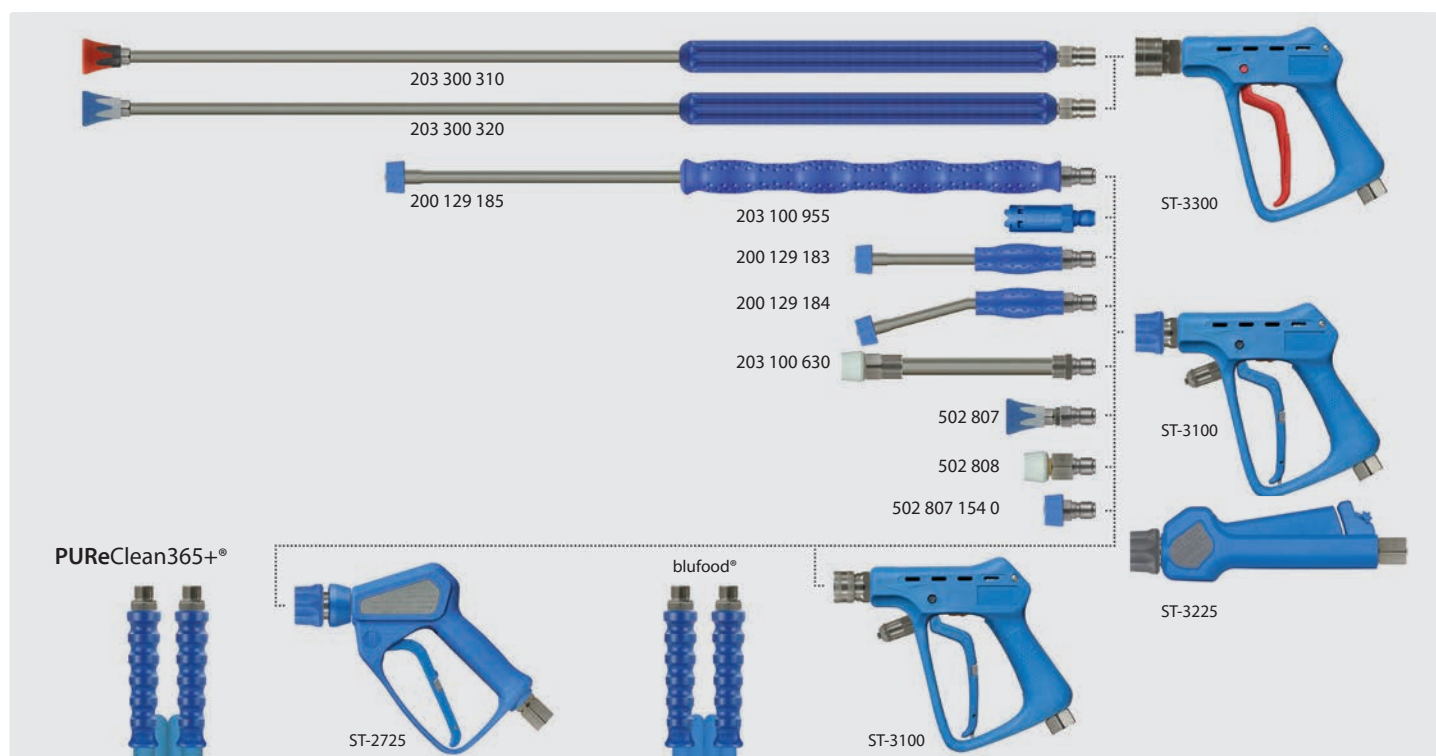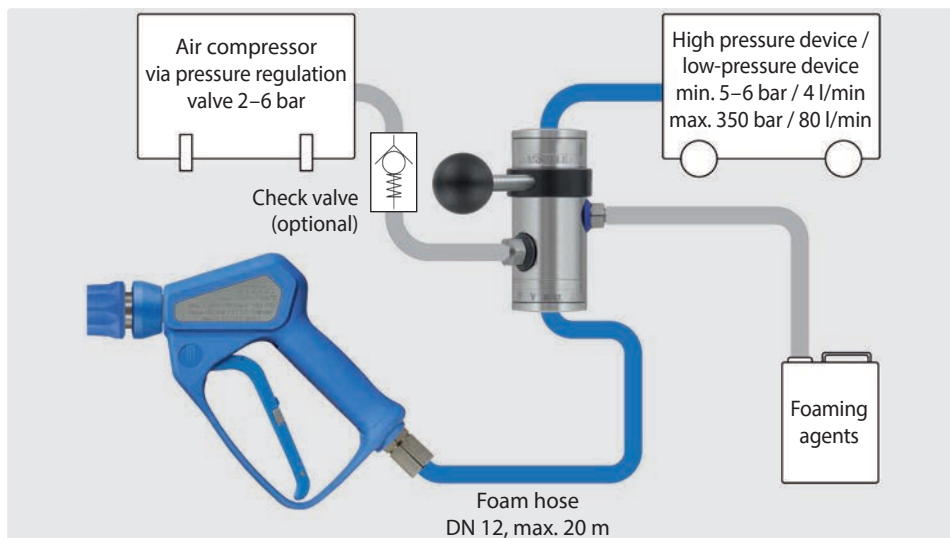


Have you already known? ...that our bypass injector ST-168 can also be operated with water line pressure.

The compressed air-driven **easyfoam365+®** bypass injectors of the series ST-168 are designed for foam applications with medium pressure units (10 to 50 bar) in the field of the food industry. The **easyfoam365+®** bypass injector ST-168 is a real alternative especially for smaller companies such as farmers or fish breeding companies which are selling the goods ex farmyard. These smaller companies have to stick to the existing hygiene standards such as larger firms, but they are reasonably shy at the great investment volume for a medium pressure unit.

By means of only water line pressure - 5 bar flow pressure - and the appropriate accessories for the spraying unit - hose with big nominal width, ball valve 203 100 200 and suitable foam lance 203 100 630 an excellent foam quality is reached.

When switching the lever from the injector operation into cleaning and rinsing mode the addition of cleaning agent and disinfectant is stopped and the fully available water quantity passes the bypass injector nearly without any drop in pressure.

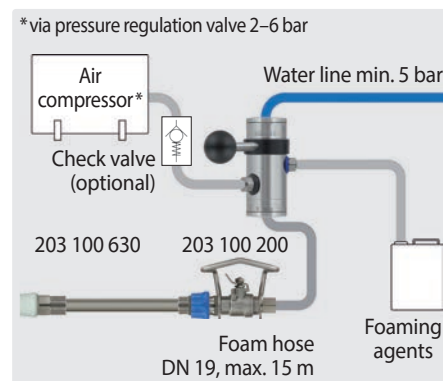

Symbols nozzle inlet outlet

easyfoam365+® foam and disinfectant units ST-164

Field of application: Designed for the cleaning of vehicles carrying cattle, food, frozen foods and fish in order to avoid bacterial spread. Also suitable for cleaning milking parlours and applicable in cattle breeding, piggery, poultry farming and in the pisciculture.

The foam device is a combination made out of stainless steel and special high performance plastics. The addition of one out of two connected chemicals is determined by positioning the lever.

All versions are suitable for the addition in low pressure from approx. 5 bar up to max. 350 bar.

When being operated in rinsing function up to 60 l/min pass through the unit without any drop in pressure.

In combination with a foam lance (ST-72, ST-74 or ST-75), an adjustable or a triple nozzle the ST-164 injector can suck in chemicals by means of the integrated check valve made out of stainless steel and spray them on or foam them depending on the chosen nozzle.

The injector has an optional compressed air connection in order to supply the required air quantity for foaming already in the injector unit.

For the application of foam a foam lance without air intake is absolutely required. The use of a spray gun with large cross section areas such as for example ST-2720, ST-2725, ST-3100 or ST-3300 with suitable lances and foam hoses (bluflood) is recommended.

The injector is especially designed for low and medium pressure applications from a water inlet pressure of 5 bar and it generates an excellent foam when being provided with the required quantity of compressed air.

The ST-164 injector is available in the nozzle size of 1.3 - 2.8 mm.

The dosing is adjusted by one of the 10 nozzle inserts which are included in the consignment. The connection for chemicals is equipped with an integrated check valve.

Injectors without compressed air module



3/8" F : 1/2" F : 2 x hose tail 9 mm. The chemical dosing is adjusted by 2 x 10 exchangeable nozzle inserts (0.5 - 1.5 mm).

Max. 350 bar / 100 °C

R+M Nr.	D
200 164 500	1.3 mm
200 164 502	1.4 mm
200 164 503	1.5 mm
200 164 504	1.6 mm
200 164 505	1.7 mm
200 164 506	1.8 mm
200 164 507	1.9 mm
200 164 508	2.0 mm
200 164 509	2.1 mm
200 164 510	2.2 mm
200 164 511	2.3 mm
200 164 512	2.4 mm
200 164 513	2.5 mm
200 164 514	2.8 mm

Injectors with compressed air module



3/8" F : 1/2" F : 2 x Hose tail 9 mm : compressed air module (1/4" M). The chemical dosing is adjusted by 2 x 10 exchangeable nozzle inserts (0.5 - 2 mm). Max. 350 bar / 100 °C

R+M Nr.	D
200 164 580	1.3 mm
200 164 582	1.4 mm
200 164 583	1.5 mm
200 164 584	1.6 mm
200 164 585	1.7 mm
200 164 586	1.8 mm
200 164 587	1.9 mm
200 164 588	2.0 mm
200 164 589	2.1 mm
200 164 590	2.2 mm
200 164 591	2.3 mm
200 164 592	2.4 mm
200 164 593	2.5 mm
200 164 594	2.8 mm

Injectors with compressed air module





3/8" F : 1/2" F : 2 x Hose tail 9 mm : compressed air module (1/4" M). The chemical dosing is adjusted by the metering valve ST-161.

Max. 350 bar / 100 °C

R+M Nr.	D
200 164 600	1.3 mm
200 164 602	1.4 mm
200 164 603	1.5 mm
200 164 604	1.6 mm
200 164 605	1.7 mm
200 164 606	1.8 mm
200 164 607	1.9 mm
200 164 608	2.0 mm
200 164 609	2.1 mm
200 164 610	2.2 mm
200 164 611	2.3 mm
200 164 612	2.4 mm
200 164 613	2.5 mm
200 164 614	2.8 mm

Symbols  nozzle

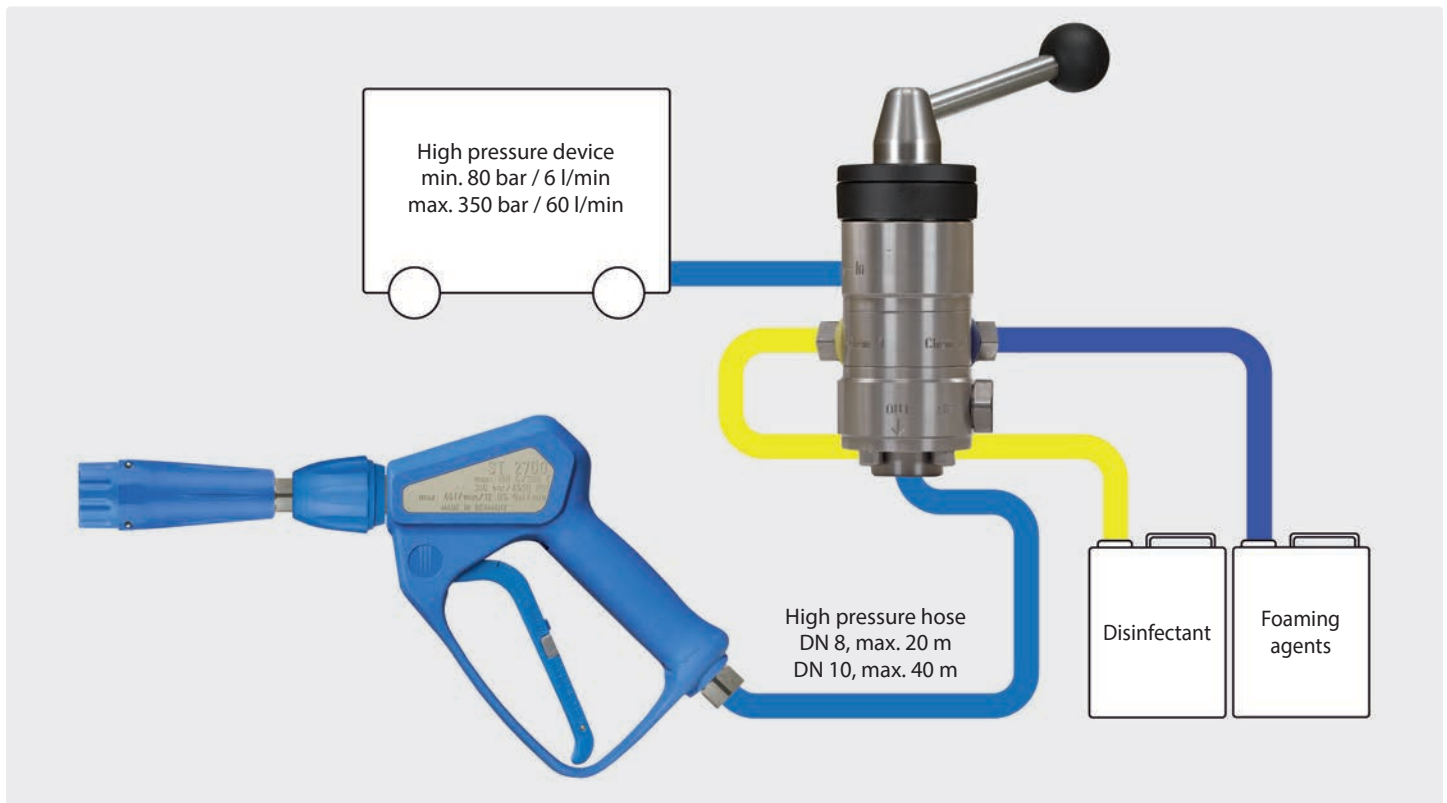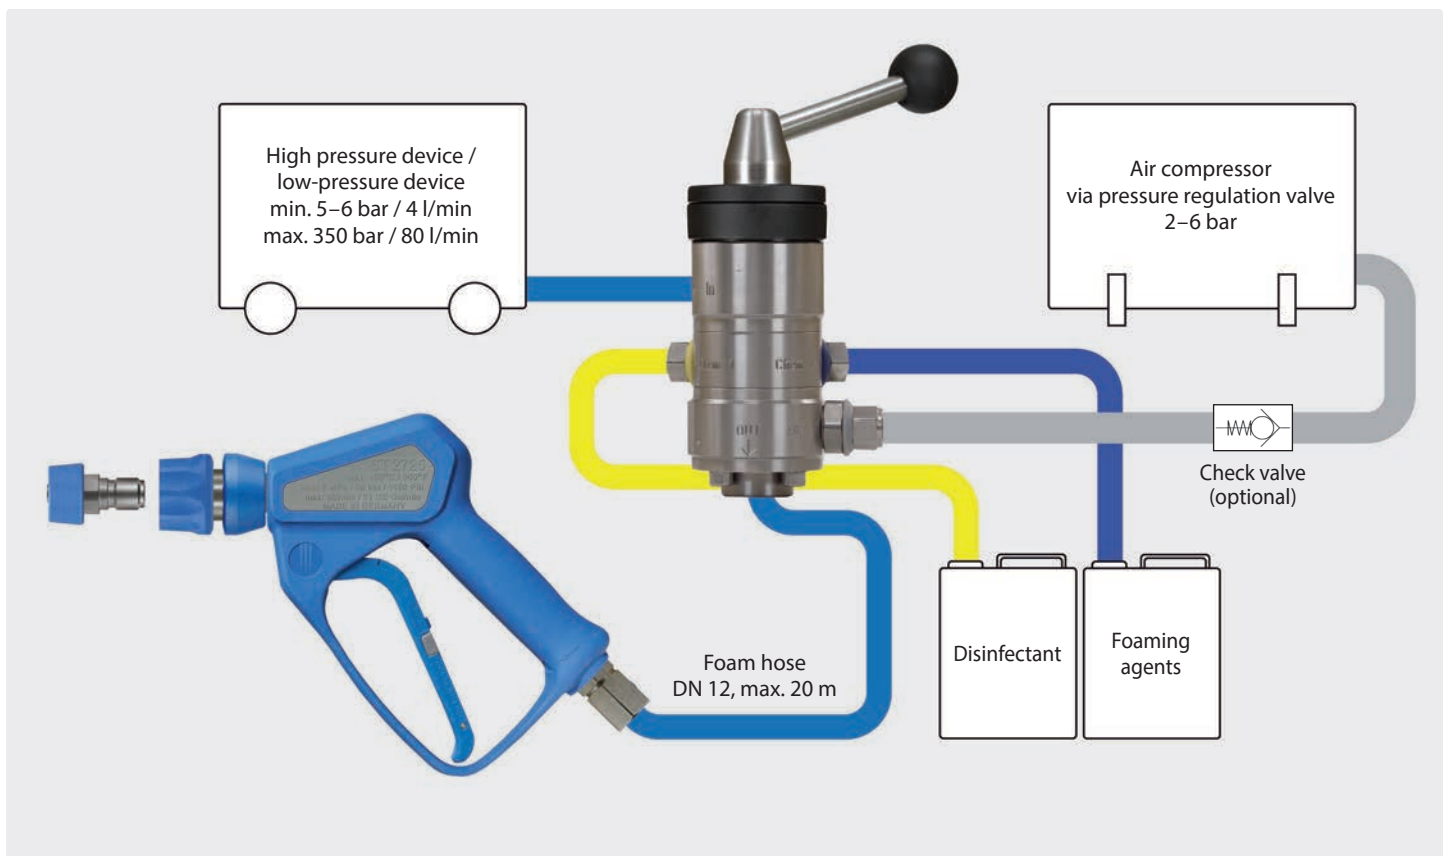Assembly scheme easyfoam365+® injectors ST-164 without compressed air module

Assembly scheme easyfoam365+® injectors ST-164 with compressed air module


easyfoamer ST-73.1 foam injector lances

Our easyfoamer ST-73.1 realizes an ideal mixing of air and cleaning agent, thus succeeding an ideal foam result.

Rely on:

- » a completely stainless steel and non-corrosive injector unit
- » the highest grade of chemical resistance
- » 5 defined dosing positions
- » 1 l and 2 l bottles
- » vertical or horizontal spray pattern
- » patent pending
- » max. 300 bar / 80 °C




1/4" F. Foam injector lance with regulator and bottle. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 750	1.25	1 l
200 073 900	1.50	1 l



1/4" F. Foam injector lance with regulator and bottle. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 755	1.25	2 l
200 073 910	1.80	2 l
200 073 950	2.10	2 l

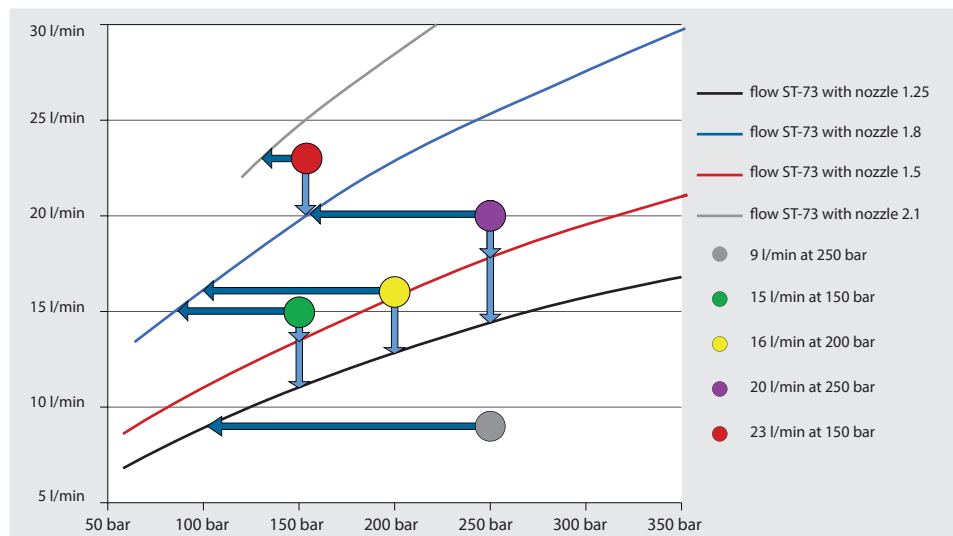

M22 M. Foam injector lance with regulator and bottle. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 512	1.25	1 l
200 073 514	1.25	2 l
200 073 614	1.80	2 l



TR20 F. Stainless steel. Foam injector lance with regulator and bottle. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 540	1.25	1 l
200 073 542	1.25	2 l
200 073 544	1.8	2 l



Plug KW. Foam injector lance with regulator and bottle. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 528	1.25	1 l
200 073 530	1.25	2 l
200 073 640	1.50	2 l
200 073 630	1.80	2 l
200 073 631	2.10	2 l



Plug KR. Foam injector lance with regulator and bottle. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 751	1.25	1

Symbols nozzle volume packing unit

easyfoamer ST-73.1 foam injector lances



Bayonet K. Plastic. Foam injector lance with regulator and bottle.
Max. 180 bar / 80 °C

R+M Nr.	D	l
200 073 536	1.25	1 l
200 073 538	1.25	2 l
200 073 638	1.80	2 l



M22 F. Foam injector lance with regulator and bottle.
Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 516	1.25	1 l
200 073 518	1.25	2 l
200 073 618	1.80	2 l



M22 F swivel. Foam injector lance with regulator and bottle.
Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 520	1.25	1 l
200 073 522	1.25	2 l
200 073 622	1.80	2 l



ST-247. Foam injector lance with regulator and bottle.
Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 760	1.25	1 l
200 073 761	1.50	1 l
200 073 762	1.25	2 l
200 073 764	1.80	2 l
200 073 765	2.10	2 l

easyfoamer ST-73.2 foam injector lances

Our latest innovation realizes an ideal mixing of air and cleaning agent, thus succeeding an ideal foam result - the new addition to the easyfoam365+family!

Rely on:

- » ideal for high flow applications
- » without foam pad
- » a completely stainless steel and non-corrosive injector unit
- » the highest grade of chemical resistance
- » 5 defined dosing positions
- » 2 l bottle
- » vertical or horizontal spray pattern
- » patent pending
- » max. 300 bar / 80 °C

Don't lose any more time and feel invited to test it now!



1/4" F. Foam injector lance with regulator and bottle. Without foam pad. Max. 300 bar / 80 °C

R+M Nr.	D	l
200 073 906	1.50	2 l
200 073 916	1.80	2 l
200 073 956	2.10	2 l

Accessories easyfoamer ST-73.1 & ST-73.2



Bottle 1 liter

R+M Nr.
020 073 525



Bottle 2 liter

R+M Nr.
020 073 520



Nozzles

R+M Nr.	D
040 073 512	1.5 *
040 073 513	2.1 **



Foam pad (ST-73.1)

R+M Nr.	VPE
540 500 09	1
540 500 10	10
540 500 11	100



Cover blue for 1 and 2 liter

R+M Nr.
020 073 522



Wall bracket.
Stainless steel.
68 mm x 95 mm.
Incl. mounting parts

R+M Nr.
200 073 425



Bottle adapter

R+M Nr.
020 073 530

* Replacement only for ST-73.1 & ST-73.2 with nozzles 1.25. ** Replacement only for ST-73.1 & ST-73.2 with nozzles 1.80

Foam injector lances

LS3 foam injector lances



Lance with regulator and bottle.
Max. 180 bar / 60 °C / 12 l/min

R+M Nr.	D	G	l
540 500	1.25	1/4" F	1 l
540 505	1.25	M22 F	1 l
540 502	1.25	M22 M	1 l
540 506	1.25	plug KW	1 l
540 503	1.25	bayonet K brass	1 l
540 504	1.25	bayonet K PVC	1 l



Foam pad

R+M Nr.
540 500 09



Bottles for LS3

R+M Nr.	G	l
540 500 25	LS3	1 l

LS10 foam injector lances



Lance with regulator and bottle. Max. 200 bar / 65 °C / 25 l/min

R+M Nr.	D	G	l
540 35	1.5	3/8" M	1 l
540 352	1.5	3/8" M	2 l
540 40	1.5	M22 M	1 l
540 402	1.5	M22 M	2 l
540 355	1.5	plug KW	1 l
540 355 2	1.5	plug KW	2 l



Bottles for LS10

R+M Nr.	G	l
540 351	LS10	1 l
540 352 1	LS10	2 l



Lance with regulator
D 1.5.

Max. 200 bar / 65 °C / 25 l/min

R+M Nr.	G
540 30	3/8" M
540 300 8	1/4" F
540 300 1	M22 F
540 300	M22 M
540 300 3	ST-3100

Foam gun



Features

- » Exceptional chemical resistance to acidic and caustic cleaner.
- » Foam generating wand creates a thick clinging foam.
- » Automatic dosing of chemicals.
- » Durable polymer mixing head with stainless steel screws.
- » Multi-ratio dial has 5 mixing settings and off.
- » Gun is removable from quick coupling for clear rinsing with water.
- » Easy filling by means of wide mouth.
- » Only works with water pipe pressure.
- » Suitable for all customary water couplings.
- » Chemical container volume 1,000 ml.

Applications

Designed for applications with acidic and caustic cleaner, soaps, disinfectants, degreasing and softening agents. The field of application is very versatile.

- » Food industry and canteen kitchen
- » Sanitary facilities and swimming baths
- » Cleaning of trucks, cars and other vehicles
- » Garages and petrol stations
- » Shops and workshops

The foam gun directly connected to the public water pipe produces a cleaning foam by means of foam injector. The water pressure sucks in the cleaning agent and air, both are being mixed to consistent foam, sprayed out via the spraying head and the foam wand. The cleaning agent can also purposely and automatically be diluted via a built-in proportioner so that the right mixture of chemical and water as foam can be chosen for the cleaning application.

Technical specifications

Water pressure 2.5 - 6 bar (for maximum accuracy 3 - 4 bar)

Output 5.5 l/min

Mixing Ratio

Multi-ratio dial has 5 mixing settings and off

A	B	C	D	E	O
1:128	1:64	1:32	1:20	1:10	off



R+M Nr.	G	l
106 996 500	incl. coupler plugs "universal"	1 l

Please use the backflow preventer (R+M Nr. 734 10) on page 27.

Symbols D nozzle G inlet l volume O thread

Disinfection cold fog device ST-83.1 / ST-83.2

The brand new ST-83.1 cold fog hand tool is ideal for small applications for fogging of disinfectants, odor neutralizers or insecticides and the ST-83.2 disinfection cold fogger is ideal for applications for fogging of disinfectants in large rooms.

- » **Inexpensive** and safe application for hygienically germ-free cleaning of interiors to remove microorganisms, viruses and bacteria. Also for use on construction sites for dust deposition or mold removal
- » **No inhalation of the disinfectant solution** as rooms do not have to be entered
- » The finest nebulization of active ingredients comes into the smallest gaps and into the last corner

» A compressed air connection is required:

83.1: Inlet pressure 3 bar, 180-220 l / min.

83.2: Inlet pressure 3 bar, 200-400 l / min

- » **Extremely productive use:** (e.g. 1 liter for rooms with 60 m³, room size of approx. 25 m² or 5 - 7 vehicle compartments, 2 liters for rooms with 120 m³, room size of approx. 50 m²)



Disinfection cold fog air device ST-83.1. For compressed air connection 3 bar, 180-220 l / min. Stainless steel / plastic

R+M Nr.	D	l
200 083 500	0.7	1 l

ST-83.1 window bracket



With elastomer protection rings.
Stainless steel

R+M Nr.
200 083 400



Disinfection cold fog air device ST-83.2. For compressed air connection 3 bar, 200-400 l / min. Stainless steel / plastic

R+M Nr.	D	l
200 083 550	0.7	2 l

ST-83 cold fog hand tool accessories

ST-83 adapter for canisters



For 5 - 30 liter canisters. Incl. 0.5 m clear PVC hose for suction of chemicals, DN 4

R+M Nr.
200 083 200

Exchangeable nozzle inserts



Plastic. 10 nozzle inserts (0.5 - 2.0 mm). Incl. o-rings

R+M Nr.
200 163 340

Two different fog nozzle inserts are included.

Better swirling:
Particularly suitable in smaller rooms such as passenger compartments.

Larger throw range.
For the treatment of entire rooms or for targeted treatment at the air intake of ventilation systems.

Sprayer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Spray lance 600 mm with nozzle. Fill level indication.
- » Suitable for the use in the car wash and industry.
- » **Available from 10 pieces in other RAL colors.**

R+M Nr.	TYP	📦
106 024 500	coated steel	24 l
106 050 500 🚚	coated steel	50 l
106 100 500 🚚	coated steel	100 l

Foamer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Foam lance 600 mm with nozzle head and 4 nozzles. Fill level indication.
- » Integrated dosing unit to realise the desired air/foam mixture. Permanent pressure exposure is required in order to achieve an uniform foam result.
- » Suitable for the use in the car wash and industry.
- » **Available from 10 pieces in other RAL colors.**

R+M Nr.	TYP	📦
106 024 550	coated steel	24 l
106 050 550 🚚	coated steel	50 l
106 100 550 🚚	coated steel	100 l

Suitable for keeping and application of liquids of the group 2 according to the directive EWG/67/548 Art. 2, para. 2 and directive EG/97/23 Art. 9. Not suitable for liquids of group 1 and especially strong alkaline solution and acids.

Accessories for sprayer and foamer

Foam hoses



Bayonet.
10 m

R+M Nr.
106 901 01

Spray hoses



1/4" M.
10 m

R+M Nr.
106 911 01

Foam head



1/2" M

R+M Nr.
106 906 0

Nozzles



Foamer.
55° 55

R+M Nr.
609 805 59



Foamer.
60° 25

R+M Nr.
609 802 59



Sprayer.
110° 04

R+M Nr.
609 110 04



Sprayer.
110° 045

R+M Nr.
609 110 045

Symbols TYP type 📦 volume 🚚 shipment by truck

Sprayer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Spray lance 600 mm with nozzle.
Fill level indication.
- » Suitable for the use in the food industry, car wash and industry.

R+M Nr.	TYP	📦
106 024 600	stainless steel AISI 304, V2A	24 l
106 050 600	stainless steel AISI 304, V2A	50 l
106 100 600	stainless steel AISI 304, V2A	100 l

Foamer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Spray lance 600 mm with nozzle.
Fill level indication.
- » Integrated dosing unit to realise the desired air/foam mixture.
Permanent pressure exposure is required in order to achieve an uniform foam result.
- » Suitable for the use in the food industry, car wash and industry.

R+M Nr.	TYP	📦
106 024 650	stainless steel AISI 304, V2A	24 l
106 050 650	stainless steel AISI 304, V2A	50 l
106 100 650	stainless steel AISI 304, V2A	100 l

Suitable for keeping and application of liquids of group 2 according to the directive EWG/67/548 Art. 2, para. 2 and directive EG/97/23 Art. 9. Not suitable for liquids of group 1.

Accessories for sprayer and foamer

Nozzle	Nozzle filters	Reduction nipples	Adaptor	Nut for nozzle	Seal
Sprayer. 110° 03	50 MESH	1/4" F : 1/2" M. Brass	Bayonet : 1/4" M	1/2" M	
R+M Nr. 609 110 03	R+M Nr. 106 909 2	R+M Nr. 575 40	R+M Nr. 106 900 1	R+M Nr. 554 714	R+M Nr. 106 909 3
		R+M Nr. 575 49			R+M Nr. 106 909 4

Chemical spray guns ST-510 & lances

Chemical spray gun ST-515



Gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 70 l/min / 50 °C

R+M Nr.		
200 515 500	1/2" F	1/2" F

Chemical spray gun ST-515 with trigger guard



Gun with trigger guard and stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 70 l/min / 50 °C

R+M Nr.		
200 515 510	1/2" F	1/2" F


Trigger guard for chemical spray gun ST-515



Trigger guard for retrofitting.

R+M Nr.
200 515 480

Filter for chemical spray gun ST-515



Plastic. Max. 50 °C

R+M Nr.
500 04


Chemical spray gun ST-515 with foam nozzle



Gun with foam nozzle and stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 70 l/min / 50 °C / nozzle 50° 200


R+M Nr.		
200 515 503	foam nozzle	1/2" F

Chemical spray guns ST-515 with lances

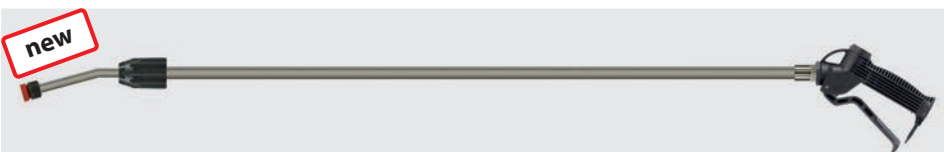

1,000 - 2,000 mm. Spray gun with telescopic lance made out of stainless steel and nozzle holder without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.		
200 515 600	nozzle holder	1/2" F

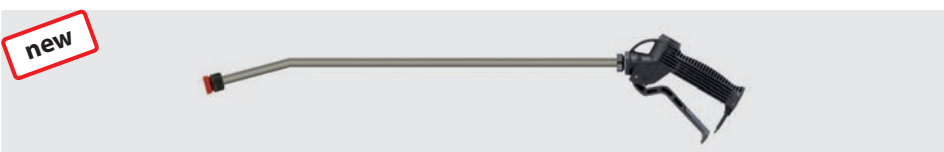

600 mm. Spray gun with lance made out of stainless steel and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.		
200 515 550	nozzle holder	1/2" F




300 mm. Spray gun with lance made out of stainless steel and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.		
200 515 560	nozzle holder	1/2" F




210 mm. Spray gun with plastic lance and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.		
200 515 710	nozzle holder	1/2" F

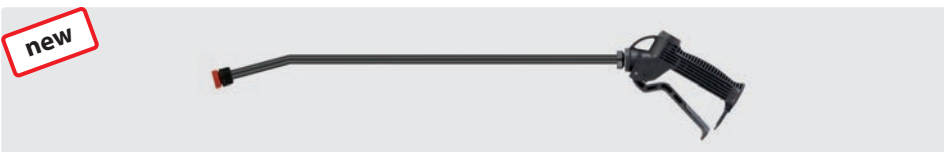

600 mm. Spray gun with lance made out of plastic and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.		
200 515 700	nozzle holder	1/2" F

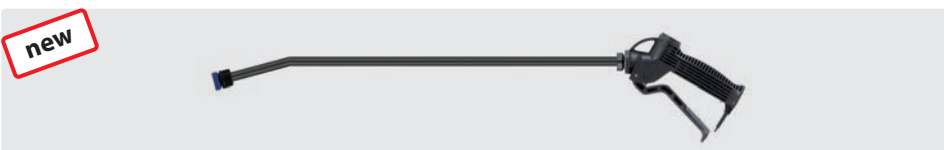

600 mm. Spray gun with lance made out of plastic and nozzle nut without nozzle. Spray gun with acid-resistant ball. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.		
200 515 705	nozzle holder	1/2" F

HACCP – Colour Coding Concept



R+M / Suttner's hygienic colour-coding concept

Suttner's color-coded concept provides a pragmatic approach to the food sector's challenges of ensuring efficient hygienic cleaning and a visibly safe physical environment in:

- » Food and beverage manufacturing facilities and throughout their supply chain
- » Professional kitchens and restaurants
- » Food-related areas of supermarkets and shops

Durable and effective accessories

All of R+M / Suttner's food-industry specific 'high hygiene' tools are made of 1935/2004/EC compliant materials and materials which meet the requirements of EC regulation 10/2011/EC regarding food contact materials and can be washed at high temperatures to eliminate germs and bacteria. All equipment is durable, fully molded to guarantee easy cleaning, and capable of maintaining a long-lasting attractive appearance. The effective tool range includes spray and foam guns, spray lances, nozzle protectors, foam lances and hoses in up to four color-code options.

HACCP - spray gun kits ST-2300, ST-2600, ST-2700

Kit contains half shells, logo plate, trigger and trigger lock



R+M Nr.
202 300 473



R+M Nr.
202 300 474



R+M Nr.
202 300 472



R+M Nr.
202 300 471

Suttner rotating nozzles in 4 colours



With effect from today we enlarge the choice of colours of the plastic plugs for our rotating nozzles ST-357, ST-456 and ST-458. In addition to the standard colour black, you are invited to take the nozzle in blue, red, yellow and green, now.

Plastic plugs for rotating nozzles ST-357

R+M Nr.	C
020 007 411	green
020 007 406	blue
020 007 412	red
020 007 409	yellow


Plastic plugs for rotating nozzles ST-456

R+M Nr.	C
020 001 047	green
020 001 041	blue
020 001 048	red
020 001 046	yellow

Plastic plugs for rotating nozzles ST-458

R+M Nr.	C
020 001 031	green
020 001 026	blue
020 001 032	red
020 001 029	yellow

Lance clips

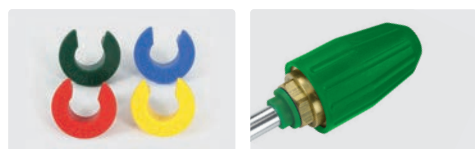

The lance clips suitable for all 1/4" lances are made out of polypropylene which is intended to come into contact with foodstuffs.

R+M Nr.	C
020 004 290	green
020 004 255	blue
020 004 260	red
020 004 230	yellow

Nozzle protector ST-11



The nozzle protector ST-11 is suitable for nozzles 1/4" M. Made out of plastics intended to come into contact with foodstuffs according to Regulation (EC) No. 1935/2004. It is clamped undetachably between the nozzle and the nozzle sleeve.

R+M Nr.	C
020 001 122	green
020 001 149	blue
020 001 121	red
020 001 123	yellow

Symbols inlet outlet thread ISO insulation length material colour



Cleantecs rotating nozzles with carbide insert	409
easyprotect365+ protection for high pressure cleaning	419
Floor cleaner heart shape, 500 bar	420
Hose protection/shroud easyprotect365+	413
Nozzles for sewer cleaning	415
Quick screw couplings ST-740 and nipples ST-741	411
Reduction nipple	414
Safety spectacles, safety goggles and face shields	418
Sewer cleaning nozzles	415
ST-2750 - the lightweight among the 500 bar spray guns	404-405
ST-540 foot valves	414
ST-550 foot valves	414
ST-559 Suttner rotating nozzles with carbide insert	408
Suttner 500 bar ultra high pressure guns	404
Suttner 600 bar ultra high pressure guns	402-403
Suttner flow switches	416
Suttner stainless steel regulation valve ST-275	417
Suttner ultra high pressure lances	406-408
Suttner ultra high pressure quick couplings ST-45-600	411
Ultra high pressure ball valves ST-3105	415
Ultra high pressure couplings 500 bar	410
Ultra high pressure hoses	412
Ultra high pressure regulation valves	416-417
Ultra high pressure relief valves	416
Ultra high pressure swivels	414
Ultra high pressure twin lances	406
Whip-stop easyprotect365+	413

Suttner 600 bar ultra high pressure guns

ST-3600



Professional ultra high pressure gun.
Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 545	1/4" F	1/2" F



Professional ultra high pressure gun.
Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 550	1/2" F	1/2" F



Professional ultra high pressure gun.
Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 570	1/2" F	1/2" F swivel



Professional ultra high pressure gun with coupling ST-45. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 655	coupling ST-45	3/8" F



Professional ultra high pressure gun with coupling ST-45. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 650	coupling ST-45	1/2" F



ST-3900 shoulder supports. New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N. Variably adjustable ST-3900. Swiveling coupling. Suitable for guns ST-3600 / ST-3500.


R+M Nr.	telescope 	
203 900 500	340 - 500 mm	505 - 675 mm

ST-351 swivels



1/2" M : 1/2" F.
Max. 600 bar

R+M Nr.
200 351 510



Repair kit swivel ST-351

R+M Nr.
200 351 400

Seal kits ST-740



O-ring

R+M Nr.
050 000 408



Back ring

R+M Nr.
050 000 407

Seal kits ST-3600



R+M Nr.
203 600 490

ST-3600



Professional ultra high pressure gun with extension ST-9 380 mm, grip and quick screw coupling ST-740. Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 532	M24 F	M24 M swivel

Suttner 600 bar ultra high pressure guns



Professional ultra high pressure gun with extension ST-9 380 mm, grip and quick screw coupling ST-740 Max. 600 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 530	M24 F	M24 M

Ultra high pressure lances



M24 M. Lance 400 mm with nozzle protector ST-10 without nozzle. Lance for ultra high pressure guns with extension ST-9. Max. 600 bar / 150 °C

R+M Nr.		
203 600 470	1/4" F NPT	M24 M

ST-3600 with lance



Professional ultra high pressure gun with lance 500 mm with grip and sleeve 1/4" F NPT stainless steel without high pressure nozzle. Max. 600 bar / 150 °C

R+M Nr.		
203 600 630	1/4" F NPT	1/2" F

ST-3600 with lance



Professional ultra high pressure gun with lance 500 mm with grip and sleeve 1/4" F NPT stainless steel without high pressure nozzle. Max. 600 bar / 150 °C

R+M Nr.		
203 600 640	1/4" F NPT	1/2" F swivel

Symbols  inlet  outlet  length

Suttner 500 bar ultra high pressure guns

ST-3600



Professional ultra high pressure gun with M22 M.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 556	M22 F	M22 M



Professional ultra high pressure gun.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 555	1/4" F	M22 M



ST-3900 shoulder supports. New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N. Variably adjustable ST-3900. Swiveling coupling. Suitable for guns ST-3600 / ST-3500.

R+M Nr.	telescope	
203 900 500	340 - 500 mm	505 - 675 mm



Professional ultra high pressure gun with extension ST-9 380 mm, grip and M22 M. Max. 500 bar / 80 l/min / 150 °C

R+M Nr.		
203 600 535	M22 F	M22 M

Ultra high pressure lances



M22 M. Lance 335 mm with nozzle protector ST-10 without nozzle. Lance for ultra high pressure guns with extension ST-9. Max. 500 bar / 150 °C

R+M Nr.		
200 000 230	1/4" F NPT	M22 M

Seal kits ST-3600



Seal kit complete

R+M Nr.	
203 600 490	

ST-2750 – the lightweight among the 500 bar spray guns

ST-2750



Professional ultra high pressure gun with patented LTF.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
202 750 500	1/4" F	3/8" F



Professional ultra high pressure gun with patented LTF.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
202 750 535	M22 F	M22 M



Professional ultra high pressure gun with patented LTF. Gun with insulated outlet suitable for lances with swivel screw coupling.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
202 750 570	M22 M	M22 M

ST-2750 - the lightweight among the 500 bar spray guns

ST-2750



LTF

Professional ultra high pressure gun with patented LTF and lance with insulation ST-9, side handle and nozzle protector ST-10 without high pressure nozzle. Max. 500 bar / 30 l/min / 150 °C

R+M Nr.				ISO		M
202 750 900	1/4" F NPT	3/8" F	760 mm	1,000 mm		stainless steel



LTF

Professional ultra high pressure gun with extension ST-9.1 240 mm and quick screw coupling ST-740. Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
202 750 610	M24 F	3/8" F

Valve complete



LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

ST-2750



LTF

Professional ultra high pressure gun with extension ST-9.1 340 mm and quick screw coupling ST-740. Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
202 750 620	M24 F	3/8" F




LTF

Professional ultra high pressure gun with extension ST-9.1 340 mm and quick screw coupling ST-740. Max. 500 bar / 30 l/min / 150 °C

R+M Nr.		
202 750 621	M24 F	3/8" F swivel

Ultra high pressure lance

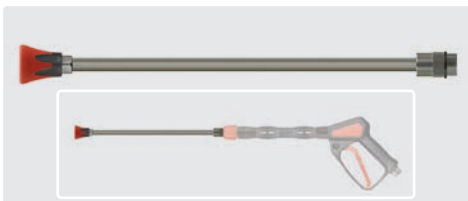

M24 M. Lance 400 mm with nozzle protector ST-10 without nozzle. Lance for ultra high pressure guns with extension ST-9.1. Max. 600 bar / 150 °C

R+M Nr.		
203 600 470	1/4" F NPT	M24 M

Shoulder supports



New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N.

R+M Nr.
202 705 590

ST-350 swivel



3/8" M : 3/8" F.
Max. 500 bar

R+M Nr.
200 350 010



Repair kit ST-350

R+M Nr.
200 300 120

Symbols inlet outlet length ISO insulation M material

Suttner ultra high pressure lances

ST-002 ultra high pressure lances



1/4" M. Lance with moulded handle. Safety factor 4. Max. 500 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
070 003 502	1/4" M	300 mm	350 mm	stainless steel
070 008 002	1/4" M	500 mm	800 mm	stainless steel
070 012 002	1/4" M	500 mm	1,200 mm	stainless steel

R+M Nr.

Ultra high pressure twin lances

ST-154



1/4" F. Lance with valve ST-154 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 500 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
200 154 510	1/4" F NPT	-	650 mm	stainless steel

R+M Nr.



1/4" M. Lance with moulded handle, valve ST-154 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 500 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
200 154 500	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.



M22 M. Lance with moulded handle, valve ST-154 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 500 bar / 150 °C

R+M Nr.	☺	ISO	↔	M
200 154 520	1/4" F NPT	300 mm	980 mm	stainless steel

R+M Nr.

Symbols ☺ inlet ☺ outlet ↔ length ISO insulation M material

Suttner ultra high pressure lances

Ultra high pressure lances ST-3600 - 600 bar



1/2" M. Lance with grip. Max. 600 bar / 150 °C

R+M Nr.				
203 600 416	1/2" M	1,500 mm	1/2" M	stainless steel
203 600 415	1/2" M	2,000 mm	1/2" M	stainless steel

R+M Nr.



1/2" M. Lance with grip and sleeve 1/4" F stainless steel without high pressure nozzle. Max. 600 bar / 150 °C

R+M Nr.				
203 600 400	1/4" F NPT	500 mm	1/2" M	stainless steel
203 600 401	1/4" F NPT	800 mm	1/2" M	stainless steel
203 600 402	1/4" F NPT	1,000 mm	1/2" M	stainless steel

R+M Nr.



1/2" M. Lance with grip for rotating nozzles with 1/4" F without rotating nozzle. Max. 600 bar / 150 °C

R+M Nr.				
203 600 411	1/4" M	500 mm	1/2" M	stainless steel
203 600 410	1/4" M	800 mm	1/2" M	stainless steel
203 600 412	1/4" M	1,000 mm	1/2" M	stainless steel

R+M Nr.



Plug ST-45. Lance with grip and sleeve 1/4" F NPT stainless steel without high pressure nozzle. Max. 600 bar / 150 °C

R+M Nr.				
203 600 444	1/4" F NPT	500 mm	plug ST-45	stainless steel

R+M Nr.



Plug ST-45. Lance with grip for rotating nozzles with 1/4" F without rotating nozzle. Max. 600 bar / 150 °C

R+M Nr.				
203 600 441	1/4" M	800 mm	plug ST-45	stainless steel

R+M Nr.

Suttner ultra high pressure lances

Lances with ergonomic swivel screw coupling



M22 M swivel Lance with ergonomic swivel screw coupling, vented handle ST-9 & grip and nozzle protector (M20x1) without tip.
Max. 650 bar / 150 °C

R+M Nr.					R+M Nr.
200 146 550 nozzle protector	700 mm	M22 F swivel	stainless steel		

ST-559 Suttner rotating nozzles with carbide insert

ST-559



1/4" F. 300 - 600 bar. Max. 90 °C

R+M Nr.	
200 559 520	02
200 559 530	03
200 559 540	04
200 559 550	05
200 559 555	055
200 559 560	06



M20x1 F. 300 - 600 bar. Max. 90 °C

R+M Nr.	
200 559 320	02
200 559 330	03
200 559 340	04



Kit ST-559

R+M Nr.
200 559 120
200 559 130
200 559 140
200 559 150
200 559 155
200 559 160

Cleantecs rotating nozzles with carbide insert

HM 500



Kit HM 500



G9/16". Spray angle 20°.
Max. 500 bar / 90 °C

R+M Nr.	D
655 500 630	03

R+M Nr.	
655 500 130	

HM 500



Kit HM 500



M20x1. Spray angle 20°.
Max. 500 bar / 90 °C

R+M Nr.	D
655 500 640	028

R+M Nr.	
655 500 130	

HM 500



Kit HM 500



M20x1. Spray angle 20°.
Max. 500 bar / 90 °C

R+M Nr.	D
655 500 650	05

R+M Nr.	
655 500 150	

HM 500



Kit HM 500



1/4" F. Spray angle 20°.
Max. 500 bar / 100 °C

R+M Nr.	D
655 500 520	02
655 500 525	025
655 500 530	03
655 500 535	035
655 500 540	04
655 500 545	045
655 500 550	05
655 500 555	055
655 500 560	06
655 500 570	07

R+M Nr.	
655 500 120	
655 500 125	
655 500 130	
655 500 135	
655 500 140	
655 500 145	
655 500 150	
655 500 155	
655 500 160	
655 500 170	

HM 700



Kit HM 700



1/4" F. Spray angle 20°.
Max. 700 bar / 100 °C.
Delivery time of approx. 1 week

R+M Nr.	D
655 700 520	02
655 700 525	025
655 700 530	03
655 700 535	035
655 700 540	04
655 700 545	045
655 700 550	05
655 700 555	055
655 700 560	06
655 700 570	07

R+M Nr.	
655 700 120	
655 700 125	
655 700 130	
655 700 135	
655 700 140	
655 700 145	
655 700 150	
655 700 155	
655 700 160	
655 700 170	

HM 1000



Kit HM 1000



1/4" F. Spray angle 20°.
Max. 1,000 bar / 100 °C.
Delivery time of approx. 1 week

R+M Nr.	D
655 100 520	02
655 100 525	025
655 100 530	03
655 100 535	035
655 100 540	04
655 100 545	045
655 100 550	05
655 100 555	055
655 100 560	06
655 100 570	07

R+M Nr.	
655 100 120	
655 100 125	
655 100 130	
655 100 135	
655 100 140	
655 100 145	
655 100 150	
655 100 155	
655 100 160	
655 100 170	

Ultra high pressure couplings 500 bar

Quick screw couplings



M22 F : F. Stainless steel

R+M Nr.	⊙
561 39	M22 : 1/4"
561 59	M22 : 3/8"



M22 F : M. Stainless steel

R+M Nr.	⊙
561 49	M22 : 1/4"
561 69	M22 : 3/8"



Back ring

R+M Nr.	VPE
050 001 440	1
781 021 391 21	100



O-ring

R+M Nr.	VPE
790 24	1
790 241 00	100

Nipples



M22 M : M. Stainless steel

R+M Nr.	⊙
565 39	M22 : 1/4"
565 59	M22 : 3/8"
565 69	M22 : 1/2"



M22 M : F. Stainless steel

R+M Nr.	⊙
565 29	M22 : 1/4"
565 49	M22 : 3/8"



M : M. Stainless steel

R+M Nr.	⊙
570 79	3/8" : 3/8"
570 89	3/8" : 1/2"



M : M. Zinc-plated steel

R+M Nr.	⊙
570 78	3/8" : 3/8"
570 88	3/8" : 1/2"

Hose connectors



DKOS M22 M : M. Stainless steel

R+M Nr.	⊙
593 142	M22 : M22



M22 M : M. Stainless steel

R+M Nr.	⊙
569 59	M22 : M22

M22 M. Solid version stainless steel
with rubber cover.
Max. 500 bar

R+M Nr.
569 49



Rubber

R+M Nr.
569 60

Straight screw connectors (bicone ring system, heavy duty series)



X-GE. Stainless steel

R+M Nr.	AG : AG	I
596 141 21	M22 : 1/2"	41 mm
596 143 81	M22 : 3/8"	39 mm



X-GE. Zinc-plated steel

R+M Nr.	AG : AG	I
581 141 21	M22 : 1/2"	41 mm

Symbols ⊙ thread VPE packing unit DN nominal diameter I height AG male thread

Quick screw couplings ST-740 and nipples ST-741

Quick screw couplings ST-740 and nipples ST-741



M24 F : M.
Max. 700 bar / 150 °C



M24 F : M.
Max. 700 bar / 150 °C



M : M24 M.
Max. 700 bar / 150 °C



M24 M : M24 M.
Max. 700 bar / 150 °C

3/8"
1/2"
M24

R+M Nr.
200 740 501
200 740 503

R+M Nr.
200 740 601

R+M Nr.
200 741 501
200 741 503

R+M Nr.
200 741 600



M24 F : F.
Max. 700 bar / 150 °C



M24 F : F.
Max. 700 bar / 150 °C



F : M24 M.
Max. 700 bar / 150 °C

1/4"
3/8"
M16x1

R+M Nr.
200 740 504
200 740 502
200 740 506

R+M Nr.
200 740 604
200 740 602

R+M Nr.
200 741 504
200 741 502

Seals



O-ring - ST-740

R+M Nr.
050 000 408



O-ring - ST-741

R+M Nr.
050 001 000



Back ring - ST-740

R+M Nr.
050 000 407

Suttner ultra high pressure quick couplings ST-45-600

Couplings and plug ST-45-600



Coupling : M. Stainless steel.
Max. 600 bar / 150 °C



Coupling : M. Stainless steel.
Max. 600 bar / 150 °C



Plug : F. Stainless steel.
Max. 600 bar / 150 °C

	DN
1/4"	8

R+M Nr.	
200 045 600	57 mm

R+M Nr.	
200 045 605	57 mm

R+M Nr.	
040 005 468	40 mm



O-ring, 11x1.5

R+M Nr.
050 000 020



Back ring, 11x14x1

R+M Nr.
050 001 430



O-ring, 10x2.5

R+M Nr.
050 000 160

Ultra high pressure hoses

Hoses with double wire braid and wrapped cover. Type 2SC. Nominal diameter 10. Safety factor 3.5. Fittings stainless steel. Max. 150 °C

Female thread (DKOS)

M22 : M22




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 177 310 9	10 m
358 177 315 9	15 m
358 177 320 9	20 m
358 177 330 9	30 m

Male thread (AGR)

3/8" : 3/8"




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 144 310 9	10 m
358 144 315 9	15 m
358 144 320 9	20 m
358 144 330 9	30 m

Quick screw couplings

M22 : M22



maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 100 310 9	10 m
358 100 315 9	15 m
358 100 320 9	20 m
358 100 330 9	30 m




Type 2SC.
Max. 500 bar

R+M Nr.	
364 100 310 9	10 m
364 100 315 9	15 m
364 100 320 9	20 m
364 100 330 9	30 m

Hoses with double wire braid and wrapped cover. Nominal diameter 10.
Fittings stainless steel. Max. 150 °C

Quick screw couplings

M24 : M24



maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 197 310 9	10 m
358 197 315 9	15 m
358 197 320 9	20 m
358 197 330 9	30 m




Type 2SC.
Max. 500 bar

R+M Nr.	
364 197 310 9	10 m
364 197 315 9	15 m
364 197 320 9	20 m
364 197 330 9	30 m



maxpressure. Type 2SN.
Max. 500 bar

R+M Nr.	
368 697 610 9	10 m
368 697 615 9	15 m
368 697 620 9	20 m
368 697 630 9	30 m




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 114 431 09	10 m
358 114 431 59	15 m
358 114 432 09	20 m
358 114 433 09	30 m



Type 2SC.
Max. 500 bar

R+M Nr.	
364 114 471 09	10 m
364 114 471 59	15 m
364 114 472 09	20 m
364 114 473 09	30 m




R+M Nr.	

Hoses with double wire braid and wrapped cover. Nominal diameter 10.
Fittings stainless steel. Max. 150 °C

Quick screw couplings : male thread

M24 : M24




maxpressure. Type 2SC.
Max. 500 bar

R+M Nr.	
358 114 431 09	10 m
358 114 431 59	15 m
358 114 432 09	20 m
358 114 433 09	30 m



Type 2SC.
Max. 500 bar

R+M Nr.	
364 114 471 09	10 m
364 114 471 59	15 m
364 114 472 09	20 m
364 114 473 09	30 m



Hoses with double wire braid and smooth cover. Nominal diameter 6.
Fittings stainless steel. Max. 150 °C

Quick screw couplings / male thread (AGR)

M22 : M22



flexy 500.
Max. 500 bar

R+M Nr.	
338 000 310 9	10 m
338 000 315 9	15 m
338 000 320 9	20 m
338 000 330 9	30 m

M22 : 1/8"



flexy 500.
Max. 500 bar

R+M Nr.	
424 300 010 9	10 m
424 300 015 9	15 m
424 300 020 9	20 m
424 300 030 9	30 m

M22 : 1/4"



flexy 500.
Max. 500 bar

R+M Nr.	
424 301 010 9	10 m
424 301 015 9	15 m
424 301 020 9	20 m
424 301 030 9	30 m

1/4" : 1/4"



flexy 500.
Max. 500 bar

R+M Nr.	
424 344 010 9	10 m
424 344 015 9	15 m
424 344 020 9	20 m
424 344 030 9	30 m

Whip-stop easyprotect365+

For securing hose ends at foot pedals, pumps or connections. Catches the broken hose and prevents it from whipping. Mounted by slipping it over the hose ends, stretching it and finally tightening the ends, securing with the rubber lock rings. Easy to carry, easy to clean.

Width approx 25 mm/1 in.

Produced and tested in accordance with EN 12195-2.




R+M Nr.	VPE	↔	M	Tensile strength
956 160 050	50	750 mm	polyester	30 kN/3 tons

Hose protection/shroud easyprotect365+

The hose is held close to vital parts of the body, so the danger of bursting hoses for the body is very high. The hose protection provides effective protection for the operator!

It was tested at 500 bar / 7500 psi. An adjustable strap keeps the hose guard securely in place.

The hose protection is very smooth and flexible.

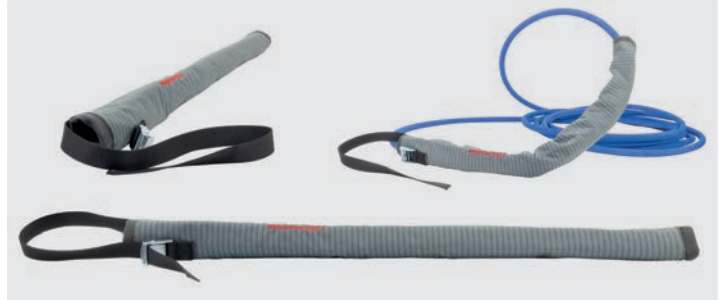

R+M Nr.	↔	∅	P
956 160 045	750 mm	41 mm	500 bar

Ultra high pressure swivels

Elbow swivel



1/2" M : 1/2" F. Inox.
Max. 600 bar

ST-350 swivel



3/8" M : 3/8" F.
Max. 600 bar



Repair kit ST-350

R+M swivel



1/4" F : 3/8" M. Housing
and axle stainless steel.
Max. 600 bar / 90 °C



Seal kit swivel for
750 280 0

R+M Nr.

178 261 330 00

R+M Nr.

200 350 010

R+M Nr.

200 300 120

R+M Nr.

750 280 0


R+M Nr.

750 200 2

ST-351 swivel



1/2" M : 1/2" F.
Max. 600 bar



Repair kit swivel ST-351

Reduction nipple



Stainless steel.
Max. 500 bar

R+M Nr.

200 351 510

R+M Nr.

200 351 400

R+M Nr.

040 002 207



1/4" F



1/8" M

ST-550 foot valves



Housing stainless steel.
Valve stainless steel.
Rubber feet.
Max. 500 bar / 80 l/min / 150 °C



Housing stainless steel.
Valve stainless steel.
Rubber feet.
Max. 500 bar / 80 l/min / 150 °C

R+M Nr.

200 550 600



1/4" F



1/4" F

R+M Nr.

200 550 620



M22 F



M22 M

ST-540 foot valves



Incl. HP-gun ST-2750.
Material housing powdercoated
steel.
Rubber feet.
Max. 500 bar / 30 l/min / 150 °C



Incl. HP-gun ST-2750.
Material housing powdercoated
steel.
Rubber feet.
Max. 500 bar / 30 l/min / 150 °C

R+M Nr.

200 540 550



1/4" M



3/8" F

R+M Nr.

200 540 560




M22 M



M22 M

Ultra high pressure ball valves ST-3105

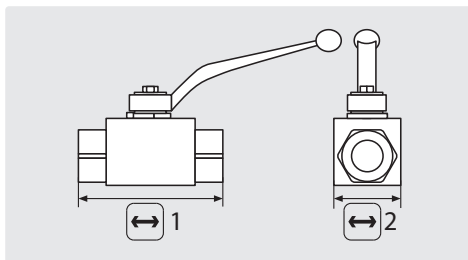


Stainless steel V4A / AISI 316 Ti. Ball stainless steel.
Max. 500 bar / 80 °C

R+M Nr.	1	2	
707 15	69 mm	26 mm	1/4" F
707 25	72 mm	32 mm	3/8" F
707 35	83 mm	35 mm	1/2" F

Sewer cleaning nozzles


Rotating nozzles RT . 1,000 bar



1/8" F. Side jet 2. Front jet 2. Stainless steel.
Rotating body hp-bronze. Compact model,
universally applicable. Extreme cleaning
performance, removes hard deposits. 1 80 mm.
2 12 mm. Weight 0.18 kg.
Max. 1,000 bar

R+M Nr.	
652 710 006	6 l / 100 bar
652 710 010	10 l / 100 bar
652 710 012	12 l / 100 bar
652 710 014	14 l / 100 bar

Rotating nozzles RH . 1,000 bar



1/8" F. Side jet 2. Stainless steel. Rotating
body hp-bronze. Compact model, universally
applicable. Extreme cleaning performance,
removes hard deposits. 1 63 mm. 2 12 mm.
Weight 0.18 kg.
Max. 1,000 bar

R+M Nr.	
652 810 006	6 l / 100 bar
652 810 010	10 l / 100 bar
652 810 014	14 l / 100 bar

Nozzles for sewer cleaning

Suttner nozzles for sewer cleaning ST-49.3



1/8" F. Nozzle with traction. Stainless steel.
Hardened stainless steel body. Compact model,
universally applicable. Extreme cleaning
performance.
2 12 mm.
Max. 500 bar

R+M Nr.	D
200 049 950	05
200 049 970	07

Symbols inlet outlet 1 height 2 length 3 diameter 4 thread 5 flow D nozzle

Suttner flow switches

ST-505 flow switches 600 bar



Floater VA with hole.
Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	 °C		cable 
200 505 706	3/8" F	vertical	3.3/1.8	80	30 l/min	1,200 mm
200 505 709	3/8" F	vertical	2.9/1.7	80	30 l/min	3,600 mm



Floater brass without hole.
Contact 1 A - 250 V.

R+M Nr.		mount	closed/open	 °C		cable 
200 505 708	3/8" F	vertical	0.5/0.1	80	30 l/min	1,200 mm
200 505 711	3/8" F	vertical	0,5/0.1	80	30 l/min	3,600 mm



Floater VA without hole. Contact 1 A - 250 V

R+M Nr.		mount	closed/open	°C		cable 
205 505 707	3/8" F	vertical	1.8/1.3	80	30 l/min	1,200 mm

Floater ST-505 with hole

R+M Nr.
200 005 301

R+M Nr.	cable ←
200 005 435	1,200 mm
200 005 438	3,500 mm

Floater ST-505 without hole

R+M Nr.
200 005 526

R+M Nr.	cable
200 005 435	1,200 mm
200 005 438	3,500 mm

Floater ST-505 without hole

R+M Nr.
200 005 311

REED switch

R+M Nr.
200 005 438

Ultra high pressure regulation valves

VB60/600



Stainless steel. $\odot$ = inlet 1/2" F. $\ominus$ = outlet 1/2" F. $\square$ = bypass 1/2" F.
Max. 600 bar / 90 °C

R+M Nr.	←
532 260 0	60 l/min

H560



Stainless steel. $\square$ = bypass 1/2" F. $\square$ = pressure gauge 1/4" F.
Max. 500 bar / 80 °C / 60 l/min

R+M Nr.	$\odot$	$\ominus$
100 005 60	1/2" F	1/2" F

BKX



$\square$ = bypass 3/4" F.
Max. 600 bar / 80 °C / 60 l/min

R+M Nr.	$\odot$	$\ominus$
010 000 02	1/2" F	1/2" F

VB60/600



Stainless steel. $\odot$ = inlet 1/2" F. $\ominus$ = outlet 1/2" F. $\square$ = bypass 1/2" F.
Regulation valve with switch (IP55) and cable 950 mm.
Max. 600 bar / 90 °C

R+M Nr.	←
532 265 0	60 l/min

Ultra high pressure relief valves

VS 500



$\square$ 222 mm. Max. 500 bar / 80 l/min / 90 °C

R+M Nr.	$\square$	$\odot$
532 520 0	3/8" F	1/2" F

S3



$\square$ 110 mm. Max. 580 bar at 31,5 l/min.
Max. 185 bar at 100 l/min. Max. 60 °C.

R+M Nr.	$\odot$
010 002 15	1/2" M


Ultra high pressure regulation valves

ST-230-700 Pressure regulating valve

Seal possible




1 165 mm. Max. 40 l/min / 60 °C.
Short-term max. 85° C

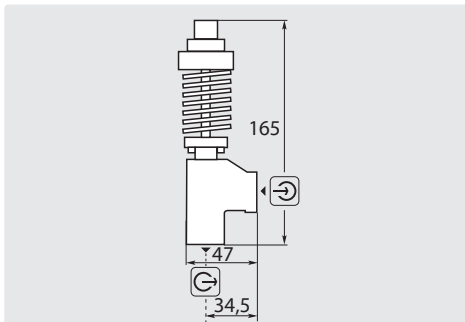

R+M Nr.	⊖	⊕	P
200 230 700	3/8" F	1/4" F	200-700 bar


Repair kit

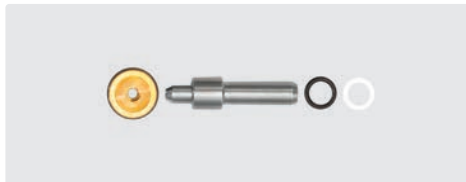

ST-230-700

R+M Nr.
200 230 400

Jetbreaker

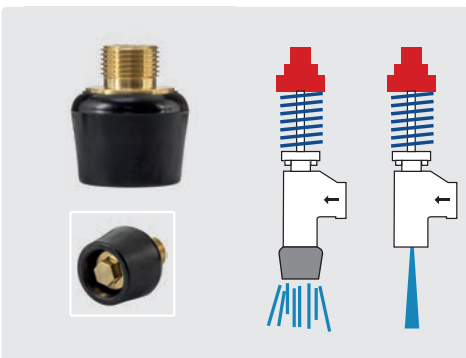

1 27 mm


R+M Nr.	⊕
200 230 410	3/8" M

ST-220 Pressure regulating valve

Seal possible




1 146 mm. Max. 50 l/min / 60 °C.
Short-term max. 85° C

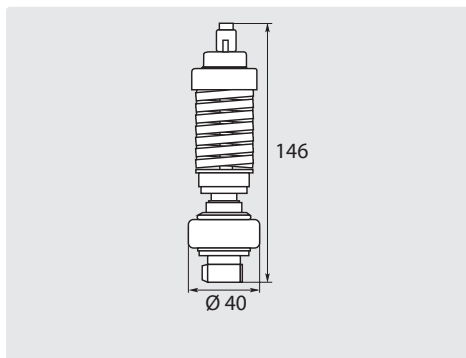

R+M Nr.	⊕	P
200 220 500	1/2" M	200-700 bar

Suttner stainless steel regulation valve ST-275

ST-275

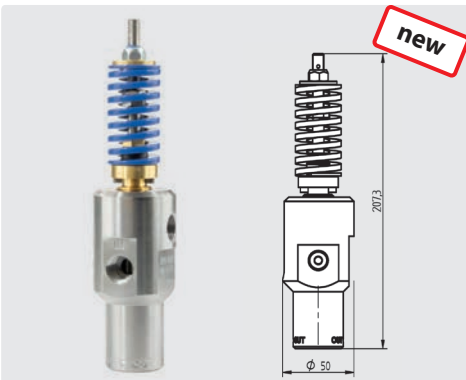

⊕ = Inlet 3/8" F. ⊖ = Outlet 1/2" F.
BP = Bypass 3/8" F. Valve ball made of high-performance ceramic.
Max. 500 bar / 90 °C

R+M Nr.	1
200 275 500	40 l/min

Hand grip



For 200 275 500 and
200 275 550

ST-275 with switch



⊕ = Inlet 3/8" F. ⊖ = Outlet 1/2" F.
BP = Bypass 3/8" F. Valve ball made of high-performance ceramic. With pressure switch (IP 6K7) and cable 1,200 mm.
Max. 500 bar / 90 °C

R+M Nr.	1
200 275 550	40 l/min

Repair/retrofit kit switch ST-275



Switch for Suttner unloader valve ST-275. Protection class IP 6K7. Cable 1.200 mm, 3xAWG20. Maximum inrush current: 10 mA-5 A (2 A). Voltage: 12-24 VDC, 12-250 VAC

R+M Nr.
200 265 430

Symbols ⊖ length 1 height ⊕ thread ⊖ flow °C temperature D nozzle Ø diameter

Safety spectacles, safety goggles and face shields

Safety spectacles



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Panoramac field of vision
- » EN166 - EN170
- » Protected against shock, splinters and solid particle
- » Weight 30 g

R+M Nr.

985 600 891 5



- » Anti-fog and scratch-proof polycarbonate smoke lens
- » Panoramac field of vision
- » 100 % UV-protection
- » Protected against shock, splinters and solid particle
- » Weight 30 g

R+M Nr.

956 002 820

Flip-up face shields



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Adjustable headgear
- » 100 % UV-protection
- » Protected against shock, splinters, solid particle and chemical danger (dangerous drops)
- » Weight 200 g

R+M Nr.

956 003 487

Safety goggles with temples



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Straight temples with adjustable strap. Integrated side protection. Exchangeable plastic foam rim with indirect ventilation
- » Including microfibre cloth
- » 100 % UV-protection
- » Shockproof in case of extreme temperatures
- » Protected against shock, splinters, solid particle and liquids
- » Weight 52 g

R+M Nr.

956 004 828

Safety goggles with adjustable strap



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Fits over prescription spectacles. Ball-pivot. Fits with respiratory half mask
- » 100 % UV-protection
- » Shockproof in case of extreme temperatures. Resistant to chemical drops, toxic gases, small and big toxic particle, melting metals and hot solids
- » Weight 105 g

R+M Nr.

985 600 996 6

The accident prevention regulations of the Employer's Liability Insurance Association regarding "the use of high pressure cleaner" (BGV D15) and "tasks with liquid jets" (BGV D26) prescribe that adequate eye and face protection have to be worn in case of an operating pressure of 25 bar and more.

easyprotect365+ protection for high pressure cleaning

easyprotect365+ professional protective clothing for abrasive blasting operations up to 500 bar / 7,500 psi.

The strongest fiber in the world for the toughest demands of the world. Thanks Dyneema any application grown to safely master the most difficult tasks.

The perfect protection for people who work professionally with high-pressure cleaner not only in the industry.

Comfort, function and safety

Until now there has been no adequate protection for high pressure cleaning.

Nothing that corresponded to the achievements of modern devices or user requirements on comfort and functionality. Our experience with water blasting work at high pressures (up to 500 bar / 7,500 psi) and other personal protective equipment are the basis for our new clothing range. **easyprotect365+ protection for high pressure cleaning.**

Ideal protection for abrasive blasting of concrete rehabilitation works, shipyards, petrochemical and steel industry.

Apron



- » 3-layer apron with CE certification
- » Security for blasting work up to 500 bar
- » Ideal for work in warm environments
- » Adjustable carrying band, waist band
- » Easy to put on and waterproof
- » Weight 0.7 kg
- » One Size
- » Protection class 5/5/2

Special gloves



- » Special gloves with CE certification
- » Security for blasting work up to 500 bar
- » Sand-rubber coating for maximum grip
- » Extra inner glove made of nylon
- » Protection class 5 cut 4 abrasion, tear and cut resistance
- » In two sizes 8 / 11
- » Protection class 5/5/2

Protective boots



- » Protective boots with CE Certification
- » Security for blasting work up to 500 bar
- » Designed for long working in rough conditions
- » Textile lining for maximum comfort
- » Waterproof and anti-slip sole
- » Weight 2.8 kg
- » Sizes 42 - 48
- » Protection class 5/5/3

R+M Nr.
956 123 501

R+M Nr.	size
956 100 502	11

R+M Nr.	EUR	US	UK
956 152 501	42	9	8
956 152 502	43	9.5	9
956 152 503	44	10.5	10
956 152 504	45	11.5	11
956 152 505*	46	12	11.5

Protection class 5/5/3

- rotating nozzle 500 bar/7,500 psi
- flat jet 500 bar/7,500 psi
- point jet 300 bar/4,350 psi

CE 89/686/EEC

Protection class 5/5/2

- rotating nozzle 500 bar/7,500 psi
- flat jet 500 bar/7,500 psi
- point jet 200 bar/3,000 psi

CE 89/686/EEC

Note - load capacity for point jet:
300 bar / 4,350 psi

* limited stock

Floor cleaner heart shape, 500 bar



- » High-quality stainless steel version with lance holder at the push handle
- » **Working width 1,200 mm**
- » 3 variable rotary swivel bars with two spray nozzles each
- » 2 big industrial castors $\varnothing$ 400 mm and 1 double guide roll $\varnothing$ 160 mm
- » The integrated screen filter prevents that the nozzles get clogged
- » includes ST-45/600 coupling
- » 6 nozzles 1/4" M BSP are required
- » Min. 150 bar / **max. 500 bar**
- » Min. 30 l/min. / max. 60 l/min.
- » Max. 90 °C




R+M Nr.				
710 100 123	ST-45/600 coupling	min. 150 bar / max. 500 bar	90°	36 kg




24° DIN Compression pipe couplings stainless steel V4A 1.4571 / AISI 316 TI	424
24° DIN Compression pipe couplings zinc-nickel coating	425
Accessories for hose reels	435-436, 439-440, 443, 448-449
Accessories for ST-71	446
Accessories STKI with electric drive	444
Automatic hose reel, mounted with pre-assembled HP-hoses	440-442
Automatic hose reels	434-435, 438-439
Bypass valve with pneumatic control	429
Compression fittings (bicone ring system)	426
Compression pipe couplings	427
Distributor connector block	447
High pressure ball valves	428
High pressure ball valves ST-3105	427
High pressure hose reels	443, 445, 447
High pressure hose reels ST-71	446
High pressure hose reels with electric drive	444
High pressure pipes	423
High pressure solenoid valves closed in off-position	428
Hose guide system . stainless steel V2A / AISI 304 . 28 x 30 mm profile	431
Hose guide system . zinc-plated steel . 28 x 30 mm profile	430-431
Hose guide system . zinc-plated steel . 32 x 30 mm profile	432-433
Inox automatic hose reels	437
Mounting bracket	427
Pipe holder	422
Pressure gauge fitting	427
Screw clamps / fixing material	423
ST-550 AIR 2/2 valve – Pneumatically operated high pressure valve	429
ST-71 hose reels with sewer cleaning hose assembly	446
Universal hose guide ST-71	447
Water tank for wall mounting	447

Pipe holder

Assembly on welding plate




Holder including bolts, discs and welding plate.



Holder including bolts, discs and welding plate.

Simple assembly




Holder including bolts and discs, zinc-plated steel. Suitable for twin assembly and assembly on double welding plate.

R+M Nr.	Ø	M
598 100 49	10	stainless steel
598 120 49	12	stainless steel
598 150 49	15	stainless steel
598 160 49	16	stainless steel
598 180 49	18	stainless steel
598 200 49	20	stainless steel
598 220 49	22	stainless steel


R+M Nr.		
598 100 4	10	zinc-plated steel
598 120 4	12	zinc-plated steel
598 150 4	15	zinc-plated steel
598 160 4	16	zinc-plated steel
598 180 4	18	zinc-plated steel
598 200 4	20	zinc-plated steel
598 220 4	22	zinc-plated steel

R+M Nr.		
598 100 3	10	zinc-plated steel
598 120 3	12	zinc-plated steel
598 150 3	15	zinc-plated steel
598 160 3	16	zinc-plated steel
598 180 3	18	zinc-plated steel
598 200 3	20	zinc-plated steel
598 220 3	22	zinc-plated steel

For assembly on support




Holder including nuts for track and bolts with discs.



Holder including nuts for track and bolts with discs.

Twin assembly



Holder including twin bolts and fixing support.
Zinc-plated steel

R+M Nr.	Ø	M
598 100 19	10	stainless steel
598 120 19	12	stainless steel
598 150 19	15	stainless steel
598 160 19	16	stainless steel
598 180 19	18	stainless steel
598 200 19	20	stainless steel
598 220 19	22	stainless steel

R+M Nr.		
598 100 1	10	zinc-plated steel
598 120 1	12	zinc-plated steel
598 150 1	15	zinc-plated steel
598 160 1	16	zinc-plated steel
598 180 1	18	zinc-plated steel
598 200 1	20	zinc-plated steel
598 220 1	22	zinc-plated steel



R+M Nr.		
598 150 2	15	zinc-plated steel
598 160 2	16	zinc-plated steel
598 180 2	18	zinc-plated steel
598 200 2	20	zinc-plated steel
598 220 2	22	zinc-plated steel

Support pipe holder



Length 2 m

R+M Nr.	(M)
598 002 09	stainless steel



R+M Nr.	(M)
040 003 895	stainless steel

Symbols pipe diameter in mm material diameter packing unit wall thickness pressure weight shipment by truck

Screw clamps / fixing material

Pipe clamps



Stainless steel V2A. 1.4301 / AISI 304

R+M Nr.	Ø
598 912 169	12 - 16 mm
598 915 199	15 - 19 mm
598 920 239	20 - 23 mm



Hanger bolt. Stainless steel. M8 x 80

R+M Nr.
598 010 809

Hammer head screws



M8 x 30.

Zinc-plated steel

R+M Nr.	VPE
107 902 1	1
107 902 0	50




M8 x 30. Stainless steel.

R+M Nr.	VPE
107 902 9	1
107 902 8	50

High pressure pipes

Seamless per metre

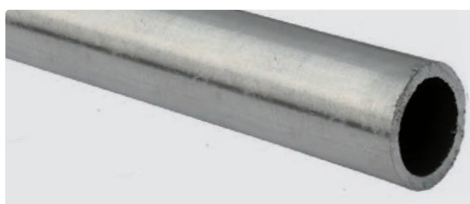

Stainless steel - according to DIN 2391 and 17458/1 or **galvanized steel / chromated** / E235 + N according to EN 10305-4 (DIN 2445/2). Production length 5-7 m - (Minimum order). The calculation is per meter, plus cost per cut (599 000 0).

Other dimensions and grades of stainless steel are available on request.

Ø	R+M Nr.	M	N	P	Ø
10	599 101 0	Stainless steel V2A / AISI 304	1.5 mm	297 bar	0.319 kg/m
10	599 101 51	Galvanized steel / chromated	1.5 mm	385 bar	0.314 kg/m
12	599 121 5	Stainless steel V2A / AISI 304	1.5 mm	241 bar	0.394 kg/m
12	599 121 51	Galvanized steel / chromated	1.5 mm	305 bar	0.388 kg/m
15	599 151 5	Stainless steel V2A / AISI 304	1.5 mm	189 bar	0.507 kg/m
15	599 151 51	Galvanized steel / chromated	1.5 mm	249 bar	0.499 kg/m
16	599 162 0	Stainless steel V2A / AISI 304	2.0 mm	252 bar	0.701 kg/m
16	599 162 02	Stainless steel V4A / AISI 316Ti	2.0 mm	305 bar	0.701 kg/m
16	599 162 01	Galvanized steel / chromated	2.0 mm	305 bar	0.691 kg/m
18	599 182 0	Stainless steel V2A / AISI 304	2.0 mm	221 bar	0.801 kg/m
20	599 202 0	Stainless steel V2A / AISI 304	2.0 mm	196 bar	0.901 kg/m
22	599 222 0	Stainless steel V2A / AISI 304	2.0 mm	177 bar	1.000 kg/m

Despatch for pipes (length 5-7 m)

In case of less than 5 rods the despatch can only be effected by UPS. The rods are then cut (max. 2 m).

Ø	parcel service (approx. 2 m)
10	3-9 pieces (6-27 m)
12	3-9 pieces (6-27 m)
15	3-9 pieces (6-27 m)
16	3-9 pieces (6-27 m)
18	3-9 pieces (6-27 m)
20	3-9 pieces (6-27 m)
22	3-9 pieces (6-27 m)

In case of 5 rods (30 m) or more the uncut lengths are sent by freight forwarding.

Ø	forwarding (approx. 5-7 m)
10	from 5 pieces (from 30 m)
12	from 5 pieces (from 30 m)
15	from 5 pieces (from 30 m)
16	from 5 pieces (from 30 m)
18	from 4 pieces (from 24 m)
20	from 4 pieces (from 24 m)
22	from 4 pieces (from 24 m)

Which diameter?

Ø	water flow
10	up to 600 l/h
12	up to 900 l/h
15	up to 1,100 l/h
16	up to 1,200 l/h
18	up to 1,500 l/h
20	up to 2,400 l/h
22	up to 3,600 l/h

Do not hesitate to ask for current prices!

24° DIN Compression pipe couplings stainless steel V4A 1.4571 / AISI 316 TI

Standard tube connection program complies with DIN 2353 and ISO 8434-1

Type GAI, cone 24°



R+M Nr.	RØ	Ø	TYP	↔
592 101 4	10	1/4"	L	39
592 13	12	3/8"	L	41
592 15	15	3/8"	L	45
592 17	15	1/2"	L	46
592 18	18	1/2"	L	47
592 16	16	1/2"	S	50
592 161	16	M22	S	52

Type GE, cone 24°



R+M Nr.	RØ	Ø	TYP	↔
581 09	8	1/4"	L	37
596 101 4	10	1/4"	L	38
596 121 4	12	1/4"	L	39
596 123 8	12	3/8"	L	39
596 121 2	12	1/2"	L	42
596 153 8	15	3/8"	L	40
596 151 2	15	1/2"	L	40
596 183 8	18	3/8"	L	43
596 181 2	18	1/2"	L	45
591 12	12	3/8"	S	46
591 120	12	1/2"	S	48
591 14	16	3/8"	S	48
591 16	16	1/2"	S	51

Type G, cone 24°



R+M Nr.	RØ	TYP	↔
593 081	8	L	41
593 101	10	L	43
593 121	12	L	44
593 15	15	L	46
593 18	18	L	49
593 22	22	L	53
593 12	12	S	52
593 16	16	S	58
593 20	20	S	66

Type T, cone 24°



R+M Nr.	RØ	TYP	↔
595 101	10	L	60
595 121	12	L	64
595 15	15	L	72
595 18	18	L	80
595 22	22	L	88
595 12	12	S	76
595 16	16	S	86
595 20	20	S	96

Type W, cone 24°



R+M Nr.	RØ	TYP	↔
594 101	10	L	30
594 121	12	L	32
594 15	15	L	36
594 18	18	L	40
594 22	22	L	44
594 12	12	S	38
594 16	16	S	43
594 20	20	S	48

Type REDV, cone 24°

Straight reducer with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	RØ	TYP	↔
593 121 02	12	10	L	42
593 151 22	15	12	L	46
593 181 52	18	15	L	45
593 161 22	16	12	S	48

Type EWVD, cone 24°

90° elbow connector with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	TYP	↔
594 101 02	10	L	30
594 121 22	12	L	32
594 151 52	15	L	36
594 161 62	16	S	43

Type ETVD, cone 24°

Branch Tee with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	TYP	↔
595 101 02	10	L	60
595 121 22	12	L	64
595 151 52	15	L	72
595 161 62	16	S	86

Type ELVD, cone 24°

Run Tee with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	TYP	↔
595 101 03	10	L	58
595 121 23	12	L	61
595 151 53	15	L	69
595 161 63	16	S	78

Type EGV-D-R-WD, cone 24°

Straight connector with 24° DKO swivel



R+M Nr.	RØ	Ø	TYP	↔
596 101 42	10	1/4"	L	27
596 103 82	10	3/8"	L	29
596 123 82	12	3/8"	L	34
596 151 22	15	1/2"	L	32
596 161 22	16	1/2"	S	37

Please follow the assembly instructions
DIN 3859.

Which operating pressure for stainless steel?

LL = light series
L = solid series
S = heavy duty series
Other connections are available on request.

TYP	Nominal pressure acc. to DIN 2401
LL (4 - 8)	100 bar
L (6 - 10)	315 bar
L (12 - 18)	315 bar
L (22 - 42)	160 bar
S (6 - 10)	630 bar
S (12 - 16)	490 bar
S (20 - 38)	315 bar

Symbols RØ pipe diameter in mm Ø thread ↔ length in mm TYP type

24° DIN Compression pipe couplings zinc-nickel coating

The optimised zinc-nickel coating has demonstrated values in excess of 1,200 hours corrosion protection against white rust during testing in accordance with DIN EN ISO 9227.

Type GAl, cone 24°



R+M Nr.	RØ	Ø	TYP	↔
580 101 4	10	1/4"	L	40
580 123 8	12	3/8"	L	41
580 153 8	15	3/8"	L	43
581 56	18	1/2"	L	47
580 123 81	12	3/8"	S	43
580 161 21	16	1/2"	S	50

Type GE, cone 24°



R+M Nr.	RØ	Ø	TYP	↔
581 101 4	10	1/4"	L	38
581 121 4	12	1/4"	L	39
581 123 8	12	3/8"	L	39
581 121 23	12	1/2"	L	42
581 153 8	15	3/8"	L	40
581 81	15	1/2"	L	43
581 183 8	18	3/8"	L	41
581 181 2	18	1/2"	L	45
581 123 81	12	3/8"	S	45
581 121 21	12	1/2"	S	48
581 163 8	16	3/8"	S	48
581 80	16	1/2"	S	51

Type G, cone 24°



R+M Nr.	RØ	TYP	↔
581 101 0	10	L	41
581 121 2	12	L	44
581 151 5	15	L	46
581 181 8	18	L	40
581 222 2	22	L	53
581 121 22	12	S	52
581 161 6	16	S	58

Type T, cone 24°



R+M Nr.	RØ	TYP	↔
585 510	10	L	60
585 512	12	L	64
585 515	15	L	72
585 518	18	L	80
585 522	22	L	88
585 512 1	12	S	76
585 516 1	16	S	86

Type W, cone 24°



R+M Nr.	RØ	TYP	↔
583 101 0	10	L	30
583 121 2	12	L	32
583 151 5	15	L	36
583 181 8	18	L	40
583 121 21	12	S	38
583 161 6	16	S	43

Type REDV, cone 24°

Straight reducer with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	RØ	TYP	↔
586 121 02	12	10	L	42
586 151 22	15	12	L	47
586 181 52	18	15	L	45
586 161 22	16	12	S	49

Type EWVD, cone 24°

90° elbow connector with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	TYP	↔
583 101 02	10	L	30
583 121 22	12	L	32
583 151 52	15	L	37
583 161 62	16	S	43

Type ETVD, cone 24°

Branch Tee with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	TYP	↔
585 101 02	10	L	60
585 121 22	12	L	64
585 151 52	15	L	74
585 161 62	16	S	86

Type ELVD, cone 24°

Run Tee with 24° DKO swivel and 24 °Cone end



R+M Nr.	RØ	TYP	↔
585 101 03	10	L	59
585 121 23	12	L	62
585 151 53	15	L	70
585 161 63	16	S	80

Type EGVd-R-WD, cone 24°

Straight connector with 24° DKO swivel



R+M Nr.	RØ	Ø	TYP	↔
581 101 42	10	1/4"	L	41
581 103 82	10	3/8"	L	42
581 123 82	12	3/8"	L	47
581 151 22	15	1/2"	L	48
581 161 22	16	1/2"	S	52

Please follow the assembly instructions
DIN 3859.

Which operating pressure for carbon steel ZnNi coating?

LL = light series
L = solid series
S = heavy duty series
Other connections are available on request.

TYP	Nominal pressure acc. to DIN 2401
LL (4 - 8)	100 bar
L (6 - 10)	500 bar
L (12 - 18)	100-400 bar
L (22 - 42)	250 bar
S (6 - 10)	800 bar
S (12 - 16)	630 bar
S (20 - 38)	420 bar

Altemp Q NB 50



Grease for compression pipe couplings

R+M Nr.
953 60

Compression fittings (bicone ring system)

Straight screw connectors



X-GE. Zinc-plated steel

R+M Nr.	TYP	AG : AG	I
580 90	6 LL	M10 : 1/8"	20
580 95	6 L	M12 : 1/8"	23
580 98	6 L	M12 : 1/4"	28
580 99	8 L	M14 : 1/8"	24
581 00	8 L	M14 : 1/4"	29
581 05	8 L	M14 : 3/8"	31
581 10	10 L	M16 : 1/4"	30
581 20	10 L	M16 : 3/8"	28
581 25	10 L	M16 : 1/2"	34
581 50	12 L	M18 : 1/4"	31
581 60	12 L	M18 : 3/8"	28
581 55	12 L	M18 : 1/2"	31
581 141 21	14 S	M22 : 1/2"	41



X-GE. Stainless steel

R+M Nr.	TYP	AG : AG	I
581 19	10 L	M16 : 1/4"	30
581 29	10 L	M16 : 3/8"	28
581 59	12 L	M18 : 1/4"	31
581 69	12 L	M18 : 3/8"	28
596 143 81	14 S	M22 : 3/8"	39
596 141 21	14 S	M22 : 1/2"	41

Straight screw connectors



X-GAI. Zinc-plated steel

R+M Nr.	TYP	IG : AG	I
580 00	6 L	1/4" : M12	25
580 10	8 L	1/4" : M14	31
580 20	10 L	1/4" : M16	32
580 50	10 L	3/8" : M16	28
580 30	12 L	1/4" : M18	33
580 40	12 L	3/8" : M18	33



X-GAI. Stainless steel

R+M Nr.	TYP	IG : AG	I
580 29	10 L	1/4" : M16	32
580 39	12 L	1/4" : M18	33

Nominal pressure according to DIN 2401

LL = light series

L = solid series

S = heavy duty series

Other connections are available on request.

TYP	Stainless steel	Zinc-plated steel
LL (4 - 8)	100 bar	100 bar
L (6 - 10)	315 bar	500 bar
L (12 - 18)	315 bar	100-400 bar
L (22 - 42)	160 bar	250 bar
S (6 - 10)	630 bar	800 bar
S (12 - 16)	490 bar	630 bar
S (20 - 38)	315 bar	420 bar

Double nipples / connectors



X-G. Zinc-plated steel

R+M Nr.	TYP	AG	I
581 30	10 L	M16	27
581 70	12 L	M18	28



X-G. Stainless steel

R+M Nr.	TYP	AG	I
581 79	12 L	M18	28

Elbows

WE-R. Zinc-plated steel.
With nut & bicone ring

R+M Nr.	TYP	AG	Ø	I
583 00	6 L	1/8"	6	28
583 20	12 L	3/8"	12	35
583 121 4	12 L	1/4"	12	35

Pipe pieces

EG. Zinc-plated steel.
Nut & bicone ring premounted

R+M Nr.	TYP	Ø : AG	Ø	I
581 12	8 L	M14 : 1/4"	8	42
581 11	10 L	M16 : 1/4"	10	40
581 138 2	10 L	M16 : 3/8"	10	44
581 61	12 L	M18 : 3/8"	12	47
581 619*	12 L	M18 : 3/8"	12	47
581 13	12 L	M18 : 1/4"	12	47

X-EG. Zinc-plated steel.
Without nut & bicone ring

R+M Nr.	Ø : AG	Ø	I
582 25	M18 : 3/8"	12	47

Bicone rings



Zinc-plated steel

R+M Nr.	TYP	Ø
584 102	L / S	10
584 122	L / S	12

Nut



Zinc-plated steel

R+M Nr.	TYP	Ø
584 101	10 L	M16
584 121	12 L	M18

* Stainless steel

Symbols TYP type IG female thread AG male thread I height I length Ø diameter Ø pipe diameter Ø thread M material P pressure

Compression pipe couplings

Stop nuts



Stainless steel V4A 1.4571 / AISI 316 Ti.
Stop nuts as per DIN 3870

R+M Nr.	Ø
590 081	M14 x 1.5
590 101	M16 x 1.5
590 121	M18 x 1.5
590 123	M20 x 1.5
590 151	M22 x 1.5
590 163	M24 x 1.5
590 181	M26 x 1.5
590 203	M30 x 2
590 221	M30 x 2
590 303	M42 x 2

Bicone rings



Hardened stainless steel. Bicone ring
as per DIN 3861 Form B

R+M Nr.	RØ	TYP
590 082	8 mm	L
590 102	10 mm	L
590 122	12 mm	L
590 122	12 mm	S
590 152	15 mm	L
590 164	16 mm	S
590 182	18 mm	L
590 204	20 mm	S
590 222	22 mm	L
590 304	30 mm	S

Please follow the assembly instructions DIN 3859.

Pressure gauge fitting

new



1/4" F zinc-plated. With 24° cone end

R+M Nr.	TYP
580 061 43	6 L
580 081 43	8 L
580 101 43	10 L
580 121 43	12 L

new



1/4" F zinc-plated.
With 24° sealing cone

R+M Nr.	TYP
581 061 43	6 L
581 081 43	8 L
581 101 43	10 L
581 121 43	12 L

Mounting bracket




Mount for 500 bar ball valves 3/8"
and 1/2"

R+M Nr.	M
708 00	stainless steel

High pressure ball valves ST-3105


Standard

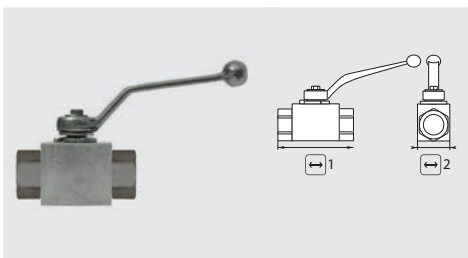

Lever Zn.
Ball chrome-plated.
Max. 80 °C

R+M Nr.	Ø	P	1	2
706 03	1/4"	500 bar	69	26
706 10	3/8"	500 bar	72	32
706 15	1/2"	500 bar	83	35
706 18	3/4"	315 bar	95	49


High pressure ball valves

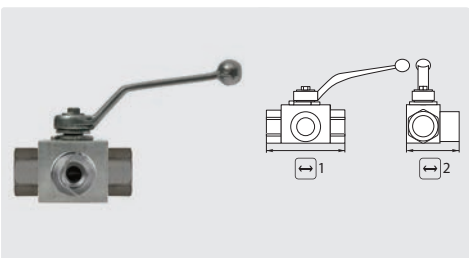

Lever Zn.
Ball chrome-plated. L-form.
Max. 80 °C

R+M Nr.	Ø	P	1	2
706 23	1/4"	500 bar	69	48
706 24	3/8"	500 bar	72	52
706 25	1/2"	500 bar	83	59
706 27	3/4"	315 bar	95	72


Standard stainless steel

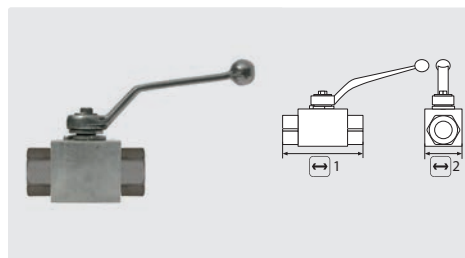

AISI 316 Ti.
Ball stainless steel.
Max. 100 °C

R+M Nr.	Ø	P	1	2
707 15	1/4"	500 bar	69	26
707 25	3/8"	500 bar	72	32
707 35	1/2"	500 bar	83	35
707 45	3/4"	315 bar	95	49

HP ball valves stainless steel

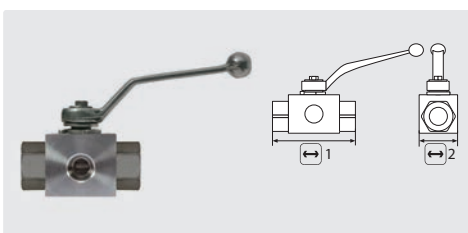

AISI 316 Ti. Lever Zn.
Ball stainless steel. L-form.
Max. 100 °C. Pressure supply only from the centre
connection!

R+M Nr.	Ø	P	1	2
706 279	1/4"	500 bar	69	48
706 269	3/8"	500 bar	72	52
706 260	1/2"	500 bar	83	57
706 299	3/4"	315 bar	95	72

Valves with connections



Zinc-plated steel. Lever Zn.
Ball chrome-plated.
Max. 500 bar / 80 °C


R+M Nr.	Ø	Ø	1
706 05	M22 M	M22 F	65
706 151	M22 M	tube Ø 16	83
706 20	M18 M	M18 M	64
706 101	M22 M	M22 M	100



Zinc-plated steel. Lever Zn.
Ball chrome-plated.
Max. 500 bar / 80 °C


R+M Nr.	Ø	Ø	1
706 031	M22 F	M22 F	110

High pressure ball valves

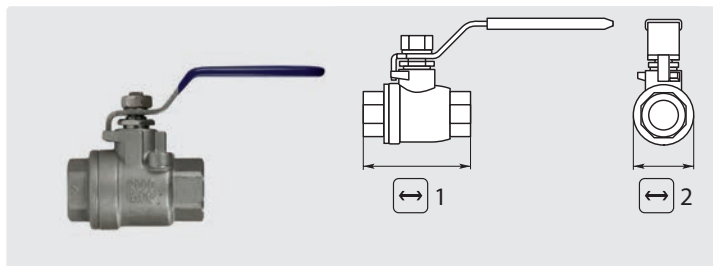

Stainless steel V2A / AISI 304.
Ball stainless steel.
Max. 140 bar / 60 °C

R+M Nr.	⊙	↔ 1	↔ 2
707 10	1/4"	52	28
707 20	3/8"	52	28
707 30	1/2"	64	31
707 40	3/4"	71	35

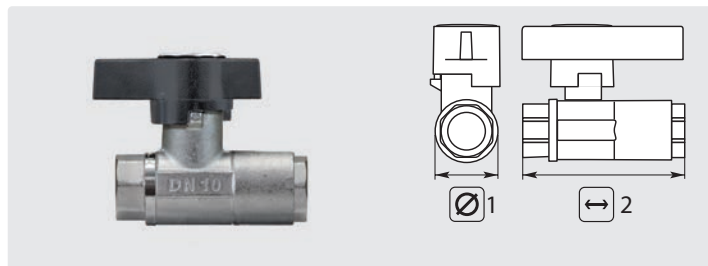


Nickel-plated brass.
Ball chrome-plated.
Max. 210 bar / 80 °C

R+M Nr.	⊙	↔ 1	↔ 2
705 383 82	3/8"	30	75
705 121 22	1/2"	36	85
705 343 42	3/4"	45	95

Further ball valve models are available on request.

High pressure solenoid valves closed in off-position


Danfoss VDHT

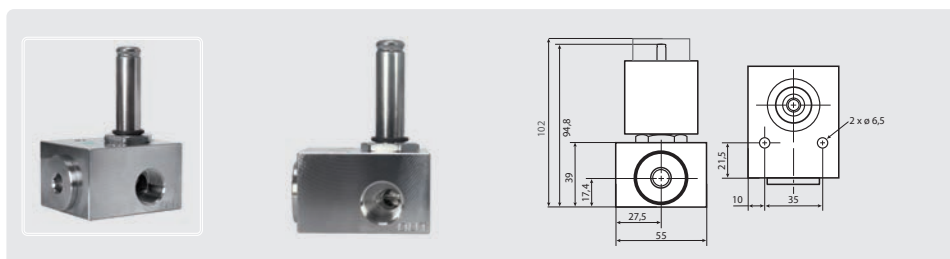

Stainless steel. Viton. Pressure range 0 - 160 bar. Without coil. Max. 90 °C

R+M Nr.	⊙	↔
837 180 094	1/2"	60 l/min
837 180 092	3/8"	30 l/min

Danfoss solenoid coil

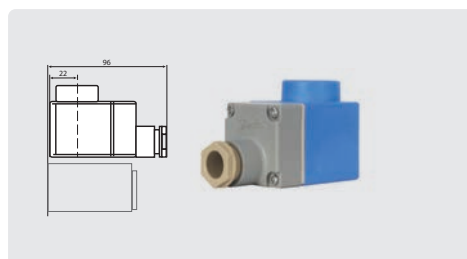

24 V / DC / 13 W

R+M Nr.
837 018 791 4

Rapa SV 04



1/4" F. NW 1.5 mm. Solenoid valve with connector. Pressure range 0 - 130 bar. Max. 90 °C

R+M Nr.	V
832 01	24 V =


AK



1/4" F. NW 1.2 mm. Solenoid valve without connector. Pressure range 0 - 180 bar. Max. 90 °C

R+M Nr.	↔	I	V
833 10	48 mm	109 mm	24 V =
833 15	48 mm	109 mm	24 V ~ 50 Hz
833 00	48 mm	109 mm	230 V ~ 50 Hz

Connector




R+M Nr.
833 50

Symbols ⊙ thread ↔ flow V voltage I height ↔ length P pressure °C temperature ⊕ inlet ⊖ outlet BP bypass

Bypass valve with pneumatic control

ST-265 AIR

new




Unloader valve pneumatically controlled and permissible working pressure up to 350 bar Precise adjustment of the working pressure, low pressure drop. Ball check valve. Pneumatic drive = max. 7,5 bar.

R+M Nr.	P	°C	G	G	BP	l/min.	Air
200 265 560	350 bar	80 °C	3/8" F	3/8" F	3/8" F	50 l/min.	1/4" F

ST-285 AIR


new




Bypass valve with pneumatic control for high flow rates. Precise adjustment of the working pressure, low pressure drop. Piston check valve. Pneumatic drive = max. 7,5 bar.

R+M Nr.	P	°C	G	G	BP	l/min.	Air
200 285 560	160 bar	90 °C	1/2" F	1/2" F	1/2" F	100 l/min.	1/4" F

ST-550 AIR 2/2 valve – Pneumatically operated high pressure valve




1. High-pressure generator
2. Pressure gauge
3. Safety valve
4. Unloader valve
5. ST-550-valve
6. Nozzle
7. Return line




2/2 way pneumatic valve. Brass body. Piston stainless steel. For use in Control Systems with compressed air insert for valve actuation.

R+M Nr.	P	l/min.	Air	G	G	°C
200 550 700	350 bar	80 l/min.	1/4" F	3/8" F	3/8" F	80 °C

new



1. High-pressure generator
2. Pressure gauge
3. Safety valve
4. Unloader valve
5. ST-550-valve
6. Nozzle
7. Return line




2/2 way pneumatic valve. Body stainless steel. Piston stainless steel. For use in Control Systems with compressed air insert for valve actuation.



R+M Nr.	P	l/min.	Air	G	G	°C
200 550 710	500 bar	80 l/min.	1/4" F	3/8" F	3/8" F	80 °C




Hose guide system . zinc-plated steel . 28 x 30 mm profile

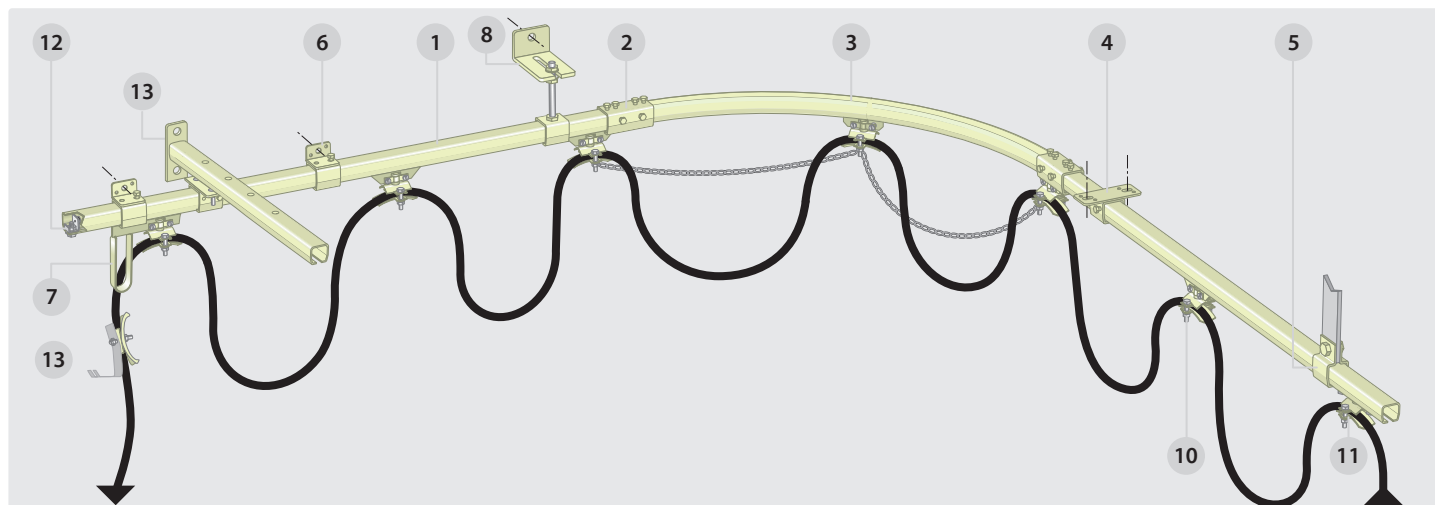

In case of angle installation it is recommended to connect the trolleys with a chain.

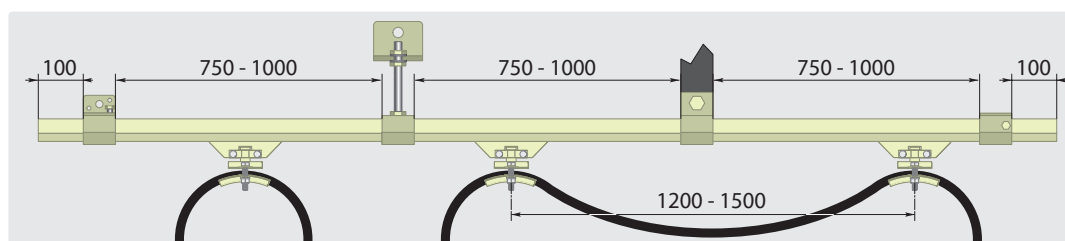

C-rails

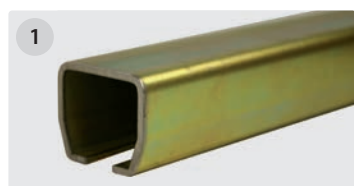

R+M Nr.	
107 008 02	2 m
107 008 003 	3 m
107 008 0 	6 m

Connecting rails



R+M Nr.	
107 208 0	80 mm

90 °C-rails



R+M Nr.	radius
107 508 0	650 mm

Ceiling support brackets



Hole size 63 mm

R+M Nr.	
107 608 0	40 mm

Mount base for flat iron



R+M Nr.	
107 908 0	40 mm

Wall mount base




R+M Nr.	
107 108 0	40 mm

Mounting brackets



R+M Nr.		
107 901 0	1	300 mm
107 902 0	2	 = 50

Adjustable bracket in height + double wall angle



Angle length 100 mm

R+M Nr.		TYP
107 808 1	1	angle
107 808 2	2	sleeve

Please use the hose guide system made out of stainless steel in case of saline conditions!

Hose guide system . zinc-plated steel . 28 x 30 mm profile

Attachment trolleys

7



Weight max. 10 kg

R+M Nr.	outer	⌀
107 308 07	8 - 15 mm	
107 308 06	16 - 24 mm	

Lance holder

Clamp galvanized steel, holder stainless steel. For Hose-⌀ 16-24 mm

R+M Nr.
200 000 180

Twin hose trolleys

9



Weight max. 10 kg

R+M Nr.	outer	⌀
107 308 012	8 - 15 mm	
107 308 002	16 - 24 mm	

Hose trolleys

10



Weight max. 10 kg

R+M Nr.	outer	⌀
107 308 01	8 - 15 mm	
107 308 0	16 - 24 mm	

End clamps

11



Weight max. 10 kg

R+M Nr.	outer	⌀
107 708 01	8 - 15 mm	
107 708 0	16 - 24 mm	

Bumpers

12




R+M Nr.
107 408 0

Hose guide system . stainless steel V2A / AISI 304 . 28 x 30 mm profile

C-rails

1



R+M Nr.		↔
107 008 093		3 m
107 008 09		6 m

Mounting brackets



R+M Nr.		↔
107 901 9	1	300 mm
107 902 8	2	VPE = 50

Connecting rails

2



R+M Nr.
107 208 09

Ceiling support brackets

4



Hole size 63 mm

R+M Nr.		↔
107 608 09		40 mm

Adjustable bracket in height + double wall angle

8



Angle length 100 mm

R+M Nr.		TYP
107 808 19	1	angle
107 808 29	2	sleeve

Bumpers

12



R+M Nr.
107 408 09

Attachment trolleys

7



Suitable for hoses up to 24 mm

R+M Nr.
107 308 069

Hose trolleys

10



Suitable for hoses up to 24 mm

R+M Nr.
107 308 09

Hose end clamps

11



Suitable for hoses up to 24 mm

R+M Nr.
107 708 09

Symbols TYP type VPE packing unit ↔ length ⌀ diameter shipment by truck

Hose guide system . zinc-plated steel . 32 x 30 mm profile


Hose guide system elements for easy installation on 32 x 30 mm profile rails, for existing systems:


- » Material: galvanized steel / plastic.
- » For hoses with an outer diameter of 10-16, 17-25 and 26-32 mm.
- » Safe and variable adaptations, indestructible and easy to disassemble.
- » Smooth-running guide rollers.
- » Corrosion-free and lightweight.
- » Can be put together individually (modular system).
- » Temperature range: - 30 °C to + 60 °C.
- » Contact us! We supply a wide range of additional accessories on request!


C-Rail*


Galvanized steel, C-Rail 32 x 30 mm.

R+M Nr.

107 000 900*	4 meters
107 000 801	6 meters

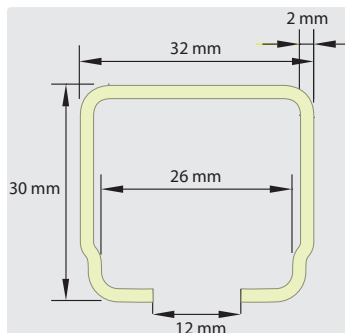

* the profile is suitable for existing systems (not for items on catalog pages 430-431)

Ceiling support brackets

Wall mount base


Hole size 60 mm

R+M Nr.

107 000 825	86 mm
-------------	-------



R+M Nr.

107 000 830	50 mm
-------------	-------

Connecting rails

R+M Nr.


107 000 810	100 mm
-------------	--------

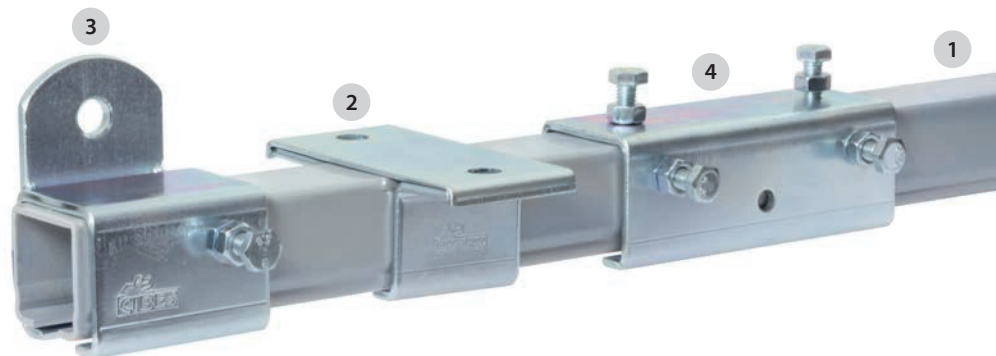
Hose trolleys plastic / galvanized steel


For C-Rail 32 x 30 mm. Load capacity 20 kg.
Rollers with ball bearings.

R+M Nr.

107 000 301

Hose trolleys plastic


For C-Rail 32 x 30 mm. Load capacity 5 kg.
Castors with steel axles.

R+M Nr.

107 000 305

* limited stock

Hose guide system . zinc-plated steel . 32 x 30 mm profile

Hose hanger plastic

∅ 10-16 mm



Galvanized steel screws. For C-Rail 32 x 30 mm.

R+M Nr.	↔	R
107 000 050	70	80


∅ 17-25 mm



Galvanized steel screws. For C-Rail 32 x 30 mm.


R+M Nr.	↔	R
107 000 051	100	125

∅ 26-36 mm

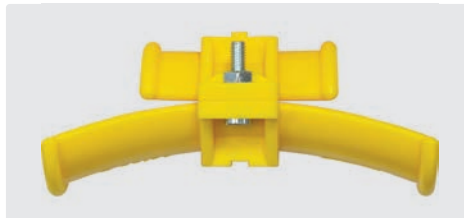

Galvanized steel screws. For C-Rail 32 x 30 mm.

R+M Nr.	↔	R
107 000 052	140	160

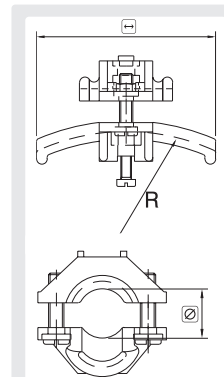

End clamp



Plastic / galvanized steel. For C-Rail 32 x 30 mm

R+M Nr.
107 000 779

End stop



Galvanized steel. Rubber buffer. For C-Rail 32 x 30 mm

R+M Nr.
107 408 0

Automatic hose reels


The ST and SoST series are robust and reliable hose reel models with automatic spring return with the following characteristics:

- » Maintenance-free slide bearings made out of plastics being resistant to chemicals, wetness and dirt.
- » There are 8 positions per rotation to stop the hose. A quick pull unmakes the locking device.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a ring as sealing element.

» Suitable for the mediums water or water with cleaning detergent, air, oils and greases.

» Further models are available on request: electrostatically buffed suitable for the food industry or the ATEX version designed for applications in explosion-proof areas.

ST 14 / ST 20 / ST 30 / ST 40

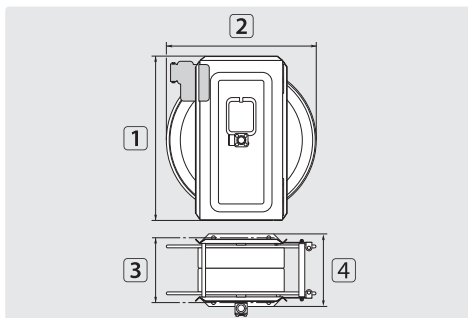


TYP	outer Ø = hose
01	15.0 mm = 14 m
02	15.0 mm = 20 m
03	15.0 mm = 40 m
08	25.0 mm = 10 m
09	25.0 mm = 36 m
10	15.0 mm = 28 m

Powder-coated steel. Application in dry areas

R+M Nr.	★	⊕	⊖	DN	P	°C	⊗	1	2	3	4	TYP
750 14	●	3/8" F	3/8" F	10	5-400 bar	90 °C	14.0 kg	440 mm	400 mm	176 mm	206 mm	01
750 141	●	M22 M	M22 M	10	5-400 bar	90 °C	14.0 kg	440 mm	400 mm	176 mm	206 mm	01
750 20	●	3/8" F	3/8" F	10	5-400 bar	90 °C	16.0 kg	500 mm	460 mm	176 mm	206 mm	02
750 201	●	M22 M	M22 M	10	5-400 bar	90 °C	16.0 kg	500 mm	460 mm	176 mm	206 mm	02
750 30	■	3/8" F	3/8" F	10	5-400 bar	90 °C	18.0 kg	500 mm	460 mm	226 mm	256 mm	10
750 40	■	3/8" F	3/8" F	10	5-400 bar	90 °C	25.0 kg	500 mm	460 mm	276 mm	306 mm	03
750 401	■	M22 M	M22 M	10	5-400 bar	90 °C	25.0 kg	500 mm	460 mm	276 mm	306 mm	03
750 201 9	●	3/4" F	3/4" F	19	200 bar	90 °C	17.0 kg	500 mm	460 mm	176 mm	206 mm	08
750 401 9	▲	3/4" F	3/4" F	19	200 bar	90 °C	26.5 kg	500 mm	460 mm	376 mm	406 mm	09

ST 14 / ST 20 / ST 30 / ST 40

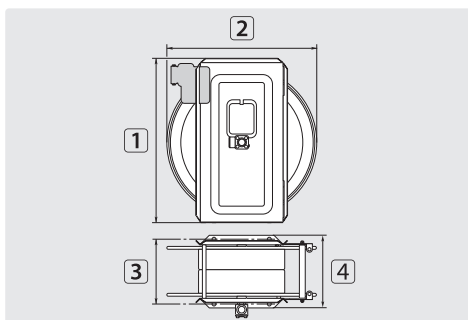


TYP	outer Ø = hose
01	15.0 mm = 14 m
02	15.0 mm = 20 m
03	15.0 mm = 40 m
04	15.0 mm = 57 m
05	20.0 mm = 17 m
06	20.0 mm = 25 m
07	20.0 mm = 37 m
09	25.0 mm = 36 m
10	15.0 mm = 28 m

Stainless steel V2A / AISI 304. Application in wet areas

R+M Nr.	★	⊕	⊖	DN	P	°C	⊗	1	2	3	4	TYP
740 14	●	3/8" F	3/8" F	10	5-400 bar	90 °C	14.0 kg	440 mm	400 mm	176 mm	206 mm	01
740 141	●	M22 M	M22 M	10	5-400 bar	90 °C	14.0 kg	440 mm	400 mm	176 mm	206 mm	01
740 20	●	3/8" F	3/8" F	10	5-400 bar	90 °C	16.0 kg	500 mm	460 mm	176 mm	206 mm	02
740 201	●	M22 M	M22 M	10	5-400 bar	90 °C	16.0 kg	500 mm	460 mm	176 mm	206 mm	02
740 30	■	3/8" F	3/8" F	10	5-400 bar	90 °C	18.0 kg	500 mm	460 mm	226 mm	256 mm	10
740 301	■	M22 M	M22 M	10	5-400 bar	90 °C	18.0 kg	500 mm	460 mm	226 mm	256 mm	10
740 312	■	1/2" F	1/2" F	12	5-400 bar	90 °C	18.0 kg	500 mm	460 mm	226 mm	256 mm	06
740 40	■	3/8" F	3/8" F	10	5-400 bar	90 °C	25.0 kg	500 mm	460 mm	276 mm	306 mm	03
740 401	■	M22 M	M22 M	10	5-400 bar	90 °C	25.0 kg	500 mm	460 mm	276 mm	306 mm	03
740 60	▲	3/8" F	3/8" F	10	5-400 bar	90 °C	32.5 kg	500 mm	460 mm	376 mm	406 mm	04
740 201 2	●	1/2" F	1/2" F	12	5-300 bar	90 °C	16.0 kg	500 mm	460 mm	176 mm	206 mm	05
740 401 2	■	1/2" F	1/2" F	12	5-300 bar	90 °C	25.0 kg	500 mm	460 mm	276 mm	306 mm	07
740 401 9	▲	3/4" F	3/4" F	19	200 bar	90 °C	26.5 kg	500 mm	460 mm	376 mm	406 mm	09

Automatic hose reels

SoST 14 / SoST 20

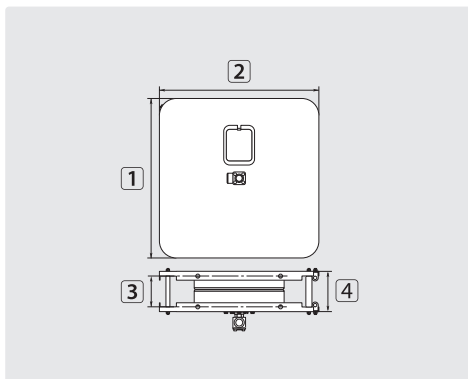


TYP	outer $\varnothing$ = hose $\rightarrow$
01	15.0 mm = 14 m
02	15.0 mm = 20 m

Powder-coated steel. Application in dry areas

R+M Nr.	★	Ⓒ	Ⓔ	DN	P	°C	Ⓕ	1	2	3	4	TYP
740 002	●	3/8" F	1/2" F	10	5-400 bar	90 °C	14.0 kg	470 mm	470 mm	107 mm	135 mm	01
740 005	●	3/8" F	1/2" F	10	5-400 bar	90 °C	16.0 kg	470 mm	470 mm	167 mm	195 mm	02

SoST 14 / SoST 20

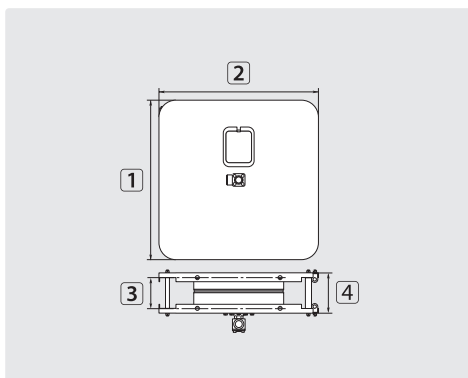

TYP	outer $\varnothing$ = hose $\rightarrow$
01	15.0 mm = 14 m
02	15.0 mm = 20 m

Stainless steel V2A / AISI 304. Application in wet areas

R+M Nr.	★	Ⓒ	Ⓔ	DN	P	°C	Ⓕ	1	2	3	4	TYP
740 008	●	3/8" F	1/2" F	10	5-400 bar	90 °C	14.0 kg	470 mm	470 mm	107 mm	135 mm	01
740 009	●	3/8" F	1/2" F	10	5-400 bar	90 °C	16.0 kg	470 mm	470 mm	167 mm	195 mm	02

Accessories for hose reels

Wall swivel brackets ST 14 / ST 20



180° swivel

R+M Nr.	★	(M)
741 00	●	zinc-plated steel
741 01	●	stainless steel *

Wall swivel brackets ST 30 / ST 40



180° swivel

R+M Nr.	★	(M)
741 001	■	zinc-plated steel
741 011	■	stainless steel *

Wall swivel brackets ST 40



180° swivel

R+M Nr.	★	(M)
741 003	▲	zinc-plated steel
741 012	▲	stainless steel *

Counterplates ST14/20/30/40



R+M Nr.	(M)
741 002	stain. steel *

* V2A / AISI 304

Symbols ★ marking Ⓒ inlet Ⓔ outlet DN nominal diameter P pressure °C temperature Ⓕ weight TYP type (M) material $\varnothing$ diameter $\rightarrow$ shipment by truck

Accessories for hose reels

Swivels ST-322



3/8" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 500	5-400 bar	65 mm



1/2" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 510	5-300 bar	65 mm



1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 520	5-300 bar	67 mm




1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 522	5-300 bar	68 mm

ST / SoSt




Swivel 200 bar



Seal kit swivel 200 bar

Repair kit ST-322



Repair kit swivels
ST-322

Hose guides



Wall hose guide frame.
50 x 37 mm

Locking bracket for elbow swivel joints



Incl. holder for locking screw

R+M Nr.	O
750 400 1	3/4"

R+M Nr.	TYP
750 400 2	3/4"


R+M Nr.	P
200 322 490	5-400

R+M Nr.
741 06

R+M Nr.
741 25




1/4" F : 3/8" M. Housing
and axle stainless steel.
Max. 600 bar / 90 °C



Seal kit swivel 750 280 0

Hose stops



Hose stop with six exchangeable inserts.
Hose $\varnothing$ 10 - 34 mm



R+M Nr.	$\varnothing$
200 000 171	14.5
200 000 170	16.0
200 000 172	17.7
200 000 173	21.5
200 000 174	24.5

Bolt sets



Stainless steel.
Set for bracket

R+M Nr.	I
750 280 0	59 mm

R+M Nr.
750 200 2


R+M Nr.
741 03

R+M Nr.
741 033

R+M Nr.
741 02


Inox automatic hose reels

- » Base frame stain. steel V2A / AISI 304. Reel made out of especially impact-resistant ABS plastic which is usually used for the manufacture of motorcycle helmets and in the automotive industry.
- » Due to the high quality construction of the automatic spring-driven high pressure hose reels they are suitable for applications in service stations, garages, in the agriculture and in the building industry etc.
- » The automatic hose reels are easy to install in every place such as wall, ceiling, vehicle etc. An optionally available wall bracket enables an easy mounting of the hose reel.
- » All models offer a traction release. A quick pull unmakes the locking device.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a ring as sealing element.
- » Due to the processed materials the hose reels are unhesitatingly suitable for the mediums water, water with cleaning detergent, oils, greases and air.
- » They are suitable for a working pressure of 5 - 300 bar max. and a temperature of max. 90 °C.

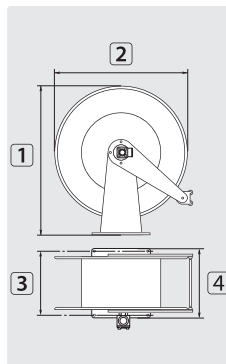

TYP	outer Ø = hose
05	17.0 mm = 21 m
05	19.5 mm = 16 m
05	22.0 mm = 14 m

R+M Nr.	C	★	⊕	⊖	DN	P	°C	⊞	1	2	3	4	TYP
764 434 30	yellow	●	1/2" F	1/2" F	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
764 434 32	yellow	●	M22 M	plug coupling 11 mm	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
764 434 34	yellow	●	M22 M	M22 M	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
R+M Nr.	C	★	⊕	⊖	DN	P	°C	⊞	1	2	3	4	TYP
764 434 31	grey	●	1/2" F	1/2" F	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
764 434 33	grey	●	M22 M	plug coupling 11 mm	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
764 434 35	grey	●	M22 M	M22 M	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
R+M Nr.	C	★	⊕	⊖	DN	P	°C	⊞	1	2	3	4	TYP
764 434 36	black	●	1/2" F	1/2" F	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
764 434 37	black	●	M22 M	plug coupling 11 mm	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05
764 434 38	black	●	M22 M	M22 M	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	05

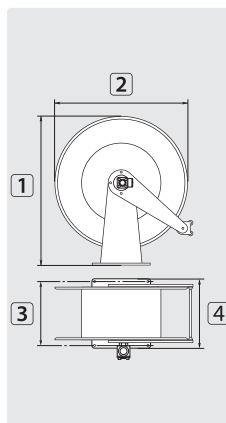

TYP	outer Ø = hose
02	18.5 mm = 28 m
02	20.0 mm = 26 m
02	22.0 mm = 24 m

TYP	outer Ø = hose
03	22.0 mm = 30 m
03	28.0 mm = 22 m
03	34.0 mm = 17 m

R+M Nr.	C	★	⊕	⊖	DN	P	°C	⊞	1	2	3	4	TYP
763 532 30	grey	▲	1/2" F	1/2" F	12	5-300 bar	90 °C	19.0 kg	560 mm	510 mm	153 mm	203 mm	02
763 454 41	grey	■	1/2" F	1/2" F	12	5-300 bar	90 °C	21.5 kg	573 mm	510 mm	218 mm	300 mm	03

Symbols [P] pressure [1] height [↔] length [Ø] diameter [⊕] inlet [⊖] outlet [DN] nominal diameter [°C] temperature [⊞] weight

Automatic hose reels

Due to the high quality construction of the automatic spring-driven high pressure hose reels they are suitable for applications in service stations, garages, in the agriculture and in the building industry etc.

- » The automatic hose reels are easy to install in every place such as wall, ceiling, vehicle etc. An optionally available wall bracket enables an easy mounting of the hose reel.
- » All models offer a traction release. A quick pull unmakes the locking device.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a ring as sealing element.
- » Due to the processed materials the hose reels are unhesitatingly suitable for the mediums water, water with cleaning detergent,


oils, greases and air.

- » Fixed as well as swivelling brackets are available for all models. Both brackets and hose reels are made out of stainless steel V2A / AISI 304.
- » According to directive 94/9/EG (Atex 95/100) the hose reels are suitable for applications in mining and explosion-proof areas.
- » They can be used in explosive zones 1 + 2 (gas) and 21 + 22 (dust). The temperature has to be defined accordingly.



II 2/GD c (T4) 135 °C X


R+M 434

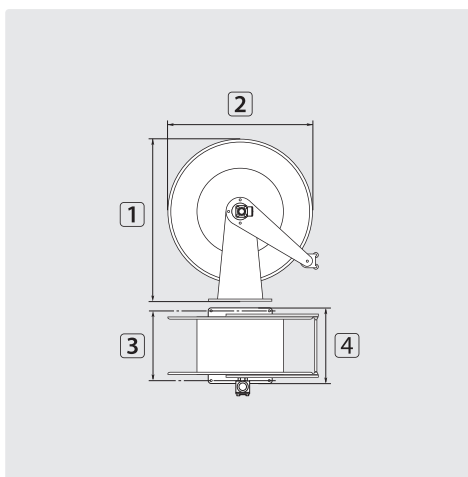

TYP	outer $\varnothing$ = hose $\leftrightarrow$
01	17.0 mm = 21 m
01	19.5 mm = 16 m
01	22.0 mm = 14 m

R+M Nr.	★	Ⓒ	Ⓔ	DN	P	°C	Ⓔ	1	2	3	4	TYP
763 434 30	●	1/2" F	1/2" F	12	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	01
763 434 31	●	M22 M	plug coupling 11 mm	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	01
763 434 32	●	M22 M	M22 M	10	5-300 bar	90 °C	14.0 kg	460 mm	420 mm	140 mm	186 mm	01

R+M 534

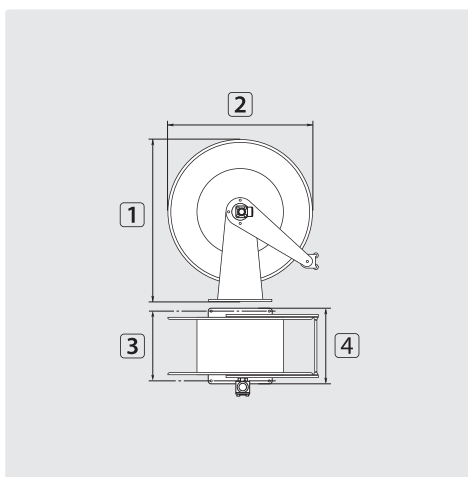


TYP	outer $\varnothing$ = hose $\leftrightarrow$
02	18.5 mm = 28 m
02	20.0 mm = 26 m
02	22.0 mm = 24 m

R+M Nr.	★	Ⓒ	Ⓔ	DN	P	°C	Ⓔ	1	2	3	4	TYP
763 534 30	▲	1/2" F	1/2" F	12	5-300 bar	90 °C	19.0 kg	560 mm	510 mm	153 mm	203 mm	02
763 534 31	▲	M22 M	plug coupling 11 mm	10	5-300 bar	90 °C	19.0 kg	560 mm	510 mm	153 mm	203 mm	02

Symbols ★ marking Ⓒ inlet Ⓔ outlet DN nominal diameter P pressure °C temperature Ⓔ weight $\varnothing$ diameter I height $\leftrightarrow$ length TYP type

Automatic hose reels


R+M 544

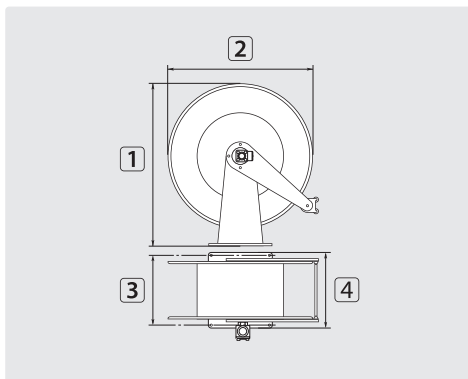

TYP	outer $\varnothing$ = hose
03	22.0 mm = 30 m
03	28.0 mm = 22 m
03	34.0 mm = 17 m

R+M Nr.	★	Ⓒ	Ⓔ	DN	P	°C	Ⓔ	1	2	3	4	TYP
763 544 30	■	1/2" F	1/2" F	12	5-300 bar	90 °C	24.0 kg	573 mm	510 mm	218 mm	300 mm	03
763 544 20	■	1" F	1" F	19	100 bar	90 °C	24.0 kg	573 mm	510 mm	218 mm	300 mm	03

R+M 564

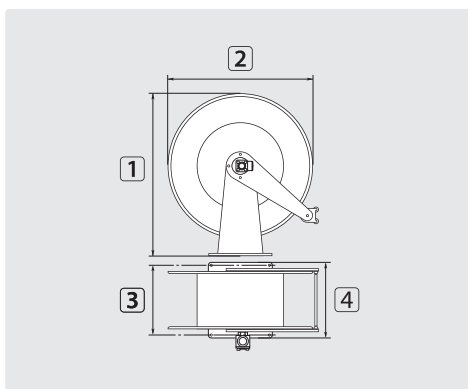

TYP	outer $\varnothing$ = hose
04	22.0 mm = 60 m
04	30.0 mm = 40 m
04	35.0 mm = 30 m

R+M Nr.	★	Ⓒ	Ⓔ	DN	P	°C	Ⓔ	1	2	3	4	TYP
763 564 30	▼	1/2" F	1/2" F	10	5-300 bar	90 °C	30.0 kg	578 mm	510 mm	399 mm	488 mm	04

Accessories for hose reels

Wall swivel brackets



Stainless steel V2A / AISI 304, 80° swivel

R+M Nr.	★
763 430 06	●
763 530 06	▲
763 540 06	■


Wall brackets



Stainless steel. Optionally as fit-up aid

R+M Nr.	★
763 430 02	●
763 530 02	▲
763 540 02	■
763 560 02	▼

Swivels ST-322



Repair kit swivel ST-322


R+M Nr.
200 322 490

Ⓔ M28 M. DN 12.
Max. 5-300 bar / 90 °C

R+M Nr.	1	Ⓒ
200 322 523	79.5 mm	1/2" F
200 322 525	79.5 mm	3/8" F

Accessories for hose reels

Centrifugal brake mechanism

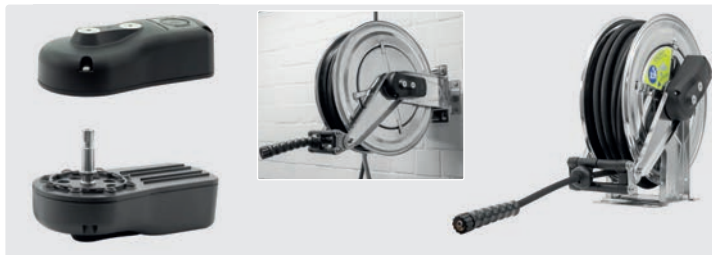

For Model R+M 434, R+M 532, R+M 534, R+M 544 and R+M 564

R+M Nr.
763 430 020

Automatic inlet window




R+M Nr.	TYP
763 443 12	R+M 434
763 453 12	R+M 532, R+M 534
763 454 12	R+M 544
763 456 12	R+M 564

For Model R+M 434, R+M 532, R+M 534, R+M 544 and R+M 564



Automatic hose reel, mounted with pre-assembled HP-hoses

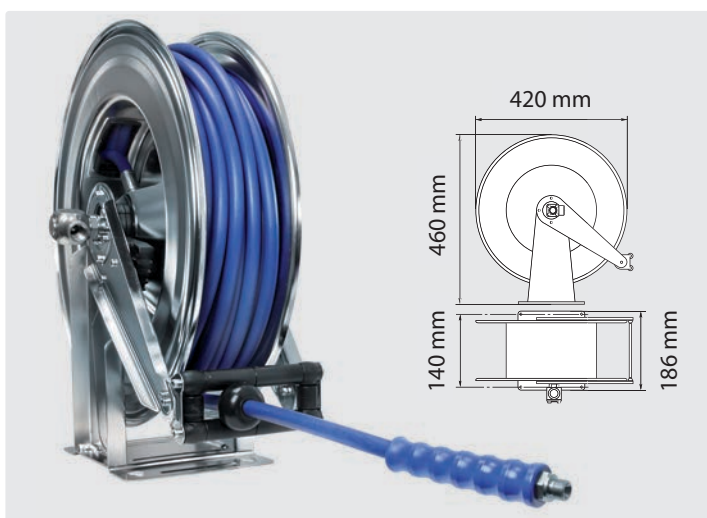

Hose reel: Stainless steel V2A / AISI 304. With automatic spring-drive and traction release. Suttner swivel ST-322 made out of stainless steel. Max. 90 °C



with HP-hose: 2 SN. DN 8. 20 metres. Smooth, blue cover. Outlet stainless steel

R+M Nr.	P	G	⊖	★
763 434 001	5-300 bar	1/2" F	3/8" M stainless steel	●

Hose reel: Base frame stainless steel V2A / AISI 304. Reel made out of especially impact-resistant ABS plastic with automatic spring-drive and traction release. Suttner swivel ST-322 made out of stainless steel. Max. 90 °C



Reel with HP-hose: 2 SC. DN 8. 20 metres. Wrapped, blue cover

R+M Nr.	P	G	⊖	reel	★
764 434 503	5-300 bar	M22 M	M22 F	black	●

Reel with HP-hose: 2 SC. DN 8. 20 metres. Wrapped, black cover

R+M Nr.	P	G	⊖	reel	★
764 434 311	5-300 bar	M22 M	M22 F	grey	●


Reel with HP-hose: 2 SC. DN 8. 20 metres. Wrapped, black cover

R+M Nr.	P	G	⊖	reel	★
764 434 500	5-300 bar	M22 M	M22 F	black	●

Reel with HP-hose: 1 SN. DN 8. 20 metres. Wrapped, black cover

R+M Nr.	P	G	⊖	reel	★
764 434 502	100-210 bar	M22 M	M22 F	black	●

Automatic hose reel, mounted with pre-assembled HP-hoses

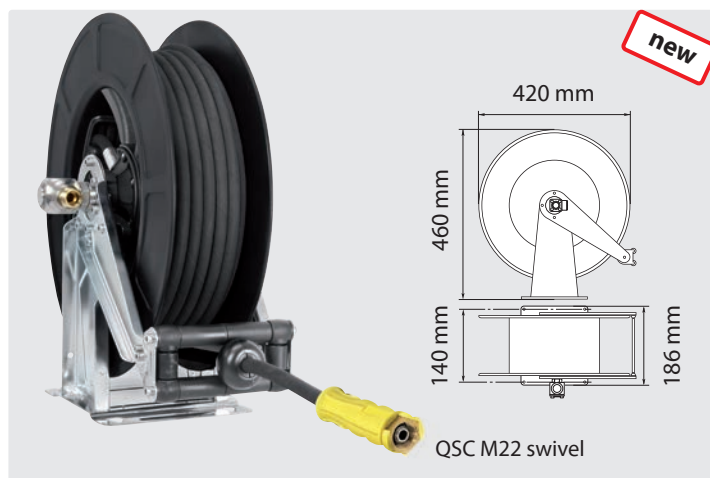

Hose reel: Base frame stainless steel V2A / AISI 304. Reel made out of especially impact-resistant ABS plastic with automatic spring-drive and traction release. Suttner swivel ST-322 made out of stainless steel. Max. 90 °C



Reel with HP-hose: 2 SC. DN 8. 20 metres. Wrapped, black cover

R+M Nr.	P	G	☺	reel	★
764 434 506	5-300 bar	M22 M	M22 F	black	●



Hose reel: Base frame stainless steel V2A / AISI 304. Reel made out of especially impact-resistant ABS plastic with automatic spring-drive and traction release. Suttner swivel ST-322 made out of stainless steel. Max. 90 °C



Dynaflex365+®

Reel with HP-hose Dynaflex365+®: 2 SC. DN 8. 15 metres. Smooth, black cover

R+M Nr.	P	G	☺	reel	★
764 434 318	5-300 bar	TR22	TR22 swivel	black	●

Reel with HP-hose Dynaflex365+®: 2 SC. DN 8. 20 metres. Smooth, black cover

R+M Nr.	P	G	☺	reel	★
764 434 319	5-300 bar	TR22	TR22 swivel	black	●

You can find more versions
in our webshop




R+M service

In case of an order for hose reels and hose please be informed that we are willingly prepared to directly mount the assembled hose on your desired hose reel.
For this purpose you only have to state the **R+M Nr. 740 00** on your order.
It's definitely worth booking this service!
Should you require more information about our offer, do not hesitate to contact us at any time!
We are looking forward to receiving your order.

R+M Nr.
740 00

Symbols P pressure G inlet ☺ outlet ★ marking TYP type

Automatic hose reel, mounted with pre-assembled HP-hoses

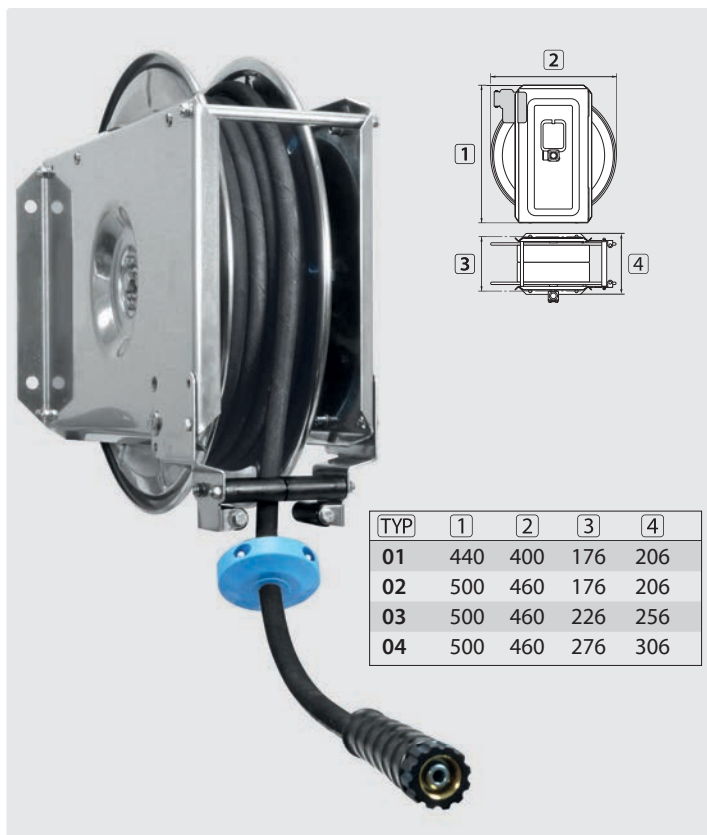

Hose reel: Stainless steel V2A / AISI 304. There are 8 positions per rotation to stop the hose. A quick pull unmakes the locking device. Suttner swivel ST-322 made out of stainless steel.
Max. 90 °C



TYP 01 with HP-hose: 1 SN. DN 10. 10 metres.
Wrapped, black cover

R+M Nr.	P	G	↺	★
740 140 01	210 bar	3/8" F	M22 F	●

TYP 02 with HP-hose: 2 SC. DN 8. 20 metres.
Wrapped, black cover


R+M Nr.	P	G	↺	★
740 202 201	5-400 bar	M22 M	M22 F stainless steel	●

TYP 03 with HP-hose: 1 SN. DN 8. 30 metres.
Smooth, black cover, outlet stainless steel

R+M Nr.	P	G	↺	★
740 302 222	250 bar	M22 M	M22 F stainless steel	■

TYP 04 with HP-hose: 2 SC. DN 8. 40 metres.
Wrapped, black cover, outlet stainless steel

R+M Nr.	P	G	↺	★
740 402 201	5-400 bar	M22 M	M22 F stainless steel	■

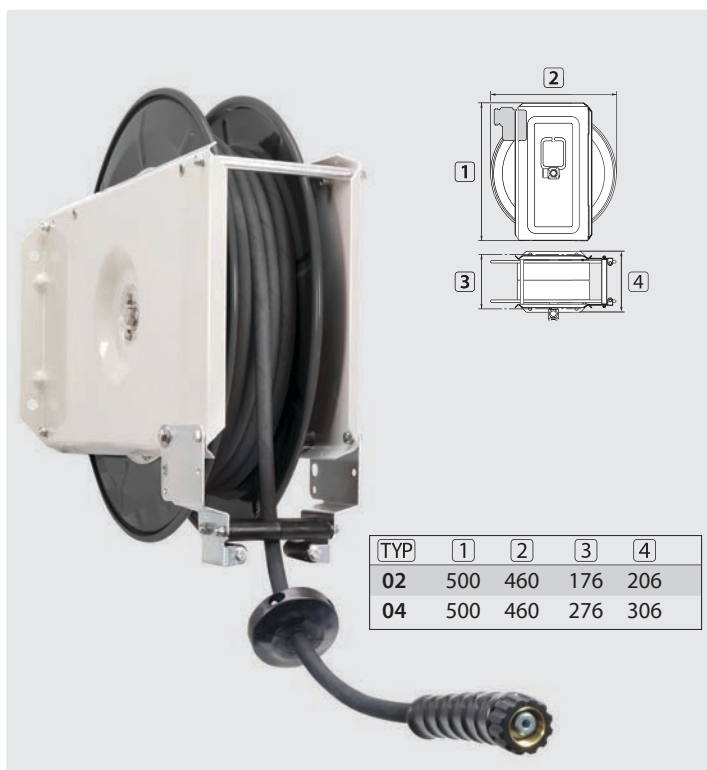

Hose reel: Powder-coated steel. There are 8 positions per rotation to stop the hose. A quick pull unmakes the locking device. Suttner swivel ST-322 made out of stainless steel.
Max. 90 °C



TYP 02 with HP-hose: 2 SC. DN 8. 20 metres.
Wrapped, black cover

R+M Nr.	P	G	↺	★
750 202 201	5-400 bar	M22 M	M22 F stainless steel	●

TYP 04 with HP-hose: 2 SC. DN 8. 40 metres.
Wrapped, black cover

R+M Nr.	P	G	↺	★
750 402 201	5-400 bar	M22 M	M22 F stainless steel	■

TYP 04 with HP-hose: 2 SC. DN 8. 30 metres.
Wrapped, black cover

R+M Nr.	P	G	↺	★
750 402 202	5-400 bar	M22 M	M22 F stainless steel	■

You can find more versions
in our webshop



Symbols P pressure G inlet ↺ outlet ★ marking TYP type 1 height ↔ length Ø diameter °C temperature 8 weight O thread DN nominal diameter 🚚 shipment by truck


High pressure hose reels

STKI

The STKI series suitable for applications in craft and industry:

- » The base frame is made out of canted steel sheet profiles which stand for excellent stability.
- » The drum rotates by means of an adjustable handwheel being equipped with a free-wheel polyamide grip.
- » By means of a mechanical brake integrated in the bearing the drum can be slowly decelerated or even totally blocked.

- » Suitable for the mediums water or water with cleaning detergent, air, oils and greases.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a slide ring as sealing element.

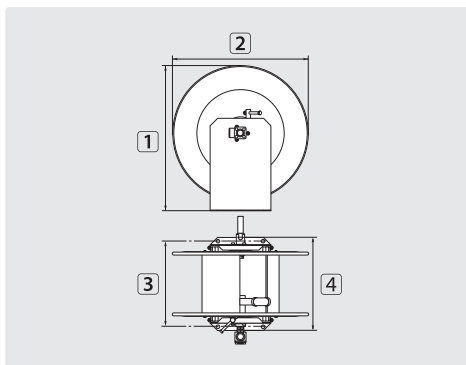

TYP	outer Ø = hose
01	22.0 mm = 35 m
02	22.0 mm = 70 m
03	22.0 mm = 100 m
04	22.0 mm = 115 m
05	28.0 mm = 20 m
06	28.0 mm = 40 m
07	28.0 mm = 60 m
08	28.0 mm = 70 m
09	28.0 mm = 80 m
10	35.0 mm = 61 m

Stainless steel V2A / AISI 304

R+M Nr.	⌀	⌀	DN	P	°C	Ø	1	2	3	4	TYP
739 50	1/2" F	1/2" F	10	5-300 bar	90 °C	10.5 kg	515 mm	465 mm	280 mm	312 mm	01
739 60	1/2" F	1/2" F	10	5-300 bar	90 °C	13.5 kg	515 mm	465 mm	480 mm	512 mm	02
739 65	1/2" F	1/2" F	10	5-300 bar	90 °C	15.7 kg	515 mm	465 mm	680 mm	712 mm	03
739 701 2	1/2" F	1/2" F	10	5-300 bar	90 °C	16.8 kg	515 mm	465 mm	780 mm	812 mm	04
739 501 9	3/4" F	3/4" F	19	200 bar	90 °C	11.7 kg	515 mm	465 mm	280 mm	312 mm	05
739 601 9	3/4" F	3/4" F	19	200 bar	90 °C	14.7 kg	515 mm	465 mm	480 mm	512 mm	06
739 651 9	3/4" F	3/4" F	19	200 bar	90 °C	16.9 kg	515 mm	465 mm	680 mm	712 mm	07
739 70	3/4" F	3/4" F	19	200 bar	90 °C	18.0 kg	515 mm	465 mm	780 mm	812 mm	08
739 801 9	3/4" F	3/4" F	19	200 bar	90 °C	19.1 kg	515 mm	465 mm	880 mm	912 mm	09
739 702 4	1" F	1" F	25	100 bar	90 °C	18.3 kg	515 mm	465 mm	780 mm	812 mm	10

Accessories for hose reels

Elbow swivels



3/8" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 500	5-400 bar	65 mm



1/2" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 510	5-300 bar	65 mm



1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 520	5-300 bar	67 mm



1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 522	5-300 bar	68 mm

ST / SoST



Swivel 200 bar



Repair kit swivel 750 400 1

R+M Nr.	⌀
750 400 1	3/4"


R+M Nr.	TYP
750 400 2	3/4"

High pressure hose reels with electric drive

STKI with electric drive

The STKI series suitable for applications in craft and industry:

- » The base frame is made out of canted steel sheet profiles which stand for excellent stability.
- » For horizontal winding above ground.
- » The drum has an almost closed sheet steel hub and runs in maintenance-free plastic bearings.
- » Easy to use thanks to electric drive and remote control.
- » Drum can be separated from the drive thanks to the sliding clutch.
- » Right/left rotation can be controlled via buttons.
- » Suitable for the mediums water or water with cleaning detergent, air, oils and greases.
- » The hose reels are all equipped with a swivel ST-322. The swivels ST-322 are completely made out of stainless steel and have a slide ring as sealing element.

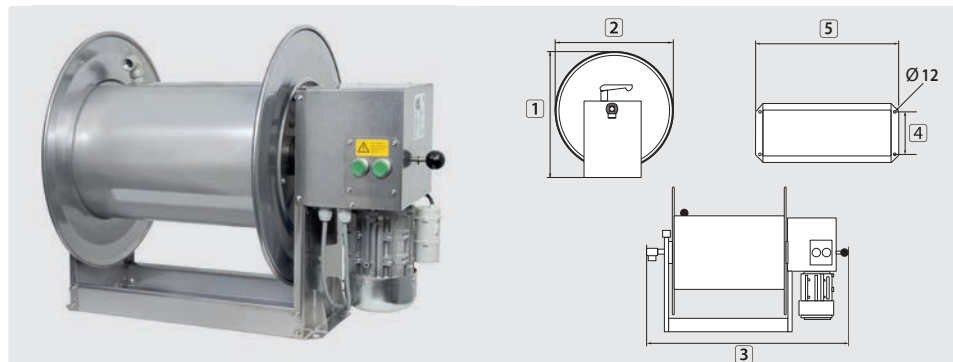

TYP	outer Ø = hose
01	17.0 mm = 125 m
02	17.0 mm = 150 m
03	17.0 mm = 185 m
01	22.0 mm = 70 m
02	22.0 mm = 85 m
03	22.0 mm = 100 m

Stainless steel V2A / AISI 304. With 230 V / 24 V / 12 V, 50 Hz worm gear motor, 0.22 kW with manual claw clutch

R+M Nr.	⊕ & ⊖	V	DN	P	°C	Ⓔ	1	2	3	4	5	TYP
739 602 30	1/2" F	230 V / AC	12	5-300 bar	90 °C	24 kg	515 mm	460 mm	730 mm	153 mm	480 mm	01
739 602 302	1/2" F	230 V / AC	12	5-300 bar	90 °C	25 kg	515 mm	460 mm	830 mm	153 mm	580 mm	02
739 602 303	1/2" F	230 V / AC	12	5-300 bar	90 °C	26 kg	515 mm	460 mm	930 mm	153 mm	680 mm	03
739 600 240	1/2" F	24 V / DC	12	5-300 bar	90 °C	24 kg	515 mm	460 mm	730 mm	153 mm	480 mm	01
739 600 241	1/2" F	24 V / DC	12	5-300 bar	90 °C	25 kg	515 mm	460 mm	830 mm	153 mm	580 mm	02
739 600 242	1/2" F	24 V / DC	12	5-300 bar	90 °C	26 kg	515 mm	460 mm	930 mm	153 mm	680 mm	03
739 600 120	1/2" F	12 V / DC	12	5-300 bar	90 °C	24 kg	515 mm	460 mm	730 mm	153 mm	480 mm	01
739 600 121	1/2" F	12 V / DC	12	5-300 bar	90 °C	25 kg	515 mm	460 mm	830 mm	153 mm	580 mm	02
739 602 122	1/2" F	12 V / DC	12	5-300 bar	90 °C	26 kg	515 mm	460 mm	930 mm	153 mm	680 mm	03

Accessories STKI with electric drive

Swivel ST-322



1/2" F : 1/2" M. DN 12.
 (P) 100-300 bar.
 Max. 30 r.p.m. / 90 °C

R+M Nr.	1
200 322 520	67 mm



Repair kit swivel
 ST-322

R+M Nr.
200 322 490



Radio remote control retrofit kit.
 868.3 MHz hand transmitter, receiver and rod antenna

R+M Nr.
739 704 013

Symbols ⊕ inlet ⊖ outlet V voltage DN nominal diameter P pressure °C temperature Ⓔ weight 1 height ⇄ length Ø diameter TYP type


High pressure hose reels

STK

Series STK made out of deep-drawing metal sheet:

- » Fold-away handwheel
- » Adjustable braking and blocking device.
- » Steel shackle avoids rolling over of the hose.
- » Maintenance-free synthetic bearing sleeves.

- » The hose reels are all equipped with a swivel ST-322. The swivel ST-322 are completely made out of stainless steel and have a slide ring as sealing element.
- » Suitable for the mediums water or water with cleaning detergent, air, oils and greases.

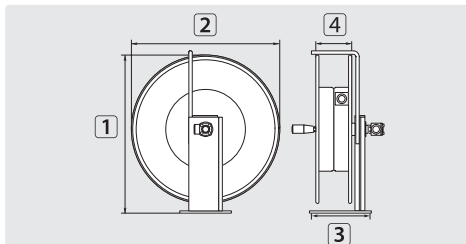

TYP	outer $\varnothing$ = hose $\leftrightarrow$
01	15.0 mm = 24 m
02	15.0 mm = 36 m


Powder-coated steel

R+M Nr.	$\odot$	$\ominus$	DN	P	°C	$\boxplus$	1	2	3	4	TYP
760 20	3/8" F	3/8" F	10	5-400 bar	90 °C	6.2 kg	437 mm	400 mm	210 mm	100 mm	01
760 30	3/8" F	3/8" F	10	5-400 bar	90 °C	6.8 kg	500 mm	460 mm	210 mm	100 mm	02

STKI mini

- » The drum rotates by means of an adjustable handwheel being equipped with a free-wheel polyamide grip.
- » By means of a mechanical brake integrated in the bearing the drum can be slowly decelerated or even totally blocked.
- » Suitable for the mediums water or water with cleaning detergent, air,

- oils and greases.
- » The hose reels are all equipped with a swivel ST-320. The swivels ST-320 are completely made out of stainless steel and have a slide ring as sealing element.

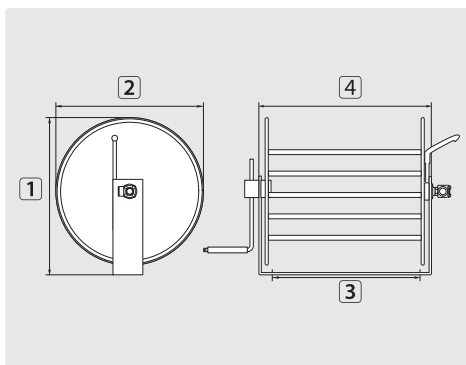


TYP	outer $\varnothing$ = hose $\leftrightarrow$
01	15,0 mm = 20 m

Stainless steel V2A / AISI 304

R+M Nr.	$\odot$	$\ominus$	DN	P	°C	$\boxplus$	1	2	3	4	TYP
739 40	3/8" F	3/8" F	8	5-300 bar	90 °C	5,0 kg	298 mm	265 mm	210 mm	258 mm	01

High pressure hose reels ST-71

- » The base frame is made out of stainless steel V2A / AISI 304 and stands for highest stability.
- » Equipped with an especially wide orifice of 12 mm.
- » Suitable media: water or water with cleaning chemicals, air, oils and grease.
- » The drum hub consists of 5 sturdy stainless steel rods and runs in specially maintenance-free bearing sleeves.
- » The drum rotates by means of an adjustable handwheel being equipped with a free-wheel polyamide grip.
- » A mechanical brake makes it possible to lock in 6 positions.
- » This high pressure hose reel is equipped with the swivel ST-322.
- » The Suttner swivels ST-322 are completely made out of stainless steel and have a slide-ring sealing element.
- » Not suitable for being mounted at walls and ceiling.

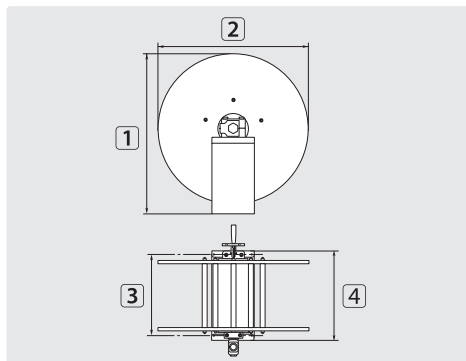

TYP	outer $\varnothing$ = hose $\leftrightarrow$
01	22.0 mm = 40 m

Stainless steel V2A / AISI 304

R+M Nr.	C	⊖	DN	P	°C	⊞	1	2	3	4	TYP
200 071 705	1/2" F	1/2" F	12	5-300 bar	90 °C	13 kg	460 mm	440 mm	240 mm	290 mm	01

Accessories for ST-71

Swivels ST-322

1/2" F : 1/2" M, DN 12.
Max. 30 r.p.m. / 90 °C

Repair kit swivel ST-322

R+M Nr.	P	I	R+M Nr.	P bar
200 322 520	5-300 bar	67 mm	200 322 490	5-400

ST-71 hose reels with sewer cleaning hose assembly

The ST-71 hose reel is equipped with a 15 m Flexy sewer cleaning hose DN 6. The frame of the reel is made out of stainless steel and the reel is made out of plastics.

The space-saving and orderly solution can either be hung up at the wall or refitted in high pressure cleaner.

The hose can be used as extension of high pressure hoses or as sewer cleaning hose.

Max. 300 bar / 90 °C

R+M Nr.	⊖	C
200 071 615	1/4" M	M22 M
200 071 620	1/8" M	M22 M
200 071 625	M22 F	M22 M
200 071 626	Quick screw coupling M22 F swivel	M22 M
200 071 630	plug $\varnothing$ 8.8	M22 M



High pressure hose reels

- » High pressure hose reel: plastic.
- » Swivel: brass / stainless steel.
- » Holder: steel powder coated.
- » Max. 250 bar / 90 °C

R+M Nr.	⊞	⊞	⊞	for hose-↔	outer-∅
738 072 000	3.4 kg	3/8" M	3/8" M	20 m with	20 mm
738 074 00	3.8 kg	3/8" M	3/8" M	40 m with	20 mm




Universal hose guide ST-71

- » Extremely robust and stable
- » Stainless steel construction
- » Hose guide rollers made of food-grade plastic, suitable for use in food processing plants
- » Suitable for hoses with an outside diameter up to 38 mm
- » Simple attachment with 2 holes ∅ 8 mm
- » Material thickness of the bracket: 4 mm

R+M Nr.
710 071 500




Distributor connector block

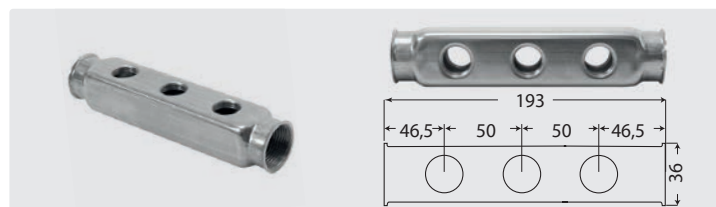

Stainless steel. 2 x 3 connections.
H x W x D: 36 x 193 x 40 mm. 290 g.
Max. 10 bar. 150 °C

R+M Nr.	6 x ∅	⊞	⊞
725 061 012	1/2" F	1" F	1" F

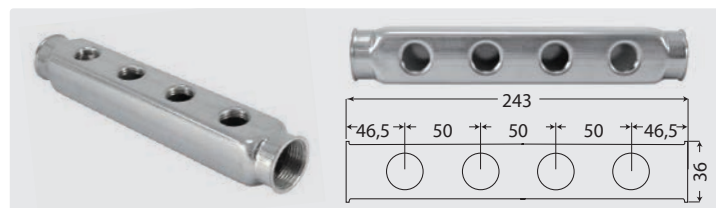

Stainless steel. 4 connections.
H x W x D: 36 x 243 x 40 mm. 390 g.
Max. 10 bar. 150 °C

R+M Nr.	4 x ∅	⊞	⊞
725 041 012	1/2" F	1" F	1" F

Water tank for wall mounting



Stainless steel. Incl. wall bracket, baffle and cover. 21 kg

R+M Nr.	∅ / ⊞	⊞	capacity
105 000 030	27 mm / 3/4" M	3/4" F	60 l

Accessories for hose reels

Hose reel trolley

- » Stainless steel-trolley for mounting hose reels
- » Manoeuvrable and easy to handle such as a sack truck
- » Ergonomic plastic handle strip which is easily unscrewable for the food industry



Trolley with two big wheels. Ø 260 mm.
H x W x D: 1,210 x 715 x 560 mm

R+M Nr.	Ⓜ
712 000 078	9.0 kg

Canister holder

- » Material: made out of stainless steel
- » Optimal sizes:
 - type 1: suitable for 5, 10 or 12 liter canister
 - type 2: suitable for 20 or 25 liter canister
- » Mounting holes 8.5 mm
- » One-piece item
- » High loading capacity by solid quality
- » Open base for placing the canister, thus ensuring an unhindered discharge of spilled liquids
- » Strength of material: 1.5 mm



R+M Nr.	TYP	H x W x D	Ⓜ
105 000 001	1	160 x 250 x 210	1.2 kg
105 000 002	2	200 x 285 x 310	2.0 kg

- » One lance holder on each side, diameter: 37 mm
- » Suitable for the hose reels ST-71 (200 071 705), STKI 20 and STKI 40 (739 50, 739 601 9, 739 60, 739 501 9, 739 601 9)



With optionally available extension plate

Trolley with two grey and non-fading wheels.
H x W x D: 1,175 x 700 x 650 mm

R+M Nr.	Ⓜ
712 000 070	7.9 kg

Extension plate, optional

- » **Extension plate made of stainless steel**
- » Easy installation for 712 000 070
- » Including fastening material
- » 4 vibration dampers made of stainless steel and elastic natural rubber 55 °. Rubber buffer type A. M10 x 28. Spring stiffness: 500 N / mm. Load: 2,000 N
- » For large hose reels: 739 65; 739 651 9 and 739 602 0



R+M Nr.
105 000 103

Accessories for hose reels

Trolley



- » Multifunctional trolley for foam and disinfection units
- » Stainless steel. Trolley with two grey and non-fading wheels
- » Manoeuvrable and easy to handle such as a sack truck
- » Open space for placing the canister, thus ensuring an unhindered discharge of spilled liquids
- » Ergonomic plastic handle strip which is easily unscrewable for the food industry
- » Two laterally attached lance holder
- » Sufficient space for 2 container with chemicals comprising up to 25 kg each.
- » H x W x D 1,150 x 540 x 620 mm

R+M Nr.	
710 000 163 389	14,0



- » Multifunctional trolley for foam and disinfection units
- » Stainless steel. Trolley with foot brake and 4 non-marking stainless steel wheels
- » Equipped with swivel castors at the front
- » Open space for placing the canister, thus ensuring an unhindered discharge of spilled liquids
- » Ergonomic plastic handle strip which is easily unscrewable for the food industry
- » Two laterally attached lance holder
- » Space for two 10-liter canisters or one 30-liter canister
- » H x W x D 1,200 x 400 x 500 mm

R+M Nr.	
710 100 750	11,1



Accessories for sprayer and foamer	486-487	High pressure hoses for self-service washing bays	477
Adapter connection ST-160.	462	High pressure spray guns for self-service car wash	454-455
Air spinner system Mosmatic	488-489	Hurricane Mosmatic	490-491
Brush holder	465	Lance holder, Mosmatic	467
CARWASH COMFORT - the proven hose marvel for self-service car washes	474-475	Lance Mosmatic	457
CARWASH COMFORT - you are invited to experience our blue hose wonder in DN 8!	476	Low pressure pre-spraying unit.	470
CARWASH COMFORT PREMIUM.	471-473	Mosjet-Rotor-Nozzles	468
Carwash low pressure foam lance	460	Mosmatic car wash ceiling booms	498
Centrifugal pump	518	Mosmatic car wash ceiling booms with LED	499
Chemical spray guns ST-510 & lances	480	Mosmatic flex-brush wand – no more washing without coin slot! ..	465
Coin box easywash365+® including control box	512	Mosmatic high RPM swivels DY-Series.	509-510
Coin meter	511	Mosmatic seal kits	509
Coin tester	513	Mosmatic swivel joints DGR	509
Compressed air guns	482	Mosmatic swivels DGE / DGEI	508
Disinfection cold fog device ST-83.1	482	Mosmatic swivels DGL	509
easyclean365+® Gun	481	Mosmatic swivels DGS / DGV / DGK.	508
easyclean365+® microfibre cloths	479	Mosmatic swivels DGVI.	508
easywash365+® brush holder.	465	Mosmatic swivels WDG.	507
easywash365+® car wash ceiling booms	494-495, 497	Mosmatic swivels WDRS.	510
easywash365+® car wash ceiling booms with suspension	496	Motor control easywash365+®	512
easywash365+® foam lances	461	Positioner	497
easywash365+® foam sets	462	Protective gloves	470
easywash365+® handles by Suttner.	456	Quick couplings suitable for Nito system	516
easywash365+® holder	469	R+M car wash booms	502-503
easywash365+® holder for Underbody Lance.	490	R+M swivels	510
easywash365+® lance holder	467	Replacement hoses	497
easywash365+® lance swivels ST-345 by Suttner.	456	Replacement spring	497
easywash365+® lances by Suttner	457-458, 460	Self-service air dryer Mosmatic	489
easywash365+® mat cleaner.	469	Shovels	516
easywash365+® mat cleaner available in 5 colors powder-coated.	469	Sleeves for windscreen wipers.	470
easywash365+® prewashing trolley.	466	Snowbrooms	516
easywash365+® spray guns by Suttner	452	Sprayer.	483-485
easywash365+® spray guns with swivels running in ball bearings by Suttner	453	Sprayer with pressure tank	486-487
easywash365+® suction swivel arm	493	Surface cleaner with air recovery system and integrated gum remover, Mosmatic	492
easywash365+® swivels	507	Suttner swivels	504-505
easywash365+® swivels	507	Suttner swivels ST-320	506
easywash365+® vertical boom.	493	Suttner swivels ST-322	506
easywash365+® wall and ceiling booms.	501	Swivels for easywash365+® ceiling booms	497
easywash365+® wall boom extension with ceiling boom.	500	turbofoam365+ lances by Suttner	459
easywash365+® wash brushes - large areas are completely clean from now on!	463	Underbody cleaner with ramp set-up, Mosmatic.	491
Floor cleaner Mosmatic	492	Underbody lance ST-97.1.	490
Foam gun	481	Vacuum cups	470
Foamer with pressure tank	486-487	Vorwerk lances & wash brushes.	464
Handles with water flow	517	Wall mounts	497, 516
Handles without water flow	517	Wash brushes.	463-464
Heated high pressure hoses (before 2005).	478	Wash brushes with water flow	513
Heated low pressure hoses	478	Wash brushes without water flow.	514-515
		Wheel scrubber.	466
		Wheel scrubber WHEELBLASTER PRO	466
		Window brushes and accessories	515-516

easywash365+® spray guns by Suttner

New freeze stop valves in **easywash365+®** spray guns and freeze stop spray guns

The valves are made entirely of non-rusting materials.

Contrary to all commercially available freeze stop valves, the actual internal

valve body is made of a very wear-resistant, partially crystalline thermoplastic.

This difference significantly increases the robustness, reliability as well as preciseness in switching.

easywash365+® standard



LTF

Professional gun. Standard.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 518	1/4" F	3/8" F swivel

easywash365+® weep



LTF

Professional gun. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 528	1/4" F	3/8" F swivel

easywash365+® freeze stop



LTF

Professional gun. Freeze stop version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 538	1/4" F	3/8" F swivel

easywash365+® standard



LTF

Professional gun with lance swivel ST-345.
Standard.

Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 802	1/4" F	3/8" F swivel

easywash365+® weep



LTF

Professional gun with lance swivel ST-345.
Weep version.

Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 803	1/4" F	3/8" F swivel

easywash365+® freeze stop



LTF

Professional gun with lance swivel ST-345.
Freeze stop version.

Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 600 804	1/4" F	3/8" F swivel

Valves complete - easywash365+®



Standard

R+M Nr.
202 300 490



Weep

R+M Nr.
202 300 491



Freeze stop

R+M Nr.
202 300 457

ST-301 swivels



1/4" F : 3/8" F. ST-2300

R+M Nr.
200 301 050



Repair kit ST-301

R+M Nr.
200 300 100

easywash365+® spray guns with swivels running in ball bearings by Suttner

- » High-quality, integrated maintenance-free swivel joint, corrosion-resistant and very smooth-running.
- » Extra-long service life of connected hoses guaranteed by the swivel protecting the hoses from twisting.
- » Convenient 360° handling in any cleaning application.
- » Max. 310 bar / 45 l/min / 150 °C.
- » Gun inlet: 3/8" F, swivelling, gun outlet: 1/4" F.
- » All guns with integrated ball-bearing swivel also feature the proven Low Trigger Force technology and are available with weep and freeze stop option or as standard version.


easywash365+® standard


Professional gun.
Standard.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☞	☛
202 600 514	1/4" F	3/8" F swivel

easywash365+® weep


Professional gun.
Weep version.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☞	☛
202 600 524	1/4" F	3/8" F swivel

easywash365+® freeze stop


Professional gun.
Freeze stop version.
With integrated ball bearing swivel.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.	☞	☛
202 600 534	1/4" F	3/8" F swivel

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Valves complete - easywash365+®


Standard

R+M Nr.
202 300 490



Weep

R+M Nr.
202 300 491



Freeze stop

R+M Nr.
202 300 457



easywash365+® - ball bearing swivel ST-303


1/4" F : 3/8" F. Stainless steel / nickel-plated brass

R+M Nr.
200 303 051

Symbols ☞ outlet ☛ inlet

What is the difference between the versions freeze stop and weep?

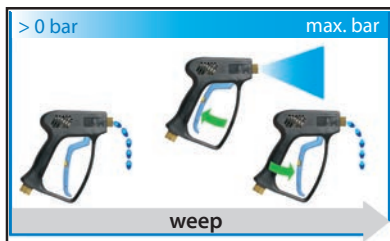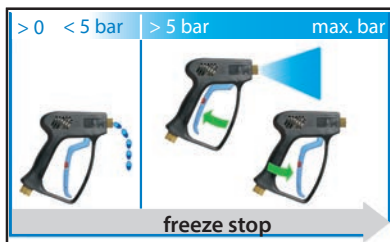

The picture illustrates the different effects regarding diverse winter safety methods of high pressure spray devices. The physical effect that liquids in motion tend to freeze to a lesser extent forms the basis of both versions. Therefore, both the weep as well as the freeze stop version let water pass through the valve (in case of different pressures and under the circumstances) even if the spray gun is closed in order to keep the water which is in piping, hose and spray device in motion.

The weep high pressure spray guns let a reduced water quantity pass through even if the trigger of the gun is not pulled as there is a notch in the seal seat of the valve. This is ensured in high pressure when the high pressure pump is in operation as well as in low pressure in case of water pipe pressure.

The so called freeze stop spray guns are equipped with a valve in valve technology. The operating valve which is driven by the spray gun trigger includes the real automatically operating freeze stop piston. For cleaning applications the spray gun is opened and closed as usual by the operating valve. The integrated freeze stop valve only comes into operation when there is low pressure (water pipe pressure). It is opened in a spring driven way if the pressure is lower than 5 bar. If the pressure increases e.g. by switching on the high pressure pump the freeze stop valve closes automatically. This improves the comfort of washing as there is no water coming out of the gun when taking it out of the lance holder.

High pressure spray guns for self-service car wash

ST-2300 freeze stop



Professional gun. Freeze stop version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 582	1/4" F	3/8" F swivel

ST-2300 weep



Professional gun. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 580	1/4" F	3/8" F

ST-2300 weep



Professional gun. Weep version.
Max. 310 bar / 45 l/min / 150 °C

R+M Nr.		
202 300 581	1/4" F	3/8" F swivel

Valve complete ST-2300



Standard

R+M Nr.
202 300 490



Weep

R+M Nr.
202 300 491



Freeze stop


R+M Nr.
202 300 457

ST-301 swivels



1/4" F : 3/8" F. ST-2300

R+M Nr.
200 301 050



Repair kit ST-301

R+M Nr.
200 300 100

Seal kits



ST-1100

R+M No.
201 100 401
201 100 403*

* Year of manufacture from 2016

ST-1100 weep



Professional gun. Weep version.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 535	1/4" F	3/8" F

ST-1100 weep



Professional gun. Weep version.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 530	1/4" F	3/8" F swivel

ST-1100 without trigger



Professional gun without valve.
Max. 210 bar / 25 l/min / 150 °C

R+M Nr.		
201 100 570	1/4" F	3/8" F swivel

High pressure spray guns for self-service car wash

ST-1500 freeze stop



Professional gun. Freeze stop version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 580	1/4" F	3/8" F

ST-1500 freeze stop



Professional gun. Freeze stop version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 581	1/4" F	3/8" F swivel

ST-1500 weep



Professional gun. Weep version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 620	1/4" F	3/8" F

ST-1500 without trigger



Professional gun without valve.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
201 500 750	1/4" F	3/8" F

ST-601 linear standard



Standard.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
200 601 600	1/4" F	3/8" F

ST-601 linear freeze stop



Freeze stop version.
Max. 275 bar / 45 l/min / 150 °C

R+M Nr.		
200 601 601*	1/4" F	3/8" F

Valves complete



ST-601

R+M Nr.
202 000 044



ST-1500. Freeze stop

R+M Nr.
202 000 101

Valve



ST-1500. Weep


R+M Nr.
202 000 045

ST-300 swivels



1/4" F : 3/8" F. ST-1500

R+M Nr.
200 300 050



Repair kit ST-300

R+M Nr.
200 300 100

* limited stock

Symbols  outlet  inlet

easywash365+® handles by Suttner


Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 650	1/4" F	1/4" M



Stainless steel. Handle 20° bended.
easywash365+® blue. Max. 350 bar / 150 °C

R+M Nr.		
200 009 655	1/4" F	1/4" M



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 665	1/4" F	1/4" M



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 657	1/4" F	M18 M (CEL)



Stainless steel. Handle 20° bended.
Max. 350 bar / 150 °C

R+M Nr.		
200 009 659	M18 F (DKOL)	M18 M (CEL)



Stainless steel. Retrofit kit.
M18 F (DKOL) : 1/4" M

R+M Nr.
200 009 480

easywash365+® lance swivels ST-345 by Suttner

The **easywash365+®** lance swivel guarantees improved ergonomics in the professional car wash and in the cleaning industry. The lance swivel is mounted between the brush lance or spray lance and the high pressure gun or the brush grip.



1/4" F : 1/4" M. 350 bar. Stainless.
RAL 5005

R+M Nr.
200 345 520



1/4" F : 1/4" M. 350 bar. Stainless

R+M Nr.
200 345 530



1/4" F : 1/4" M. 350 bar. Stainless

R+M Nr.
200 345 500



1/4" F : 1/4" M. 350 bar. Stainless.
easywash365+® blue

R+M Nr.
200 345 510

Symbols inlet outlet length ISO insulation


Lance Mosmatic



Stainless steel. Lance with filter sieve, hard plastic handle and nozzle protector without nozzle. Max. 275 bar / 45 l/min / 120 °C

R+M Nr.			
108 280 05	1/8" F NPT	750 mm	1/4" M

easywash365+® lances by Suttner



Stainless steel. Lance with **easywash365+®** handle and nozzle protector ST-10 without nozzle. Max. 350 bar / 45 l/min / 150 °C

R+M Nr.			
515 65	1/4" F NPT	500 mm	1/4" M



Lance with moulded handle Cool & Compact, **easywash365+®** handle, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	ISO			
200 009 670	700 mm	wash brush	900 mm	1/4" M
200 009 675	700 mm	wash brush	1,200 mm	1/4" M




lance rotating

Lance with moulded handle Cool & Compact, **easywash365+®** handle, **easywash365+®** lance swivel, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	ISO			
200 009 673	700 mm	wash brush	900 mm	1/4" M
200 009 678	700 mm	wash brush	1,200 mm	1/4" M

easywash365+® lances by Suttner

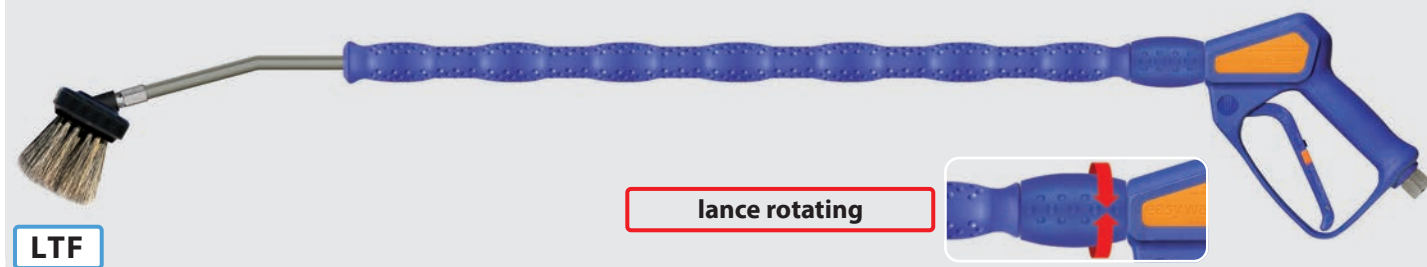

LTF

Lance with moulded handle Cool & Compact, **easywash365+®** spray gun, **easywash365+®** lance swivel, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	spray gun	ISO	↻	↔	Ⓒ
202 600 957	standard	700 mm	wash brush	900 mm	3/8" F swivel
202 600 972	weep	700 mm	wash brush	900 mm	3/8" F swivel
202 600 987	freeze stop	700 mm	wash brush	900 mm	3/8" F swivel
202 600 962	standard	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 977	weep	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 993	freeze stop	700 mm	wash brush	1,200 mm	3/8" F swivel



LTF

Lance with moulded handle Cool & Compact, **easywash365+®** spray gun, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	spray gun	ISO	↻	↔	Ⓒ
202 600 955	standard	700 mm	wash brush	900 mm	3/8" F swivel
202 600 970	weep	700 mm	wash brush	900 mm	3/8" F swivel
202 600 985	freeze stop	700 mm	wash brush	900 mm	3/8" F swivel
202 600 960	standard	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 975	weep	700 mm	wash brush	1,200 mm	3/8" F swivel
202 600 990	freeze stop	700 mm	wash brush	1,200 mm	3/8" F swivel

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.



LTF

Lance with moulded handle Cool & Compact, **easywash365+®** spray gun and nozzle protector ST-10 without nozzle. Max. 310 bar / 150 °C

R+M Nr.	spray gun	ISO mm	↻	↔ mm	Ⓒ
202 600 950	standard	300	1/4" F NPT	600	3/8" F swivel
202 600 966	weep	700	1/4" F NPT	900	3/8" F swivel
202 600 965	weep	300	1/4" F NPT	600	3/8" F swivel
202 600 980	freeze stop	300	1/4" F NPT	600	3/8" F swivel

R+M Nr.	spray gun	ISO mm	↻	↔ mm	Ⓒ
202 600 950 1	standard	300	1/4" F NPT	600	3/8" F swivel
202 600 966 1	weep	700	1/4" F NPT	900	3/8" F swivel
202 600 965 1	weep	300	1/4" F NPT	600	3/8" F swivel
202 600 980 1	freeze stop	300	1/4" F NPT	600	3/8" F swivel

Symbols Ⓒ inlet ↻ outlet ↔ length ISO insulation D nozzle

turbofoam365+ lances by Suttner

easywash365+® spray gun, lance and brush with **turbofoam365+** air injector by Suttner

- » Especially soft cleaning with very soft hog bristles with forked ends
- » Cool & Compact insulation for a comfortable use
- » Ergonomic handling by means of the well-tried **easywash365+®** spray gun with LTF-technology
- » Available in 2 length: 900 and 1,200 mm
- » Brush with injector is also available as retrofit kit
- » **easywash365+®** spray gun is obtainable as standard, weep or freeze stop version
- » Lance swivel ST-345 is optionally available
- » Not suitable for powder chemicals




Retrofit kit for lances. Air injector **turbofoam365+** and brush with cover plate.
20 – 150 bar. Max. 50 °C

Bristles 60 mm

R+M Nr.	C	D
500 023 101	1/4" F	1.20
500 023 102	1/4" F	1.35
500 023 105	1/4" F	1.60

Bristles 90 mm

R+M Nr.	C	D
500 023 201	1/4" F	1.20
500 023 202	1/4" F	1.35
500 023 205	1/4" F	1.60

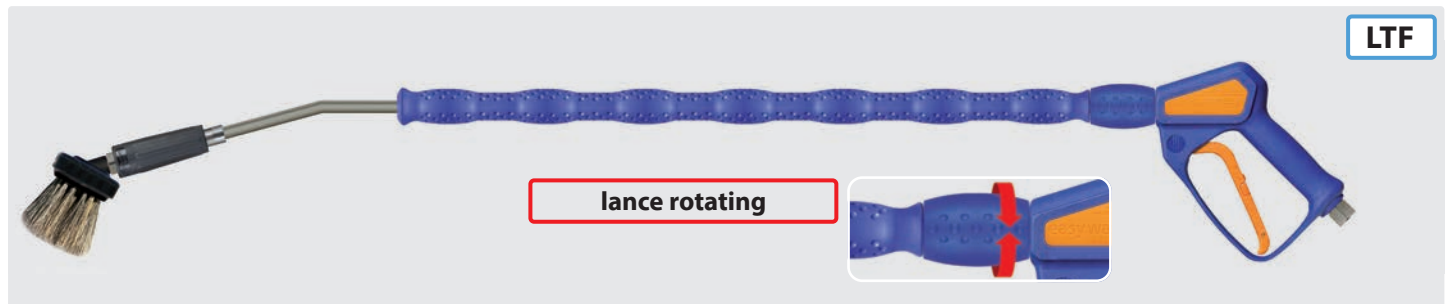

Lance with moulded insulation Cool & Compact, **easywash365+®** spray gun, **easywash365+®** lance swivel, air injector **turbofoam365+** and brush (bristles 60 mm). 20-150 bar. Max. 50 °C


R+M Nr.	spray gun	D	ISO	☞	☛	C
502 600 100 05	standard	1.6	700 mm	brush	900 mm	3/8" F swivel
502 610 100 05	weep	1.6	700 mm	brush	900 mm	3/8" F swivel
502 620 100 05	freeze stop	1.6	700 mm	brush	900 mm	3/8" F swivel
502 601 100 05	standard	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 611 100 05	weep	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 621 100 05	freeze stop	1.6	700 mm	brush	1,200 mm	3/8" F swivel



Lance with moulded insulation Cool & Compact, **easywash365+®** spray gun, air injector **turbofoam365+** and brush (bristles 60 mm). 20-150 bar. Max. 50 °C

R+M Nr.	spray gun	D	ISO	☞	☛	C
502 600 000 05	standard	1.6	700 mm	brush	900 mm	3/8" F swivel
502 610 000 05	weep	1.6	700 mm	brush	900 mm	3/8" F swivel
502 620 000 05	freeze stop	1.6	700 mm	brush	900 mm	3/8" F swivel
502 601 000 05	standard	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 611 000 05	weep	1.6	700 mm	brush	1,200 mm	3/8" F swivel
502 621 000 05	freeze stop	1.6	700 mm	brush	1,200 mm	3/8" F swivel

easywash365+® lances by Suttner

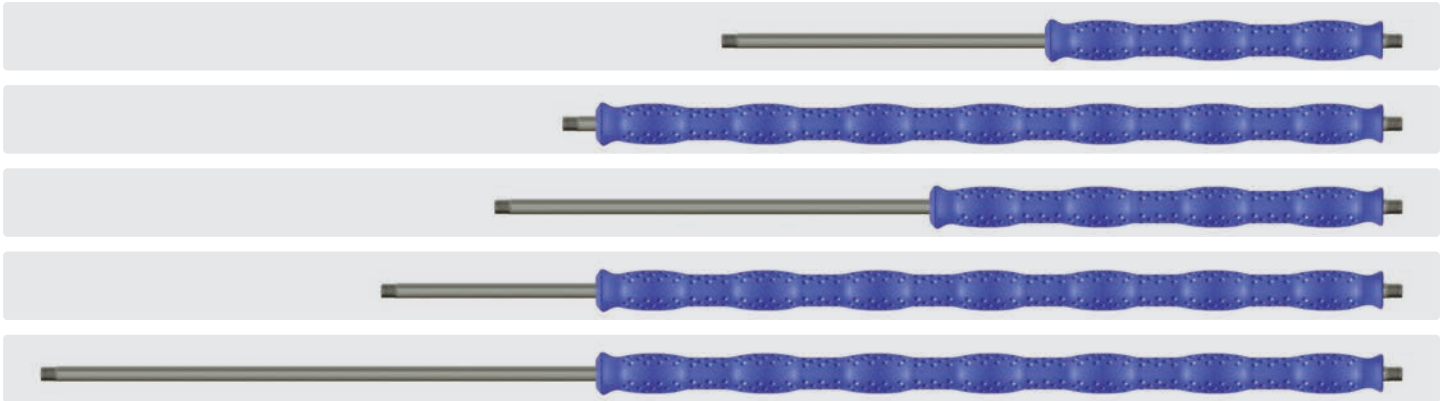

Stainless steel. Lance with moulded handle Cool & Compact. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 129 306	300 mm	1/4" M	600 mm	1/4" M
200 129 707 *	700 mm	1/4" M	740 mm	1/4" M
200 129 408	400 mm	1/4" M	800 mm	1/4" M
200 129 709	700 mm	1/4" M	900 mm	1/4" M
200 129 712	700 mm	1/4" M	1,200 mm	1/4" M



Stainless steel. Lance with moulded handle. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 029 709	700 mm	1/4" M	900 mm	1/4" M



Stainless steel. Lance with moulded handle. Max. 400 bar / 150 °C

R+M Nr.	ISO	⌀	↔	Ⓒ
200 029 712 *	700 mm	1/4" M	1,200 mm	1/4" M

Carwash low pressure foam lance



Professional low pressure foam lance with patented LTF technology. Gun ST-2620 with 300 mm insulated lance and nozzle protection ST-10 with low-pressure nozzle 9040. Max. 125 bar / 80 l / min / 150 °C


R+M Nr.	⌀	TYP	Ⓒ
202 620 906	Low pressure nozzle 9040	Standard	1/2" F swivel

R+M Nr.	⌀	TYP	Ⓒ
202 620 905	Low pressure nozzle 9040	Weep	1/2" F swivel

Sample application

Carwash low pressure Foam lance:

4 bar water pressure
3 bar compressed air addition
and 3% foam cleaning
chemicals via dosing pump

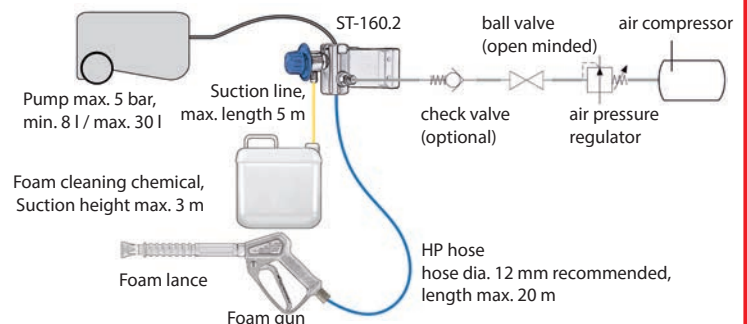

* limited stock

easywash365+® foam lances

LTF



Foam lance with easywash365+® gun standard, lance with extension ST-9.1 245 mm and foam head ST-75. Max. 310 bar / 25 l/min / 150 °C

R+M Nr.	☺	TYP	☺
202 600 918	foam head ST-75 (1.9 mm)	standard	3/8" F swivel

LTF



Foam lance with easywash365+® gun, lance with extension ST-9.1 245 mm and foam head ST-75. Max. 310 bar / 25 l/min / 150 °C

R+M Nr.	☺	TYP	☺
202 600 911	foam head ST-75 (1.05 mm)	weep version	3/8" F swivel
202 600 949	foam head ST-75 (1.20 mm)	weep version	3/8" F swivel
202 600 909	foam head ST-75 (1.35 mm)	weep version	3/8" F swivel
202 600 917	foam head ST-75 (1.90 mm)	weep version	3/8" F swivel

LTF



Foam lance with easywash365+® gun, lance with extension ST-9.1 245 mm and foam head ST-75. Max. 310 bar / 25 l/min / 150 °C

R+M Nr.	☺	TYP	☺
202 600 963	foam head ST-75 (1.05 mm)	freeze stop version	3/8" F swivel.
202 600 929	foam head ST-75 (1.20 mm)	freeze stop version	3/8" F swivel.
202 600 930	foam head ST-75 (1.35 mm)	freeze stop version	3/8" F swivel
202 600 995	foam head ST-75 (1.70 mm)	freeze stop version	3/8" F swivel
202 600 919	foam head ST-75 (1.90 mm)	freeze stop version	3/8" F swivel

Valves complete - easywash365+®



Standard



Weep



Freeze stop

ST-301 swivels

1/4" F : 3/8" F.
easywash365+® guns

Repair kit ST-301

R+M Nr.
202 300 490

R+M Nr.
202 300 491

R+M Nr.
202 300 457

R+M Nr.
200 301 050

R+M Nr.
200 300 100

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Symbols ☺ inlet ☺ outlet ☺ length ISO insulation TYP type

easywash365+® foam sets

By introducing the universally applicable **easywash365+®** foam sets we succeeded in enlarging the application possibility of our foam injector family.

The stainless steel injector with high pressure foam lance which is installed via a T-piece between the outlet of the high pressure unit and the original spraying unit is especially designed for the professional cleaning of trucks of shipping or food companies as well as for applications in the industrial foam cleaning.

The connection from injector unit to the high pressure foam lance is realized by an optionally high pressure hose of up to a length of 40 m. The already existing spraying unit is used for cleaning and


rinsing works. Enormous savings of both cleaning agent and time can be achieved as the foam lance has cleaning agent immediately available without switching at the unit or change of equipment.

It is possible to simplify the handling of the construction and to boost efficiency at the same time by integrating two hose reels. This set is suitable for all common high pressure cleaning units for up to 310 bar and max. 90 °C.



easywash365+® foam set: **easywash365+®** foam lance standard with foam head ST-75, injector ST-160 (M22 F and 2 x M22 M) with metering valve ST-161, suction hose 1000 mm and suction filter ST-32. Max. 310 bar / 90 °C

R+M Nr.		
200 160 720	foam head ST-75 (1.9 mm)	3/8" F swivel

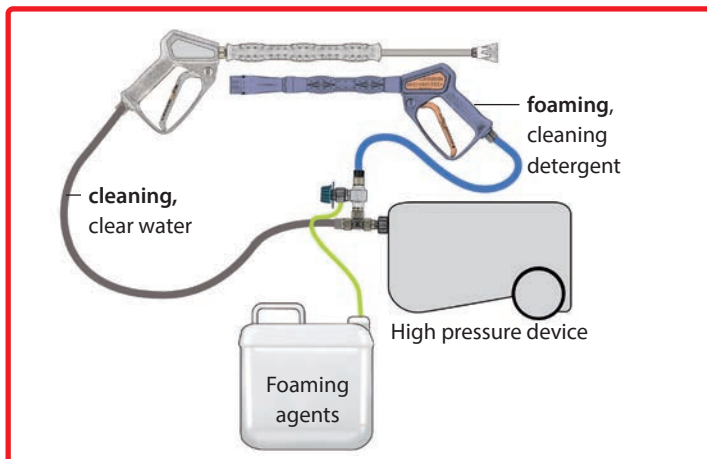

Adapter connection ST-160



Brass. For connecting the ST-160 to the pump head for hobby high-pressure cleaner with hose reel

R+M Nr.		
010 003 080	1/4" F	M18 M

The following hoses are highly recommended for easywash365+® foam sets

Hoses with single wire braid and *wrapped cover*

TYP	DN	P	°C	↔	R+M Nr.
1SN	8	315 bar	150 °C	10 m	343 103 310
				15 m	343 103 315
				20 m	343 103 320
				30 m	343 103 330

QSC : male thread

M22 : 3/8"



Symbols inlet outlet **DN** nominal diameter **P** pressure **°C** temperature length **TYP** type thread

easywash365+® wash brushes - large areas are completely clean from now on!


By means of a very wide work surface of approx. 260 x 80 mm the **easywash365+®** wash brush is especially designed for the efficient cleaning of large areas such as railway carriages, tramcars, omnibuses, caravans, trucks, boats and ships, facades, greenhouses as well as vehicles, motorcycles and many more.

Fine and extremely soft natural bristles with split ends ensure an especially gentle cleaning of sensitive surfaces such as windows and car finish. The solid body of the **easywash365+®** wash brush consists of 152 bristle bundles which are attached undetachably by means of multi-component synthetic resin.

Our **easywash365+®** wash brush convinces all users working in the self-service foam- and prewash of an ideal and very easy handling. The soft coating of the body made out of thermoplastic elastomer demonstrably protects sensitive surfaces from damages.

The inlet of the **easywash365+®** wash brush is equipped with a brass insert with 1/4" female thread which is fixed in the body. By means of an additional grub screw the high pressure lances available at self-service bays are safe from twisting and theft. Therefore, the grub screw needs to be screwed to the lance tube. **Further fastening plates or protection against theft are not required.**

13 outlet ports at the bottom of the **easywash365+®** wash brush enable the required water flow and guarantee a convincingly good foam quality at the same time.

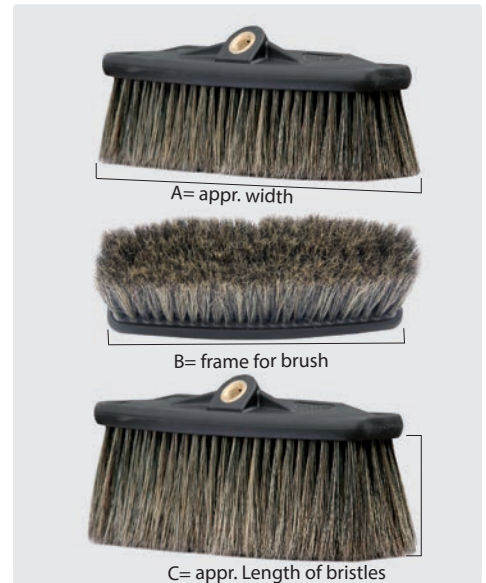

Wash brushes



A= 270. B= 260 x 80 mm. Hog hair.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓒ
200 023 550	60 mm	1/4" F



A= 270. B= 260 x 80 mm. Hog hair.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓒ
200 023 650	90 mm	1/4" F



A= 270. B= 260 x 80 mm. Hog hair / synthetic.
Max. 40 l/min / 60 °C

R+M Nr.	C	Ⓒ
200 023 660	90 mm	1/4" F

Wash brushes

Wash brushes



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C
200 023 500	60 mm
200 023 600	90 mm

Wash brush with cover



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	Ⓒ
200 023 710	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
With stainless steel frame.
Max. 50 °C

R+M Nr.	C	Ⓒ
200 023 735	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
With stainless steel frame.
Max. 50 °C

R+M Nr.	C	Ⓒ
200 023 736	90 mm	1/4" F

Covers



Cover suitable as theft protection for wash brushes. Plastic.
Max. 50 °C

R+M Nr.	B
020 001 540	230 mm

Frames for wash brushes



Frame with fixing bolts. Stainless steel. Max. 60 °C

R+M Nr.	B	Ⓒ
200 023 560	230 mm	1/4" F



Frame. Stainless steel.
Max. 60 °C

R+M Nr.	B	Ⓒ
200 023 570	230 mm	1/4" F

Wash brushes



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	
523 703	60 mm	1/8" M



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	
200 023 700	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair. With stainless steel frame. Max. 50 °C

R+M Nr.	C	
200 023 730	60 mm	1/4" F



A= 260. B= 230 x 80 mm. Hog hair.
Max. 50 °C

R+M Nr.	C	
523 701	60 mm	M18 x 1.5 F

The original

Vorwerk lances & wash brushes



Extension pipe with water flow

R+M Nr.			
523 790 1	1,000 mm	1/4" M	1/4" F
523 790 2	1,500 mm	1/4" M	1/4" F
523 790 3	2,000 mm	1/4" M	1/4" F

Vorwerk wash brushes



A= 300. B= 300 x 100 mm. Nylon

R+M Nr.	C	
523 780	60 mm	1/4" F



A= 240. B= 230 x 80 mm. Hog hair

R+M Nr.	C	
523 70	60 mm	1/4" F
523 75	90 mm	1/4" F

Adaptor



Adaptor for telescopic lance 525 300 10.
Coarse thread : 1/4" M

R+M Nr.
010 003 610



Brush. A= 260. B= 230 x 80 mm.
Hog hair

R+M Nr.	C
523 72	60 mm
523 73	90 mm



Frame. 260 mm.
Aluminium

R+M Nr.	
523 76	1/4" F

Air injector



1/4" F : 1/4" M.
Flow at 100 bar

R+M Nr.		
108 290 60	13 l/min	1.5
108 290 20	34 l/min	2.5


Symbols length inlet outlet diameter flow

Mosmatic flex-brush wand – no more washing without coin slot!

Flex-mechanism: The Flex-Brush has an additional feature compared to all existing wands. It's the wobble feature! This will allow the brush head to wobble when not under pressure and become solid when under pressure. The mechanism requires a minimum pressure of 2.5 bar to be used. This will happen through a pin which moves forward. As soon as the pressure drops, the pin will move back to its origin position and the brush head starts to wobble again.

Integrated swivel (optional): An integrated swivel at the inlet of the brush-wand will give you optimal freedom of movement. In addition, the high pressure hose will not tangle up and will provide the user a secure handling.

easywash365+® handle (optional): for a safe and ergonomic handling.

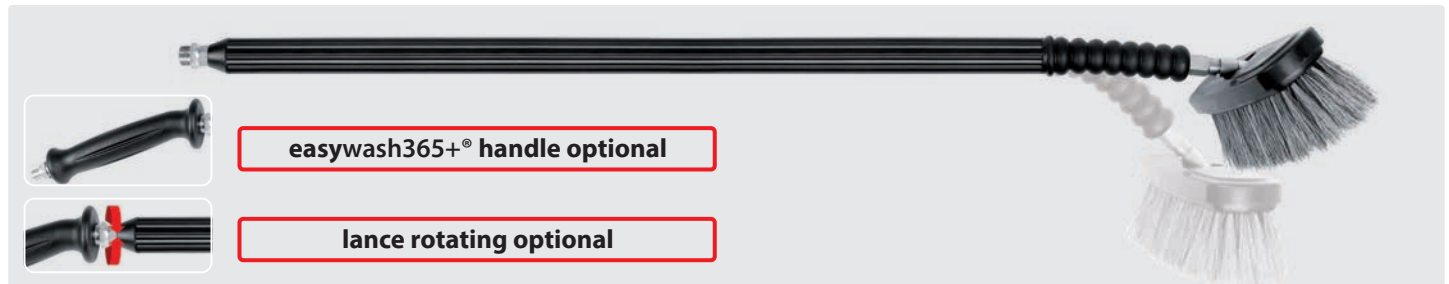

Lance with moulded handle, air injector and wash brush (bristles 60 mm). Max. 50 °C

R+M Nr.	TYP	↔	ISO	⊖	P	↔	⊕
108 271 02	-	1,000 mm	800 mm	wash brush	2.5 - 20 bar	min. 5 l/min	1/4" M
108 271 07	-	1,000 mm	800 mm	wash brush	20 - 80 bar	min. 9 l/min	1/4" M
108 273 02	-	1,200 mm	800 mm	wash brush	2.5 - 20 bar	min. 5 l/min	1/4" M (handle)
108 273 07	-	1,200 mm	800 mm	wash brush	20 - 80 bar	min. 9 l/min	1/4" M (handle)
108 271 22	swivel	1,000 mm	800 mm	wash brush	2.5 - 20 bar	min. 5 l/min	1/4" M
108 271 27	swivel	1,000 mm	800 mm	wash brush	20 - 80 bar	min. 9 l/min	1/4" M
108 273 22	swivel	1,200 mm	800 mm	wash brush	2.5 - 20 bar	min. 5 l/min	1/4" M (handle)
108 273 27	swivel	1,200 mm	800 mm	wash brush	20 - 80 bar	min. 9 l/min	1/4" M (handle)

easywash365+® brush holder



Container with overflow and lateral drain for cleaning. For wall and floor mounting.
H x W x D = 670 x 340 x 143 mm

R+M Nr.	(M)
105 810	stainless steel



Wash brush holder, two-piece.
For floor mounting and positioning for different length of lances.

Holder: H x W x D: 315 x 305 x 120 mm.
Support pipe: Pipe Ø 42 mm,
height adjustable from 570 to 1,000 mm

R+M Nr.	(M)
105 820	stainless steel

Brush holder



Suitable for all brushes. Hole spacing 202 mm.
H x W x D = 90 x 250 x 100 mm

R+M Nr.	(M)
108 290 30	stainless steel

easywash365+® prewashing trolley

- » Stainless steel
- » 2 separate areas
- » Water pipe connection: ST-45 plug nipple for 1/2" DN 13 or 3/4" DN 19
- » Drain tap and nozzle for DN 13
- » Incl. Intake hose with filter and check valve
- » Storage of detergent canisters up to 30 liters
- » The water and detergent supply is automatically closed or opened by a float valve



R+M Nr.		
105 830	ST-45	ball valve

Wheel scrubber WHEELBLASTER PRO

- » Made out of stainless steel
- » 4 nozzles tips are required
- » Variable height and swing adjustment
- » Multiple cleaning heads can be installed
- » High impact at distance
- » DYTIs swivel
- » Rotor arm 160/160 mm
- » Minimum flow rate: 30 l/min.
- » **Delivery about 3 weeks**

The Wheelblaster Pro is the new standard for vehicle wash systems. The complete wash head can be placed nearly anywhere you wish and has variable height and swing adjustment. The unit must be equipped with 4 stabilizer nozzles. These four 0° stabilizer nozzles increase distance and impact to achieve optimal cleaning. It is possible to cover a larger cleaning area by mounting various cleaning heads on the 1 meter high stand

action-:

distance cleaning surface

250 mm	450 mm
500 mm	700 mm
750 mm	950 mm
1,000 mm	1,200 mm

R+M Nr.	TYP	°C	P	U		
108 845 41	incl. stand	120°	275 bar	up to 2,000 rpm	3/8" F	11.5 kg
108 845 91	excl. stand	120°	275 bar	up to 2,000 rpm	3/8" F	4.2 kg

Wheel scrubber



Buffed stainless steel. Accessories for automatic car wash. Turbo swivel. Rotating arm is powered by water. Adjustable in height. Connectable with a hose of the pumping system. 4 nozzles 1/8" M NPT are required. Rotor  470 / 350 mm. Max. 250 bar / 2,000 r.p.m. / 120 °C

R+M Nr.	TYP	
108 845 12	standard	3/8" F
108 845 17	high performance	3/8" F

Symbols  inlet  outlet TYP type P pressure U revolutions  weight M material °C temperature  width  flow

easywash365+® lance holder

Lance holder for floor mounting



Lance holder with drain $\varnothing$ 20 mm. Pipe length 730 mm. Appropriate wall mounting bracket (for $\varnothing$ 60 mm only): 105 625

R+M Nr.	(M)	Pipe- $\varnothing$
105 620	stainless steel	60 mm
105 626	stainless steel	100 mm

Lance holder with suspension



Holder with suspension and drain $\varnothing$ 20 mm. Pipe length 730 mm. Pipe diameter 60 mm. Appropriate wall mounting bracket: 105 625

R+M Nr.	(M)
105 650	stainless steel

Lance holder for wall mounting



Pipe length 590 mm. Pipe diameter 60 mm.

R+M Nr.	(M)
105 630	stainless steel

easywash365+® twin lance holder



Lance holder with drain $\varnothing$ 28 mm. Pipe length 2 x 730 mm. Pipe diameter 60 mm.

R+M Nr.	(M)
105 660	stainless steel

easywash365+® lance holder



Lance holder with drain $\varnothing$ 28 mm. Pipe length 730 mm. Pipe diameter 60 mm.

R+M Nr.	(M)
105 640	stainless steel

easywash365+® car wash lance holder



Stainless steel. Height adjustable. Lance support: 800 mm.

R+M Nr.	(S)	(I)	(A)
105 610 060	7 kg	800-900 mm	710 mm




Lance holder, Mosmatic

Lance holder for wall mounting




Pipe length 720 mm. Pipe diameter 100 mm.

R+M Nr.	(M)	(S)
108 291 43	stainless steel	3.3 kg




Mosjet-Rotor-Nozzles

- » Optimal cleaning with the MOSjet rotary nozzle from Mosmatic
- » 24° spray angle for precise cleaning
- » Consistent results thanks to slow rotation
- » Easy maintenance thanks to replaceable filter
- » Available in a range of sizes for different applications
- » Areas of application: Vehicle care and industrial cleaning
- » Important: Do not use unprotected

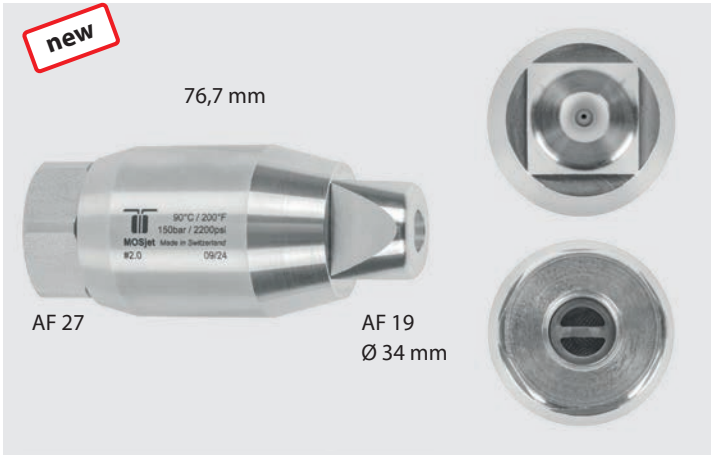

1/4" F. Stainless steel. Spray angle 24°. 35-150 bar. Max. 90 °C

R+M Nr.	☐
108 143 20	020
108 143 30	030
108 143 35	035
108 143 40	040
108 143 45	045
108 143 50	050
108 143 55	055
108 143 60	060
108 143 65	065
108 143 70	070

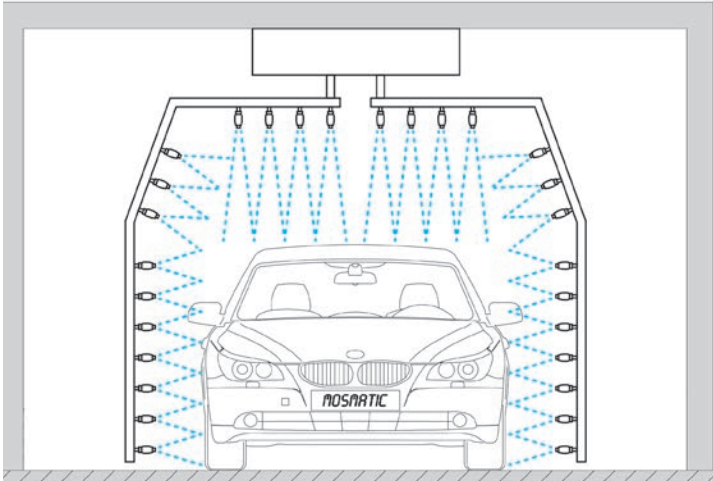

easywash365+® mat cleaner

H x W x D 1,200 x 540 x 35 mm.
Mounting plates $\varnothing$ 100 mm.
Weight 16 kg.
Mounting parts excluded in delivery

R+M Nr.	(M)
105 735	stainless steel



H x W x D 920 x 630 x 350 mm.
Weight 25 kg.
Mounting parts included in delivery

R+M Nr.	(M)
105 740	zinc-plated steel

easywash365+® mat cleaner available in 5 colors powder-coated

Iron glimmer grey DB 703	White aluminum RAL 9006	Traffic red RAL 3020	Signal red RAL 3001	Ultramarine blue RAL 5002

- » Appealing design, available in 5 colors, powder-coated. Other RAL tones on request
- » Galvanized and powder-coated, practical and robust
- » Sheet steel housing mounted vibration-proof and noise-reducing
- » Including 4 fastening screws with universal dowels
- » Collecting drawer with ABS recessed grip, secure locking and centering
- » For easier emptying, the back of the drawer is designed as a chute and guide plates running all around guide the dirt straight into the drawer

R+M Nr.	(S)	(M)
105 740 703	25 kg	galvanized / Iron glimmer grey
105 749 006	25 kg	galvanized / White aluminum
105 743 020	25 kg	galvanized / Traffic red
105 743 001	25 kg	galvanized / Signal red
105 745 002	25 kg	galvanized / Ultramarine blue

easywash365+® holder**Car mat holder**

The solid car mat holder for practical wet cleaning of rubber mats or within the vacuum cleaner area for textile mats.
Height 300 mm

R+M Nr.	(M)
108 909 09	stainl. steel



The solid car mat holder for practical wet cleaning of rubber mats or within the vacuum cleaner area for textile mats.
Height 240 mm

R+M Nr.	(M)
105 750	stainl. steel

Holder for motorcycle helmets

H x W x D 150 x 125 x 87 mm.
Weight 0.38 kg.
Mounting parts excluded in delivery.

R+M Nr.	(M)
105 000	stainl. steel

Symbols $\square$ pressure $\rightarrow$ flow $\square$ revolutions $\square$ KW kilowatt $\square$ TYP type $\varnothing$ piston diameter $\square$ thread $\square$ height $\square$ weight

Low pressure pre-spraying unit



Pre-spraying unit with gun ST-810, lance ST-28 Cool & Compact zinc-plated steel, nozzle protector ST-10 and nozzle 65° 01 with filter.
Max. 140 bar / 150 °C

R+M Nr.			
200 810 785	nozzle 65° 01	500 mm	1/4" M swivel

Protective gloves

Protective gloves in dispenser box



Gloves made out of pressed transparency film.
Hammered. Taking of gloves at the bottom.
100 pieces per box. Size 240 x 300 mm

R+M Nr.	VPE
105 901 000	1,000 pieces
105 903 000	3,000 pieces
105 910 000	10,000 pieces

Wall mount for protective gloves



Taking of gloves at the bottom.
Stainless steel

R+M Nr.	W	H	D
105 900	235	165	20

Sleeves for windscreen wipers




Polyethylene. 25 µ. HDPE. Blocked at 50 pieces each. Tear-off perforation

R+M Nr.	H x L	VPE
980 806 002 6	80 x 600 mm	5,000

HDPE = high density

Vacuum cups



Height of cup mm: H
Connection length mm: L
Connection width mm: B

For fixing the rear wipers onto the window.
VPE 100 pieces.

Suitable to adhere to smooth, nonporous surfaces.

Flexible PVC.

Soft degree of hardness.



R+M Nr.	H	L	B	VPE
105 950	8	86	16	100



R+M Nr.	H	L	B	VPE
105 952	7	100	16	100



R+M Nr.	H	L	B	VPE
105 953	8	86	16	100

Symbols inlet outlet length VPE packing unit weight

CARWASH COMFORT PREMIUM

- » Extremely flexible and elastic high-pressure hose, thanks to a special plastic compound
- » For use in professional car cleaning
- » Highest resistance to oil, UV-, ozone- and weatherproof
- » Experience the new orange miracle in use, maximum durability and flexibility for perfect vehicle care
- » The solution in the self-service washing area for professionals by professionals
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F
- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12.8 mm at DN 6
- » Burst pressure > 800 bar



1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔	
466 052 133 5	3.5 m	
466 052 133 7	3.7 m	
466 052 134	4.0 m	
466 052 134 2	4.2 m	
466 052 134 5	4.5 m	
466 052 134 7	4.7 m	
466 052 135	5.0 m	
466 052 135 5	5.5 m	
466 052 136	6.0 m	

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔	
466 054 133 5	3.5 m	
466 054 133 7	3.7 m	
466 054 134	4.0 m	
466 054 134 2	4.2 m	
466 054 134 5	4.5 m	
466 054 134 7	4.7 m	
466 054 135	5.0 m	
466 054 135 5	5.5 m	
466 054 136	6.0 m	

M14 : M14



Female thread (DKOL)

R+M Nr.	↔	
466 072 133 5	3.5 m	
466 072 133 7	3.7 m	
466 072 134	4.0 m	
466 072 134 2	4.2 m	
466 072 134 5	4.5 m	
466 072 134 7	4.7 m	
466 072 135	5.0 m	
466 072 135 5	5.5 m	
466 072 136	6.0 m	

M18 : M18



Female thread (DKOL)

R+M Nr.	↔	
466 076 133 5	3.5 m	
466 076 133 7	3.7 m	
466 076 134	4.0 m	
466 076 134 2	4.2 m	
466 076 134 5	4.5 m	
466 076 134 7	4.7 m	
466 076 135	5.0 m	
466 076 135 5	5.5 m	
466 076 136	6.0 m	

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔	
466 044 133 5	3.5 m	
466 044 133 7	3.7 m	
466 044 134	4.0 m	
466 044 134 2	4.2 m	
466 044 134 5	4.5 m	
466 044 134 7	4.7 m	
466 044 135	5.0 m	
466 044 135 5	5.5 m	
466 044 136	6.0 m	



Female thread (DKR)

R+M Nr.	↔	
461 105 260 35	3.5 m	
461 105 260 37	3.7 m	
461 105 260 4	4.0 m	
461 105 260 42	4.2 m	
461 105 260 45	4.5 m	
461 105 260 47	4.7 m	
461 105 260 5	5.0 m	
461 105 260 55	5.5 m	
461 105 260 6	6.0 m	



Female thread (DKR)

R+M Nr.	↔	
461 105 460 35	3.5 m	
461 105 460 37	3.7 m	
461 105 460 4	4.0 m	
461 105 460 42	4.2 m	
461 105 460 45	4.5 m	
461 105 460 47	4.7 m	
461 105 460 5	5.0 m	
461 105 460 55	5.5 m	
461 105 460 6	6.0 m	



Female thread (DKOL)

R+M Nr.	↔	
461 107 260 35	3.5 m	
461 107 260 37	3.7 m	
461 107 260 4	4.0 m	
461 107 260 42	4.2 m	
461 107 260 45	4.5 m	
461 107 260 47	4.7 m	
461 107 260 5	5.0 m	
461 107 260 55	5.5 m	
461 107 260 6	6.0 m	



Female thread (DKOL)

R+M Nr.	↔	
461 107 660 35	3.5 m	
461 107 660 37	3.7 m	
461 107 660 4	4.0 m	
461 107 660 42	4.2 m	
461 107 660 45	4.5 m	
461 107 660 47	4.7 m	
461 107 660 5	5.0 m	
461 107 660 55	5.5 m	
461 107 660 6	6.0 m	



Male thread (AGR)

R+M Nr.	↔	
461 104 460 35	3.5 m	
461 104 460 37	3.7 m	
461 104 460 4	4.0 m	
461 104 460 42	4.2 m	
461 104 460 45	4.5 m	
461 104 460 47	4.7 m	
461 104 460 5	5.0 m	
461 104 460 55	5.5 m	
461 104 460 6	6.0 m	

Our hose assemblies are durably marked on the crimp in accordance with EN 853 / EN 856 / EN 855.

Symbols ↔ length

CARWASH COMFORT PREMIUM

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔
462 105 230 35	3.5 m
462 105 230 37	3.7 m
462 105 230 4	4.0 m
462 105 230 42	4.2 m
462 105 230 45	4.5 m
462 105 230 47	4.7 m
462 105 230 5	5.0 m
462 105 230 55	5.5 m
462 105 230 6	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔
462 105 430 35	3.5 m
462 105 430 37	3.7 m
462 105 430 4	4.0 m
462 105 430 42	4.2 m
462 105 430 45	4.5 m
462 105 430 47	4.7 m
462 105 430 5	5.0 m
462 105 430 55	5.5 m
462 105 430 6	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	↔
462 107 230 35	3.5 m
462 107 230 37	3.7 m
462 107 230 4	4.0 m
462 107 230 42	4.2 m
462 107 230 45	4.5 m
462 107 230 47	4.7 m
462 107 230 5	5.0 m
462 107 230 55	5.5 m
462 107 230 6	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	↔
462 107 630 35	3.5 m
462 107 630 37	3.7 m
462 107 630 4	4.0 m
462 107 630 42	4.2 m
462 107 630 45	4.5 m
462 107 630 47	4.7 m
462 107 630 5	5.0 m
462 107 630 55	5.5 m
462 107 630 6	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔
462 104 430 35	3.5 m
462 104 430 37	3.7 m
462 104 430 4	4.0 m
462 104 430 42	4.2 m
462 104 430 45	4.5 m
462 104 430 47	4.7 m
462 104 430 5	5.0 m
462 104 430 55	5.5 m
462 104 430 6	6.0 m



Female thread (DKR)

R+M Nr.	↔
463 105 270 35	3.5 m
463 105 270 37	3.7 m
463 105 270 4	4.0 m
463 105 270 42	4.2 m
463 105 270 45	4.5 m
463 105 270 47	4.7 m
463 105 270 5	5.0 m
463 105 270 55	5.5 m
463 105 270 6	6.0 m



Female thread (DKR)

R+M Nr.	↔
463 105 470 35	3.5 m
463 105 470 37	3.7 m
463 105 470 4	4.0 m
463 105 470 42	4.2 m
463 105 470 45	4.5 m
463 105 470 47	4.7 m
463 105 470 5	5.0 m
463 105 470 55	5.5 m
463 105 470 6	6.0 m



Female thread (DKOL)

R+M Nr.	↔
463 107 270 35	3.5 m
463 107 270 37	3.7 m
463 107 270 4	4.0 m
463 107 270 42	4.2 m
463 107 270 45	4.5 m
463 107 270 47	4.7 m
463 107 270 5	5.0 m
463 107 270 55	5.5 m
463 107 270 6	6.0 m



Female thread (DKOL)

R+M Nr.	↔
463 107 670 35	3.5 m
463 107 670 37	3.7 m
463 107 670 4	4.0 m
463 107 670 42	4.2 m
463 107 670 45	4.5 m
463 107 670 47	4.7 m
463 107 670 5	5.0 m
463 107 670 55	5.5 m
463 107 670 6	6.0 m



Male thread (AGR)

R+M Nr.	↔
463 104 470 35	3.5 m
463 104 470 37	3.7 m
463 104 470 4	4.0 m
463 104 470 42	4.2 m
463 104 470 45	4.5 m
463 104 470 47	4.7 m
463 104 470 5	5.0 m
463 104 470 55	5.5 m
463 104 470 6	6.0 m

Symbols ↔ length

CARWASH COMFORT PREMIUM

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
464 105 230 35	3.5 m
464 105 230 37	3.7 m
464 105 230 4	4.0 m
464 105 230 42	4.2 m
464 105 230 45	4.5 m
464 105 230 47	4.7 m
464 105 230 5	5.0 m
464 105 230 55	5.5 m
464 105 230 6	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
464 105 430 35	3.5 m
464 105 430 37	3.7 m
464 105 430 4	4.0 m
464 105 430 42	4.2 m
464 105 430 45	4.5 m
464 105 430 47	4.7 m
464 105 430 5	5.0 m
464 105 430 55	5.5 m
464 105 430 6	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
464 107 230 35	3.5 m
464 107 230 37	3.7 m
464 107 230 4	4.0 m
464 107 230 42	4.2 m
464 107 230 45	4.5 m
464 107 230 47	4.7 m
464 107 230 5	5.0 m
464 107 230 55	5.5 m
464 107 230 6	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	
464 107 630 35	3.5 m
464 107 630 37	3.7 m
464 107 630 4	4.0 m
464 107 630 42	4.2 m
464 107 630 45	4.5 m
464 107 630 47	4.7 m
464 107 630 5	5.0 m
464 107 630 55	5.5 m
464 107 630 6	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
464 104 430 35	3.5 m
464 104 430 37	3.7 m
464 104 430 4	4.0 m
464 104 430 42	4.2 m
464 104 430 45	4.5 m
464 104 430 47	4.7 m
464 104 430 5	5.0 m
464 104 430 55	5.5 m
464 104 430 6	6.0 m



Female thread (DKR)

R+M Nr.	
465 105 230 35	3.5 m
465 105 230 37	3.7 m
465 105 230 4	4.0 m
465 105 230 42	4.2 m
465 105 230 45	4.5 m
465 105 230 47	4.7 m
465 105 230 5	5.0 m
465 105 230 55	5.5 m
465 105 230 6	6.0 m



Female thread (DKR)

R+M Nr.	
465 105 430 35	3.5 m
465 105 430 37	3.7 m
465 105 430 4	4.0 m
465 105 430 42	4.2 m
465 105 430 45	4.5 m
465 105 430 47	4.7 m
465 105 430 5	5.0 m
465 105 430 55	5.5 m
465 105 430 6	6.0 m



Female thread (DKOL)

R+M Nr.	
465 107 230 35	3.5 m
465 107 230 37	3.7 m
465 107 230 4	4.0 m
465 107 230 42	4.2 m
465 107 230 45	4.5 m
465 107 230 47	4.7 m
465 107 230 5	5.0 m
465 107 230 55	5.5 m
465 107 230 6	6.0 m



Female thread (DKOL)

R+M Nr.	
465 107 630 35	3.5 m
465 107 630 37	3.7 m
465 107 630 4	4.0 m
465 107 630 42	4.2 m
465 107 630 45	4.5 m
465 107 630 47	4.7 m
465 107 630 5	5.0 m
465 107 630 55	5.5 m
465 107 630 6	6.0 m




Male thread (AGR)

R+M Nr.	
465 104 430 35	3.5 m
465 104 430 37	3.7 m
465 104 430 4	4.0 m
465 104 430 42	4.2 m
465 104 430 45	4.5 m
465 104 430 47	4.7 m
465 104 430 5	5.0 m
465 104 430 55	5.5 m
465 104 430 6	6.0 m

CARWASH COMFORT - the proven hose marvel for self-service car washes

The original

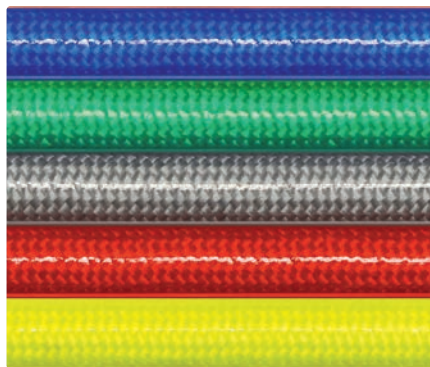

- » High standard of easy and comfortable use in combination with spraying equipment, e.g. brush lance
- » Light weight, 92 g/m at DN 6. More than half in weight in comparison to an usual self-service hose
- » Chemically resistant, smooth interior made out of PES
- » Transparent surface made out of a thermoplastic elastomer, depending on colour: CCBL, CCRT, CCGR, CCGE, CCGN
- » Oil-, UV-, ozone-resistant and weatherproof
- » Flexible in case of low temperatures: -40 °C – +60 °C, -40 °F – +140 °F

- » High-tensile polyester reinforcing, working pressure of up to 200 bar with a fourfold guarantee that the hose does not burst
- » Outer diameter 12 mm at DN 6
- » Burst pressure > 800 bar

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
461 052 603 5	3.5 m
461 052 603 7	3.7 m
461 052 604	4.0 m
461 052 604 2	4.2 m
461 052 604 5	4.5 m
461 052 604 7	4.7 m
461 052 605	5.0 m
461 052 605 5	5.5 m
461 052 606	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
461 054 603 5	3.5 m
461 054 603 7	3.7 m
461 054 604	4.0 m
461 054 604 2	4.2 m
461 054 604 5	4.5 m
461 054 604 7	4.7 m
461 054 605	5.0 m
461 054 605 5	5.5 m
461 054 606	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
461 072 603 5	3.5 m
461 072 603 7	3.7 m
461 072 604	4.0 m
461 072 604 2	4.2 m
461 072 604 5	4.5 m
461 072 604 7	4.7 m
461 072 605	5.0 m
461 072 605 5	5.5 m
461 072 606	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	
461 076 603 5	3.5 m
461 076 603 7	3.7 m
461 076 604	4.0 m
461 076 604 2	4.2 m
461 076 604 5	4.5 m
461 076 604 7	4.7 m
461 076 605	5.0 m
461 076 605 5	5.5 m
461 076 606	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	
461 044 603 5	3.5 m
461 044 603 7	3.7 m
461 044 604	4.0 m
461 044 604 2	4.2 m
461 044 604 5	4.5 m
461 044 604 7	4.7 m
461 044 605	5.0 m
461 044 605 5	5.5 m
461 044 606	6.0 m



Female thread (DKR)

R+M Nr.	
462 052 303 5	3.5 m
462 052 303 7	3.7 m
462 052 304	4.0 m
462 052 304 2	4.2 m
462 052 304 5	4.5 m
462 052 304 7	4.7 m
462 052 305	5.0 m
462 052 305 5	5.5 m
462 052 306	6.0 m



Female thread (DKR)

R+M Nr.	
462 054 303 5	3.5 m
462 054 303 7	3.7 m
462 054 304	4.0 m
462 054 304 2	4.2 m
462 054 304 5	4.5 m
462 054 304 7	4.7 m
462 054 305	5.0 m
462 054 305 5	5.5 m
462 054 306	6.0 m



Female thread (DKOL)

R+M Nr.	
462 072 303 5	3.5 m
462 072 303 7	3.7 m
462 072 304	4.0 m
462 072 304 2	4.2 m
462 072 304 5	4.5 m
462 072 304 7	4.7 m
462 072 305	5.0 m
462 072 305 5	5.5 m
462 072 306	6.0 m



Female thread (DKOL)

R+M Nr.	
462 076 303 5	3.5 m
462 076 303 7	3.7 m
462 076 304	4.0 m
462 076 304 2	4.2 m
462 076 304 5	4.5 m
462 076 304 7	4.7 m
462 076 305	5.0 m
462 076 305 5	5.5 m
462 076 306	6.0 m



Male thread (AGR)

R+M Nr.	
462 044 303 5	3.5 m
462 044 303 7	3.7 m
462 044 304	4.0 m
462 044 304 2	4.2 m
462 044 304 5	4.5 m
462 044 304 7	4.7 m
462 044 305	5.0 m
462 044 305 5	5.5 m
462 044 306	6.0 m

CARWASH COMFORT - the proven hose marvel for self-service car washes

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	↔
463 052 703 5	3.5 m
463 052 703 7	3.7 m
463 052 704	4.0 m
463 052 704 2	4.2 m
463 052 704 5	4.5 m
463 052 704 7	4.7 m
463 052 705	5.0 m
463 052 705 5	5.5 m
463 052 706	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	↔
463 054 703 5	3.5 m
463 054 703 7	3.7 m
463 054 704	4.0 m
463 054 704 2	4.2 m
463 054 704 5	4.5 m
463 054 704 7	4.7 m
463 054 705	5.0 m
463 054 705 5	5.5 m
463 054 706	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	↔
463 072 703 5	3.5 m
463 072 703 7	3.7 m
463 072 704	4.0 m
463 072 704 2	4.2 m
463 072 704 5	4.5 m
463 072 704 7	4.7 m
463 072 705	5.0 m
463 072 705 5	5.5 m
463 072 706	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	↔
463 076 703 5	3.5 m
463 076 703 7	3.7 m
463 076 704	4.0 m
463 076 704 2	4.2 m
463 076 704 5	4.5 m
463 076 704 7	4.7 m
463 076 705	5.0 m
463 076 705 5	5.5 m
463 076 706	6.0 m

3/8" : 3/8"



Male thread (AGR)

R+M Nr.	↔
463 044 703 5	3.5 m
463 044 703 7	3.7 m
463 044 704	4.0 m
463 044 704 2	4.2 m
463 044 704 5	4.5 m
463 044 704 7	4.7 m
463 044 705	5.0 m
463 044 705 5	5.5 m
463 044 706	6.0 m



Female thread (DKR)

R+M Nr.	↔
464 052 303 5	3.5 m
464 052 303 7	3.7 m
464 052 304	4.0 m
464 052 304 2	4.2 m
464 052 304 5	4.5 m
464 052 304 7	4.7 m
464 052 305	5.0 m
464 052 305 5	5.5 m
464 052 306	6.0 m



Female thread (DKR)

R+M Nr.	↔
464 054 303 5	3.5 m
464 054 303 7	3.7 m
464 054 304	4.0 m
464 054 304 2	4.2 m
464 054 304 5	4.5 m
464 054 304 7	4.7 m
464 054 305	5.0 m
464 054 305 5	5.5 m
464 054 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
464 072 303 5	3.5 m
464 072 303 7	3.7 m
464 072 304	4.0 m
464 072 304 2	4.2 m
464 072 304 5	4.5 m
464 072 304 7	4.7 m
464 072 305	5.0 m
464 072 305 5	5.5 m
464 072 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
464 076 303 5	3.5 m
464 076 303 7	3.7 m
464 076 304	4.0 m
464 076 304 2	4.2 m
464 076 304 5	4.5 m
464 076 304 7	4.7 m
464 076 305	5.0 m
464 076 305 5	5.5 m
464 076 306	6.0 m



Male thread (AGR)

R+M Nr.	↔
464 044 303 5	3.5 m
464 044 303 7	3.7 m
464 044 304	4.0 m
464 044 304 2	4.2 m
464 044 304 5	4.5 m
464 044 304 7	4.7 m
464 044 305	5.0 m
464 044 305 5	5.5 m
464 044 306	6.0 m



Female thread (DKR)

R+M Nr.	↔
465 052 303 5	3.5 m
465 052 303 7	3.7 m
465 052 304	4.0 m
465 052 304 2	4.2 m
465 052 304 5	4.5 m
465 052 304 7	4.7 m
465 052 305	5.0 m
465 052 305 5	5.5 m
465 052 306	6.0 m



Female thread (DKR)

R+M Nr.	↔
465 054 303 5	3.5 m
465 054 303 7	3.7 m
465 054 304	4.0 m
465 054 304 2	4.2 m
465 054 304 5	4.5 m
465 054 304 7	4.7 m
465 054 305	5.0 m
465 054 305 5	5.5 m
465 054 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
465 072 303 5	3.5 m
465 072 303 7	3.7 m
465 072 304	4.0 m
465 072 304 2	4.2 m
465 072 304 5	4.5 m
465 072 304 7	4.7 m
465 072 305	5.0 m
465 072 305 5	5.5 m
465 072 306	6.0 m



Female thread (DKOL)

R+M Nr.	↔
465 076 303 5	3.5 m
465 076 303 7	3.7 m
465 076 304	4.0 m
465 076 304 2	4.2 m
465 076 304 5	4.5 m
465 076 304 7	4.7 m
465 076 305	5.0 m
465 076 305 5	5.5 m
465 076 306	6.0 m



Male thread (AGR)

R+M Nr.	↔
465 044 303 5	3.5 m
465 044 303 7	3.7 m
465 044 304	4.0 m
465 044 304 2	4.2 m
465 044 304 5	4.5 m
465 044 304 7	4.7 m
465 044 305	5.0 m
465 044 305 5	5.5 m
465 044 306	6.0 m

Symbols ↔ length

CARWASH COMFORT - you are invited to experience our blue hose wonder in DN 8!

High-tensile polyester reinforcing, working pressure of up to 200 bar. DN 8. -40 °C – +60 °C, -40 °F – +140 °F

1/4" : 1/4"



Female thread (DKR)

R+M Nr.	
471 052 603 5	3.5 m
471 052 603 7	3.7 m
471 052 604	4.0 m
471 052 604 2	4.2 m
471 052 604 5	4.5 m
471 052 604 7	4.7 m
471 052 605	5.0 m
471 052 605 5	5.5 m
471 052 606	6.0 m

3/8" : 3/8"



Female thread (DKR)

R+M Nr.	
471 054 603 5	3.5 m
471 054 603 7	3.7 m
471 054 604	4.0 m
471 054 604 2	4.2 m
471 054 604 5	4.5 m
471 054 604 7	4.7 m
471 054 605	5.0 m
471 054 605 5	5.5 m
471 054 606	6.0 m

M14 : M14



Female thread (DKOL)

R+M Nr.	
471 072 603 5	3.5 m
471 072 603 7	3.7 m
471 072 604	4.0 m
471 072 604 2	4.2 m
471 072 604 5	4.5 m
471 072 604 7	4.7 m
471 072 605	5.0 m
471 072 605 5	5.5 m
471 072 606	6.0 m

M18 : M18



Female thread (DKOL)

R+M Nr.	
471 076 603 5	3.5 m
471 076 603 7	3.7 m
471 076 604	4.0 m
471 076 604 2	4.2 m
471 076 604 5	4.5 m
471 076 604 7	4.7 m
471 076 605	5.0 m
471 076 605 5	5.5 m
471 076 606	6.0 m

3/8" : 3/8"




Male thread (AGR)

R+M Nr.	
471 044 603 5	3.5 m
471 044 603 7	3.7 m
471 044 604	4.0 m
471 044 604 2	4.2 m
471 044 604 5	4.5 m
471 044 604 7	4.7 m
471 044 605	5.0 m
471 044 605 5	5.5 m
471 044 606	6.0 m



Female thread (DKR)

R+M Nr.	
471 405 230 35	3.5 m
471 405 230 37	3.7 m
471 405 230 4	4.0 m
471 405 230 42	4.2 m
471 405 230 45	4.5 m
471 405 230 47	4.7 m
471 405 230 5	5.0 m
471 405 230 55	5.5 m
471 405 230 6	6.0 m



Female thread (DKR)

R+M Nr.	
471 405 430 35	3.5 m
471 405 430 37	3.7 m
471 405 430 4	4.0 m
471 405 430 42	4.2 m
471 405 430 45	4.5 m
471 405 430 47	4.7 m
471 405 430 5	5.0 m
471 405 430 55	5.5 m
471 405 430 6	6.0 m




Female thread (DKOL)

R+M Nr.	
471 407 230 35	3.5 m
471 407 230 37	3.7 m
471 407 230 4	4.0 m
471 407 230 42	4.2 m
471 407 230 45	4.5 m
471 407 230 47	4.7 m
471 407 230 5	5.0 m
471 407 230 55	5.5 m
471 407 230 6	6.0 m




Female thread (DKOL)

R+M Nr.	
471 407 630 35	3.5 m
471 407 630 37	3.7 m
471 407 630 4	4.0 m
471 407 630 42	4.2 m
471 407 630 45	4.5 m
471 407 630 47	4.7 m
471 407 630 5	5.0 m
471 407 630 55	5.5 m
471 407 630 6	6.0 m



Male thread (AGR)

R+M Nr.	
471 404 430 35	3.5 m
471 404 430 37	3.7 m
471 404 430 4	4.0 m
471 404 430 42	4.2 m
471 404 430 45	4.5 m
471 404 430 47	4.7 m
471 404 430 5	5.0 m
471 404 430 55	5.5 m
471 404 430 6	6.0 m



Female thread (DKR)

R+M Nr.	
471 205 230 35	3.5 m
471 205 230 37	3.7 m
471 205 230 4	4.0 m
471 205 230 42	4.2 m
471 205 230 45	4.5 m
471 205 230 47	4.7 m
471 205 230 5	5.0 m
471 205 230 55	5.5 m
471 205 230 6	6.0 m



Female thread (DKR)

R+M Nr.	
471 205 430 35	3.5 m
471 205 430 37	3.7 m
471 205 430 4	4.0 m
471 205 430 42	4.2 m
471 205 430 45	4.5 m
471 205 430 47	4.7 m
471 205 430 5	5.0 m
471 205 430 55	5.5 m
471 205 430 6	6.0 m



Female thread (DKOL)

R+M Nr.	
471 207 230 35	3.5 m
471 207 230 37	3.7 m
471 207 230 4	4.0 m
471 207 230 42	4.2 m
471 207 230 45	4.5 m
471 207 230 47	4.7 m
471 207 230 5	5.0 m
471 207 230 55	5.5 m
471 207 230 6	6.0 m



Female thread (DKOL)

R+M Nr.	
471 207 630 35	3.5 m
471 207 630 37	3.7 m
471 207 630 4	4.0 m
471 207 630 42	4.2 m
471 207 630 45	4.5 m
471 207 630 47	4.7 m
471 207 630 5	5.0 m
471 207 630 55	5.5 m
471 207 630 6	6.0 m



Male thread (AGR)

R+M Nr.	
471 204 430 35	3.5 m
471 204 430 37	3.7 m
471 204 430 4	4.0 m
471 204 430 42	4.2 m
471 204 430 45	4.5 m
471 204 430 47	4.7 m
471 204 430 5	5.0 m
471 204 430 55	5.5 m
471 204 430 6	6.0 m

High pressure hoses for self-service washing bays

Hoses with single wire braid and wrapped cover. 15N. Nominal diameter 6. Max. 210 bar /150 °C

1/4" : 1/4"



Female thread (DKR)

3/8" : 3/8"



Female thread (DKR)

1/4" : 1/4"



Female thread (DKR)

M22 : 10  swivel



QSC - swivel disc plug



QSC - swivel disc plug

R+M Nr.	
331 152 803 5	3.5 m
331 152 804 2	4.2 m
331 152 805	5.0 m

R+M Nr.	
331 154 803 5	3.5 m
331 154 804 2	4.2 m
331 154 805	5.0 m

R+M Nr.	
331 152 603 5	3.5 m
331 152 604	4.0 m
331 152 604 2	4.2 m
331 152 605 5	5.5 m

R+M Nr.	
330 117 303 5	3.5 m
330 117 304	4.0 m
330 117 304 2	4.2 m
330 117 310	10.0 m

R+M Nr.	
331 117 303 5	3.5 m
331 117 304	4.0 m
331 117 304 2	4.2 m
331 117 305	5.0 m
331 117 310	10.0 m

Further high pressure hoses suitable for self-service washing bays are available on request.

Symbols  length

Heated low pressure hoses

Connecting hoses within ceiling boom 1 SN DN 8 black


Solid, wound surface with steel wire braid, therefore an excellent bending behaviour

1/4" female thread (DKR)

1/4" with e-cable



R+M Nr.	
330 012 701 001	2.2 m
330 012 701 002	3.1 m
330 012 701 003	3.6 m

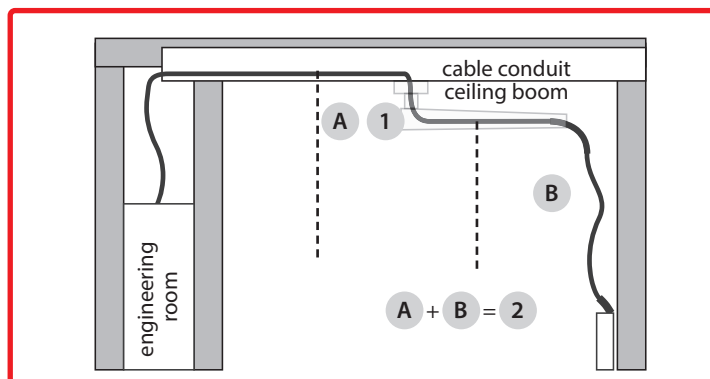

Heated low pressure hoses

Complete hose comprising connecting hose within ceiling boom and hose from boom to foam lance

Heated foam hoses.

Soft, smooth surface:

- » enjoyably easy handling
- » very gentle to surface of the vehicle
- » no black stripes on the car



1/4" female thread (DKR) with e-cable : silicone hose



R+M Nr.	
330 012 701 016	7.2 m
330 012 701 017	8.0 m
330 012 701 018	10.0 m

Heated high pressure hoses (before 2005)

Heated high pressure hoses 1 SN DN 8 black

Heated high pressure hoses for 2 or 3 washing bays. Solid, wound surface with steel wire braid, therefore an excellent bending behaviour

M22 x 1.5 QSC with e-cable :
10 mm plug nipple with bearing

M22 x 1.5 QSC with e-cable :
3/8 M plug nipple with bearing



R+M Nr.	
330 012 701 023	12 m
330 012 701 024	15 m



R+M Nr.	
330 012 701 025	12 m
330 012 701 026	15 m

easyclean365+® microfibre cloths



Excellent water absorption and high absorption speed by polyurethane skin which treats the surfaces with care.

According to the principle "completely clean with only one wipe". Even spots like fingerprints are removed in the twinkling of an eye and the surfaces gleam in mint condition.


Washable and usable several times.

Water drops on the surfaces after cleaning are a thing of the past and the use of any detergents is dropped.

Due to the interwoven and strong texture the microfibre cloth is tear-resistant. Furthermore, it is lint-free, antibacterial, very kind to your skin and anti-allergic.

Composition: PET/PA microfibre, high-tech polyurethane.

easyclean365+® microfibre cloth WA 1400



The extremely absorbent drying wonder! Ideal for the professionally exterior cleaning of vehicles, car finish, motorcycles, catering trade, kitchen & bathroom. Single pack with European perforation and product code.

Size: 37.5 x 40 cm

100% 100% 100% 100% 100%

R+M Nr.	M	VPE
951 700 610	PET/PA microfibre, high-tech polyurethane	10

easyclean365+® microfibre cloth WA 600



The streak-free cleaning wonder! Ideal for the professionally interior cleaning of vehicles, car finish, motorcycles, catering trade, kitchen & bathroom. Single pack with European perforation and product code.

Size: 35 x 40 cm

100% 100% 100% 100% 100%

R+M Nr.	M	VPE
951 700 700	PET/PA microfibre, high-tech polyurethane	10

easyclean365+® microfibre cloth WA 1400



The extremely absorbent drying wonder! Ideal for the professionally exterior cleaning of vehicles, car finish, motorcycles, catering trade, kitchen & bathroom.

Size: 45 x 50 cm

100% 100% 100% 100% 100%

R+M Nr.	M	VPE
951 700 500	PET/PA microfibre, high-tech polyurethane	10

Chemical spray guns ST-510 & lances

Chemical spray gun ST-515



Gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals.
Max. 24 bar / 70 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 500	1/2" F	1/2" F

Chemical spray gun ST-515 with trigger guard



Gun with trigger guard and stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 70 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 510	1/2" F	1/2" F


Trigger guard for chemical spray gun ST-515



Trigger guard for retrofitting.

R+M Nr.
200 515 480

Filter for chemical spray gun ST-515



Plastic. Max. 50 °C

R+M Nr.
500 04


Chemical spray gun ST-515 with foam nozzle



Gun with foam nozzle and stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals.
Max. 24 bar / 70 l/min / 50 °C / nozzle 50° 200


R+M Nr.	⊖	Ⓢ
200 515 503	foam nozzle	1/2" F

Chemical spray guns ST-515 with lances

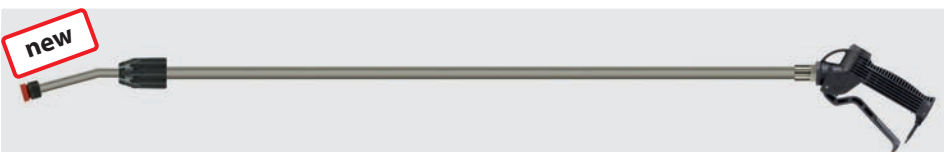

1,000 - 2,000 mm. Spray gun with telescopic lance made out of stainless steel and nozzle holder without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 600	nozzle holder	1/2" F

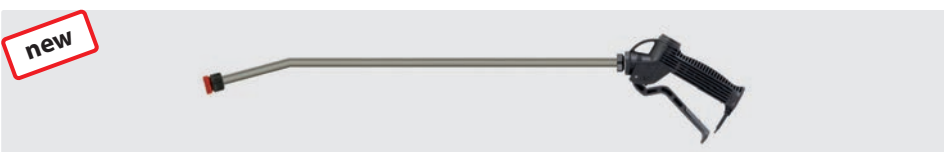

600 mm. Spray gun with lance made out of stainless steel and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 550	nozzle holder	1/2" F




300 mm. Spray gun with lance made out of stainless steel and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 560	nozzle holder	1/2" F




210 mm. Spray gun with plastic lance and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Viton seals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 710	nozzle holder	1/2" F

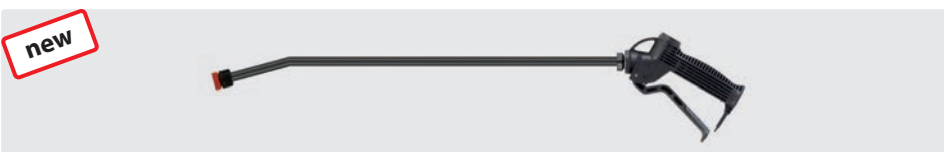

600 mm. Spray gun with lance made out of plastic and nozzle nut without nozzle. Spray gun with stainless steel V4A / AISI 316 ball being resistant to chemicals. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 700	nozzle holder	1/2" F

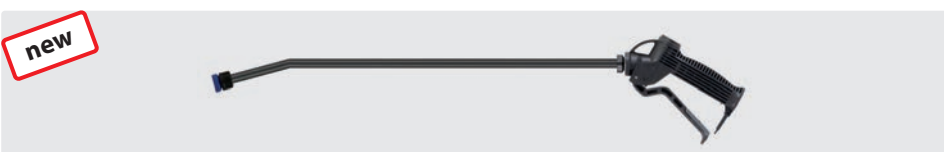

600 mm. Spray gun with lance made out of plastic and nozzle nut without nozzle. Spray gun with acid-resistant ball. Max. 24 bar / 30 l/min / 50 °C

R+M Nr.	⊖	Ⓢ
200 515 705	nozzle holder	1/2" F

Foam gun



Applications

Designed for applications with acidic and caustic cleaner, soaps, disinfectants, degreasing and softening agents. The field of application is very versatile.

- » Food industry and canteen kitchen
- » Sanitary facilities and swimming baths
- » Cleaning of trucks, cars and other vehicles
- » Garages and petrol stations
- » Shops and workshops

The foam gun directly connected to the public water pipe produces a cleaning foam by means of foam injector. The water pressure sucks in the cleaning agent and air, both are being mixed to consistent foam, sprayed out via the spraying head and the foam wand. The cleaning agent can also purposely and automatically be diluted via a built-in proportioner so that the right mixture of chemical and water as foam can be chosen for the cleaning application.

Technical specifications

Water pressure 2.5 - 6 bar (for maximum accuracy 3 - 4 bar)

Output 5.5 l/min

Mixing Ratio

Multi-ratio dial has 5 mixing settings and off

A	B	C	D	E	0
1:128	1:64	1:32	1:20	1:10	off



R+M Nr.	☐	☐
106 996 500	incl. coupler plugs "universal"	1 l

Features

- » Exceptional chemical resistance to acidic and caustic cleaner.
- » Foam generating wand creates a thick clinging foam.
- » Automatic dosing of chemicals.
- » Durable polymer mixing head with stainless steel screws.
- » Multi-ratio dial has 5 mixing settings and off.
- » Gun is removable from quick coupling for clear rinsing with water.
- » Easy filling by means of wide mouth.
- » Only works with water pipe pressure.
- » Suitable for all customary water couplings.
- » Chemical container volume 1,000 ml

easyclean365+® Gun

New improved version

The new cleaning wonder the so called **easyclean365+® Gun** ensures the most professional and efficient interior and exterior cleaning of all kinds of dirt in the car wash sector. From now on strenuous manual work together with different cleaning agents are not necessary anymore as the **easyclean365+® Gun** removes chocolate on seats, dirt in ventilation ducts and also brake dust on wheel rims by its technically mature technology. Thereby, it generates the cleaning efficiency of a rotary cutter - only a permanent compressed air connection for minimum 5.5 bar and a suitable cleaning agent are required and necessary. By the needed low water volume and the effect in depth of the dirt a speedy drying of the surfaces is guaranteed!

Save your **easyclean365+® Gun** today and become acquainted with its convincing performance!

Technical specifications

Working pressure 5.5 - 9.0 bar

Air consumption 200 l/min



R+M Nr.	☐	☐
106 996 700	1/4" F	1 l

Accessories easyclean365+ Gun




Discharge funnel

R+M Nr.
106 996 710



Suction hose

R+M Nr.
106 996 717



Spray hose

R+M Nr.
106 996 711



Weighted tube ass'y

R+M Nr.
106 996 712



Bottle 1 l

R+M Nr.
106 996 713



Plug for compressed air

R+M Nr.
555 30

Compressed air guns

new



Compressed air gun without nozzle

R+M Nr.		
552 208 500	1/4" F	16 bar

new



Compressed air gun with nozzle

R+M Nr.		
552 208 510	1/4" F	16 bar

Disinfection cold fog device ST-83.1

The brand new ST-83.1 cold fog hand tool is ideal for small applications for fogging of disinfectants, odor neutralizers or insecticides.

- » **Inexpensive** and safe application for hygienically germ-free cleaning of interiors to remove microorganisms, viruses and bacteria. Also for use on construction sites for dust deposition or mold removal
- » **No inhalation of the disinfectant solution** as rooms do not have to be entered
- » The finest nebulization of active ingredients comes into the smallest gaps and into the last corner

- » **A compressed air connection is required:**
Inlet pressure 3 bar, 180-220 l / min.
- » **Extremely productive use:** (e.g. 1 liter for rooms with 60 m³, room size of approx. 25 m² or 5 - 7 vehicle compartments)

The original



Disinfection cold fog air device ST-83. For compressed air connection 3 bar, 180-220 l / min. Stainless steel / plastic

R+M Nr.		
200 083 500	0:7	1 l



Two different fog nozzle inserts are included:

**Better swirling:**

Particularly suitable in smaller rooms such as passenger compartments.

Larger throw range:

For the treatment of entire rooms or for targeted treatment at the air intake of ventilation systems.



ST-83 cold fog hand tool accessories

ST-83 window bracket



With elastomer protection rings.
Stainless steel

R+M Nr.
200 083 400

ST-83 adapter for canisters



For 5 - 30 liter canisters. Incl. 0.5 m clear PVC hose for suction of chemicals, DN 4

R+M Nr.
200 083 200

Exchangeable nozzle inserts



Plastic. 10 nozzle inserts (0.5 - 2.0 mm).
Incl. o-rings

R+M Nr.
200 163 340

Sprayer

Industry Line

The sprayer of the series Industry line are special devices for extraordinary difficult applications such as car wash, oil platforms or industrial cleaning applications.

They are resistant to lots of chemicals which are used in industry.

Due to the acid-resistant lance, the EPDM / Viton seals and the extremely durable high-pressure container the devices are designed for the most difficult cleaning applications. Safety for the user is absolutely guaranteed.

Field of application

- » Oil industry
- » Chemical industry
- » Control of epidemics
- » Workshops and factories
- » Disinfection and rat control



R+M Nr.	Seal kit	⌀	l	⌀	l	VPE
106 995 070	EPDM	2.0 kg	470 mm	220 mm	7 l	1/4
106 995 090	EPDM	2.2 kg	570 mm	220 mm	9 l	1/4
106 995 120	EPDM	2.4 kg	600 mm	220 mm	12 l	1/4
106 995 070 1	Viton	2.0 kg	470 mm	220 mm	7 l	1/4
106 995 090 1	Viton	2.2 kg	570 mm	220 mm	9 l	1/4
106 995 120 1	Viton	2.4 kg	600 mm	220 mm	12 l	1/4

Spare parts Industry Line



Telescopic lance with handle 700 - 1,350 mm

R+M Nr.
106 995 500



Lance tip with nozzle 1.5 mm

R+M Nr.	TYP
106 995 558	EPDM
106 995 512	Viton



Hose 1.7 m

R+M Nr.
106 995 501



Seal kit Viton

R+M Nr.
106 995 503

Spare parts Ergo Industry

Seal kit EPDM

R+M Nr.
106 995 508

Seal kit Viton

R+M Nr.
106 995 502

Ergo Industry



The compression sprayer of the series Ergo Industry are modern hand pressure sprayer. Due to their user-friendly design and the excellent quality of their Viton seals they are the best on the market regarding technical solutions of compression sprayer.

Equipment

- » Nozzle consisting of a regulator for defining the stream angle
- » Interior filter being placed at the flexible intake pipe. **Upside down spraying is possible**
- » Durably efficient pump
- » Precision dosing valve. **With transparent volume scale on the tank**
- » Ergonomic shape. **On-off button for spraying at the handle**
- » The sprayer can be hung up by means of the hand grip

R+M Nr.	l	kg	VPE
106 995 015 2	1.5 l	0.54 kg	1/12
106 995 020 2	2.0 l	0.60 kg	1/12

Mini Line



The trigger sprayer of the series Mini line are used for manual spraying and sprinkling of plants in greenhouses, gardens, on terraces and balconies. The sprayer are equipped with technically advanced nozzles with adjustable stream angle. They are perfect devices for spraying liquid fertilizers, chemicals and for sprinkling water. All parts of the sprayer are made out of durable materials which are resistant to chemicals. The special spraying head of the Mini assures a very fine stream of liquid so that it does not weep. sealing: NBR

Equipment

- » Precision valve for an ideal spraying of liquids
- » Ergonomic spraying head is fitted with an easy pusher for spraying
- » Filter armed at the little intake pipe

R+M Nr.	l	kg	VPE
106 995 005	0.5 l	0.10 kg	1/25
106 995 010	1.0 l	0.12 kg	1/60

Sprayer

AXEL

After being filled (up to 2/3 l) and short pumping (up to 4 bar), the AXEL foam sprayer is immediately ready for use. Three more foam nozzles are included in the scope of supply. Depending on the foam carpet to be generated, they can be changed quickly. This is why this sprayer is unique in terms of its various fields of use. Thanks to the EPDM seals, the sprayer is perfectly suitable for a large number of cleaning agents/shampoos. When removing the foam nozzle inserts, AXEL 2000/3000 can be used like a normal pressure sprayer, too. This is why the AXEL foam sprayers are probably the best foam sprayers of this type available in the market.

Equipment:

- » incl. 3 more foam nozzles with exchangeable pads
- » EPDM seal kit



R+M Nr.	Ⓜ	Ⓢ	VPE
106 995 586	1.0 l	0.86 kg	1/12
106 995 587	2.0 l	0.89 kg	1/12

titan

Titan is a modern and comfortable knapsack sprayer with seals.

Titan knapsack is designed to make their exploitation and operation easy and comfortable. The lever can be adapted to either side of the sprayer to suit both right and left hand operators.

Equipment:

- » telescopic wand 75-135 cm
- » light-weight, hermetic (no-hole at the base) tank
- » transparent walls with a scale
- » strong, durable base
- » high efficient pump with glass balls inside the piston
- » 2 nozzles with regulation of stream angle MR 1.5 (1.5 mm), MR 1.0 (1.0 mm)
- » push-in valve (thumb control for instant on/off)
- » safety valve
- » in line filter
- » reinforced PCV hose 130 cm
- » extra spare parts and silicone smear enclosed



R+M Nr.	Ⓢ	H x W x D	Ⓜ	VPE
106 995 312	3.6 kg	610 x 400 x 150 mm	12 l	1
106 995 316	4.2 kg	610 x 410 x 180 mm	16 l	1
106 995 320	4.4 kg	610 x 410 x 205 mm	20 l	1

Symbols Ⓢ weight Ⓜ height Ⓢ diameter VPE packing unit Ⓜ volume

Sprayer

VX ALKA battery operated, mobile

The spray devices from our VX ALKA series are special devices for disinfecting and applying cleaning agents.

Long working hours are possible thanks to the battery and annoying pumping is no longer necessary.

Disinfection of machines and systems.

The mobile sprayer is ideal when disinfection has to be carried out in a large area. The large capacity of 20 liters and the powerful battery enable a long period of use without the mobile device having to be carried.

Use in washing systems, on drilling rigs or for special operations - these are areas of application for which the VX ALKA series was created.

They are resistant to a wide variety of chemicals used in industry.

The acid-resistant lance, the seals and the ultra-durable pressure tank guarantee that the device can cope with even the most difficult tasks and that the user is absolutely safe.

Areas of application :

- » Oil industry
- » Chemical industry
- » Control of the epidemic
- » Workshops and businesses
- » Disinfection and pest control
- » Car washes



R+M Nr.	8	H x W x D	8	VPE
106 995 612	6.8 kg	340 x 240 x 640 mm	12 l	1

RX ALKA battery operated, mobile

The spray devices from our RX ALKA series are special devices for disinfecting and applying cleaning agents. Long working hours are possible thanks to the battery and annoying pumping is no longer necessary.

Disinfection of machines and systems.

The mobile sprayer is ideal when disinfection has to be carried out in a large area. The large capacity of 12 liters and the powerful battery enable a long period of use without the mobile device having to be carried.

The backpack system enables fatigue-free and ergonomic work.

Use in washing systems, on drilling rigs or for special operations - these are areas of application for which the RX ALKA series was created. They are resistant to a wide variety of chemicals used in industry. The acid-resistant lance, the seals and the ultra-durable pressure tank guarantee that the device can cope with even the most difficult tasks and that the user is absolutely safe.

Areas of application :

- » Oil industry
- » Chemical industry
- » Control of the epidemic
- » Workshops and businesses
- » Disinfection and pest control
- » Car washes



R+M Nr.	8	H x W x D	8	VPE
106 995 620	8.2 kg	400 x 350 x 910 mm	20 l	1

Sprayer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Spray lance 600 mm with nozzle. Fill level indication.
- » Suitable for the use in the car wash and industry.
- » **Available from 10 pieces in other RAL colors.**

R+M Nr.	TYP	📦
106 024 500	coated steel	24 l
106 050 500 🚚	coated steel	50 l
106 100 500 🚚	coated steel	100 l

Foamer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Foam lance 600 mm with nozzle head and 4 nozzles. Fill level indication.
- » Integrated dosing unit to realise the desired air/foam mixture. Permanent pressure exposure is required in order to achieve an uniform foam result.
- » Suitable for the use in the car wash and industry.
- » **Available from 10 pieces in other RAL colors.**

R+M Nr.	TYP	📦
106 024 550	coated steel	24 l
106 050 550 🚚	coated steel	50 l
106 100 550 🚚	coated steel	100 l

Suitable for keeping and application of liquids of the group 2 according to the directive EWG/67/548 Art. 2, para. 2 and directive EG/97/23 Art. 9. Not suitable for liquids of group 1 and especially strong alkaline solution and acids.

Accessories for sprayer and foamer

Foam hoses



Bayonet.
10 m

R+M Nr.
106 901 01

Spray hoses



1/4" M.
10 m

R+M Nr.
106 911 01

Foam head



1/2" M

R+M Nr.
106 906 0

Nozzles



Foamer.
55° 55

R+M Nr.
609 805 59



Foamer.
60° 25

R+M Nr.
609 802 59



Sprayer.
110° 04

R+M Nr.
609 110 04



Sprayer.
110° 045

R+M Nr.
609 110 045

Symbols TYP type 📦 volume 🚚 shipment by truck

Sprayer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Spray lance 600 mm with nozzle.
Fill level indication.
- » Suitable for the use in the food industry, car wash and industry.

R+M Nr.	TYP	📦
106 024 600	stainless steel AISI 304, V2A	24 l
106 050 600	stainless steel AISI 304, V2A	50 l
106 100 600	stainless steel AISI 304, V2A	100 l

Foamer with pressure tank



- » The filling is very easy and effected by means of a plastic hopper to fill in.
- » 1/4" M connection to be attached at the compressed-air supply.
- » Max. 8 bar. Equipped with a default safety valve.
- » Chemically resistant hose 10 m. Spray lance 600 mm with nozzle.
Fill level indication.
- » Integrated dosing unit to realise the desired air/foam mixture.
Permanent pressure exposure is required in order to achieve an uniform foam result.
- » Suitable for the use in the food industry, car wash and industry.

R+M Nr.	TYP	📦
106 024 650	stainless steel AISI 304, V2A	24 l
106 050 650	stainless steel AISI 304, V2A	50 l
106 100 650	stainless steel AISI 304, V2A	100 l

Suitable for keeping and application of liquids of group 2 according to the directive EWG/67/548 Art. 2, para. 2 and directive EG/97/23 Art. 9. Not suitable for liquids of group 1.

Accessories for sprayer and foamer

Nozzle	Nozzle filters	Reduction nipples		Adaptor	Nut for nozzle	Seal	
							
Sprayer. 110° 03	50 MESH	1/4" F : 1/2" M. Brass	1/4" F : 1/2" M. Stainless steel	Bayonet : 1/4" M	Plug DN 7.2 : 1/4" F	1/2" M	
R+M Nr. 609 110 03	R+M Nr. 106 909 2	R+M Nr. 575 40	R+M Nr. 575 49	R+M Nr. 106 900 1	R+M Nr. 554 714	R+M Nr. 106 909 3	R+M Nr. 106 909 4

Air spinner system, Mosmatic

The air spinner system is a novelty used in the self-service car wash. It is especially designed for outdoor vacuum cleaner and self-service drying plants. The air spinner system eliminates the use of floor hoses so that the user has more room to move.


Air system spinner LU-W for wall fastening




R+M Nr.	↔	M	⊙	⚖
108 603 11	1,600 mm	stainless steel	⊙ 50 mm	8.0 kg



R+M Nr.	↔	M	⊙	⚖
108 609 25	1,000 mm	stainless steel	⊙ 40 mm	7.0 kg

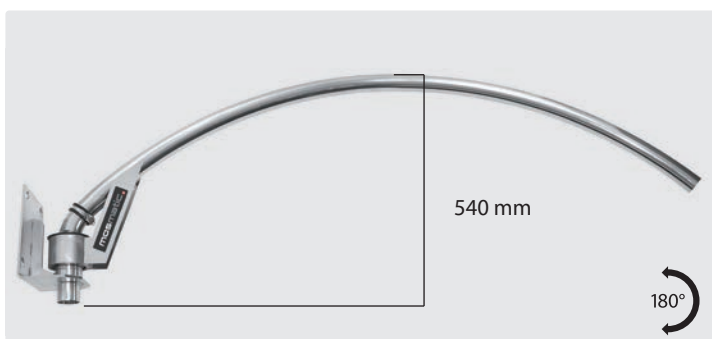


R+M Nr.	↔	M	⊙	⚖
108 609 58	1,750 mm	stainless steel	⊙ 50 mm	8.6 kg

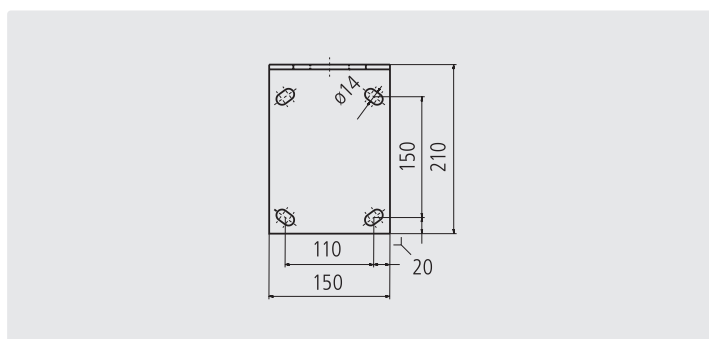


Wall plate

Air system spinner LU-D for ceiling fastening

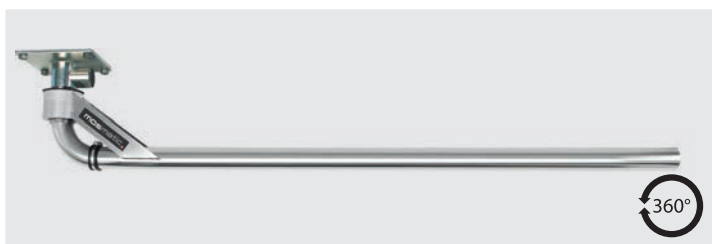

R+M Nr.	↔	M	⊙	⚖
108 603 10	1,600 mm	stainless steel	⊙ 50 mm	8.0 kg

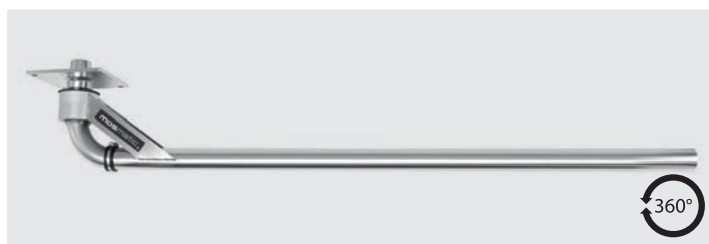

R+M Nr.	↔	M	⊙	⚖
108 603 13	1,600 mm	stainless steel	⊙ 50 mm	8.0 kg



R+M Nr.	↔	M	⊙	⚖
108 603 26	1,550 mm	stainless steel	⊙ 50 mm	8.2 kg

Symbols ↔ length M material ⊙ thread ⚖ weight ⊙ diameter VPE packing unit V voltage W watt

Air spinner system, Mosmatic

Air system spinner LU-B for floor fastening



Spinner with a moving radius of 360°. Height 3,100 mm

R+M Nr.	↔	M	⊙	⊞
108 603 12	1,600 mm	stainless steel	⊙ 50 mm	18.0 kg

90° elbow pipe



1 pipe clamp

R+M Nr.	⊙
108 603 14	⊙ 50 mm

Extension



1 pipe clamp. 1,000 mm

R+M Nr.	⊙
108 603 15	⊙ 50 mm

Rotating socket



1 pipe clamp

R+M Nr.	⊙
108 603 23	⊙ 50 mm

Clip flue



2 pipe clamps. ↔ Max. 1.5 m

R+M Nr.	⊙
108 603 20	⊙ 50 mm

System is also available in 40 mm.

Self-service air dryer Mosmatic



To easily dry in a quick and uncomplicated way!

Substantially reduces water spots, no impairment of the paint – both in summer and winter. The strong blower and the especially moulded air nozzle guarantee a polished and spotless result. It dries the smallest gaps such as door joints, wing mirrors, radiator grills etc. and really eliminates water spots. Combined with a Mosmatic air spinner system the dryer is for sure an interesting and very profitable attraction at your wash bay.

Attention: Connection should be carried out by authorised staff only!

Specifications

Dimension drying unit	533 mm x 533 mm.
Dimension universal plate	421 mm x 421 mm



Drying unit with 75 cm hose connection ⊙ 50 mm, universal plate for mounting the dryer, special air nozzle with 4.5 m hose connection ⊙ 50 mm, wall holder for mounting the special air nozzle, information and operation sign.

R+M Nr.	V	W
108 604 96	220 - 240 Volt 50 / 60 Hz	2 motors à 1,600 Watt



Underbody lance ST-97.1

Material stainless steel. Rolls: POM. Pipe: stainless steel, plastic-coated. Max. 40 l/min. 100 °C. 3 nozzles 1/8" M are required. Spraying angle of 25°



R+M Nr.	Ⓒ	Ⓔ	spray gun	P	↔	⌀ rolls
200 097 801	3/8" F	3 x 1/8" F	ST-601 standard	180 bar	1,700 mm	60 mm
200 097 803	3/8" F	3 x 1/8" F	ST-601 weep	180 bar	1,700 mm	60 mm
200 097 802	3/8" F	3 x 1/8" F	ST-601 freeze stop	180 bar	1,700 mm	60 mm

easywash365+® holder for Underbody Lance



Stainless Steel. H x W x D 35 x 245 x 45 mm. Pre-drilled mounting holes at a distance of 190 mm

R+M Nr.	Ⓔ
040 000 321	260 g



Hurricane Mosmatic

Hurricane

- » Ergonomical and versatile
- » Requires 2 HP-nozzles
- » Incl. HP gun
- » Easy to maneuver
- » High rpm stainless steel swivel features reinforced self lubricated stainless steel ball bearings for improved performance. The dual spring based carbide seal system, guarantees long lasting operation under tough conditions

Manual underbody washing made easy. The handy Hurricane is versatile as for example for cars, trucks, agricultural and construction machines. The object to be cleaned does not even need to be on a lifting platform.



R+M Nr.	⌀	min. clearance	Ⓔ	°C	P	castor-⌀	Ⓒ	Ⓔ
108 806 91	520 mm	165 mm	2 x HP-nozzles 15°, 1/8"	120°	275 bar	3 x 100 mm	3/8" F	12.4 kg
108 806 93 *	520 mm	230 mm	2 x nozzle tips 15°	120°	275 bar	3 x 100 mm	3/8" F	15.1 kg

* Delivery about 3 weeks

Symbols Ⓒ inlet Ⓔ outlet P pressure ↔ length ⌀ diameter °C temperature Ⓔ weight

Underbody cleaner with ramp set-up, Mosmatic

- » Mobile underbody cleaning
- » Suitable for disinfection
- » Simple and quick assembly
- » 100% stainless steel
- » Only 120mm high
- » Available as a double ramp, information on request.
- » Accessories: extension and collision protection


This innovative underbody cleaner from Mosmatic, with patented technology and a compact design of just 120 mm high, is ideal for extending the life of your vehicles and fleets. The construction, made entirely of stainless steel, can be assembled in just a few minutes using simple tools and can be anchored or used mobile.

Compatible with hot and cold water systems and suitable for chemicals with a pH of 3 to 12.


Flow 86 l/min.

Dimensions in mm, L/W/D=1.462 / 5.018 / 120.

Max. 120 °C

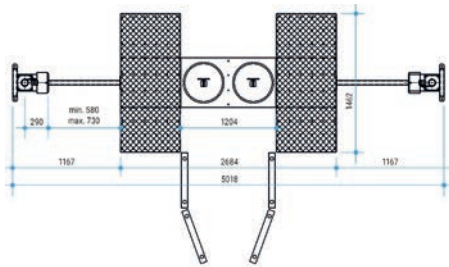

Delivery without nozzles

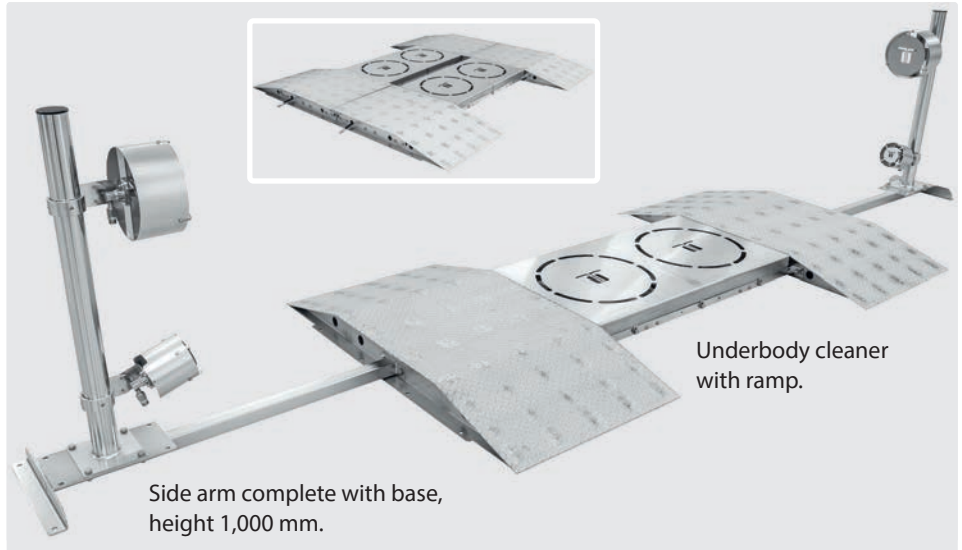

R+M Nr.	Water connection ramp	Water connection WBP	Flow medium	 min. ground clearance	
108 805 01*	3/8" M	3/8" F	pH 3-12	70 bar 122 mm	232 kg

Check your local laws for rules and regulations regarding wastewater drainage.

Hurricane Mosmatic

Hurricane Flip, 2 - in - 1 Mosmatic

The Mosmatic Hurricane Flip can be used as surface cleaner and underbody wash, all in one unit. The Hurricane Flip can be converted from a floor cleaner to an undercarriage cleaner in just a few simple steps. The proven toggle joint makes easy and effortless cleaning possible. Positioned on the side of the housing, this special design enables cleaning under the vehicle. With 3 stainless steel castors $\varnothing$ 60 mm. Incl. 2 high-pressure nozzles ex works for e.g. 15 l/min. at 130 bar or 18 l/min. at 175 bar. Max. 275 bar / 120 °C.




Thanks to the low profile, the vehicle does not need to be lifted on a platform to be cleaned.



R+M Nr.			
108 786 02	300 mm	3/8" F	max. 275 bar

Surface cleaner with air recovery system and integrated gum remover, Mosmatic

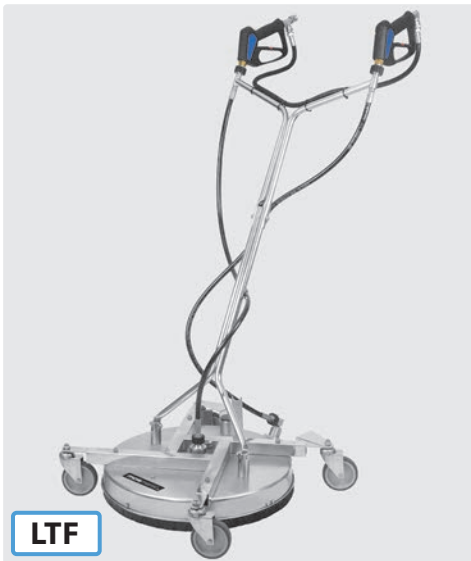

- » Such as the other devices of the FL-AH series the new FL-AH-KAU is a record performance regarding quality, finish and excellent cleaning result. We do not know anybody who has not yet seen places such as railway stations, stadiums, schools and many more which are covered with hundreds of chewing gums. This development is the best solution against this appearance!
 - » In order to ensure an effective removal of the gums the special nozzle is positioned behind the stainless steel cap. The surface is cleaned in a conventional way by means of the gun which is mounted at the right side. In case of removing stubborn dirt e.g. chewing gums the special nozzle is switched on by the gun mounted at the left side. The gums are cut up and totally removed by the hp jets and finally sucked in.
 - » By means of four 100 mm plastic rolls the surface cleaner can be easily moved.
 - » The frame as well as all mounting parts made out of stainless steel offer additional stability. Best cleaning results are achieved due to the height adjustable housing.
 - » The swivel has reinforced self-lubricating stainless steel ball bearings and a dual spring based carbide seal system especially designed for higher revs. This combination guarantees a very long durability.
 - » 2 spray guns ST-2605 equipped with the patented LTF technology, 2 hp nozzles 15° 03 and a special nozzle for the removal of chewing gums are included. Further nozzle sizes are available on request.
 - » Suitable for 50 mm suction hose. Suction hose is excluded.
 - » Max. 350 bar / 120 °C. Min. 15 l/min / 250 bar
- | R+M Nr. | Ø | G | ⊞ |
|------------|--------|--------|-------|
| 108 809 61 | 520 mm | 3/8" F | 20 kg |

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Floor cleaner Mosmatic

Floor cleaner with suction system, Mosmatic FL-ABB 200



Stainless steel. 2 flat stream nozzles 15° 1/8" M are required.
Min. 18 l/min / 150 bar.
Max. 350 bar / 120 °C

- » Floor cleaner - graffiti removing by means of suction system
- » Field of application: graffiti removing, restoration of different surfaces, maintenance of buildings and exclusively designed for applications with high water pressure
- » Suitable for applications from the outside e.g. concrete, brick, lime stone buildings or wooden surfaces
- » Suitable for 50 mm suction hose
- » Our spray gun ST-2605 (202 605 500) equipped with the patented LTF system is recommended for effortless cleaning applications
- » The high pressure gun and nozzles are excluded

R+M Nr.	Ø	G	⊞
108 780 35	200 mm	1/4" F	2.7 kg

Floor cleaner, Mosmatic FL-EB 200



Stainless steel. 2 flat stream nozzles 15° 1/8" M are required.
Max. 275 bar / 120 °C

- » Floor cleaner - economy
- » This multifunction floor cleaner is especially designed for all applications such as brick-lined walls, boat walls, bases, stairs, sidewalks, windows etc.
- » Our spray gun ST-2605 (202 605 500) equipped with the patented LTF system is recommended for effortless cleaning applications
- » The high pressure gun and nozzles are excluded

R+M Nr.	Ø	G	⊞
108 780 02	200 mm	1/4" F	2.7 kg

easywash365+® vertical boom**Absolutely new in the car wash industry!**

- » Completely made out of stainless steel
- » Rotatable by 360°
- » Solid construction
- » Spring action

The vertical boom for single washing bays! This cost-efficient solution is ideal for smaller self-service motorcycle, bicycle or car washing bays. It is not absolutely imperative that the boom is incorporated in the technical board as it can be easily mounted on the wall. Therefore, the vertical boom is also the perfect solution for areas with a shortage of space. Due to its compact design not much room is needed, but however a high degree of mobility is given. The radius of 360° as well as the built-in spring guarantee best possible mobility when carrying out the washing.

The **easywash365+®** vertical boom is completely made out of stainless steel. A mounting bracket is included in the consignment.

Technical specifications:

Height 2,008 mm.

Weight 4.4 kg

easywash365+® suction swivel arm**New for self-service vacuum cleaning**

- » entirely made out of stainless steel
- » solid construction
- » suspension

The vertical **easywash365 +** suction swivel arm for self-service!

This cost-effective solution is ideal for single suction places.

In this case, the arm does not necessarily have to be integrated into the cabinet technology, but can be easily mounted on a wall. Perfect if space might be limited, because due to its construction this boom needs little space and bending over offers a lot of mobility.

The built-in spring prevents kinking of the suction hose and allows a barrier-free handling with optional freedom of mobility.

The vertical **easywash365 +** suction swivel arm is completely made out of stainless steel and is supplied including a mounting bracket.

Height 2,320 mm.

Tube height 1,500 mm.

Internal tube diameter of 65 mm.

Weight 10.1 kg

R+M Nr.

108 607 01

R+M Nr.

109 001 500

Symbols inlet outlet weight diameter


easywash365+® car wash ceiling booms

easywash365+® standard



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Max. 275 bar / 90 °C.

R+M Nr.	↔	⌚	↺	⊠
109 766 954	1,750 mm	1/4" F	1/4" M swivel	8.0 kg








easywash365+® double ceiling booms



Stainless steel. Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums. Max. 275 bar / 90 °C

R+M Nr.	↔	⌚	↺	⊠
109 767 921 	1,600 mm / 1,750 mm	1/4" F	1/4" M swivel	13.5 kg

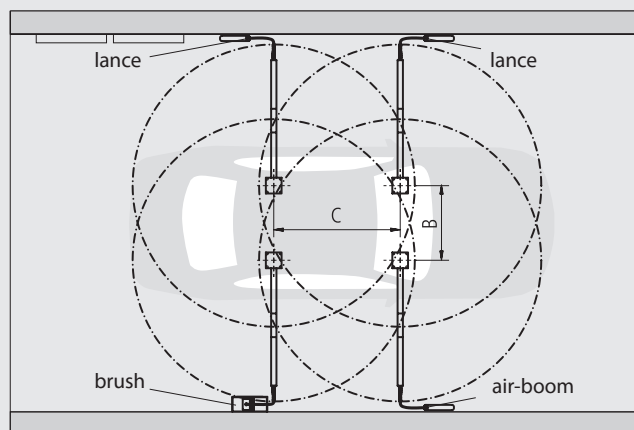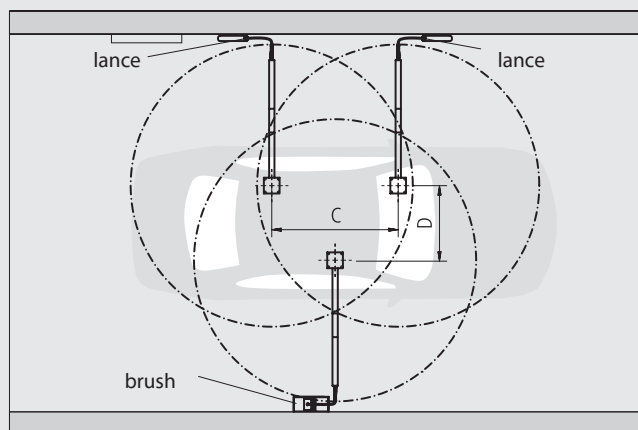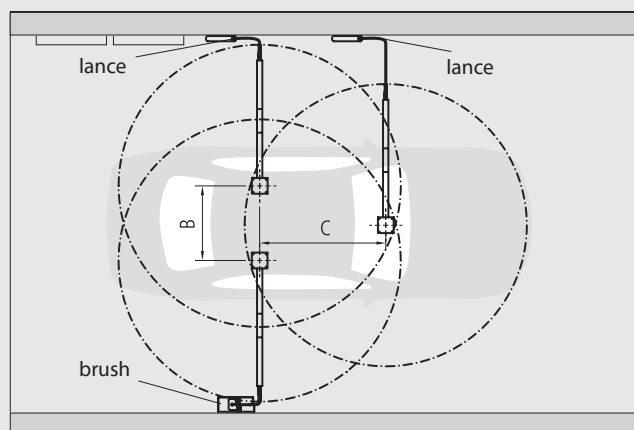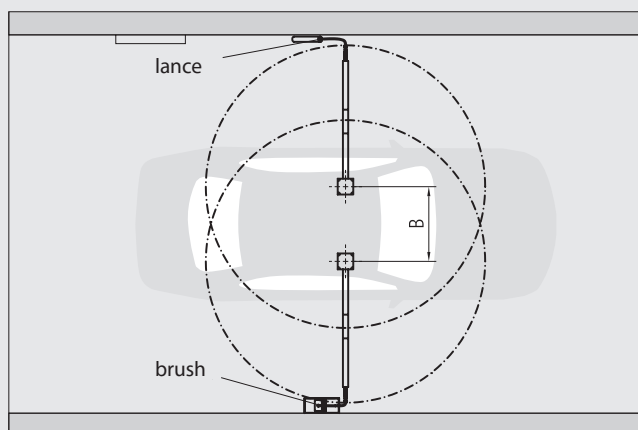

easywash365+® car wash ceiling booms


easywash365+® car wash ceiling boom-Z



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially designed for using two booms side by side.

Max. 275 bar / 90 °C

R+M Nr.				
109 765 926	1,550 mm	1/4" F	1/4" M swivel	8.0 kg

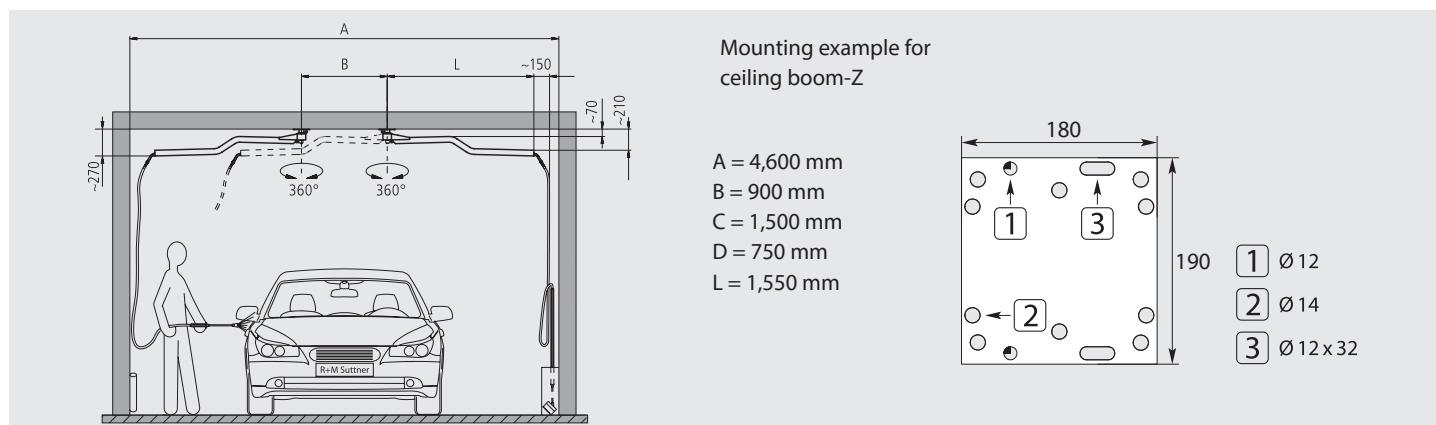


easywash365+® car wash ceiling boom-Z



Stainless steel. Ready for installation with integrated quality swivel joints, professional high-pressure hose with strain relief spring and integrated hose stiffener. Axle has 2 bearings and is permanently lubricated. Especially suitable for the use of 2 ceiling booms next to each other and developed for 2 different media and applications.

Max. 275 bar / 90 °C


R+M Nr.				
109 679 28	1,550 mm / 1,450 mm	1/4" F	1/4" M swivel	16.0 kg

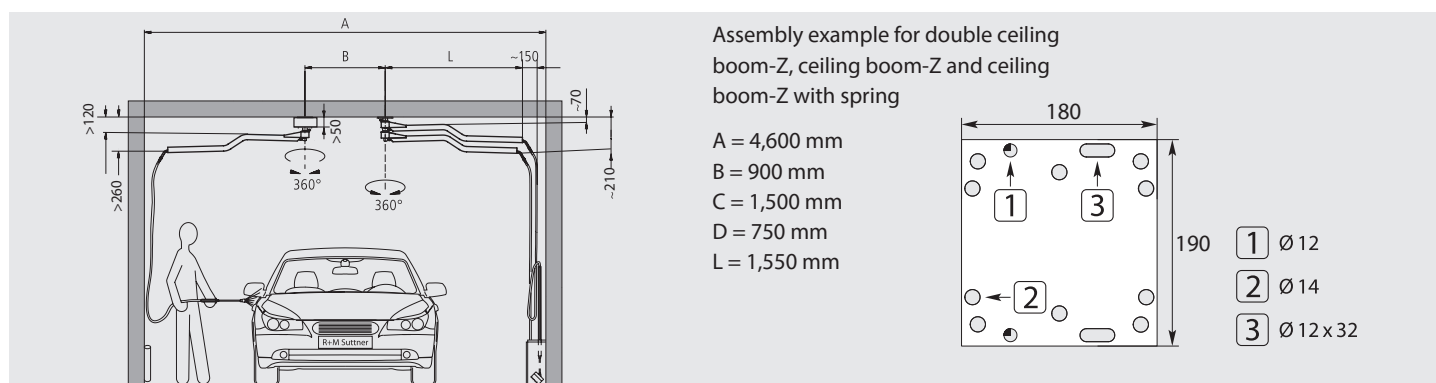

Symbols inlet outlet weight length shipment by truck


easywash365+® car wash ceiling booms with suspension

easywash365+® standard with spring

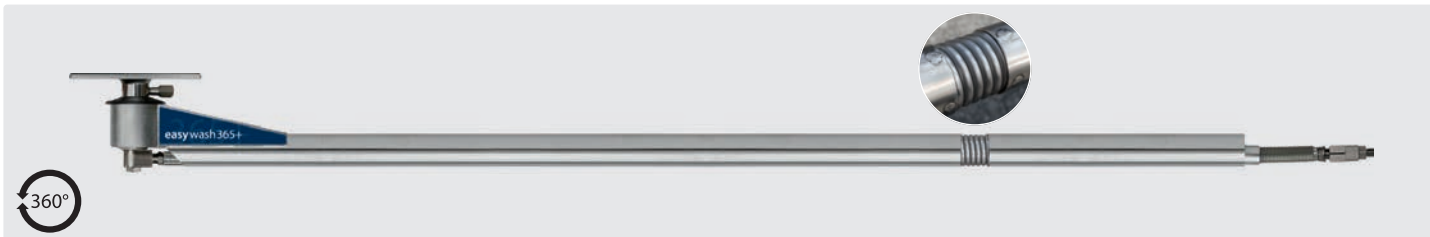


Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors.
Axle 2-ball bearings and permanently lubricated.
Max. 275 bar / 90 °C.

R+M Nr.	↔	⌚	↻	Ⓢ
109 766 972	1,750 mm	1/4" F	1/4" M swivel	8.0 kg




easywash365+® car wash ceiling boom-Z with spring

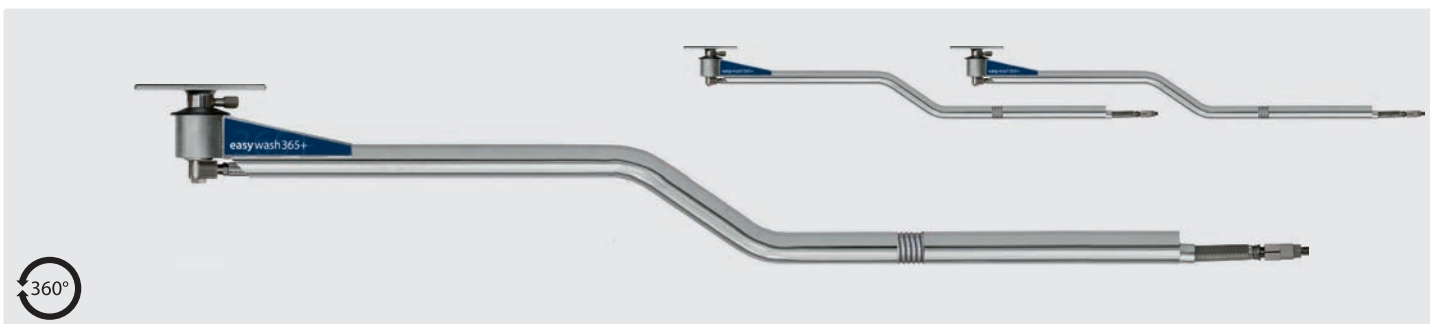






Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated.
Especially designed for using two booms side by side.
Max. 275 bar / 90 °C

R+M Nr.	↔	⌚	↻	Ⓢ
109 765 978	1,550 mm	1/4" F	1/4" M swivel	8.0 kg



Mounting example for
ceiling boom-Z

A = 4,600 mm
B = 900 mm
C = 1,500 mm
D = 750 mm
L = 1,550 mm

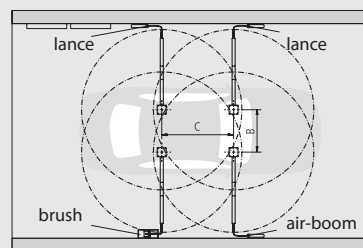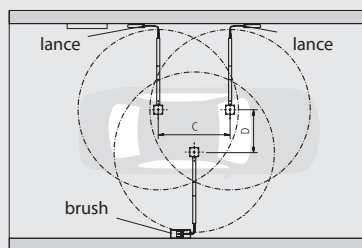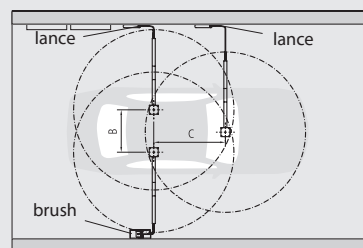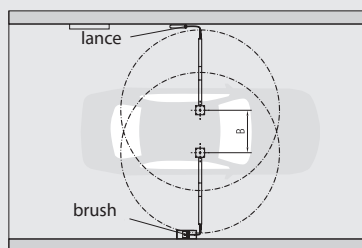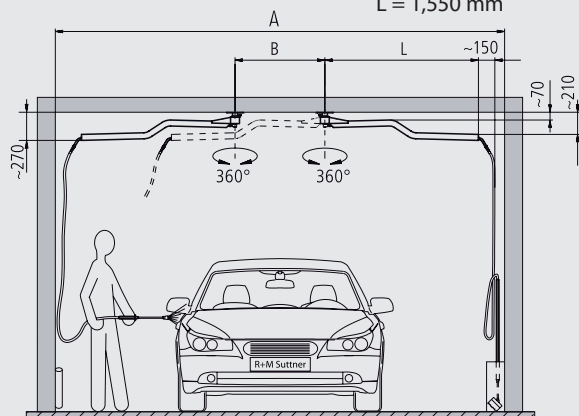

Symbols ⌚ inlet ↻ outlet Ⓢ weight ↔ length

easywash365+® car wash ceiling booms


easywash365+® double ceiling booms with suspension



Stainless steel. Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums.

Max. 275 bar / 90 °C

R+M Nr.	↔	⌚	⌚	⌚
109 763 904	1,600 mm / 1,750 mm	1/4" F	1/4" M swivel	13.5 kg




easywash365+® motorcycle ceiling booms



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially designed for using in motorcycle bays.

Max. 275 bar / 90 °C

R+M Nr.	↔	⌚	⌚	⌚
109 766 956	850 mm	1/4" F	1/4" M swivel	5.9 kg



Swivels for easywash365+® ceiling booms



1/4" M BSP : 3/8" F NPT

R+M Nr.
108 409 26



1/4" M BSP : 3/8" F NPT

R+M Nr.
108 329 27

Wall mounts



Stainless steel V2A / AISI 304. For easywash365+® and Mosmatic ceiling booms

R+M Nr.
109 721 047

Positioner



Positioner with magnet. By means of a positioning device the Mosmatic ceiling boom-Z can easily be parked in the desired position.

R+M Nr.
108 659 11

Replacement hoses

easywash365+®

Hoses for easywash365+® ceiling booms / **ceiling boom-Z

R+M Nr.	↔
340 144 000 994 9	850 mm
340 144 001 694 9**	1,550 mm
340 144 001 744 9	1,600 mm
340 144 001 894 9	1,750 mm
340 144 002 034 9	2,050 mm


Mosmatic

Hoses for Mosmatic ceiling booms / *ceiling boom-Z incl. replacement spring

R+M Nr.	↔
345 176 001 578*	1,450 mm
346 176 001 67	1,550 mm
345 176 001 678*	1,550 mm
346 176 001 72	1,600 mm
346 176 001 87	1,750 mm
345 176 001 878*	1,750 mm
346 176 002 00	1,900 mm
346 176 002 15	2,050 mm
346 176 002 35	2,250 mm
346 176 002 60	2,500 mm

Replacement spring

easywash365+®



Replacement spring for easywash365+® ceiling booms

R+M Nr.
108 901 858

Mosmatic



Replacement spring for Mosmatic ceiling booms

R+M Nr.
108 375 70

Mosmatic car wash ceiling booms

Mosmatic Ceiling boom/ Wall boom extension




Stainless steel. This classic, straight ceiling boom is used in numerous industrial areas, such as truck washing, food, manufacturing or assembly. A real all-rounder that can be used in many ways. For the use of liquids, gases or air. 1/2" throughout.

Max. 150 bar / 120 °C.

Attention: Delivery time of approx. 2 weeks!

R+M Nr.	↔	⌚	↺	⊠
108 664 11	1,450 mm	1/2" F	1/2" M	10,2 kg




Mosmatic double ceiling booms with insulated high pressure hoses




Stainless steel. Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums. Max. 275 bar / 90 °C.

Attention: Delivery time of approx. 2 weeks!

R+M Nr.	↔	⌚	↺	⊠
108 674 23 	1,750 mm / 1,900 mm	1/4" F	1/4" M swivel	19.2 kg
108 674 33 	1,900 mm / 2,050 mm	1/4" F	1/4" M swivel	19.5 kg
108 674 43 	2,050 mm / 2,250 mm	1/4" F	1/4" M swivel	19.8 kg
108 674 53 	2,250 mm / 2,500 mm	1/4" F	1/4" M swivel	21.1 kg



Mosmatic car wash ceiling boom-Z with insulated high pressure hose

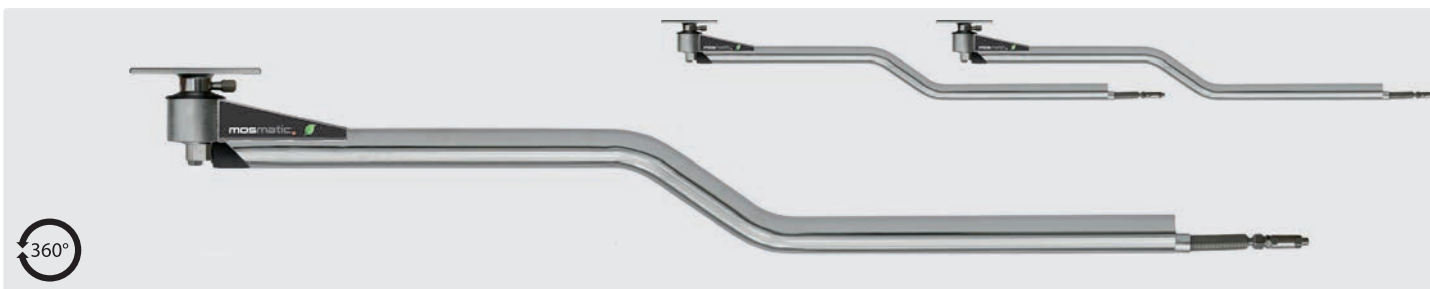


Stainless steel. Ready for installation with two integrated swivels. Especially designed for using two booms side by side. Insulated high pressure hose.

Max. 275 bar / 90 °C.

Attention: Delivery time of approx. 2 weeks!

R+M Nr.	↔	⌚	↺	⊠
108 650 11	1,550 mm	1/4" F	1/4" M swivel	9.9 kg



Mosmatic car wash ceiling booms with LED

- » Modern visual effects
- » Visualisation of the wash cycles
- » Additional lighting for the wash bay
- » Stand out above competition
- » **Delivery about 3 weeks**

The worlds first for the self-service car wash. The LED Boom can be synchronized with your wash cycle to visualize your wash program. The LED ceiling boom is not only an eye-catcher for self-service car washes, but also provides additional lighting for the bay adding safety for your clients. This is product should be installed by a certified electrician.




Mosmatic standard with LED



Ceiling boom with ball bearing swivels. Maintenance-free. Connection with swivel

R+M Nr.	(M)	↔	(P)	(G)	↺	(V)	LED/m	IP code	light intensity	°C	(g)
108 662 23	stainless steel	1,750 mm	275 bar	1/4" F	1/4" M swivel	24	30	IP 66	120 lx	90° C	10.2 kg


Mosmatic car wash ceiling boom-Z with LED

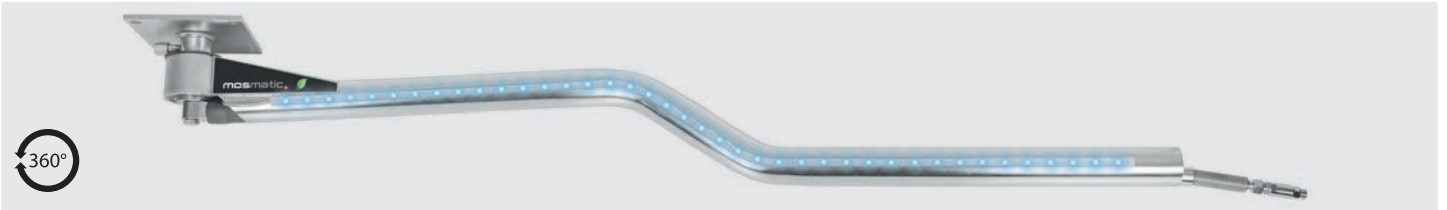

Ready for installation with two integrated swivels. Especially designed for using two booms side by side. Insulated high pressure hose


R+M Nr.	(M)	↔	(P)	(G)	↺	(V)	LED/m	IP code	light intensity	°C	(g)
108 652 13	stainless steel	1,550 mm	275 bar	1/4" F	1/4" M swivel	24	30	IP 66	120 lx	90° C	10.1 kg

Mosmatic double ceiling booms with LED

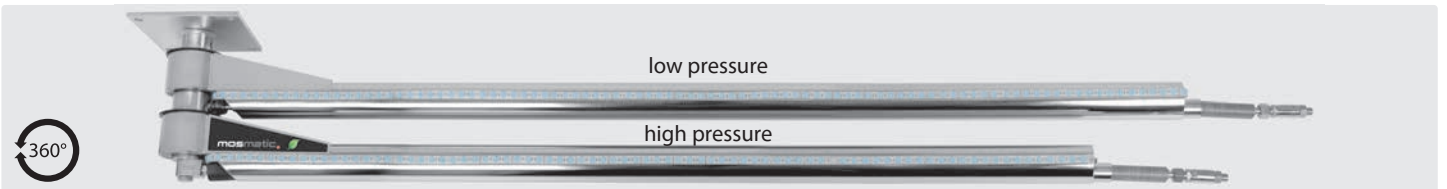

Ready for installation with three integrated swivels, professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated. Especially developed for 2 different application mediums

R+M Nr.	(M)	↔	(P)	(G)	↺	(V)	LED/m	IP code	light intensity	°C	(g)
108 676 13	stainless steel	1,600 / 1,750 mm	275 bar	1/4" F	1/4" M swivel	24	30	IP 66	120 lx	90° C	18.9 kg



LED-Controller


Controller, power supply, remote control, receiver with housing. For max. 2 booms

R+M Nr.
108 659 75


Symbols (G) inlet (S) outlet ↔ length 🚚 shipment by truck °C temperature (g) weight (V) voltage (P) pressure

easywash365+® wall boom extension with ceiling boom

Wall boom extension with ceiling boom

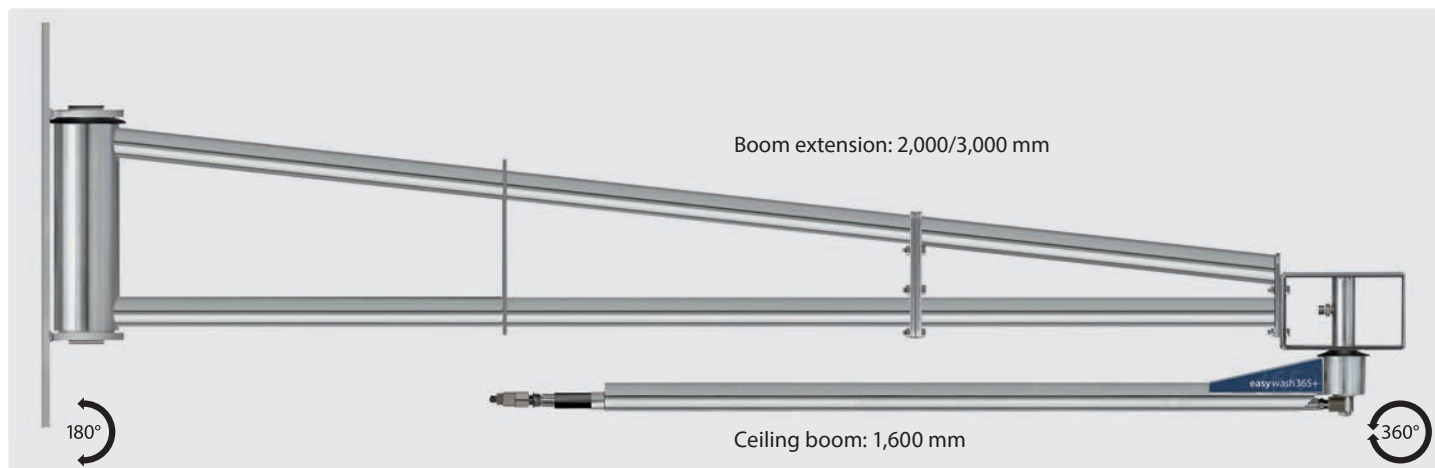

- » Designed for washing large vehicles
- » Ceiling boom swivelling 360°, wall boom swivelling by 180°
- » Maintenance-free ball bearing swivels
- » Optionally available counter plate
- » Total length of up to 4,600 mm
- » Max. 275 bar / 120 °C
- » Connection: 3/8" M
- » Material: stainless steel

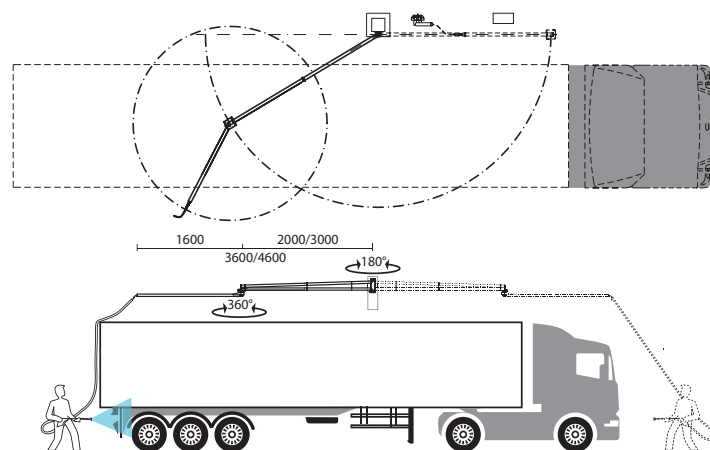

easywash365+® wall boom extension with ceiling boom

R+M Nr.			
109 760 972	2,000 + 1,600	3/8" M	3/8" M swivel
109 760 973	3,000 + 1,600	3/8" M	3/8" M swivel

easywash365+® wall boom counter plate

Stainless steel, 10 mm

R+M Nr.

109 790 419 3



High pressure hose for easywash365+® boom extension

3/8" F : 3/8" F - 90°. 2 SC. DN 8. Black

R+M Nr.

345 154 002 11

345 154 003 11

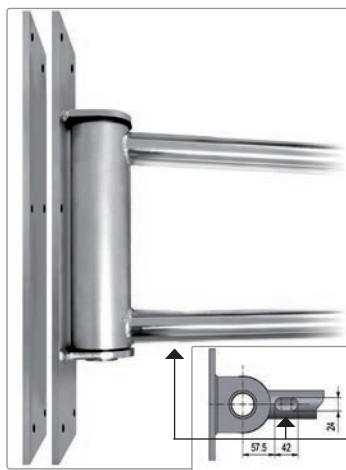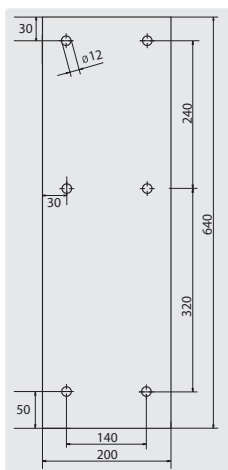

Top connection: robust bracket for safe assembly of the boom


Very robust and welded attachment with an optionally available counter plate for your safety (screws M10)

Pass: high pressure hose for wall boom extension is optionally available

Symbols inlet outlet length shipment by truck

easywash365+® wall and ceiling booms

High pressure ceiling boom including high pressure hose for walls and ceiling

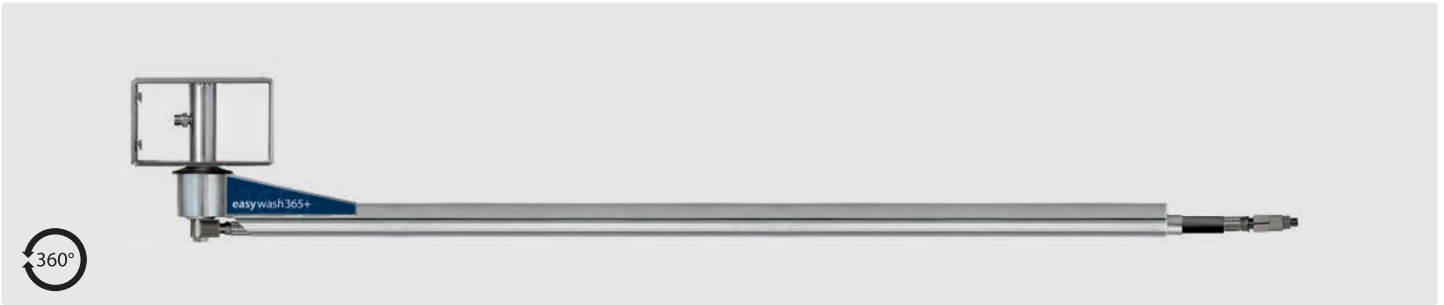

- » Assembly at walls or ceiling
- » High pressure hose including, DN 8, black
- » Ceiling boom swivelling by 360°, 180° in case of wall assembly
- » Ball bearing swivel
- » Total length of up to 2,500 mm
- » Max. 275 bar / 120 °C
- » Connection: 3/8" M
- » Material: stainless steel

easywash365+® wall and ceiling booms

Stainless steel. Boom with ball bearing swivel and high pressure hose. DN 8. Maintenance-free. Max. 275 bar / 120 °C

R+M Nr.	↔	⊕	⊖
109 766 970	1,600 mm	3/8" M	3/8" M swivel
109 766 971	2,000 mm	3/8" M	3/8" M swivel
109 766 973	2,500 mm	3/8" M	3/8" M swivel




Tip: 3/8" M connection for high pressure hose with o-ring


Replacement hoses

R+M Nr.	↔
355 144 001 758 4	1,600 mm
355 144 002 198 4	2,000 mm
355 144 002 648 4	2,500 mm


Wall fixing



Ceiling fixing




easywash365+® mounting plate

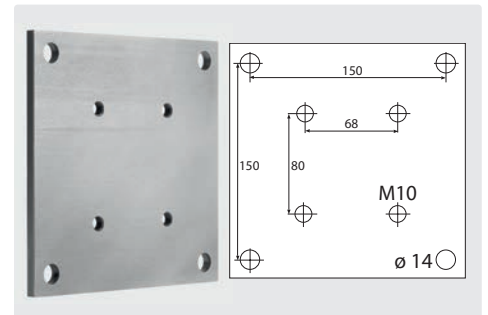


For walls and ceiling. Stainless steel. 180 x 180 mm. Thickness: 8 mm. 4 x M10

R+M Nr.

109 790 461 4




Ready for mounting:
the bracket enables an easy assembly



R+M car wash booms

R+M booms with hose reel ST 14

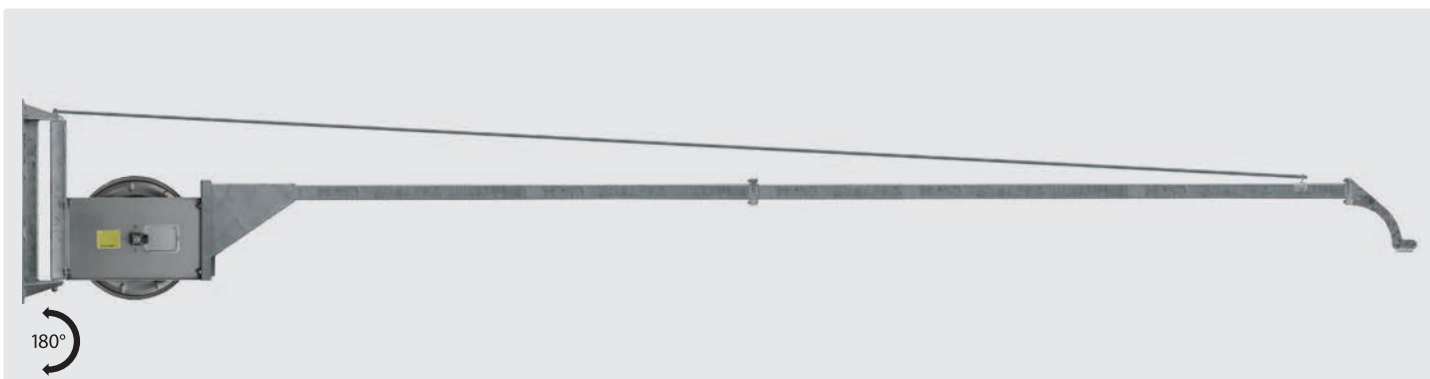

Zinc-plated steel. Extension with hose reel ST 14 made out of stainless steel.


Hose capacity outer $\varnothing$ = hose $\varnothing$ 15 mm · 20 mm = 12 m.

Without high pressure hose. Max. 300 bar.

Attention: Delivery time of approx. 2 weeks!

R+M Nr.				
109 825	2,570 mm	3/8" F	3/8" F	45.0 kg
109 835	3,570 mm	3/8" F	3/8" F	50.0 kg
109 845	4,570 mm	3/8" F	3/8" F	54.0 kg

Hose stopper



Hose stop with six exchangeable inserts.


Hose $\varnothing$ 10 - 34 mm

R+M Nr.

741 03

R+M Nr.

741 033



R+M car wash booms


R+M booms with pressure pipe



Zinc-plated steel. Pipe zinc-plated steel. Maintenance-free.

Max. 400 bar


R+M Nr.				
109 10	2,000 mm	1/4" M	1/4" M	12.0 kg
109 20	2,500 mm	1/4" M	1/4" M	14.0 kg
109 30	3,000 mm	1/4" M	1/4" M	15.0 kg
109 40	3,500 mm	1/4" M	1/4" M	17.0 kg



Symbols length inlet outlet weight diameter shipment by truck

R+M car wash booms

R+M booms with hose carrier

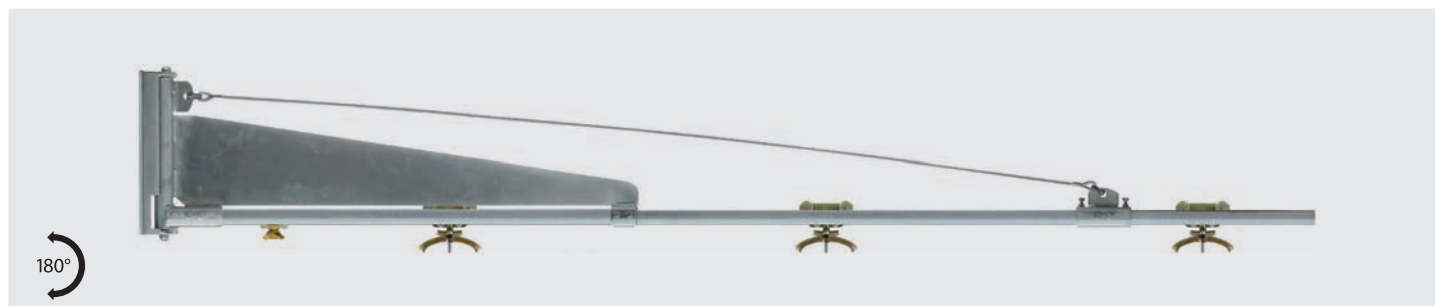

Zinc-plated steel. Maintenance-free. Trolley zinc-plated steel

Ø 17 - 25 mm



R+M Nr.		hose reel trolleys	
109 506	3,000 mm	3 pieces	20.0 kg
109 516	4,000 mm	4 pieces	23.0 kg

Hose trolleys



R+M Nr.

107 308 001

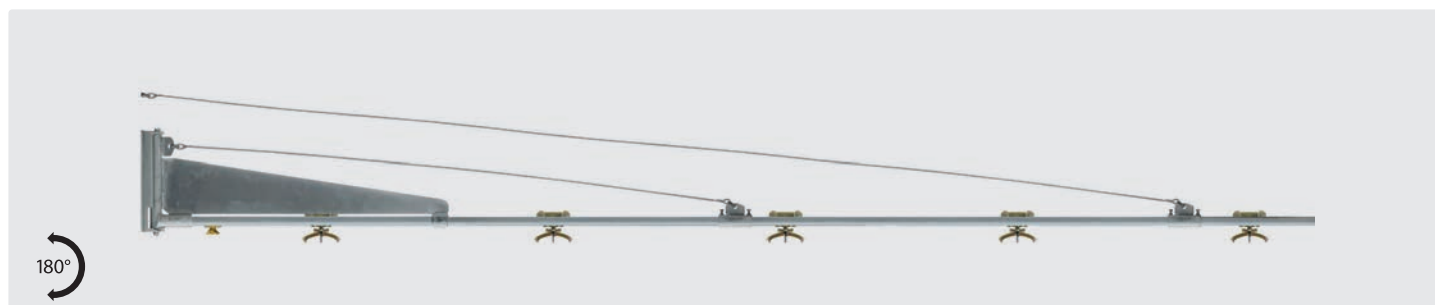

Zinc-plated steel. Maintenance-free. Trolley zinc-plated steel

Ø 17 - 25 mm


R+M Nr.		hose reel trolleys	
109 526	5,000 mm	5 pieces	38.0 kg
109 536	6,000 mm	6 pieces	43.0 kg

Hose trolleys



R+M Nr.

107 308 001




Suttner swivels

ST-300 swivels



3/8" M : 3/8" F. Stainless steel / nickel-plated brass. Max. 275 bar / 90 °C

R+M Nr.	
200 300 010	45 mm




Repair kit

R+M Nr.
200 300 100



1/4" F : 3/8" F. Stainless steel / nickel-plated brass. Max. 275 bar / 90 °C

R+M Nr.	
200 300 050	57 mm

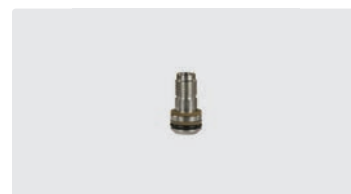

Repair kit


R+M Nr.
200 300 100

ST-300 swivels



1/4" M : 1/4" F. Brass.
Max. 275 bar / 90 °C

R+M Nr.	
200 300 040	44 mm




R+M Nr.

ST-301 swivels



1/4" F : 3/8" F. Stainless steel / brass.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	
200 301 050	58 mm

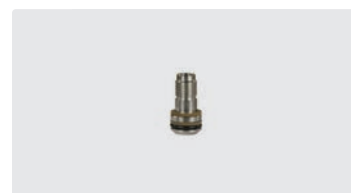

Repair kit


R+M Nr.
200 300 100

ST-301 swivels



1/4" F : M22 M. Stainless steel / brass.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	
200 301 060	62 mm




Repair kit

R+M Nr.
200 300 100



1/4" F : 3/8" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 310 000	57 mm

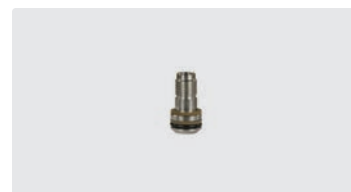

Repair kit


R+M Nr.
200 300 100

ST-310 swivels



3/8" M : 3/8" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 310 010	45 mm




Repair kit

R+M Nr.
200 300 100



1/2" M : 1/2" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	
200 310 040	49 mm

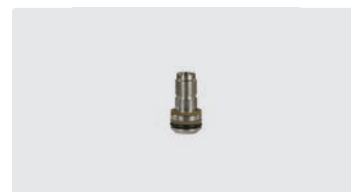

Repair kit

R+M Nr.
200 300 100

Suttner swivels

ST-311 swivels



1/4" F : 3/8" F. Stainless steel.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	i
200 311 050	58 mm




Repair kit

R+M Nr.
200 300 100



1/4" F : M22 M. Stainless steel.
Swivel with radial friction bearing.
Max. 350 bar / 90 °C

R+M Nr.	i
200 311 060	58 mm

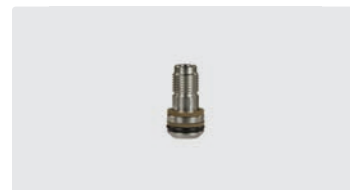

Repair kit

R+M Nr.
200 300 100

ST-340 swivels



1/2" M : 1/2" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	i
200 340 010	52 mm



Repair kit

R+M Nr.
200 340 100



1/4" F : 1/2" F. Stainless steel.
Max. 350 bar / 90 °C

R+M Nr.	i
200 340 050	73 mm



Repair kit

R+M Nr.
200 340 100



1/2" M : 1/2" F. Brass.
Max. 250 bar / 90 °C

R+M Nr.	i
200 340 510	52 mm



Repair kit

R+M Nr.
200 340 150



1/4" F : 1/2" F. Brass.
Max. 250 bar / 90 °C

R+M Nr.	i
200 340 520	73 mm



Repair kit


R+M Nr.
200 340 100

ST-351 swivels



1/2" M : 1/2" F.
Max. 600 bar

R+M Nr.	i
200 351 510	72 mm



Repair kit swivel ST-351


R+M Nr.
200 351 400

ST-350 swivels



3/8" M : 3/8" F. Stainless steel.
Max. 500 bar / 90 °C

R+M Nr.	i
200 350 010	45 mm

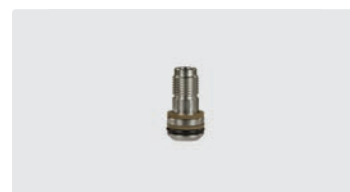

Repair kit

R+M Nr.
200 300 120

ST-345 swivels



1/4" F : 1/4" M. 350 bar.
Stainless

R+M Nr.
200 345 500



1/4" F : 1/4" M. 350 bar. Stainless.
easywash365+® blue

R+M Nr.
200 345 510



1/4" F : 1/4" M. 350 bar. Stainless.
RAL 5005

R+M Nr.
200 345 520



1/4" F : 1/4" M. 350 bar.
Stainless

R+M Nr.
200 345 530

Suttner swivels ST-320

Completely stainless steel. Swivel with slide ring as sealing element



3/8" F : 3/8" M. DN 6.
Max. 400 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
200 320 500	48 mm



1/4" F : 1/4" M. DN 6.
Max. 400 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
200 320 550	48 mm



3/8" F : 3/8" M. DN 6.
Max. 400 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
200 320 502	48 mm



Repair kit swivels ST-320

R+M Nr.
200 320 490

Suttner swivels ST-322

Completely stainless steel. Swivel with slide ring as sealing element. Field of application: Hose reels



3/8" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 500	5-400 bar	65 mm



1/2" F : 3/8" M. DN 10.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 510	5-300 bar	65 mm



1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 520	5-300 bar	67 mm




1/2" F : 1/2" M. DN 12.
Max. 30 r.p.m. / 90 °C

R+M Nr.	P	I
200 322 522	5-300 bar	68 mm



☞ M28 M. DN 12.
For series R+M 434 - R+M 564.
☐ 5-300 bar. Max. 30 r.p.m. / 90 °C

R+M Nr.	I	☐
200 322 523	79.5 mm	1/2" F
200 322 525	79.5 mm	3/8" F



Repair kit swivels ST-322

R+M Nr.	P
200 322 490	5-400 bar

Symbols I height ☐ inlet VPE packing unit P pressure

easywash365+® swivels

Housing nickel-plated brass. Axle stainless steel. Field of application: Ceiling booms in self-service car wash

1/4" F : 1/4" M. DN 7.
Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	I
562 390 503	46 mm

3/8" F : 1/4" M. DN 7.
Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	I
562 390 505	46 mm

3/8" F : 3/8" M. DN 7.
Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.	I
562 390 507	46 mm

Repair kit **easywash365+®** swivels

R+M Nr.
750 140 2

easywash365+® swivels

Housing stainless steel / nickel-plated brass. Axle stainless steel. Maintenance-free. DN 6. Field of application: Swivels applicable to high pressure spray guns and hose connections, ceiling booms in self-service car wash

1/4" M : 1/4" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 600	63 mm	1
562 391 601	63 mm	25

1/4" M : 3/8" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 605	64 mm	1
562 391 606	64 mm	25

3/8" M : 1/4" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 610	63 mm	1
562 391 611	63 mm	25

3/8" M : 3/8" F.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 615	64 mm	1
562 391 616	64 mm	25

1/4" F : 1/4" M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 620	69 mm	1
562 391 621	69 mm	25

3/8" F : 3/8" M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 625	67 mm	1
562 391 626	67 mm	25

1/4" F : M18 M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 630	62 mm	1
562 391 631	62 mm	25

1/4" F : M14 M.
Max. 275 bar / 120 °C

R+M Nr.	I	VPE
562 391 627	62 mm	1
562 391 628	62 mm	25

Mosmatic swivels WDG

Housing nickel-plated brass. Axle stainless steel. Field of application: Ceiling booms in self-service car wash

1/4" F : 1/4" M. DN 7.
Max. 150 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
750 140 11	46 mm

3/8" F : 1/4" M. DN 7.
Max. 150 bar / 30 r.p.m. / 90 °C

R+M Nr.	I
750 140 1	46 mm

Repair kit
Mosmatic swivels WDG

R+M Nr.
750 140 2

Mosmatic swivels DGS / DGV / DGK

Housing stainless steel / nickel-plated brass. Axle stainless steel. DN 6. Rust-proof and maintenance-free. Field of application: Swivels applicable to high pressure spray guns and hose connections, ceiling booms in self-service car wash. Max. 275 bar / 30 r.p.m. / 120 °C



DGS. Double ball bearing system

R+M Nr.			
108 300 01	1/4" F	1/4" M	59 mm
108 300 02	1/4" F	1/4" F	62 mm
108 300 03	1/4" F	3/8" M	60 mm
108 300 04	1/4" F	3/8" F	63 mm
108 300 05	1/4" F	M14 M	57 mm
108 300 06	1/4" F	M16 M	57 mm
108 300 07	1/4" F	M18 M	57 mm
108 300 09	1/4" F	M22 M	61 mm
108 301 03	3/8" F	3/8" M	60 mm
108 301 04	3/8" F	3/8" F	63 mm
108 301 07	3/8" F	M18 M	57 mm
108 301 09	3/8" F	M22 M	61 mm



DGV. Single ball bearing system

R+M Nr.			
108 325 11	1/4" M	1/4" M	60 mm
108 325 12	1/4" M	1/4" F	63 mm
108 325 13	1/4" M	3/8" M	61 mm
108 325 18	1/4" M	M21 M	62 mm
108 325 21	3/8" M	1/4" F	60 mm
108 325 24	3/8" M	3/8" F	61 mm
108 325 32	3/8" M	1/4" F	63 mm
108 325 33	3/8" M	3/8" M	61 mm
108 325 34	3/8" M	3/8" F	63 mm
108 325 37	3/8" M	M18 M	58 mm
108 325 39	3/8" M	M22 M	62 mm
108 325 82	1/4" F	1/4" F	67 mm
108 325 87	1/4" F	M18 M	62 mm



DGK. Single ball bearing system

R+M Nr.			
108 320 31	1/4" M	DN 06	58 mm
108 320 33	1/4" F	DN 06	62 mm
108 321 32	3/8" M	DN 08	66 mm

Mosmatic swivels DGV1

Stainless steel. DN 6. Rust-proof and maintenance-free. Field of application: Swivels applicable to high pressure spray guns and hose connections. Max. 500 bar / 30 r.p.m. / 120 °C



R+M Nr.			
108 327 02	1/4" M*	1/4" F	54
108 327 24	3/8" M*	3/8" F	56
108 327 34	3/8" M	3/8" F	64
108 328 14	1/2" M	1/2" F	75

R+M Nr.			
108 327 81	1/4" F	1/4" M	64
108 327 83	1/4" F	3/8" M	65

R+M Nr.			
108 327 82	1/4" F	1/4" F	66
108 327 84	1/4" F	3/8" F	68

R+M Nr.			
108 327 87	1/4" F	M18 M	62
108 327 88	1/4" F	M21 M	66
108 327 89	1/4" F	M22 M	66

Mosmatic swivels DGE / DGEI

Stainless steel. Maintenance-free. Field of application: especially designed for high flow rates and low revolutions per minute as for example at automatic car wash plants. Max. 30 r.p.m. / 120 °C. DN 13 for 1/2". DN 25 for 1"



DGE 90°. Housing nickel-plated brass. Single ball bearing system. Rust-proof. Max. 275 bar

R+M Nr.			
108 348 23	1/2" F	1/2" M	99

Max. 200 bar

R+M Nr.			
108 348 25	1" F	1" M	123



DGE. Housing nickel-plated brass. Single ball bearing system. Rust-proof. Max. 275 bar

R+M Nr.			
108 348 03	1/2" F	1/2" M	80

Max. 200 bar

R+M Nr.			
108 348 05	1" F	1" M	90



DGEI. Housing stainless steel. Triple ball bearing system. Max. 350 bar

R+M Nr.			
108 347 03	1/2" F	1/2" M	80

Max. 200 bar

R+M Nr.			
108 347 05	1" F	1" M	95



DGEI 90°. Housing stainless steel. Triple ball bearing system. Max. 350 bar

R+M Nr.			
108 347 23	1/2" F	1/2" M	99

Max. 200 bar

R+M Nr.			
108 347 25	1" F	1" M	123

* conical

Mosmatic high RPM swivels DY-Series

Axle stainless steel. Housing nickel-plated brass. Triple ball bearing system. DN 6. Rust-proof and maintenance-free. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 275 bar / 2,000 r.p.m. / 120 °C



DYF.

R+M Nr.			
108 580 03	1/4" F	3/8" M	80
108 581 03	3/8" F	3/8" M	80
108 580 00	1/4" F	M12 M	66



DYF.

R+M Nr.			
108 584 01	3/8" F	1/4" M	84



DYG.

R+M Nr.			
108 570 03	1/4" F	3/8" M	80
108 571 03	3/8" F	3/8" M	80



DYF.


R+M Nr.			
108 560 03	1/4" F	3/8" M	80
108 561 03	3/8" F	3/8" M	80
108 561 04	3/8" F	3/8" F	80
108 560 01	1/4" F	1/4" M	79



DYF 90°

R+M Nr.			
108 563 03	1/4" F	3/8" M	84
108 563 01	1/4" F	1/4" M	84

Mosmatic seal kits



R+M Nr.	TYP
108 369 05	DY hard metal
108 369 01	DX ceramic

Mosmatic swivels DGL



Axle stainless steel. Housing nickel-plated brass. Triple ball bearing system. DN 6. Rust-proof and maintenance-free. Field of application: designed for self-spinning applications. Very low torque required. Max. 275 bar / 1,000 r.p.m. / 30 °C. Max. 275 bar / 30 r.p.m. / 120 °C

R+M Nr.			
108 311 03	3/8" F	3/8" M	66

Mosmatic swivel joints DGR



Quadruple bearing system. Rust and maintenance free.

Radial and axial forces, for particularly large flow rates, for example in large hose reels, in agriculture or the mining industry. Max. 20 bar / 50 rpm / 5-80 °C. Weight 20 kg

R+M Nr.			
108 346 36	2.1/2" F	2.1/2" M	268
108 346 37	2.1/2" F	2.1/2" F	272

Delivery time of approx. 3 weeks

Mosmatic high RPM swivels DY-Series

Axle and housing stainless steel. Triple ball bearing system. Maintenance-free. DN 6 for 3/8". DN 13 for 1/2". DN 38 for 1.1/2"



DYCI. Triple ball bearing system. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 350 bar / 2,000 r.p.m. / 120 °C

R+M Nr.			
108 550 03	1/4" F	3/8" M	95
108 551 03	3/8" F	3/8" M	95



DYCI. Triple ball bearing system. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 350 bar / 2,000 r.p.m. / 120 °C

R+M Nr.			
108 552 53	M22	3/8" M	95



DYDI. Triple ball bearing system. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 500 bar / 2,000 r.p.m. / 120 °C

R+M Nr.			
108 552 63	M22	3/8" M	95

Symbols length mm outlet inlet TYP type

Mosmatic high RPM swivels DY-Series

Axle and housing stainless steel. Quadruple ball bearing system. DN 6. Maintenance-free. Field of application: especially designed for high revolutions per minute and self-rotating applications. Max. 2,000 r.p.m. / 120 °C



DYT. Max. 350 bar

R+M Nr.	↺	↻	↻	↻
108 590 03	1/4" F	3/8" M	107	
108 591 01	3/8" F	1/4" M	109	
108 591 03	3/8" F	3/8" M	109	



DYT 90°. Max. 350 bar

R+M Nr.	↺	↻	↻	↻
108 593 03	1/4" F	3/8" M	109	
108 594 03	3/8" F	3/8" M	110	



DYU. Max. 500 bar

R+M Nr.	↺	↻	↻	↻
108 591 13	3/8" F	3/8" M	109	




DYU 90°. Max. 500 bar

R+M Nr.	↺	↻	↻	↻
108 594 13	3/8" F	3/8" M	110	

Mosmatic swivels WDRS

Axle and housing stainless steel. Triple ball bearing system. Maintenance-free. DN 13 for 1/2". DN 38 for 1.1/2". DN 65 for 2.1/2"

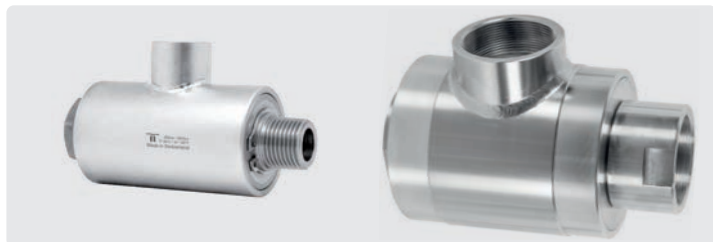

WDRS. Double ball bearing system. Area of application: Especially for large flow rates, e.g. B. designed for automatic washing systems or for large hose reels in agriculture or the mining industry.
Max. 5-80 °C

R+M Nr.	P	↺	↻	↻	↻
108 412 11	200 bar	1/2" F	1/2" M	110	150 r.p.m.
108 415 11	200 bar	1.1/2" F	1.1/2" M	150	76 r.p.m.
108 416 36*	20 bar	2.1/2" F	2.1/2" M	242	50 r.p.m.
108 416 37*	20 bar	2.1/2" F	2.1/2" F	246	50 r.p.m.

* Delivery time of approx. 3 weeks

R+M swivels



3/4" F : 3/4" M. DN 19.
Housing and axle stainless steel.
Max. 200 bar / 90 °C

R+M Nr.	I
750 400 1	80 mm



Repair kit swivel 750 400 1

R+M Nr.	
750 400 2	



3/8" M : 3/8" F.
Brass.
Max. 220 bar / 90 °C

R+M Nr.	I
562 50	39 mm



1/4" F : 3/8" M. DN 6.
Housing and axle stainless steel.
Max. 600 bar / 90 °C

R+M Nr.	I
750 280 0	59 mm



Seal kit swivel 750 280 0

R+M Nr.	
750 200 2	



3/8" M : 1/4" F.
Brass.
Max. 220 bar / 90 °C

R+M Nr.	I
562 60	39 mm

Coin meter

EMS-57



Housing powder-coated steel

- » Mechanical coin tester with coin return (MMP)
- » Sort of coins: 1
- » Display for time left with 3 digits
- » Preselection / minimum insert 1 - 4 coins adjustable
- » Adjustable time selection 1sec - 640 minutes per coin
- » Splash proof electronic
- » Current on contact 16 A - AC1
- » H x W x D 260 x 160 x 110 mm
- » Weight 3.5 kg

230 V - 50 Hz

money
JETON (profiled)
50 Cent
1 €

R+M Nr.
925 712 303
925 712 305
925 712 301

EMS-81



Housing powder-coated stainless steel

- » Mechanical coin tester with coin return (MMP)
- » Sort of coins: 1
- » Display for time left with 3 digits
- » Preselection / minimum insert 1 - 4 coins adjustable
- » Adjustable time selection 1 - 640 minutes per coin
- » Electronic counter for operating times, checkouts, clients
- » Splash proof electronic
- » Current on contact 16 A - AC1
- » H x W x D 260 x 160 x 110 mm
- » Weight 3.5 kg

24 V-50 Hz

230 V-50 Hz

money
JETON (profiled)
50 Cent
1 €

R+M Nr.
928 110 243 9
928 110 245 9
928 110 241 9

R+M Nr.
928 112 303 9
928 112 305 9
928 112 301 9

Attention

Connection only
by authorised staff.

EMS-82



Housing powder-coated stainless steel with spraying protection flap

- » Electronic coin tester with coin return (EMP)
- » Sorts of coins (Token 22 and 26 mm with hole. Coins 0.10 - 0.20 - 0.50 - 1.00 - 2.00 Euro)
- » Display for time left with 3 digits
- » Preselection / minimum insert freely programmable
- » Freely programmable time selection
- » Electronic counter for operating times, checkouts, clients
- » Splash proof electronic
- » Current on contact 16 A - AC1
- » H x W x D 260 x 160 x 110 mm
- » Weight 3.5 kg

24 V - 50 Hz

230 V - 50 Hz

money
programmable

R+M Nr.
928 210 240 9

R+M Nr.
928 212 300 9

Symbols height length inlet outlet pressure flow

Motor control easywash365+®



Motor control for the operation of motors with 4 - 7.5 kW power at 400 VAC, 50 Hz, IP 65. RAL 7035.

H x W x D 380 x 380 x 210 mm.

Supply: 400VAC, 50Hz, 3Ph / N / PE with main switch (cam switch) 25A. Control voltage conditioning 24VDC, 2.5A with backup fuse 2A.

Motor outlet with power contactor 7.5kW and wide-range motor protection switch 8-32A.

LOGO small control unit.

1 operating hours counter (IP 65) and 2 command and signaling devices built into the door

R+M Nr.	Ⓜ
920 001 380	14 kg

Coin box easywash365+® including control box

Coin box easywash365+® including control box



R+M coin box, mechanical, feat. money return, incl. control box, IP 66, RAL 7035 feat. 2 m supply cable with CEE-plug, 16 A, 400 VAC, 50 Hz, 3 Ph/N/PE. Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers. Motor output with power contactor 7.5 kW, wired to CEE add-on box. Feat. a time relay for pulse stretching 0.05 s - 10 h. Excl. control cable

R+M Nr.	money	coin box	control box
925 513 803	chip (profiled)	260 x 160 x 110	300 x 300 x 155
925 513 805	50 Cent	260 x 160 x 110	300 x 300 x 155
925 513 801	1 €	260 x 160 x 110	300 x 300 x 155
925 513 802	2 €	260 x 160 x 110	300 x 300 x 155

Control cable



5 wires, UV-resistant. Sold by metre.

R+M Nr.	TYP
925 510 001	5 G 1.5 mm ²

Control box easywash365+®



Control box, IP 66, RAL 7035. H x W x D 300 x 300 x 155 mm. Feat. 2 m supply cable with CEE-plug 16 A, 400 VAC, 50 Hz, 3 Ph/N/PE.

Control voltage processing 24 VAC, 20 VA with 2 automatic circuit breakers.


Motor output with power contactor 7.5 kW, wired to CEE add-on box.

Feat. a time relay for pulse stretching 0.05 s - 10 h.

Excl. control cable

R+M Nr.	Ⓜ
925 510 000	9.6 kg

CEE Plug

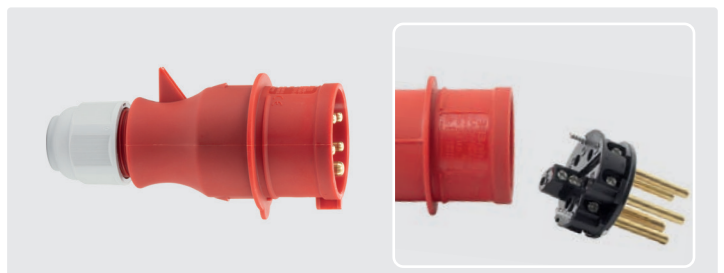

400V / 16A / 3PNE. IP 44. With screw terminals up to a maximum of 2.5 mm²

R+M Nr.
901 338 001

Symbols Ⓜ material ↺ length °C temperature Ⓢ diameter TYP type Ⓜ weight

Coin tester

Coin tester with microswitch



R+M Nr.	money	front plate	hole size
940 10	JETON (profiled)	129 x 52 mm	119 x 42 mm
940 192	JETON (profiled)	150 x 50 mm	140 x 41 mm
940 18	50 Cent	129 x 52 mm	119 x 42 mm
940 195	50 Cent	150 x 50 mm	140 x 41 mm
940 19	1 €	129 x 52 mm	119 x 42 mm
940 193	1 €	150 x 50 mm	140 x 41 mm
940 20	2 €	129 x 52 mm	119 x 42 mm
940 196	2 €	150 x 50 mm	140 x 41 mm

Coin tester with light barrier




R+M Nr.	money	front plate	hole size
940 108	JETON (profiled)	129 x 52 mm	119.0 x 42 mm
940 214	JETON (profiled)	150 x 50 mm	140.5 x 41 mm
940 188	50 Cent	129 x 52 mm	119.0 x 42 mm
940 210	50 Cent	150 x 50 mm	140.5 x 41 mm
940 198	1 €	129 x 52 mm	119.0 x 42 mm
940 211	1 €	150 x 50 mm	140.5 x 41 mm
940 208	2 €	129 x 52 mm	119.0 x 42 mm
940 212	2 €	150 x 50 mm	140.5 x 41 mm

Spraying protection flap




Polycarbon crystal clear. With two magnets and stainless steel fixing.
Weight 0.1 kg

R+M Nr.	H x W x D
108 900 77	200 x 60 x 30 mm



R+M Nr.	H x W x D
921 00	200 x 60 x 30 mm

Token

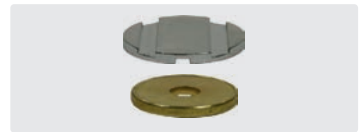

Packing unit 100 pieces

R+M Nr.	Ø	TYP
929 10	25 mm	profiled
929 15	22 mm	with hole
929 16	26 mm	with hole

Wash brushes with water flow

Hand wash brush



Brush with integrated water flow. Connection suitable for Gardena system. Ideal for smaller cleaning applications. Bristles 50 mm

R+M Nr.	↔	(M)	°C
527 001 103	350 mm	polyester	50 °C

Rim brush for trucks / busses



Brush for the cleaning of rims of trucks and busses. Connection for aluminum handles. Bristles 50 mm

R+M Nr.	↔	(M)	°C
527 001 102	230 mm	polyester	50 °C

Wash brush



Solid brush suitable for larger surfaces. Suitable for cleaning of upper areas. With rubber edge. Connection for aluminum handle. Bristles 50 mm

R+M Nr.	↔	(M)	°C
527 001 100	400 mm	polyester	50 °C

Wash brush swivelling



Brush with swivel. The inclined/slanted bristles ensure that all corners can be reached. With connection for aluminum handles. Bristles 50 mm

R+M Nr.	↔	(M)	°C
527 001 101	200 mm	polyester	50 °C

High-low wash brush



The form of the brush allows the bristles to be in constant contact with the surface. The brush is equipped with a rubber edge. With connection for aluminum handles. Bristles 50 mm

R+M Nr.	↔	(M)	°C
527 001 104	250 mm	polyester	50 °C

Wash brush



Solid brush suitable for larger surfaces. Suitable for cleaning of upper areas. The brush is equipped with a rubber edge. Connection for aluminum handles. Bristles 50 mm

R+M Nr.	↔	(M)	°C
527 001 109	260 mm	polyester	50 °C

Wash brushes without water flow

Long hand brush



Solid brush with long handle. Suitable for gas stations.

Bristles 47 mm

R+M Nr.	↔	(M)	°C
527 001 106	410 mm	polyester	50 °C

Short hand brush



Solid brush with short handle. Suitable for cleaning rims and radiator grills.

Bristles 45 mm

R+M Nr.	↔	(M)	°C
527 001 107	245 mm	polyester	50 °C

Ergonomic hand brush



Brush with rubber edge, ergonomic handle and inclined/slanted bristles. Suitable for dry and wet use. Bristles 40 mm

R+M Nr.	↔	(M)	°C
527 001 108	290 mm	polyester	50 °C

Rim brushes



Brush for cleaning of car rims. $\varnothing$ 65 mm.

Bristles 40 mm

R+M Nr.	↔	(M)	°C
527 001 105	330 mm	polyester	50 °C



Soft brush for cleaning car rims. $\varnothing$ 65 mm.

Bristles 40 mm.

R+M Nr.	↔	(M)	°C
527 001 113	330 mm	polyester	50 °C

Multi brush



Brush with soft bristles. Suitable for cleaning aluminum rims. Bristles 45 mm

R+M Nr.	↔	(M)	°C
527 001 112	320 mm	polyester	50 °C

Interior brush



Industrial brush 330 x 35 mm.

Brush for cleaning vehicle interior.

Bristles 30 mm

R+M Nr.	↔	(M)	°C
527 001 415	330 mm	polyester	50 °C

Wash brushes without water flow

Nail brushes



Very solid brush with a hole for hanging.
40 x 47 x 120 mm

R+M Nr.	↔	(M)	°C
527 001 409	120 mm	polyester	50 °C

Brush set



2 long-handled brushes with 30 mm and 50 mm wide bristles.

R+M Nr.	↔	(M)	°C
527 001 115	390 mm	polyester	50 °C

Workshop broom



Wooden cover with screwed socket for handles.
Suitable for sweeping wet and oily waste.

R+M Nr.	↔	(M)	°C
527 001 418	665 mm	PVC	60 °C

Window brushes and accessories

Hand squeegees



Effectively removes water and avoids lime spots.
Protects lacquer and windows. With connection
for aluminum handles

R+M Nr.	↔	(M)	°C
527 001 110	250 mm	rubber	50 °C
527 001 201	350 mm	rubber	50 °C



Effectively removes water and avoids lime spots.
Protects lacquer and windows. With connection
for aluminum handles

R+M Nr.	↔	(M)	°C
527 001 202	450 mm	rubber	50 °C

Floor squeegees



Effective floor squeegee for water and oil.
Oil-resistant rubber. With connection for
aluminum handles.

R+M Nr.	↔	(M)	°C
527 001 302	600 mm	PP/rubber	50 °C

Pad holder with swivel



The pads are fastened safely with sinkable arene
hooks. With connection for aluminum handles

R+M Nr.	↔	(M)	°C
527 001 209	230 mm	polypropylen	50 °C

Pad white



Scrubbing nylon, suitable for removing insects.
Only suitable for windows and glass

R+M Nr.	VPE	(M)	°C	↔
527 001 206	1	nylon	50 °C	250
527 001 206 10	10	nylon	50 °C	250

Pad brown



Suitable for removing extreme dirt on rough
surfaces. Not designed for the use on coated
surfaces

R+M Nr.	VPE	(M)	°C	↔
527 001 207	1	nylon	50 °C	250
527 001 207 10	10	nylon	50 °C	250

Symbols VPE packing unit (M) material ↔ length °C temperature

Window brushes and accessories

Windscreen scraper



The cleaning is facilitated by means of the integrated insect net. Popular at gas stations

R+M Nr.	↔	⌈	°C
527 001 203	200 mm	500 mm	50 °C

Windscreen scraper with telescopic handle



The cleaning is facilitated by means of the integrated insect net. Ideal for trucks and busses

R+M Nr.	↔	⌈	°C
527 001 204	200 mm	700 - 1,250 mm	50 °C

Replacement scraper



Spare head for 527 001 203 and 527 001 204

R+M Nr.	↔	°C
527 001 205	200 mm	50 °C

Wall mounts



Wall holder helps keeping order and increases the life of the brushes

R+M Nr.	↔	(M)	°C
527 001 404	245 mm	aluminium	50 °C

Snowbrooms



Snowbroom with integrated ice scraper. Shatterproof at arctic temperatures. Bristles 45 mm

R+M Nr.	↔	(M)
527 001 208	500 mm	PVC

Shovels



To shovel snow or suitable as safety equipment for dangerous materials.

R+M Nr.	↔	(M)
527 001 303	500 mm	PVC

Quick couplings suitable for Nito system



Hose tail for 1/2" hose

R+M Nr.	(M)
527 003 001	nickel-plated brass



Plug 1/2" M

R+M Nr.	(M)
527 003 003	nickel-plated brass




Coupling NITO 1/2" : coupling "universal"

R+M Nr.	(M)
527 003 010	nickel-plated brass

Symbols (M) material ↔ length ∅ diameter °C temperature ⌈ height


Handles with water flow

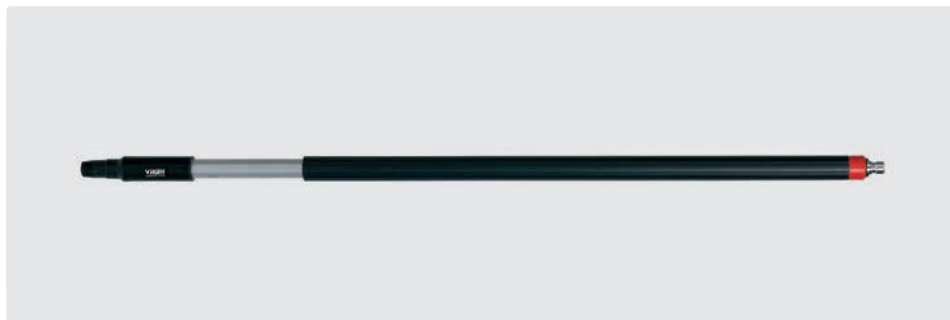

Aluminium handle. Ergonomic handle with insulated grip.
Connector suitable for Nito system

R+M Nr.	Ø	↔	M	°C
527 001 405	34 mm	1,010 mm	aluminium	max. 50 °C

Adaptor for wash brushes with coarse thread



Adaptor for lances without coarse thread.
Coarse thread F: thread M

R+M Nr.	↔
527 001 118	85 mm




Aluminium handle. Ergonomic handle with insulated grip and ball valve. Connector suitable for Nito system

R+M Nr.	Ø	↔	M	°C
527 001 406	34 mm	1,575 mm	aluminium	max. 50 °C



Aluminium handle. Ergonomic handle with insulated grip. Hose tail suitable for 1/2" and 3/4" hose

R+M Nr.	Ø	↔	M	°C
527 001 400	34 mm	1,575 mm	aluminium	max. 50 °C

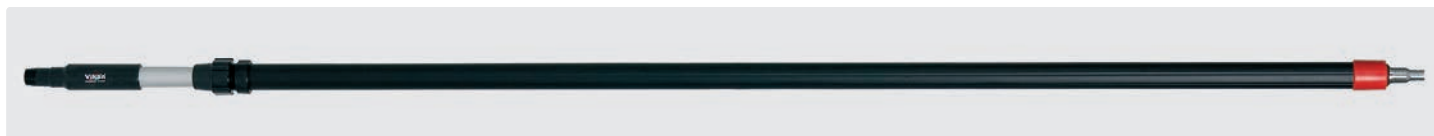

Aluminium handle. Telescopic handle with insulated grip. Hose tail suitable for 1/2" and 3/4" hose

R+M Nr.	Ø	↔	M	°C
527 001 402	50 mm	1,600-2,780 mm	aluminium	max. 50 °C

Handles without water flow



Aluminium handle. Ergonomic handle with insulated grip

R+M Nr.	Ø	↔	M	°C
527 001 403	34 mm	1,505 mm	aluminium	max. 50 °C



Aluminium handle. Telescopic handle with insulated grip

R+M Nr.	Ø	↔	M	°C
527 001 401	50 mm	1,575-2,780 mm	aluminium	max. 50 °C

Centrifugal pump



AR800X self-priming centrifugal pump for car washes.
230 V / 800 watts.
Max. Suction height 8 m.
Max. Delivery head 38 m.
Max. Temperature: 35° C
Cable length: 1m. incl. plug.
Stainless steel pump head.
Motor with thermal protection

R+M Nr.			
170 519 88	1" IG	1" F	58.33 l/min.

Symbols  inlet  outlet  flow



Barrel cleaner	529
Blasting nozzle	529
easyfarm365+®	520-521
foamblaster ST-76	521
kommunal365+	523-525
Long Cast Nozzle	529
Longcast lances	522
Micro Droplets Nozzle Holder	527
Mosmatic car wash ceiling booms with LED	535
Mosmatic duct cleaner.....	530
Mosmatic EVM wall boom for charging cable.....	536
Mosmatic manhole cleaner.....	530
Mosmatic tank cleaner.....	528
Mosmatic wall-mount EV-Boom for e-charging stations.....	534
Solar cleaning	532-533
ST-3500 high-flow spray guns	526
Suttner barrel cleaner.....	529
Suttner high pressure quick couplings ST-3100.....	523
Suttner high pressure spray guns.....	527
Suttner rotating nozzles ST-458.1 with ceramic insert.....	526
Suttner tank cleaner	528
Suttner ultra high pressure lances	526
WEED DEVIL® – Our new device for weed control	531
WEED DEVIL® – weed killer	532

easyfarm365+®

LTF



Professional gun with coupling KW.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.			
202 620 655	coupling KW	1/2" F swivel	

LTF



Professional gun with coupling ST-3100.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.			
202 620 650	coupling ST-3100	1/2" F swivel	

LTF



Professional gun.
Max. 250 bar / 60 l/min / 150 °C

R+M Nr.			
202 620 660	3/8" F	1/2" F swivel	

LTF - Low Trigger Force 90 % reduced holding force and 40 % reduced trigger force against usual market guns.

Grips



Grip for lances with
moulded handle

R+M Nr.
200 009 700



Grip for ST-85
Push & Pull lances

R+M Nr.
200 009 680

Protector ST-10



1/4" F. Plastic. Stainless
steel

R+M Nr.
200 010 760

ST-340 swivels



1/4" F : 1/2" F

R+M Nr.
200 340 520



Repair kit ST-340

R+M Nr.
200 340 150

Suitable high pressure hoses are
on page 169 and 178.

ST-85 Push & Pull lances



Plug KW. Lance stainless steel, vented handle ST-9 380 mm and nozzle protector ST-10 without nozzle. Variable adjustment of spraying angle from 20 to 140°. Especially designed for cleaning of places which are difficult to access. Max. 210 bar / 150 °C

R+M Nr.			
200 085 253	1/4" F NPT	600 mm	plug KW
200 085 613	1/4" F NPT	850 mm	plug KW
200 085 603	1/4" F NPT	1,000 mm	plug KW
200 085 653	1/4" F NPT	1,500 mm	plug KW

Lances




Plug KW. Lance stainless steel, moulded handle 300 mm, valve ST-53 on top, nozzle protector ST-10 with low pressure nozzle and 1/4" M thread for rotating nozzles. Lance without rotating nozzle. Max. 250 bar / 150 °C

R+M Nr.				
200 053 538	300 mm	1/4" M	980 mm	plug KW

easyfarm365+®

Lances

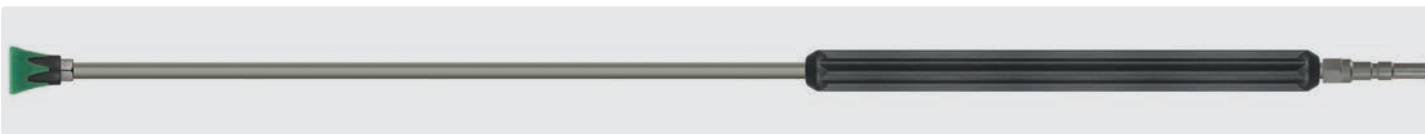


Plug KW. Lance stainless steel, moulded handle 400 mm and nozzle protector ST-10 with nozzle. Max. 400 bar / 150 °C

R+M Nr.	ISO	outlet	length	inlet
200 000 522	400 mm	1/4" F NPT	1,000 mm	plug KW



Plug KW. Lance stainless steel, moulded handle 300 mm, valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.	ISO	outlet	length	inlet
200 054 507	300 mm	1/4" F NPT	980 mm	plug KW

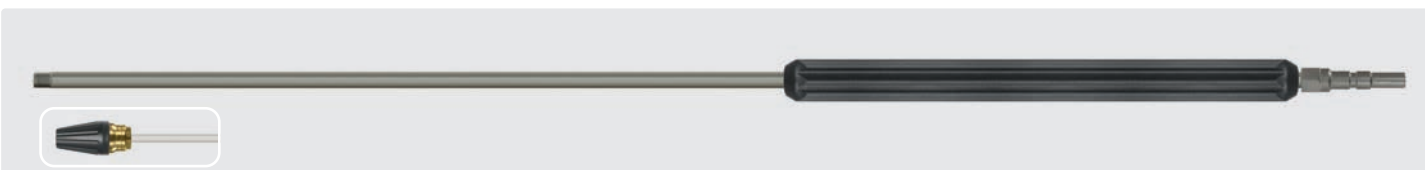

Plug KW. Lance stainless steel, moulded handle 400 mm and 1/4" M thread for rotating nozzles. Lance without rotating nozzle. Max. 400 bar / 150 °C

R+M Nr.	ISO	outlet	length	inlet
200 000 523	400 mm	1/4" M	1,000 mm	plug KW

foamblaster ST-76

The foamblaster ST-76 is designed for applications in agriculture, industry, municipal cleaning and fire fighting technology.

There are injector nozzles with diameters of up to 2.8 mm for high flow rates available for all **easyfoam365+®** stainless steel injectors ST-160, ST-164, ST-166 and ST-167.

Material: stainless steel / plastic.

Min. 70 bar for use in combination with an **easyfoam365+®** injector unit. Min. 30 bar for use with water / foamagent premix.

Max. 250 bar / 20 - 60 l/min / 100 °C

R+M Nr.	D	inlet
200 076 615	2.3 mm	1/2" F
200 076 618	2.6 mm	1/2" F
200 076 621	2.8 mm	1/2" F
200 076 600	2.9 mm	1/2" F
200 076 624	3.0 mm	1/2" F
200 076 630	3.3 mm	1/2" F
200 076 633	3.5 mm	1/2" F



Symbols outlet inlet length ISO insulation D nozzle

Longcast lances



3/8" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2300, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 45 l/min / 100 °C

R+M Nr.		
200 078 510	nozzle protector without nozzle	3/8" F



1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun ST-2320, grip aside and nozzle protector made out of plastic without nozzle.
Max. 150 bar / 80 l/min / 100 °C

R+M Nr.		
200 078 520	nozzle protector without nozzle	1/2" F



LTF

1/2" F. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, gun easyfarm365+, grip aside and nozzle protector made out of plastic without nozzle.
Max. 250 bar / 60 l/min / 100 °C

R+M Nr.		
200 078 530	nozzle protector without nozzle	1/2" F swivel



1/4" M. Stainless steel. Longcast lance 350 mm with insulation ST-29 Cool & Compact 330 mm, grip aside and nozzle protector made out of plastic without nozzle.
Max. 280 bar / 130 l/min / 100 °C

R+M Nr.		
200 078 500	nozzle protector without nozzle	1/4" M

The longcast lance can be connected to a low pressure pump, to a high pressure pump, to the public water system or to the extinguishing water network.

The lance works in the medium pressure range. By means of its very good solidity, good handling and compactness the lance is especially suitable for the intensive use.

The lateral hand grip makes a stepless adjustment of the water jet during the operation possible. A long casting point jet or a progressive, conical spray jet can be set.

In order to realize ideal cleaning results the nozzle size needs to be adapted to the pump performance (pressure and flow rate).

Nozzles for longcast lances



M15x1 M. Stainless steel

R+M Nr.	D
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 418	1.8 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm
200 078 440	4.0 mm
200 078 445	4.5 mm
200 078 450	5.0 mm
200 078 470	7.0 mm

functioning of longcast lance



progressive, conical spray jet



long casting full jet



kommunal365+



Professional gun.
Max. 150 bar / 80 l/min / 150 °C

R+M Nr.		
202 320 500	1/4" F	1/2" F



Professional gun.
Max. 150 bar / 80 l/min / 150 °C

R+M Nr.		
202 320 510	1/2" F	1/2" F



Professional gun.
Max. 150 bar / 80 l/min / 150 °C

R+M Nr.		
202 320 520	1/2" F	1/2" F swivel

ST-340 swivels



1/4" F : 1/2" F


R+M Nr.
200 340 520



Repair kit ST-340

R+M Nr.
200 340 100

Seal kits



R+M Nr.
202 320 495


Shoulder supports



New European Union guidelines imperatively prescribe the use of shoulder supports for cleaning applications exceeding an operating reaction force of 150 N.

R+M Nr.
202 705 590

Grips



Grip for lances with
moulded handle

R+M Nr.
200 009 700



Grip for ST-85 Push &
Pull lances

R+M Nr.
200 009 680

Protector ST-10



ST-10. 1/4" F.
Plastic.
Stainless steel

R+M Nr.
200 010 755

Suitable high pressure hoses are
in chapter 07.

Suttner high pressure quick couplings ST-3100

Couplings and plug ST-3100



Coupling : F.
Stainless steel.
Max. 250 bar / 150 °C



Coupling : M.
Stainless steel. 60° cone.
Max. 250 bar / 150 °C



Plug : F. Stainless steel.
Max. 250 bar / 150 °C



Plug : M.
Stainless steel. 60° cone.
Max. 250 bar / 150 °C

		R+M Nr.		R+M Nr.		R+M Nr.		R+M Nr.	
1/4"	10	203 100 466	44 mm	203 100 653	47 mm	040 005 665	35 mm		
3/8"	12	203 100 461	44 mm	203 100 474	50 mm	040 005 667	41 mm	040 005 668	47 mm
1/2"	12	203 100 460	44 mm	203 100 655	45 mm	040 005 661	47 mm	040 005 662	47 mm

Symbols outlet inlet height nozzle thread nominal diameter

kommunal365+

ST-85 Push & Pull lances



Plug ST-3100. Lance stainless steel, vented handle ST-9 380 mm and nozzle protector ST-10 with nozzle. Variable adjustment of spraying angle from 20 to 140°. Especially designed for cleaning of places which are difficult to access. Max. 210 bar / 150 °C

R+M Nr.			
200 085 251	1/4" F NPT	600 mm	plug ST-3100
200 085 611	1/4" F NPT	850 mm	plug ST-3100
200 085 601	1/4" F NPT	1,000 mm	plug ST-3100
200 085 651	1/4" F NPT	1,500 mm	plug ST-3100

Lances



Plug ST-3100. Lance stainless steel, moulded handle 400 mm and nozzle protector ST-10 with nozzle. Max. 400 bar / 150 °C

R+M Nr.				
200 000 520	400 mm	1/4" F NPT	1,000 mm	plug ST-3100



Plug ST-3100. Lance stainless steel, moulded handle 300 mm, valve ST-54 aside and nozzle protector ST-10 with low pressure nozzle & thread 1/4" F. Max. 310 bar / 150 °C

R+M Nr.				
200 054 506	300 mm	1/4" F NPT	980 mm	plug ST-3100

Symbols  outlet  inlet  length  insulation

kommunal365+

Lances



Plug ST-3100. Lance stainless steel, moulded handle 400 mm and 1/4" M thread for rotating nozzles. Lance without rotating nozzle. Max. 400 bar / 150 °C

R+M Nr.	ISO			
200 000 521	400 mm	1/4" M	1,000 mm	plug ST-3100



Plug ST-3100. Lance stainless steel, moulded handle 300 mm, valve ST-53 on top, nozzle protector ST-10 with low pressure nozzle and 1/4" M thread for rotating nozzles. Lance without rotating nozzle. Max. 250 bar / 150 °C

R+M Nr.	ISO			
200 053 537	300 mm	1/4" M	980 mm	plug ST-3100

Suttner rotating nozzles ST-458.1 with ceramic insert

ST-458.1



1/4" F. Spray angle 20°.
120 - 250 bar. Max. 100 °C

R+M Nr.	D
200 458 811	11
200 458 812	12
200 458 815	15
200 458 820	20
200 458 825	25
200 458 830	30



Kit ST-458.1

R+M Nr.
200 458 311
200 458 312
200 458 315
200 458 320
200 458 325
200 458 330

ST-3500 high-flow spray guns



Professional high-flow gun. Stainless steel.
Industrial high pressure cleaning and jetting gun
for municipal cleaning and other industrial cleaning
tasks. Valve piston hardened stainless steel.
Max. 350 bar / 200 l/min / 150 °C

R+M Nr.	⊖	⊕
203 500 500	1/2" F	1/2" F



Professional high-flow gun. Stainless steel.
Industrial high pressure cleaning and jetting gun
for municipal cleaning and other industrial cleaning
tasks. Valve piston hardened stainless steel. Swivel
stainless steel. Max. 350 bar / 200 l/min / 150 °C

R+M Nr.	⊖	⊕
203 500 550	1/2" F	1/2" F swivel

Suttner ultra high pressure lances

Ultra high pressure lances ST-3600 - 600 bar



1/2" M. Lance with grip. Max. 600 bar / 150 °C

R+M Nr.	⊖	⊕	⊕	M
203 600 416	1/2" M	1,500 mm	1/2" M	stainless steel
203 600 415	1/2" M	2,000 mm	1/2" M	stainless steel

R+M Nr.



1/2" M. Lance with grip and sleeve 1/4" F NPT stainless steel without high pressure nozzle. Max. 600 bar / 150 °C

R+M Nr.	⊖	⊕	⊕	M
203 600 400	1/4" F NPT	500 mm	1/2" M	stainless steel
203 600 401	1/4" F NPT	800 mm	1/2" M	stainless steel
203 600 402	1/4" F NPT	1,000 mm	1/2" M	stainless steel

R+M Nr.



1/2" M. Lance with grip for rotating nozzles with 1/4" F (without rotating nozzle). Max. 600 bar / 150 °C

R+M Nr.	⊖	⊕	⊕	M
203 600 411	1/4" M	500 mm	1/2" M	stainless steel
203 600 410	1/4" M	800 mm	1/2" M	stainless steel
203 600 412	1/4" M	1,000 mm	1/2" M	stainless steel

R+M Nr.

Symbols ⊖ outlet ⊕ inlet ⊕ length M material D nozzle

Suttner high pressure spray guns

ST-2635 Industrial


LTF+

Professional gun. Patented valve kit. Especially wear-resistant ball made out of carbide.
Max. 400 bar / 35 l/min / 150 °C

R+M Nr.			Swivel	Trigger
202 635 550	1/4" F	3/8" F swivel	ST-311	black/red
202 635 555	1/4" F	3/8" F swivel	ST-303	black/grey


LTF+

Professional gun with coupling KW. Patented valve kit. Especially wear-resistant ball made out of carbide. Max. 400 bar / 35 l/min / 150 °C


R+M Nr.			Swivel	Trigger
202 635 570	Coupling KW	3/8" F swivel	ST-311	black/red
202 635 575	Coupling KW	3/8" F swivel	ST-303	black/grey


LTF+
K

Professional gun with insulated outlet suitable for lances with swivel screw coupling. Patented valve kit. Especially wear-resistant ball made out of carbide. Swivel made out of stainless steel.
Max. 400 bar / 35 l/min / 150 °C

R+M Nr.		
202 635 720	M22 M	M22 M swivel


ST-311 swivel

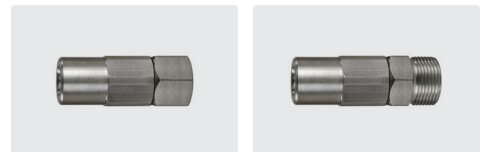

1/4" F : 3/8" F

1/4" F : M22 M

R+M Nr.	R+M Nr.
200 311 050	200 311 060



Repair kit ST-311

R+M Nr.
200 300 100

LTF+ - Low Trigger Force + 90 % reduced holding force and 55 % reduced trigger force against usual market guns.

Suitable lances are on pages 266 - 268.

Micro Droplets Nozzle Holder

Fields of application:


Disinfection, humidification, cooling, dust suppression, decontamination, odor control in agricultural, food and construction industry, defence and firefighting technology, car washing and detailing



ST-78. Stainless steel


R+M Nr.	
200 078 830	1/4" F

functioning of Micro Droplets Nozzle Holder

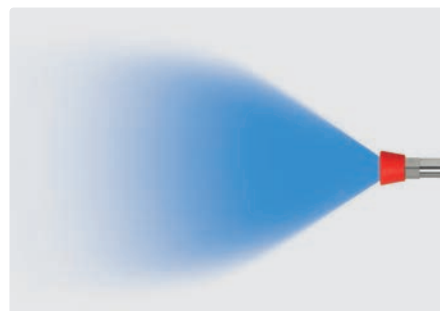

progressive, conical spray jet

Nozzles for Micro Droplets Nozzle Holder



M15x1 M. Stainless steel

R+M Nr.	
200 078 412	1.2 mm
200 078 415	1.5 mm
200 078 420	2.0 mm
200 078 423	2.3 mm
200 078 425	2.5 mm
200 078 430	3.0 mm
200 078 435	3.5 mm

Suttner tank cleaner

ST-82 h16/120 self rotating tank cleaner

Inlet: 3/4" F
 Pressure: 30 - 140 bar
 Flow: 20 - 120 l/min
 Temperature: 0 - 90 °C
 Turns: 10 - 16 r.p.m
 Coverage 360°
 Weight: 5,9 kg
 2 nozzles and 2 caps needed,
 max. 4 nozzles 1/4 " M NPT



R+M Nr.	D	←	P
200 082 730	2 x 180	69 l/min	60 bar
200 082 717	2 x 110	42 l/min	70 bar
200 082 713	2 x 120	50 l/min	80 bar
200 082 722	4 x 130	105 l/min	85 bar
200 082 701	2 x 075	34 l/min	100 bar
200 082 709	4 x 050	45 l/min	100 bar
200 082 708	2 x 110 *	48 l/min	100 bar
200 082 723	4 x 055	50 l/min	100 bar
200 082 705	4 x 055 *	50 l/min	100 bar
200 082 721	2 x 045	20 l/min	100 bar
200 082 702	2 x 060	27 l/min	100 bar
200 082 729	2 x 090	42 l/min	100 bar
200 082 727	4 x 090	85 l/min	110 bar
200 082 724	2 x 050	24 l/min	115 bar
200 082 703	2 x 045	22 l/min	120 bar
200 082 726	2 x 045 *	22 l/min	120 bar
200 082 710	4 x 045	42 l/min	120 bar
200 082 731	2 x 110	110 l/min	120 bar
200 082 716	4 x 070	67 l/min	120 bar
200 082 728	4 x 110 *	110 l/min	120 bar
200 082 732	2 x 110	60 l/min	120 bar
200 082 719	2 x 040	20 l/min	125 bar
200 082 720	2 x 040 *	20 l/min	125 bar
200 082 712	2 x 050	25 l/min	130 bar
200 082 733	4 x 085	90 l/min	135 bar
200 082 704	2 x 040	21 l/min	140 bar
200 082 725	2 x 050 *	27 l/min	140 bar
200 082 706	2 x 060	32 l/min	140 bar
200 082 711	4 x 040 *	40 l/min	140 bar
200 082 714	—	50-60 l/min	140 bar
200 082 715	2 x 055	28 l/min	140 bar
200 082 718	2 x 065 *	35 l/min	140 bar
200 082 734	4 x 075	80 l/min	140 bar
200 082 707	4 x 040	45 l/min	160 bar

Please specify pressure & flow rate with your order.
 The tank cleaner are individually assembled
 to your needs.

* with protection cage

ST-82 h16/40 self rotating tank cleaner

Inlet: 1/2" F
 Pressure: 40 - 140 bar
 Flow: 15 - 50 l/min
 Temperature: 0 - 90 °C
 Turns: 29 - 36 r.p.m
 Coverage 244°
 Weight: 3,6 kg
 3 nozzles needed 1/8" M NPT
 Other versions on request 20-50 l/min



R+M Nr.	D	←	P
200 082 600	basic version without nozzle		
200 082 608	3 x 045	23 l/min	60 bar
200 082 601	3 x 060	40 l/min	100 bar
200 082 607	3 x 060	41 l/min	100 bar
200 082 602	3 x 030	21 l/min	110 bar
200 082 606	3 x 035	25 l/min	110 bar
200 082 605	3 x 035	27 l/min	125 bar
200 082 603	3 x 040	30 l/min	140 bar
200 082 604	3 x 050	40 l/min	140 bar



You can find application
 videos and other versions
 in our online shop.

Mosmatic tank cleaner

TAR-09 self rotating tank cleaner

Inlet: 1/2" F
 Pressure: max. 200 bar
 Flow: 15 - 30 l/min
 Temperature: 0 - 120 °C
 Turns: max. 60 r.p.m
 Coverage 360°
 Weight: 6,8 kg
 Drive angle 65°
 2 nozzle tips are required


new



Tip-Nozzles

R+M Nr.	D
600 101	04
600 201	045
600 301	05
600 401	055
600 501	06
600 601	065

Only special tip-
 nozzles may be
 used.



R+M Nr.	D	←	P
108 101 112	2 Tip-Nozzles	15 - 30 l/min	max. 200 bar
108 101 122	2 Tip-Nozzles	30 - 50 l/min	max. 200 bar
108 101 172	2 Tip-Nozzles	50 - 100 l/min	max. 200 bar

Suttner barrel cleaner

ST-82 e25 / 21 power-operated barrel cleaner CE



- » Inlet: M22 M
- » Pressure: max. 220 bar
- » Flow: max. 21 l/min
- » Temperature: 0 - 90 °C
- » Electric motor: 12 V =
- » Power supply: 230 V / 50 Hz
- » 10 m cable with plug
- » Coverage 360°
- » Weight: 3.2 kg
- » Nozzles are included in the scope of delivery

R+M Nr.

200 082 500

Barrel cleaner

M 28 E power-operated barrel cleaner with exhaust + CE



- » Inlet: M22 M
- » Pressure: max. 140 bar
- » Flow: 10 - 25 l/min
- » Temperature: 0 - 90 °C
- » Electric motor: 12 V =
- » Power supply: 230 V / 50 Hz
- » 10 m cable with plug
- » Coverage 360°
- » Weight: 6.2 kg
- » Nozzles are included in the scope of delivery

R+M Nr.

276 284 380

Long Cast Nozzle

Stainless steel

- » Applications: cleaning of shafts
- » Extremely high impact force
- » Long reach
- » Nozzle protection
- » Max. 500 bar / 150 °C



R+M Nr.

040 001 963



5 mm



3/4" M

ST-3500 with Long Cast Nozzle

Industrial high-flow gun ST-3500, lance 500 mm with side handle. Long Cast Nozzle.

Max. 350 bar / 200 l/min / 150 °C

Application:

- » Man hole cleaning
- » Paper Industry. Removal of snow balls during fibre jetting
- » Cleaning Tasks in Off-Shore or Marine Applications

R+M Nr.

203 500 560



750 mm



1/2" F swivel

Blasting nozzle

Stainless steel

- » Wrench size 27



R+M Nr.

040 002 041



8 mm



1/2" M



Mosmatic manhole cleaner

Manhole cleaner TXS-2f



Inlet 1/2" F. Max. 170 bar / 120 °C

R+M Nr.	Ø	⊞
108 810 33	300 mm	3.7 kg
108 810 43	400 mm	4.4 kg
108 810 53	500 mm	5.3 kg


Mosmatic manhole cleaner TXS-2f with protective plate

Cleans ducts and manholes and realizes cleaning results like never before. The cleaner is self-rotating and very easy in its handling. By means of a protective plate the manhole cleaner and the user profit from extra protection.

Completely made of stainless steel.

Nozzles are excluded. 2 nozzles 1/8" M are required.

Further versions are available on request.

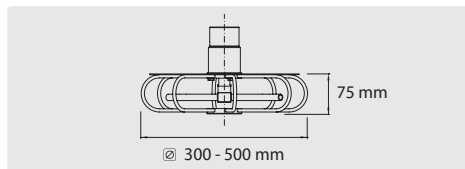

Mosmatic duct cleaner

Cleans ducts, tanks and every kind of container and realizes results like never before. Even the strongest dirt will be removed.

Depending on the kind of application you can either choose the fixed version having fixed horizontal rotor arms or the adjustable version. The angle of the rotor arms at the adjustable model can be changed thus varying the cleaning power.

The duct cleaner is equipped with a standard stainless steel cage protecting and prolonging the life of the rotor arm inside.

The field of application is almost unlimited. Mobile lavatories, drains, chimneys, rubbish chutes, ducts, tanks, container etc.

Further versions are available on request.

TYR 2s



TYR-2s adjustable. Duct cleaner with adjustable rotor arms for a variable spraying angle.

Completely rust-free. Inlet 3/8" F. Nozzles are excluded.

2 nozzles 1/8" M are required.

Max. 275 bar / 120 °C

R+M Nr.	Ø	⊞
108 815 02	75 mm	0.5 kg
108 815 22	150 mm	0.8 kg
108 815 52	300 mm	1.1 kg

TYR 2f



TYR-2f fixed. Duct cleaner with straight rotor arms for a horizontal spraying angle. Ideal for the cleaning of vertical chutes. Completely rust-free.

Inlet 3/8" F. Nozzles are excluded.

2 nozzles 1/8" M are required.

Max. 275 bar / 120 °C

R+M Nr.	Ø	⊞
108 814 02	75 mm	0.5 kg
108 814 22	150 mm	1.0 kg
108 814 52	300 mm	1.3 kg



Adapter



3/8" M : M18 F. Stainless steel

R+M Nr.
040 001 125

WEED DEVIL® – Our new device for weed control

- » Ideal for professional service provider in the garden-, municipal and building cleaning industry
- » Completely made out of stainless steel
- » For hot water use of up to 120 °C, 0 - 350 bar
- » Suitable for low and high pressure applications
- » A working width of 400 mm
- » 1/4" nozzles have the ideal spraying angle of 65°

» swivelling application on sloping and vertical areas is possible

**Completely
chemical-free!**



weeddevil®



ST-2605

LTF

Our spray gun ST-2605 with the patented LTF technology is recommended for effortless working.



4 nozzles 1/4" M NPT are required

At the underside: concentrated and well-directed hot water without any temperature loss by an optimally designed housing having a perfect cleaning distance.



Useable at the left or right: the handle at the side optimises the handling and protects within hot water applications.

4 nozzles 1/4" M are required. 2 robustly industrial castors (260 mm). Max. 120 °C

R+M Nr.	M	castors Ø	working- ⇄	Ⓒ	⇄	P	°C	Ⓔ	I / ⇄
200 097 700	stainl. steel	260 mm	400 mm	1/4" F	4 x 1/4" F	max. 350 bar	120 °C	7.4 kg	1,250 / 530 mm

Accessories thermometer WEED DEVIL®



Easy mounting with counter plate and screws (incl.), or with back spring. 0 - 120 °C

R+M Nr.	tube- Ø
200 097 420	16 mm (WEED DEVIL®)
200 097 425	13 mm (1/4")

Accessories flow restrictor WEED DEVIL®



Flow restrictor for water reduction. Incl. adapter and nozzles (1,0, 1,1, 1,2, 1,3, 1,4)

R+M Nr.	Ⓒ	⇄
200 097 750	1/4" M	1/4" M / M22 F

Symbols M material Ø diameter Ⓒ inlet ⇄ outlet ⇄ width I height °C temperature Ⓔ weight P pressure

WEED DEVIL® – weed killer

» Completely made out of stainless steel

» For hot water use of up to 120 °C

» For use in low pressure application

» Working width 150 mm

» Extremely robust and lightweight with 0.52 kg


» Ideal for individual treatment

weeddevil®

Completely
chemical-free!



R+M Nr.	G	I	Ø	M
500 097 100	1/4" F	120	150	stainless steel / brass
500 097 101	M18x1,5 F	120	150	stainless steel / brass
500 097 102	TR20x6 F	120	150	stainless steel / brass

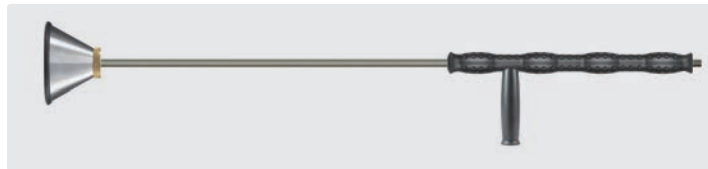

WEED DEVIL® lance with cone with ST-29.2 Cool & Compact with side handle. Pleasantly ergonomic handle with 400 mm insulation. For pumps up to max. 25 l / min.: If necessary, the flow restrictor 200 097 750 has to be used

R+M Nr.	G	I	Ø	M
500 097 103	1/4" M	1.150	120	stainless steel / brass

Solar cleaning

The rotating PV and solar cleaner is also suitable for the connection to telescopic lances


- Effective cleaning of solar modules thanks to the triple rotor arm with aqua drive for three rotating special nylon brushes.
- Brush rotor arm nozzle holder: 3 x 1/4" F. We recommend the full jet as drive nozzles.
- 3 brushes with diameter: 160 mm, bristle length: 40 mm. Brush body with stainless steel bearings.
- Height adjustable 15 mm.
- Robust design thanks to the stabilization ring and stainless steel fixings.

- 520 mm wide hood made of lightweight but indestructible ABS plastic.
- Top-class swivel joint for professional industrial use, suitable for applications up to around 500 operating hours per year. Triple bearings, carbide seals.
- All water-conducting components are made of stainless steel.
- Inlet 1/4" F on a 90° pivoting bracket, which is cushioned by a rubber stop on the hood.
- A splash guard protects against flying dirt and ensures a well-moistened cleaning surface so that the brushes clean properly.
- Flow max. 12,5 l/min

Rotating PV and solar system cleaner

new

R+M Nr.	G	I	Ø	M	°C	P	g
710 100 900	1/4" F	3 x 1/4" F	520 mm	ABS/stainless steel	50 °C	50-70 bar	7.4 kg

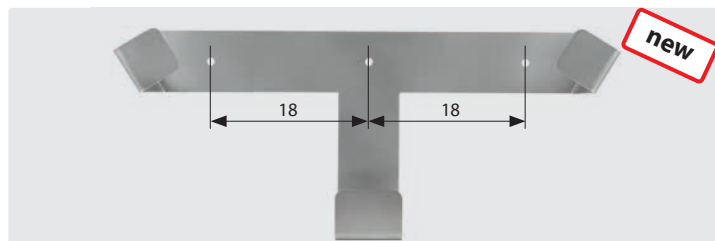Wall bracket

new



R+M Nr.	I	I	M
710 400 156	520 mm	220 mm	stainless steel

Symbols I height mm G inlet I length mm Ø diameter mm M material ★ marking fi filter

Solar cleaning

In most cases, photovoltaic module surfaces cannot simply be cleaned with water and a sponge and it would simply be too dangerous, since the modules are often mounted on the roof at an angle of 30 to 45°. R+M / Suttner offers a solar cleaning set for this purpose: A generously dimensioned surface washing brush with double water flow on a telescopic lance enables you to effectively clean your solar modules and photovoltaic systems. No matter if industry, trade, agriculture or private buildings. The possible uses are unlimited, especially in locations that are exposed to heavy pollution. The solar cleaning set only needs to be connected to tap water.

- Safe and efficient cleaning of solar and photovoltaic systems
- Comfortable working in any position thanks to the stable, telescopic lance


Gentle cleaning of solar modules, since the washing brush works in the low-pressure range, damage to the modules is ruled out

- With the help of the telescopic rods, the brush can be guided easily and safely from the ground, roof or cherry picker
- The soft-grip handle with integrated ball valve enables the brush cleaning to be operated conveniently

Soiling of the surface means loss of performance and lower feed-in tariffs. The aluminum telescopic washing brush set pays for itself after a short time.

The mobile water softening unit prevents limescale residues on cleaned surfaces. In addition, special phosphates bind the lime components dissolved in the water.


Solar telescopic brush set for PV and solar systems

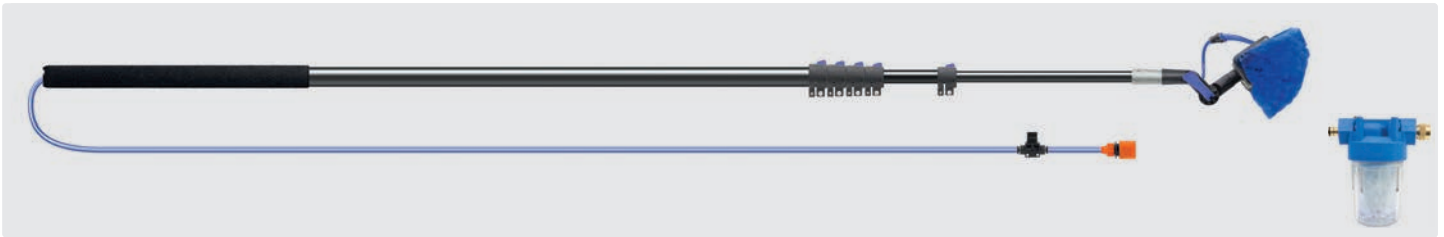

Aluminum telescopic wand with 4 or 5 clip fasteners and soft grip (570 mm). High-low shape washing brush with nylon hair on an adjustable angle joint, 8 or 12 m hose Ø 8 mm, ball valve and universal connection.

5" filter and filter insert polyphosphate with connection 3/4" coupling and tap connector.

R+M Nr.	Insulation	☞	↔	Ⓒ	fi
526 001 425	Soft grip 570 mm	High-low washing brush	1,9 - 10 m	Universal coupling	5"
526 001 435	Soft grip 570 mm	High-low washing brush	1,75 - 6 m	Universal coupling	5"
526 001 401	Soft grip 570 mm	High-low washing brush	1,9 - 10 m	Universal coupling	without filter
526 001 430	Soft grip 570 mm	High-low washing brush	1,75 - 6 m	Universal coupling	without filter


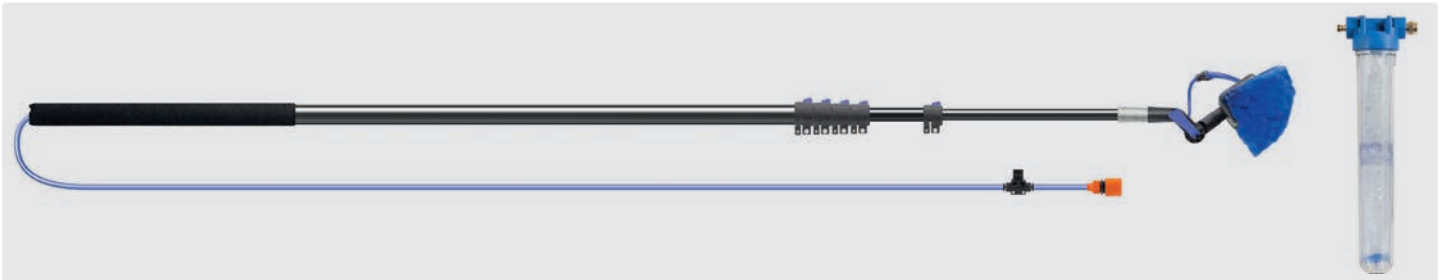


Aluminum telescopic wand with 4 or 5 clip fasteners and soft grip (570 mm). High-low shape washing brush with nylon hair on an adjustable angle joint, 8 or 12 m hose Ø 8 mm, ball valve and universal connection.

20" filter and filter insert polyphosphate with connection 3/4" coupling and tap connector.

R+M Nr.	Insulation	☞	↔	Ⓒ	fi
526 001 420	Soft grip 570 mm	High-low washing brush	1,9 - 10 m	Universal coupling	20"
526 001 440	Soft grip 570 mm	High-low washing brush	1,75 - 6 m	Universal coupling	20"

Spare parts filter inserts

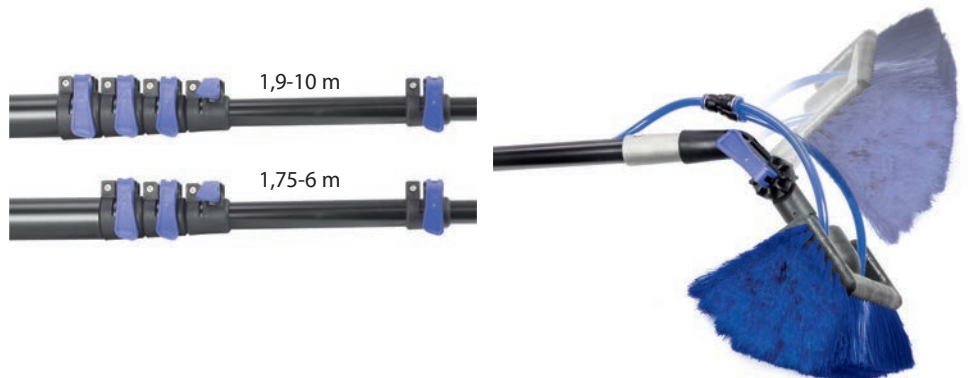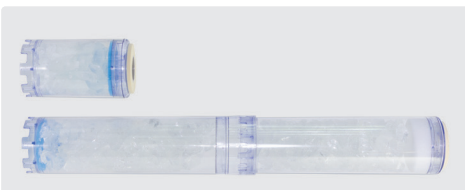

Water softener. Polyphosphate

R+M Nr.	★	fi	1
734 58	■	5"	125
734 820 035	■ ■	20"	510

Mosmatic wall-mount EV-Boom for e-charging stations

- » Optimal for every garage and other locations with charging stations
- » Easy cable management for trouble-free charging
- » Clean and convincing set-up with a professional appearance
- » Premature cable wear and tripping hazards are excluded.
- » **Delivery time about 2 weeks**

The innovative solution for vehicle charging: Mosmatic EV booms offer the perfect solution for cable management of e-charging stations in private as well as public areas.

With our selection of wall booms and wide range of accessories, we offer easy and smooth charging to suit your needs.

The EV Boom ensures a clean and convincing set-up with a professional appearance.




Mosmatic wall-mount EV-Boom LU-W




Stainless steel. The Mosmatic wall-mount EV-Boom is suitable for all e-charging cables. With ball-bearing pivot point. Maintenance free.

Attention: Delivery time of approx. 2 weeks!

R+M Nr.			
108 603 11	1,600 mm	50 mm	8.0 kg

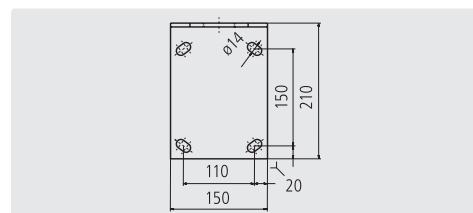


Mosmatic wall-mount EV-Boom LU-W bended

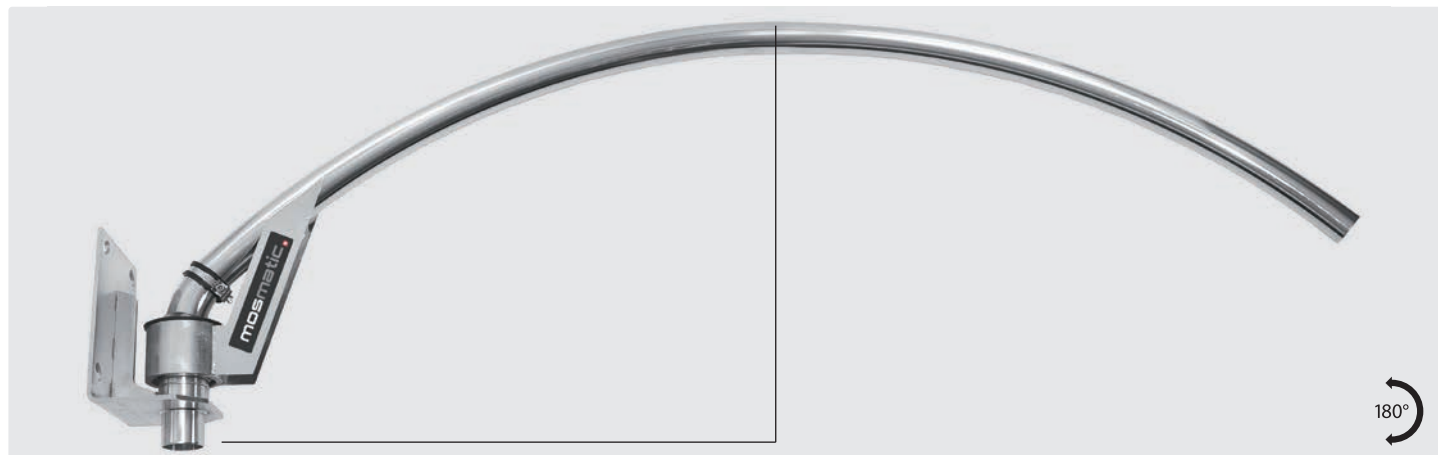

Stainless steel. The Mosmatic wall-mount EV-Boom is suitable for all e-charging cables. With ball-bearing pivot point. Maintenance free.

Attention: Delivery time of approx. 2 weeks!

R+M Nr.			
108 609 58	1,700 mm	50 mm	8.6 kg

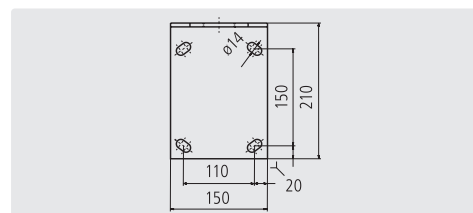

Symbols  length mm  diameter mm  material  weight

Mosmatic car wash ceiling booms with LED

Plastic plugs, Mosmatic



Protects cables from rapid wear.
For $\varnothing$ 50 mm Mosmatic wall-mount EV-Boom or pipe bends

R+M Nr.	$\varnothing$	(M)
108 905 762	34 mm	POM


Stop with rubber buffer, Mosmatic



Stop for wall mounting.
Prevents 360° rotating EV boom.
For all $\varnothing$ 50 mm Mosmatic wall-mount EV-Boom

R+M Nr.	length / height / depth mm	(M)
108 603 19	900 / 70 / 82	stainless steel/rubber

Clip flue, Mosmatic

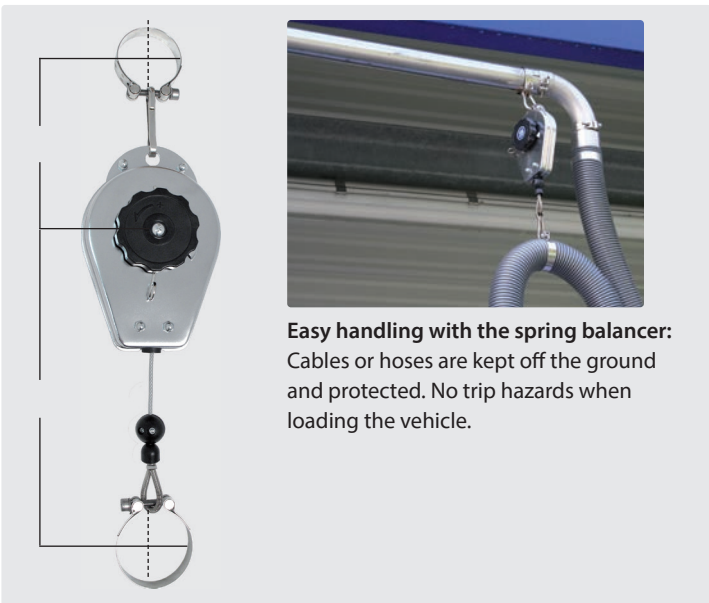

Easy handling with the spring balancer:
Cables or hoses are kept off the ground and protected. No trip hazards when loading the vehicle.

1.5 meter wire rope, extendable.
For mounting on EV Boom to attach the charging cable.
2 screw pipe clamps $\varnothing$ 50 / 60 mm

R+M Nr.	$\varnothing$	(M)
108 603 20	185 - 1,600 mm	stainless steel

Elbow 45°, Mosmatic



Stainless steel. For $\varnothing$ 50 mm Mosmatic wall-mount EV-Boom.
Incl. screw pipe clamp for attachment to the wall boom.
Cable routing and outlet: 45°

R+M Nr.	$\varnothing$
108 603 28	225 mm

Elbow 90°, Mosmatic




Stainless steel. For $\varnothing$ 50 mm Mosmatic wall-mount EV-Boom.
Incl. screw pipe clamp for attachment to the wall boom.
Cable routing and outlet: 90°

R+M Nr.	$\varnothing$
108 603 14	160 mm



Sophisticated solutions for cables:
The plastic plug protects the cable from abrasion.







Possible adaptation:
The pipe bends can be fastened with screw pipe clamps.

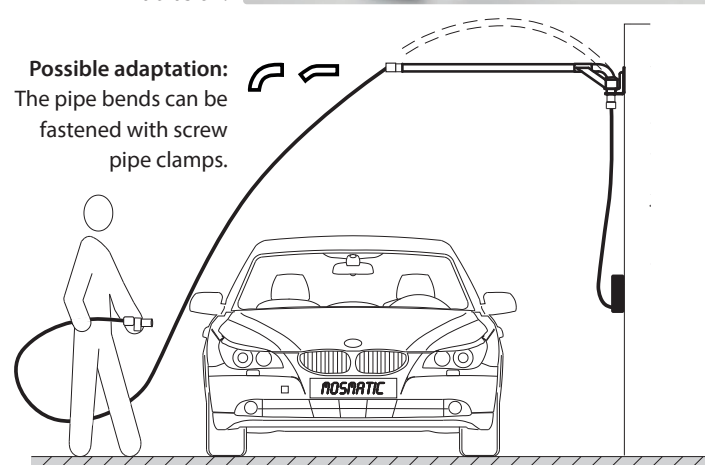

Mosmatic EVM wall boom for charging cable

Mosmatic EVM wall boom for charging cable

- » The EVM wall boom for cable management of e-charging stations
- » Axle with double-bearing and permanently lubricated
- » Boom length 1,600 mm, cable-slot length 1,500 mm
- » Stainless steel, ready for installation
- » Easy assembly and fitting
- » Suitable for all common e-charging cables up to 20 mm diameter
- » The EV boom ensures a clean setup and a professional appearance
- » Easy access to the front and rear of the vehicle without tripping hazards

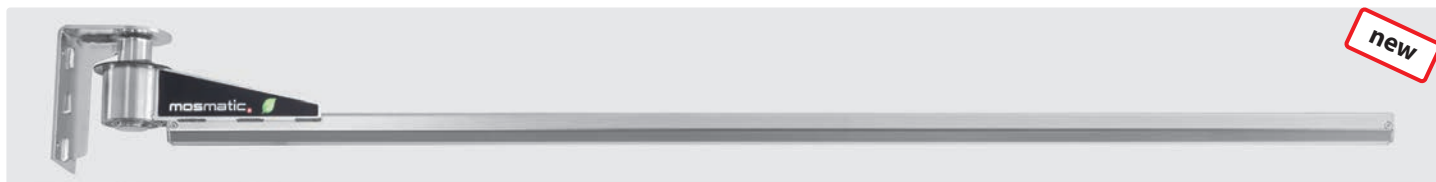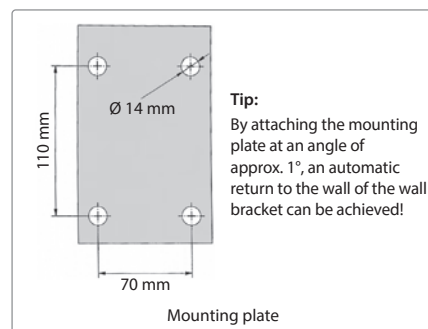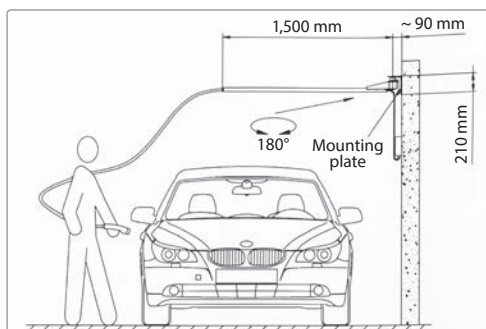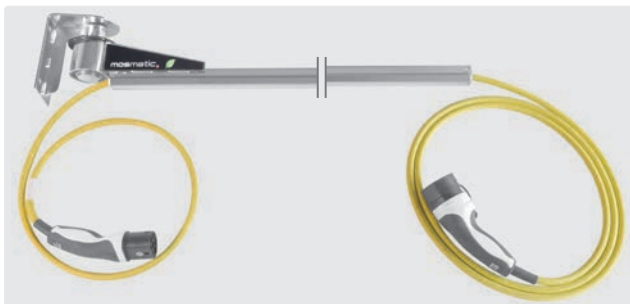

Mosmatic EVM wall boom for charging cable for wall mounting. Stainless steel. Suitable for all common e-charging cables up to 20 mm diameter.

R+M Nr.

108 687 05




1,600 mm

Symbols length mm



Accessories electrically efferent	548
Accessories for floor cleaning machines	569
Accessories for spray-ex-sucker	569
Car Wash vacuum hoses	547
Carbon brushes	560
Cartridge filter allocation for cleaning devices	551-556
Cartridge filter for cleaning devices	549-550
Crevice tool holder	546
Electric appliance adapter	545
Hose connectors	545
Motor allocation for vacuum motors	561-568
Motor cover	560
Reducing pieces	545
Rubber tool sleeve	540
Seal	560
Suction swivel arm easywash365+®	546
Tank sleeve	539
Tool sleeve PVC	540
Vacuum bags	569-577
Vacuum hoses	539
Vacuum hoses assembled	538
Vacuum hoses oil-resistant	546
Vacuum motor cable	560
Vacuum motors	556-560
Vacuum tools	541-544
Vacuum tubes	540

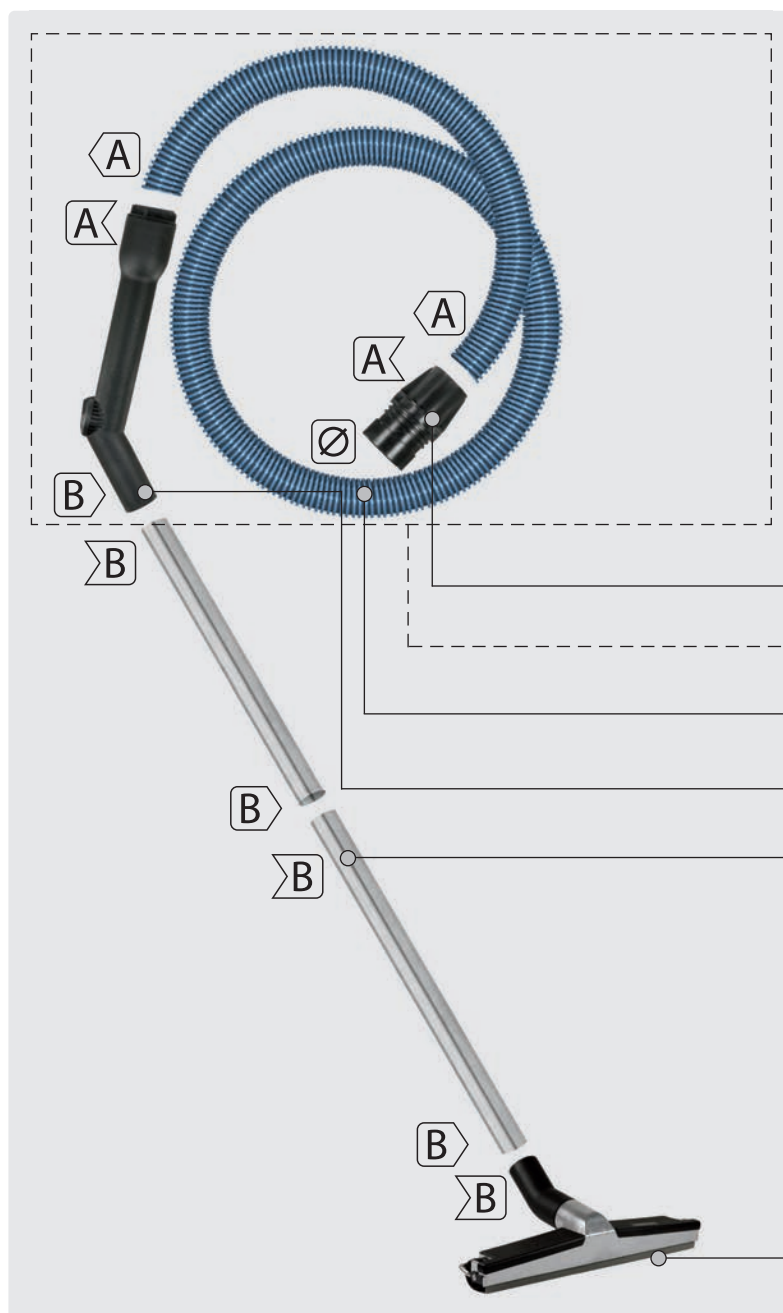

S **A** = DN 32
F **R** **H** **P** = DN 38
L **M** **T** = DN 50

B = 35 mm
G = 45 mm
O = 58 mm

A	A
A	A
B	A
B	B

Vacuum hoses assembled



(263 054 + 263 253)

R+M Nr.	↔	DN	Ø	S
263 240	2 m	32	58 mm	32 mm



(263 054 + 263 653)

R+M Nr.	↔	DN	Ø	B
263 640	2 m	32	58 mm	35 mm



(265 053 + 264 051)

R+M Nr.	↔	DN	Ø	H	G
264 040	2.5 m	38	58	38	45



(265 055 + 265 051)

R+M Nr.	↔	DN	Ø	O	M
265 040	2 m	50	58	58	50

Symbols ↔ length Ø diameter in mm DN nominal diameter in mm TYP type

Tank sleeve



Ghibli

R+M Nr.	Ø	F
264 054	49 mm	38 mm



R+M Nr.	Ø	F
264 055	49 mm	38 mm



R+M Nr.	Ø	A
265 054	58 mm	32 mm



R+M Nr.	Ø	A
265 055	58 mm	32 mm



R+M Nr.	Ø	F
265 053	58 mm	38 mm

Vacuum hoses

Black

- 25 °C - + 60 °C



R+M Nr.	TYP	DN	Outer Ø	↔
262 548 20	A	25 mm	32.0 mm	20 m
263 648 20	A	32 mm	40.0 mm	20 m
263 548 20	A	35 mm	43.3 mm	20 m
264 048 *	F	38 mm	47.0 mm	1 - 20 m
264 048 20	F	38 mm	47.0 mm	20 m
265 048 *	L	50 mm	60.0 mm	1 - 20 m
265 048 20	L	50 mm	60.0 mm	20 m

Grey


- 25 °C - + 60 °C



R+M Nr.	TYP	DN	Outer Ø	↔
263 645 *	A	32 mm	40.0 mm	1 - 20 m
263 645 20	A	32 mm	40.0 mm	20 m
264 045 *	F	38 mm	47.0 mm	1 - 20 m
264 045 20	F	38 mm	47.0 mm	20 m
265 045 *	L	50 mm	60.0 mm	1 - 20 m
265 045 20	L	50 mm	60.0 mm	20 m

Silver


- 25 °C - + 60 °C

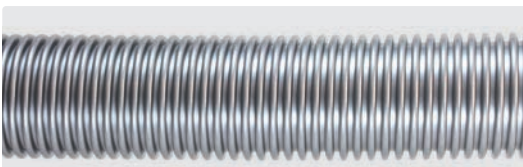

R+M Nr.	TYP	DN	Outer Ø	↔
262 549 20 **	A	25 mm	32.0 mm	20 m
262 749 20		27 mm	34.5 mm	20 m
263 249 20	A	32 mm	40.0 mm	20 m
263 649 20	A	36 mm	44.3 mm	20 m
264 049 20	F	38 mm	47.0 mm	20 m
265 049 20	L	50 mm	60.0 mm	20 m

Blue

- 25 °C - + 60 °C

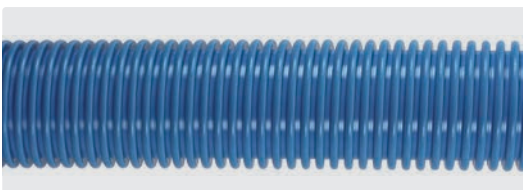

R+M Nr.	TYP	DN	Outer Ø	↔
264 047 20	F	38 mm	47.0 mm	20 m


Black electrically efferent

- 50 °C - + 60 °C. 10⁶ Ω/m electrically efferent


R+M Nr.	TYP	DN	Outer Ø	↔
262 548 30	A	25 mm	33.0 mm	30 m
263 646 30	A	32 mm	40.5 mm	30 m
264 046 30	F	38 mm	48.0 mm	30 m
265 046 30	L	50 mm	61.0 mm	30 m

EVA Silver - blue

- 45 °C - + 65 °C

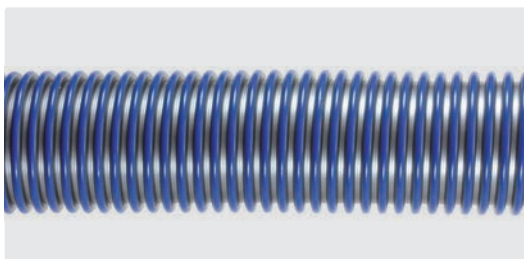

R+M Nr.	TYP	DN	Outer Ø	↔
263 660 01* **	A	35 mm	42.4 mm	1 - 30 m
263 660 30	A	35 mm	42.4 mm	30 m
264 060 01 *	F	38 mm	47.6 mm	1 - 30 m
264 060 30	F	38 mm	47.6 mm	30 m
265 060 01 *	L	50 mm	60.0 mm	1 - 30 m
265 060 30	L	50 mm	60.0 mm	30 m

Brown

- 60 °C - + 120 °C (temporary up to + 150 °C)



Oil and temperature resistant

R+M Nr.	TYP	DN	Outer Ø	↔
263 644 *		36 mm	44.7 mm	1 - 20 m
263 644 20	A	36 mm	44.7 mm	20 m
265 044 *	A	50 mm	61.0 mm	1 - 25 m
265 044 25	L	50 mm	61.0 mm	25 m

** limited stock
* per metre

Tool sleeve PVC



R+M Nr.			
263 250	A 32 mm	S 32 mm	32 mm
263 650	A 32 mm	B 36 mm	35 - 36 mm



R+M Nr.			
264 052	F 38 mm	G 45 mm	



R+M Nr.			
264 050	F 38 mm	O 58 mm	



R+M Nr.			
263 658	A 32 mm	O 58 mm	TYP
265 030	A 32 mm	O 58 mm	antistatic



R+M Nr.			
265 050	L 50 mm	O 58 mm	

Handle with adjustment



R+M Nr.			
263 253	A 32 mm	S 32 mm	
263 653	A 32 mm	B 35 mm	
263 653 1	A 32 mm	B 36 mm	
264 053	F 38 mm	G 45 mm	

Rubber tool sleeve



R+M Nr.			
264 051	F 38 mm	H 38 mm	G 45 mm



for 265 021

R+M Nr.			
265 051	L 50 mm	O 58 mm	M 50 mm


Vacuum tubes



R+M Nr.			
263 623	M chrome-plated	480 mm	O 35 mm



R+M Nr.			
264 021	M chrome-plated	1,200 mm	O 38 mm



R+M Nr.			
265 021	M chrome-plated	1,200 mm	O 50 mm



R+M Nr.			
263 223	M PVC	450 mm	O 32 mm
263 623 1	M PVC	450 mm	O 35 mm



R+M Nr.			
264 023	M PVC	500 mm	O 45 mm



R+M Nr.			
265 023	M PVC	500 mm	O 58 mm

Symbols M material ↔ length Ø diameter in mm DN nominal diameter TYP type

Vacuum tools

Combi-nozzle dry. Switchable. For all carpets and hard covers. Plastic



R+M Nr.	TYP	↔	∅	
263 611	vacuum tool dry	285 mm	35 mm	B
263 211	vacuum tool dry	285 mm	32 mm	S

Combi-nozzle dry for parquet with long and soft horsehair for gentle cleaning applications on sensitive surfaces. Plastic. Soft rollers



R+M Nr.	TYP	↔	∅	
263 612 2	combi-nozzle dry	300 mm	35 mm	B

All-purpose nozzle D300. Vacuum tool with brush strips or rubber lips and height adjustable rollers. Plastic. For all carpets and hard covers



R+M Nr.	TYP	↔	∅	
263 612 31	dry tool	300 mm	35 mm	B
263 612 38	wet tool	300 mm	35 mm	B
263 612 32	set of brush strips	300 mm		
263 612 33	set of rubber lips	300 mm		

All-purpose nozzle. Vacuum tool with grooved rubber lips and height adjustable rollers. Plastic



R+M Nr.	TYP	↔	∅	
263 612 1	vacuum tool wet/dry	400 mm	35 mm	B
263 612 13	rubber lip (1 piece)		35 mm	

All-purpose nozzle D360. Vacuum tool with brush strips, rubber lips and height adjustable rollers. Plastic. For all carpets and hard covers



R+M Nr.	TYP	↔	∅	
263 612 41	vacuum tool dry	360 mm	35 mm	
263 612 4	vacuum wet/dry	360 mm	35 mm	
263 612 42	set of brush strips			
263 612 43	set of rubber lips			

Floor body with exchangeable vacuum tool



R+M Nr.	TYP	↔	∅	
264 005	floor body		38 mm	P
264 007	dry tool	375 mm	38 mm	
264 006	wet tool	375 mm	38 mm	



Vacuum tools



All-purpose nozzle M400. Vacuum tool with brush strips, rubber lips and height adjustable rollers. Plastic. For all carpets and hard covers

R+M Nr.	TYP	↔	∅		
263 213	vacuum tool wet/dry	400 mm	32 mm	S	
263 613	vacuum tool wet/dry	400 mm	35 mm	B	
263 813	vacuum tool wet/dry	400 mm	38 mm	P	
264 013	vacuum tool wet/dry	400 mm	40 mm		K
265 013	vacuum tool wet/dry	400 mm	50 mm	T	
265 000 401	set of rubber lips				
265 000 402	set of brush strips				



All-purpose nozzle with brush strips, rubber lips and height adjustable rollers. Plastic

R+M Nr.	TYP	↔	∅		
265 005	vacuum tool wet/dry	450 mm	50 mm	T	
265 006	set of brush strips				
265 007	set of rubber lips				
265 007 3	oil-resistant squeegee blades				



All-purpose nozzle M450. Vacuum tool with brush strips, rubber lips and height adjustable rollers. Plastic. For all carpets and hard covers

R+M Nr.	TYP	↔	∅		
263 614	vacuum tool wet/dry	450 mm	35 mm	B	
263 814	vacuum tool wet/dry	450 mm	38 mm	P	
264 014	vacuum tool wet/dry	450 mm	40 mm		K
265 014	vacuum tool wet/dry	450 mm	50 mm	T	
265 814	vacuum tool wet/dry	450 mm	58 mm	O	A
265 000 451	set of rubber lips				
265 000 452	set of brush strips				



All-purpose nozzle GRD 450. Vacuum tool with brush strips, rubber lips and height adjustable rollers. Aluminium. For all carpets and hard covers

R+M Nr.	TYP	↔	∅		
263 612 51	vacuum tool dry	450 mm	35 mm	B	
263 612 52	vacuum tool wet	450 mm	35 mm	B	
263 812 51	vacuum tool dry	450 mm	38 mm	P	
263 812 52	vacuum tool wet	450 mm	38 mm	P	
264 012 51	vacuum tool dry	450 mm	40 mm		K
264 012 52	vacuum tool wet	450 mm	40 mm		K
265 006	set of brush strips				
265 007	set of rubber lips				
265 007 3	oil-resistant squeegee blades				



All-purpose nozzle IRD 500. Vacuum tool with brush strips, rubber lips and height adjustable rollers. Aluminium. For all carpets and hard covers

R+M Nr.	TYP	↔	∅		
265 008 1	vacuum tool dry	500 mm	50 mm	T	
265 008 8	vacuum tool wet	500 mm	50 mm	T	
265 008 2	set of brush strips				
265 008 3	set of rubber lips				
265 009 0	oil-resistant squeegee blades				

Symbols I height ↔ length ∅ diameter TYP type DN nominal diameter

Vacuum tools

Upholstery suction nozzle



Brush oval

R+M Nr.	↔	⊙
263 618	240 mm	35 mm



R+M Nr.	↔	⊙
263 215	100 mm	32 mm



R+M Nr.	↔	⊙
263 615	130 mm	35 mm




Upholstery / mattress tool with thread lifter

R+M Nr.	↔	⊙
263 615 1	90 mm	35 mm



Brush rotating. Suitable for sensitive parts, upholstery & furniture

R+M Nr.	ⓘ	⊙
263 617 1	220 mm	35 mm

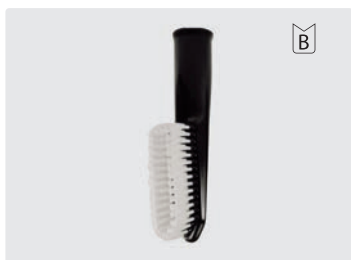

All-purpose brush. USB

R+M Nr.	ⓘ	⊙
263 618 1	230 mm	35 mm


Furniture brush



R+M Nr.	⊙
263 217	32 mm



R+M Nr.	⊙
263 617	35 mm



R+M Nr.	⊙
264 017	45 mm



R+M Nr.	⊙
265 017	58 mm



Furniture brush rotating

R+M Nr.	⊙
263 617 2	35 mm

Radiator brush



For grout nozzles 263 619 1 and 263 619 2, ⊙ 35 mm

R+M Nr.	↔
263 620	140 mm



For grout nozzle 263 219, ⊙ 32 mm

R+M Nr.	↔
263 220	140 mm

Animal care set



Body brush

R+M Nr.	↔	⊙
263 624 1	240 mm	35 mm




Curry-cumb

R+M Nr.	↔	⊙
263 624 2	240 mm	35 mm



Curry-cumb with knobs

R+M Nr.	↔	⊙
263 624 3	240 mm	35 mm



Rubber suction pipe




R+M Nr.	⊙
264 028	45 mm

Nozzle for coarse dirt



R+M Nr.	⊙
265 016	58 mm

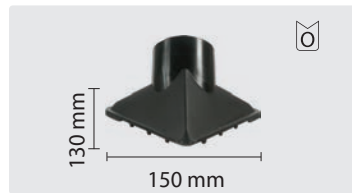

Triangle tool

R+M Nr.	⊙
265 015	58 mm

Pipe dusting nozzle



R+M Nr.	⊙	⊙
263 629	100 mm	35 mm
263 628	200 mm	35 mm



Ⓢ ⓐ = DN 32 . ⓕ = DN 38 . Ⓛ = DN 50 . Ⓡ = DN 38 . ⓑ = 35 mm . ⓖ = 45 mm . ⓗ = 38 mm . ⓘ = 50 mm . Ⓞ = 58 mm

Vacuum tools

Grout nozzles



R+M Nr.	↔	Ø
263 219	200 mm	32 mm



Chrome-plated

R+M Nr.	↔	Ø
264 020	305 mm	38 mm



R+M Nr.	↔	Ø
264 019 3	350 mm	45 mm



R+M Nr.	↔	Ø
265 018	270 mm	58 mm



R+M Nr.	↔	Ø
265 019	230 mm	58 mm



R+M Nr.	↔	Ø
265 020	370 mm	58 mm



R+M Nr.	↔	Ø
263 619	200 mm	35 mm
263 619 1	300 mm	35 mm
263 619 2	370 mm	35 mm



R+M Nr.	↔	Ø
264 019	245 mm	45 mm



R+M Nr.	↔	Ø
264 019 4	350 mm	45 mm



Glass fibre reinforced

R+M Nr.	↔	Ø
265 022 1	370 mm	58 mm



R+M Nr.	↔	Ø
265 022	370 mm	58 mm

Flexible grout nozzles



Rotating. Anti-theft protection due to three-part clip locking system

R+M Nr.	↔	Ø
264 019 12	375 mm	DN 38



Rotating. Easy assembly due to screw thread

R+M Nr.	↔	Ø
264 019 1	420 mm	DN 38



With inner bar 18 cm. Rotating. Rotating. Easy assembly due to screw thread

R+M Nr.	↔	Ø
264 019 11	420 mm	DN 38



Rotating. Easy assembly due to screw thread

R+M Nr.	↔	Ø
265 019 1	420 mm	DN 50



With inner bar 18 cm. Rotating. Easy assembly due to screw thread

R+M Nr.	↔	Ø
265 019 11	420 mm	DN 50



Flexible. PVC

R+M Nr.	↔	Ø
263 621	630 mm	35 mm



Reducing pieces



R+M Nr.	G	B
264 025	45 mm	35 / 36 mm



R+M Nr.	O	B
265 025	58 mm	35 / 36 mm


Electric appliance adapter

- Ø 26 mm
- Ø 32 mm
- Ø 35 mm



R+M Nr.	Ø
263 625	35 mm

Hose connectors



R+M Nr.	Ø
263 656	32 mm



R+M Nr.	Ø
264 056	38 mm



R+M Nr.	Ø
265 056	50 mm

[S] A = DN 32 . [F] = DN 38 . [L] = DN 50 . [R] = DN 38 . [B] = 35 mm . [G] = 45 mm . [H] = 38 mm . [M] = 50 mm . [O] = 58 mm



Symbols ⇄ length Ø diameter in mm

Vacuum hoses oil-resistant

Coiled hose made of polyester elastomer.

Properties: A profile hose made of solid plastic, smooth on the inside, with very low flow resistance, good restoring force (after compression or kinking) with excellent flexibility.

Areas of application: industrial vacuum cleaners, chemical plant construction, conveyor and suction systems, car exhaust systems, very good resistance to oil and fuels, hot air.

Temperature range: - 60 °C - + 120 °C
(temporary up to + 150 °C)



R+M Nr.	TYP	DN	Outer Ø	↔
263 644 *	A	36 mm	44.7 mm	1 - 20 m
263 644 20	A	36 mm	44.7 mm	20 m
265 044 *	L	50 mm	61.0 mm	1 - 25 m
265 044 25	L	50 mm	61.0 mm	25 m

Suction swivel arm easywash365+®

New for self-service vacuum cleaning

- » entirely made out of stainless steel
- » solid construction
- » suspension
- » The vertical **easywash365 +** suction swivel arm for self-service! This cost-effective solution is ideal for single suction places. In this case, the arm does not necessarily have to be integrated into the cabinet technology, but can be easily mounted on a wall. Perfect if space might be limited, because due to its construction this boom needs little space and bending over offers a lot of mobility.
- » The built-in spring prevents kinking of the suction hose and allows a barrier-free handling with optional freedom of mobility.
- » The vertical **easywash365 +** suction swivel arm is completely made out of stainless steel and is supplied including a mounting bracket.
- » Height 2,320 mm. Tube height 1,500 mm. Internal tube diameter of 65 mm. Weight 10.1 kg



R+M Nr.
109 001 500


Crevice tool holder

Designed for central vacuum systems

- » Attachment on wall, pillar, housing or floor
- » Extremely robust and stable
- » Stainless steel design, ground and brushed
- » Holders are designed for the new hose sleeves, which can also be easily swivelled under vacuum:

Holder for **264 052 9 for 45 mm**, accessories in conjunction with crevice nozzle 264 019 3 - 264 019 458 mm. Accessorie: 264 053 0

Holder for **264 053 0 for 58 mm**, accessories in conjunction with crevice nozzle 265 020 - 265 022 - 265 022 1

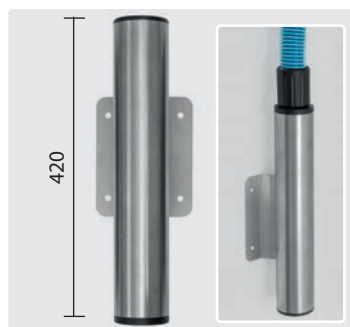

Crevice nozzle holder for wall mounting.
Stainless steel

R+M Nr.	Ø
105 610 010	45 mm
105 610 011	58 mm



Crevice nozzle holder on column for floor mounting.
Stainless steel

R+M Nr.	Ø
105 610 012	45 mm
105 610 013	58 mm



Double crevice nozzle holder on column incl. adapter plate.
Stainless steel

R+M Nr.	Ø
105 610 014	45 mm
105 610 015	58 mm

S A = DN 32 . F = DN 38 . L = DN 50 . R = DN 38 . B = 35 mm . G = 45 mm . H = 38 mm . M = 50 mm . O = 58 mm


* per metre




Car Wash vacuum hoses

The Car Wash vacuum hoses are equipped with a highly abrasion- and dirt-resistant plastic coil (non marking).




- » Extremely light and very flexible structure
- » An even interior for small pressure drops
- » High elastic recovery in case of radial deformation
- » UV-resistant, weatherproof and flexible at low temperatures



Car Wash vacuum hoses

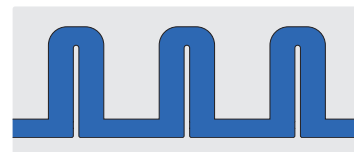

Standard vacuum hoses

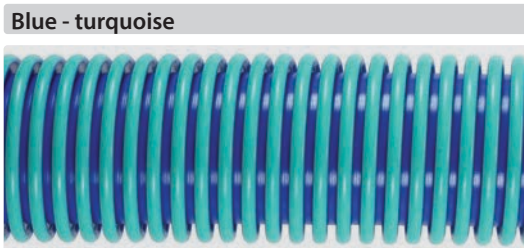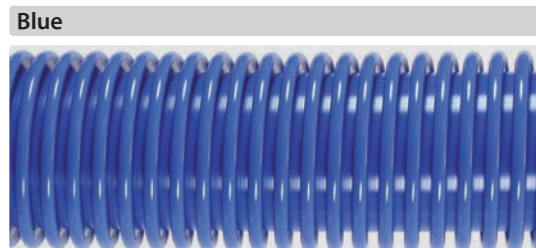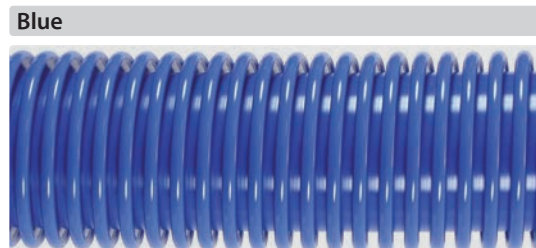

R+M Nr.	TYP	DN	Outer Ø	↔
264 049 1	R	38	50 mm	16 m
264 049 125	R	38	50 mm	23 m

R+M Nr.	TYP	DN	Outer Ø	↔
264 049 2	R	38	50 mm	16 m

Hose connectors

R+M Nr.	Ø
264 056 1	38 mm

Sleeve



R+M Nr.	Ø	R
264 052 6	50 / 58 mm	38 mm

R+M Nr.	Ø	R
264 052 7	50 / 58 mm	38 mm

R+M Nr.	G H	R
264 052 1	45 / 38 mm	38 mm

R+M Nr.	G H	R
264 052 4	45 / 38 mm	38 mm

Grout nozzles




R+M Nr.	I	Ø
264 019	245 mm	45 mm

R+M Nr.	I	Ø
264 019 2	420 mm	38 mm

R+M Nr.	I	Ø
265 020	370 mm	58 mm

R+M Nr.	I	Ø
265 022	370 mm	58 mm

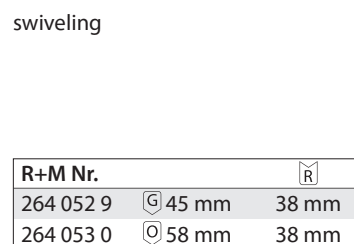

Glass fibre reinforced

R+M Nr.	I	Ø
265 022 1	370 mm	58 mm

Symbols I height ↔ length DN nominal diameter TYP type Ø diameter

Accessories electrically efferent

Vacuum tubes electrically efferent



R+M Nr.	M	↔	∅
264 023 01	<=10 ⁴ Ω/m electrically efferent	500 mm	45 mm



R+M Nr.	M	↔	∅
265 023 01	<=10 ⁴ Ω/m electrically efferent	500 mm	58 mm

Hose coupling electrically efferent



R+M Nr.	M	F	G
264 052 01	10 ⁴ Ω/m	38 mm	45 mm



R+M Nr.	M	L	O
265 050 01	10 ⁴ Ω/m	50 mm	58 mm

Tool sleeve PVC electrically efferent




R+M Nr.	A	∅
265 030	32 mm	58 mm

Vacuum hoses black electrically efferent

- 50 °C - + 60 °C. 10⁶ Ω/m electrically efferent

Black

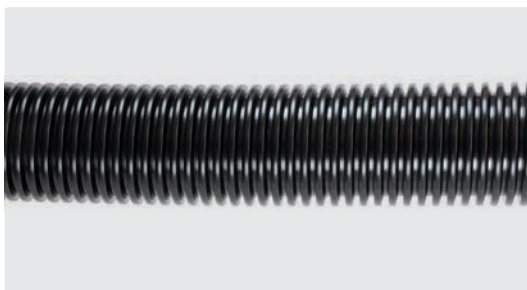

R+M Nr.	TYP	DN	Outer ∅	↔
262 548 30	A	25 mm	33.5 mm	30 m
263 646 30	A	32 mm	40.5 mm	30 m
264 046 30	F	38 mm	48.0 mm	30 m
265 046 30	L	50 mm	61.0 mm	30 m

Vacuum tools electrically efferent



R+M Nr.	M	I	∅
264 019 01	10 ⁴ Ω/m	250 mm	45 mm



R+M Nr.	M	I	∅
265 019 01	10 ⁴ Ω/m	230 mm	58 mm

(S) A = DN 32 . F = DN 38 . L = DN 50 . R = DN 38 . B = 35 mm . G = 45 mm . H = 38 mm . M = 50 mm . O = 58 mm



Symbols I height ↔ length ∅ diameter in mm ∅ internal diameter TYP type M material DN nominal diameter 🚚 shipment by truck

Cartridge filter for cleaning devices

	R+M Nr. 268 263 510	TYP paper				dust class M	manufacturer number Festool: 485 808 Protool: 625 324 ALTO/WAP: 11753
	R+M Nr. 268 263 520	TYP PET				dust class M	manufacturer number Protool: 625 324 ALTO/ WAP: 302 000 490
	R+M Nr. 268 263 610	TYP paper				dust class M	manufacturer number Festool: 486 241 ALTO/WAP: 30063
	R+M Nr. 268 263 620	TYP paper				dust class H	manufacturer number Festool: 486 145 ALTO/WAP: 11618
	R+M Nr. 268 263 700	TYP paper / screen				dust class M	manufacturer number ALTO/WAP: 41164
	R+M Nr. 268 263 710	TYP PET / screen				dust class M	manufacturer number ALTO/WAP: 41164
	R+M Nr. 268 263 800	TYP paper / screen				dust class M	manufacturer number ALTO/WAP: 34641
	R+M Nr. 268 263 810	TYP paper / screen				dust class M	manufacturer number Lavor: 3.752.0032
	R+M Nr. 268 263 820	TYP paper / screen				dust class M	manufacturer number AquaVac: AZ91171175
	R+M Nr. 268 264 000	TYP PET				dust class M	manufacturer number Festool: 488 461 ALTO/WAP: 29747
	R+M Nr. 268 264 200	TYP paper				dust class M	manufacturer number Festool: 488 924 ALTO/WAP: 60077
	R+M Nr. 268 264 210	TYP paper				dust class H	manufacturer number Festool: 489 221 ALTO/WAP: 60076
	R+M Nr. 268 264 300	TYP screen				dust class -	manufacturer number ALTO/WAP: 10022
	R+M Nr. 268 264 310	TYP screen				dust class -	manufacturer number ALTO/WAP: 15475
	R+M Nr. 268 268 600	TYP paper				dust class H	manufacturer number Protool: 625 372 ALTO/WAP: 302000658

dust class

L

transmittance

max. 1 %

endangerings

keeps 99.995 % back from:

- » dusts with max. concentration of > 1 mg/m³

keeps 99.9 % back from:

- » dusts with max. concentration of > 0.1 mg/m³
- » wood dusts (up to 1200 W/50 l)

dust class

H

transmittance






max. 0.01 %

endangerings

keeps 99.995 % back from:

- » dusts with max. concentration
- » cancer-causing dusts
- » dusts with pathogenic germs

Cartridge filter for cleaning devices

	R+M Nr.	TYP	Ø	⊙	I	dust class	manufacturer number
	268 268 710	PET / screen	275 mm	218 mm	183 mm	M	ALTO/WAP: 107400562 Protocol: 626 437
	R+M Nr.	TYP	Ø	⊙	I	dust class	manufacturer number
	268 269 000	paper / screen	185 mm	150 mm	201 mm	M	Rowenta ZR-70
	R+M Nr.	TYP	Ø	⊙	I	dust class	manufacturer number
	268 269 100	paper / screen	190 mm	145 mm	166 mm	M	Thomas: 787 421
	R+M Nr.	TYP	Ø	⊙	I	dust class	manufacturer number
	268 269 300	paper	122 mm	79 mm	113 mm	M	Top-Craft (NT 0506)
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 280 210	paper	215 mm	115 mm	58 mm	M	Festool: 452 065
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 280 220	PES	215 mm	115 mm	58 mm	M	Kärcher: 6.904-068 Kärcher: 6.904-123
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 200	paper	202 mm	75 mm	70 mm	L	Kärcher: 6.414-498
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 300	paper	239 mm	140 mm	56 mm	L	Kärcher: 6.904-206
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 310	paper	239 mm	140 mm	56 mm	M	Kärcher: 6.904-367
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 330	PES	239 mm	140 mm	56 mm	M	Kärcher: 6.904-360
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 340	PES	239 mm	140 mm	56 mm	M	Kärcher: 6.904-360
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 400	paper	250 mm	150 mm	35 mm	M	Festool: 456 077
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 600	paper	300 mm	140 mm	68 mm	M	Kärcher: 6.904-283
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 620	PES	300 mm	140 mm	68 mm	M	Kärcher: 6.904-284
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 900	paper	300 mm	140 mm	68 mm	M	Kärcher: 6.907-276
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 910	PES	300 mm	140 mm	68 mm	M	Kärcher: 6.907-277
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 228 700	paper	278 mm	216 mm	54 mm	L	Kärcher: 5.731-020
	R+M Nr.	TYP	length	↔	I	dust class	manufacturer number
	268 289 400	paper	328 mm	290 mm	50 mm	L	ALTO/WAP: 61605

dust class

L

max. 1 %

transmittance

endangerings

keeps 99.995 % back from:

- » dusts with max. concentration of > 1 mg/m³

keeps 99.9 % back from:

- » dusts with max. concentration of > 0.1 mg/m³
- » wood dusts (up to 1200 W/50 l)

dust class

H

transmittance

max. 0.01 %

endangerings

keeps 99.995 % back from:

- » dusts with max. concentration
- » cancer-causing dusts
- » dusts with pathogenic germs

M

max. 0.10 %

Cartridge filter allocation for cleaning devices

Manufacturer	(TYP)	device	absolute filter	micro filter	filter screen
ALTO / NILFISK	wet/dry vacuum cleaner	aero 400	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 440	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 5 Gallon	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 600	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 640	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 7 Gallon AS/E	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 800A	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	aero 840A	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 30-01 PC	268 263 520		268 264 310
ALTO / NILFISK	safety vacuum cleaner	Attix 30-0H PC		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 30-11 PC	268 263 520		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 30-21 PC	268 263 520		268 264 310
ALTO / NILFISK	safety vacuum cleaner	Attix 30-2H PC		268 268 600	
ALTO / NILFISK	special vacuum cleaner	Attix 30-2M PC	268 263 520		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 350-01	268 263 520		
ALTO / NILFISK	safety vacuum cleaner	Attix 350-0H		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 360-11	268 263 520		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 360-21	268 263 520		
ALTO / NILFISK	safety vacuum cleaner	Attix 360-2H		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 40-01 PC	268 263 520		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 40-21 PC	268 263 520		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 50-01 PC	268 263 520		268 264 310
ALTO / NILFISK	safety vacuum cleaner	Attix 50-0H PC		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 50-21 PC	268 263 520		268 264 310
ALTO / NILFISK	safety vacuum cleaner	Attix 50-2H PC		268 268 600	
ALTO / NILFISK	special vacuum cleaner	Attix 50-2M PC	268 263 520		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 550-01	268 263 520		
ALTO / NILFISK	safety vacuum cleaner	Attix 550-0H		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 550-21	268 263 520		
ALTO / NILFISK	safety vacuum cleaner	Attix 550-2H		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 560-21 XC	268 268 710		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 560-2M XC	268 268 710		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 560-31 XC	268 268 710		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 590-21	268 263 520		
ALTO / NILFISK	safety vacuum cleaner	Attix 751-0H		268 268 600	
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 751-11	268 263 520		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 751-21	268 263 520		268 264 310
ALTO / NILFISK	safety vacuum cleaner	Attix 751-2M	268 263 520		
ALTO / NILFISK	water vacuum cleaner	Attix 751-61			268 264 310
ALTO / NILFISK	water vacuum cleaner	Attix 751-71			268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 761-21 XC	268 268 710		
ALTO / NILFISK	special vacuum cleaner	Attix 763-2M ED	268 268 710		
ALTO / NILFISK	wet/dry vacuum cleaner	Attix 791-21 EC	268 263 520		
ALTO / NILFISK	high-performance vacuum cleaner	Attix 961-01	268 268 710		
ALTO / NILFISK	high-performance vacuum cleaner	Attix 963-21 ED XC	268 268 710		
ALTO / NILFISK	high-performance vacuum cleaner	Attix 965-21 SD SC	268 268 710		
ALTO / NILFISK	high-performance vacuum cleaner	EC 380-E	268 263 510		268 264 310
ALTO / NILFISK	safety vacuum cleaner	EC 380-SW/B1	268 263 610	268 263 620	
ALTO / NILFISK	high-performance vacuum cleaner	EC 480	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	EC 480 E/IH/B1	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	EC 480-SW/B1	268 263 610	268 263 620	
ALTO / NILFISK	high-performance vacuum cleaner	EC 850	268 263 700		268 264 300
ALTO / NILFISK	high-performance vacuum cleaner	EC 850-E	268 263 700		268 264 300
ALTO / NILFISK	self-service vacuums	SB-Saugstation	268 263 610	268 263 620	
ALTO / NILFISK	self-service vacuums	SB-Saugstation EC	268 263 610	268 263 620	
ALTO / NILFISK	self-service vacuums	SB-Saugstation Tandem	268 263 610	268 263 620	
ALTO / NILFISK	self-service vacuums	SB-Saugstation Tandem EC	268 263 610	268 263 620	
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 450-11/21/31	268 264 000		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 490-31	268 264 000		268 264 310

Symbols  height  length  diameter in mm  internal diameter (TYP) type

Cartridge filter allocation for cleaning devices

Manufacturer	TYP	device	absolute filter	micro filter	filter screen
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 550-11/21/31	268 263 510		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 650-11	268 263 510	268 263 520	268 264 310
ALTO / NILFISK	safety vacuum cleaner	SQ 650-1H		268 264 210	
ALTO / NILFISK	safety vacuum cleaner	SQ 650-1M	268 264 200		
ALTO / NILFISK	safety vacuum cleaner	SQ 650-3H		268 264 210	
ALTO / NILFISK	safety vacuum cleaner	SQ 650-3M	268 264 200		
ALTO / NILFISK	water vacuum cleaner	SQ 650-61			268 264 310
ALTO / NILFISK	water vacuum cleaner	SQ 650-71			268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 651-11	268 263 510		268 264 310
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 690-21	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 690-31	268 263 510		
ALTO / NILFISK	safety vacuum cleaner	SQ 690-3M/B1	268 264 200		268 264 210
ALTO / NILFISK	safety vacuum cleaner	SQ 691-9M/B1	268 264 200		268 264 210
ALTO / NILFISK	wet/dry vacuum cleaner	SQ 850-11	268 289 400		
ALTO / NILFISK	wet/dry vacuum cleaner	ST 10	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	ST 15	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	ST 20	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	ST 25	268 263 510		
ALTO / NILFISK	wet/dry vacuum cleaner	ST 35E	268 263 510		
ALTO / NILFISK	high-performance vacuum cleaner	turbo 1001	268 263 610	268 263 620	
ALTO / NILFISK	special water vacuum cleaner	turbo 1001 AE			268 264 310
ALTO / NILFISK	special water vacuum cleaner	turbo 1001 AE-F			268 264 310
ALTO / NILFISK	high-performance vacuum cleaner	turbo 1001 Ki	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	turbo 1001 SA	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	turbo 1001 SA/K1	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	turbo 1001 SW/IH	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	turbo 1001 SWE/I	268 263 610	268 263 620	
ALTO / NILFISK	high-performance vacuum cleaner	turbo D	268 263 700		268 264 300
ALTO / NILFISK	safety vacuum cleaner	turbo D/X-B1	268 263 700		
ALTO / NILFISK	high-performance vacuum cleaner	turbo D2	268 263 700		268 264 300
ALTO / NILFISK	safety vacuum cleaner	turbo D-B1	268 263 700		
ALTO / NILFISK	high-performance vacuum cleaner	turbo GT	268 263 800		
ALTO / NILFISK	high-performance vacuum cleaner	turbo M2	268 263 700		268 264 300
ALTO / NILFISK	high-performance vacuum cleaner	turbo M2 L	268 263 700		268 264 300
ALTO / NILFISK	safety vacuum cleaner	turbo M2 S-FA	268 263 700		268 264 300
ALTO / NILFISK	special water vacuum cleaner	turbo M2-AE			268 264 300
ALTO / NILFISK	safety vacuum cleaner	turbo SSR	268 263 510		
ALTO / NILFISK	high-performance vacuum cleaner	turbo XL	268 263 510		268 264 310
ALTO / NILFISK	high-performance vacuum cleaner	turbo XL 25	268 263 510		268 264 310
ALTO / NILFISK	safety vacuum cleaner	turbo XL-SW	268 263 510	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	turbo XL-SW/IH	268 263 610	268 263 620	
ALTO / NILFISK	safety vacuum cleaner	turbo XL-SW/K1		268 263 620	
AQUAVAC	wet/dry vacuum cleaner	1000	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	2000 plera 6160 F	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	6160 F	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	6160 P dustri	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	6200 P Bulldog 6201 A	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	6201 A	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	6400 F	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7402 B	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7402 P	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7403 B	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7403 P	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7408 P	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7409 P	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	7413 B	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	8103 B	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	8202 B	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	8203 P	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	8204 B	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	9121 P	268 263 820		

Cartridge filter allocation for cleaning devices

Manufacturer	TYP	device	absolute filter	micro filter	filter screen
AQUAVAC	wet/dry vacuum cleaner	9127 P	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	AZ 90304-12	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	AZ 90304-75	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	AZ 90306-12A	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	AZ 91951-10	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	euromac v10	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby 11	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby 22	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby 24	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby 33	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby 36	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby 44	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Hobby Vac 1000	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Max 630	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Max 7	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Multisystem 3000	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Multisystem 4000	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Multisystem 500i	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Plus 1000	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Super 615 S1	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Super 760	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Synchro 22	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Synchro 30	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Synchro 30 A	268 263 820		
AQUAVAC	wet/dry vacuum cleaner	Synchro 40 A	268 263 820		
FESTOOL	mobile dust extractor	CT 11 E	268 280 212		
FESTOOL	mobile dust extractor	CT 22 E	268 280 212		
FESTOOL	mobile dust extractor	CT 33 E/LE	268 280 212		
FESTOOL	mobile dust extractor	CT 44 E/LE	268 280 212		
FESTOOL	mobile dust extractor	CT 55 E	268 280 212		
FESTOOL	mobile dust extractor	CT Mini	268 228 400		
FESTOOL	mobile dust extractor	CTL 11 E	268 280 212		
FESTOOL	mobile dust extractor	CTL 22 E	268 280 212		
FESTOOL	mobile dust extractor	CTL 33 E/LE	268 280 212		
FESTOOL	mobile dust extractor	CTL 44 E/LE	268 280 212		
FESTOOL	mobile dust extractor	CTL 55 E	268 280 212		
FESTOOL	mobile dust extractor	CTL Mini	268 228 400		
FESTOOL	mobile dust extractor	CTM 11 E	268 280 212		
FESTOOL	mobile dust extractor	CTM 22 E	268 280 212		
FESTOOL	mobile dust extractor	CTM 33 E/LE	268 280 212		
FESTOOL	mobile dust extractor	CTM 44 E/LE	268 280 212		
FESTOOL	mobile dust extractor	CTM 55 E	268 280 212		
FESTOOL	special vacuum cleaner	SR 12 /14/15	268 263 610	268 263 620	
FESTOOL	special vacuum cleaner	SR 200/201	268 263 510		
FESTOOL	special vacuum cleaner	SR 202 /203/212	268 263 610	268 263 620	
FESTOOL	special vacuum cleaner	SR 301 /302/303	268 263 610	268 263 620	
FESTOOL	special vacuum cleaner	SR 5	268 263 510		
FESTOOL	special vacuum cleaner	SR 6	268 263 610	268 263 620	
FESTOOL	special vacuum cleaner	SRH 204 E-AS		268 264 210	
FESTOOL	special vacuum cleaner	SRH 45 E		268 264 210	
FESTOOL	special vacuum cleaner	SRM 152	268 264 200		
FESTOOL	special vacuum cleaner	SRM 212 LE-AS	268 263 610	268 263 620	
FESTOOL	special vacuum cleaner	SRM 312 LE-AS	268 263 610	268 263 620	
FESTOOL	special vacuum cleaner	SRM 45 E-AS	268 264 200		
FESTOOL	special vacuum cleaner	SRM 70 LE-EC/B1	268 264 200		
Kärcher	wet/dry vacuum cleaner	A 2701	268 228 200		
Kärcher	wet/dry vacuum cleaner	A 2731 pt	268 228 200		
Kärcher	wet/dry vacuum cleaner	A 2801 plus	268 228 200		
Kärcher	wet/dry vacuum cleaner	K 2000 E	268 280 210		

Symbols **TYP** type

Cartridge filter allocation for cleaning devices

Manufacturer	(TYP)	device	absolute filter	micro filter	filter screen
Kärcher	wet/dry vacuum cleaner	K 2000 E	268 280 220		
Kärcher	wet/dry vacuum cleaner	K 2000 TE	268 280 210		
Kärcher	wet/dry vacuum cleaner	K 2000 TE	268 280 220		
Kärcher	wet/dry vacuum cleaner	K 2501	268 228 200		
Kärcher	wet/dry vacuum cleaner	K 2501 TE	268 228 200		
Kärcher	wet/dry vacuum cleaner	K 2601 plus	268 228 200		
Kärcher	hard cover/carpet cleaner	K 3001	268 228 200		
Kärcher	wet/dry vacuum cleaner	K 3500 E	268 280 210		
Kärcher	wet/dry vacuum cleaner	K 3500 E	268 280 220		
Kärcher	wet/dry vacuum cleaner	K 3501	268 280 210		
Kärcher	wet/dry vacuum cleaner	K 3501	268 280 220		
Kärcher	wet/dry vacuum cleaner	NT 14/1 Eco Te	268 280 220		
Kärcher	wet/dry vacuum cleaner	NT 181 profi	268 228 200		
Kärcher	wet/dry vacuum cleaner	NT 35 I Eco	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 35/1 Eco	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 35/1 Eco Bs	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 35/1 Eco M	268 228 310		
Kärcher	wet/dry vacuum cleaner	NT 35/1 Eco M	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 35/1 Eco Te	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 351 Eco	268 280 220		
Kärcher	wet/dry vacuum cleaner	NT 361 Eco	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 361 Eco BE	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 361 Eco Bs	268 228 330		
Kärcher	safety vacuum cleaner	NT 361 Eco M	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 361 Eco M	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 361 Eco TE	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 45/1 Eco	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 45/1 Eco M	268 228 310		
Kärcher	wet/dry vacuum cleaner	NT 45/1 Eco M	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 45/1 Eco Te	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 55/1 Eco	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 55/1 Eco Bs	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 55/1 Eco M	268 228 310		
Kärcher	wet/dry vacuum cleaner	NT 55/1 Eco M	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 551 Eco	268 228 700		
Kärcher	wet/dry vacuum cleaner	NT 551 Eco M	268 228 700		
Kärcher	wet/dry vacuum cleaner	NT 561 Eco	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 561 Eco	268 228 300		
Kärcher	safety vacuum cleaner	NT 561 Eco M	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 561 Eco M	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 561 Eco TE	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco BS	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco K	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco KF	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco M	268 228 330		
Kärcher	wet/dry vacuum cleaner	NT 611 Eco TE	268 228 300		
Kärcher	wet/dry vacuum cleaner	NT 65/2 Eco	268 228 600		
Kärcher	wet/dry vacuum cleaner	NT 65/2 Eco	268 228 620		
Kärcher	wet/dry vacuum cleaner	NT 65/2 Eco TC	268 228 600		
Kärcher	wet/dry vacuum cleaner	NT 65/2 Eco TC	268 228 620		
Kärcher	wet/dry vacuum cleaner	NT 700 Eco	268 228 700		
Kärcher	wet/dry vacuum cleaner	NT 702 Eco	268 228 700		
Kärcher	wet/dry vacuum cleaner	NT 72/2 Eco Tc	268 228 620		
Kärcher	wet/dry vacuum cleaner	NT 72/2 Eco TC	268 228 600		
Kärcher	wet/dry vacuum cleaner	IVC 60/12-1 Tact Ec	268 228 900		
Kärcher	wet/dry vacuum cleaner	IVC60/24-2 Tact ²	268 228 900		
Kärcher	wet/dry vacuum cleaner	IVC 60/24-2 TactLp	268 228 900		
Kärcher	wet/dry vacuum cleaner	IVC60/24-2 Tact ² M	268 228 900		
Kärcher	wet/dry vacuum cleaner	IVC 60/30 Tact ²	268 228 900		

Cartridge filter allocation for cleaning devices

Manufacturer	(TYP)	device	absolute filter	micro filter	filter screen
Kärcher	wet/dry vacuum cleaner	NT55/2 Tact ² Mel	268 228 900		
Kärcher	wet/dry vacuum cleaner	NT65/2 Tact ²	268 228 900		
Kärcher	wet/dry vacuum cleaner	NT65/2 Tact ² Tc	268 228 900		
Kärcher	wet/dry vacuum cleaner	NT75/2 Tact ² Me	268 228 900		
Kärcher	wet/dry vacuum cleaner	NT75/2 Tact ² MeTc	268 228 900		
Kärcher	wet/dry vacuum cleaner	IVC 60/12-1Tact EC	268 228 910		
Kärcher	wet/dry vacuum cleaner	IVC60/24-2 Tact ²	268 228 910		
Kärcher	wet/dry vacuum cleaner	IVC60/24-2 Tact ² Lp	268 228 910		
Kärcher	wet/dry vacuum cleaner	IVC60/30 Tact ²	268 228 910		
Kärcher	wet/dry vacuum cleaner	NT65/2 Tact ²	268 228 910		
Kärcher	wet/dry vacuum cleaner	NT65/2 Tact ² Tc	268 228 910		
Kärcher	wet/dry vacuum cleaner	NT75/2 Tact ² Me	268 228 910		
Kärcher	wet/dry vacuum cleaner	NT75/2 tact ² MeTc	268 228 910		
LAVOR	vacuum cleaner	GBX 22; GBX 32	268 263 810		
LAVOR	vacuum cleaner	Genio	268 263 810		
LAVOR	vacuum cleaner	GN 22; GN 32	268 263 810		
LAVOR	vacuum cleaner	GNX 22; GNX 32	268 263 810		
LAVOR	vacuum cleaner	Nilo	268 263 810		
PROTOOL	vacuum cleaner	VCP 250 E	268 263 510		
PROTOOL	vacuum cleaner	VCP 260 E-L		268 263 520	
PROTOOL	vacuum cleaner	VCP 260 E-M		268 263 520	
PROTOOL	vacuum cleaner	VCP 32 E			
ROWENTA	multipurpose vacuum cleaner	BP 61	268 269 000		
ROWENTA	multipurpose vacuum cleaner	Bully	268 269 000		
ROWENTA	multipurpose vacuum cleaner	Collecto	268 269 000		
ROWENTA	multipurpose vacuum cleaner	Multicraft (ZR-70)	268 269 000		
ROWENTA	multipurpose vacuum cleaner	NT-Serie (ZR-70)	268 269 000		
ROWENTA	multipurpose vacuum cleaner	RB-Serie (ZR-70)	268 269 000		
ROWENTA	multipurpose vacuum cleaner	ZR 80; ZR 81	268 269 000		
THOMAS	wet/dry vacuum cleaner	820	268 269 100		
THOMAS	wet/dry vacuum cleaner	1620	268 269 100		
THOMAS	wet/dry vacuum cleaner	1020; 1030; 1031	268 269 100		
THOMAS	wet/dry vacuum cleaner	1043 LG	268 269 100		
THOMAS	wet/dry vacuum cleaner	1120 comfort	268 269 100		
THOMAS	wet/dry vacuum cleaner	1120; 1130	268 269 100		
THOMAS	wet/dry vacuum cleaner	1218 plus	268 269 100		
THOMAS	wet/dry vacuum cleaner	1220 plus	268 269 100		
THOMAS	wet/dry vacuum cleaner	1220 S	268 269 100		
THOMAS	wet/dry vacuum cleaner	1220; 1231; 1243	268 269 100		
THOMAS	wet/dry vacuum cleaner	1231 E	268 269 100		
THOMAS	wet/dry vacuum cleaner	1250 S	268 269 100		
THOMAS	wet/dry vacuum cleaner	1320; 1330	268 269 100		
THOMAS	wet/dry vacuum cleaner	1445 S	268 269 100		
THOMAS	wet/dry vacuum cleaner	1518; 1520	268 269 100		
THOMAS	wet/dry vacuum cleaner	1520 C	268 269 100		
THOMAS	wet/dry vacuum cleaner	1520 plus	268 269 100		
THOMAS	wet/dry vacuum cleaner	1620 C	268 269 100		
THOMAS	wet/dry vacuum cleaner	786/B	268 269 100		
THOMAS	wet/dry vacuum cleaner	826 SD; 826 SDE	268 269 100		
THOMAS	wet/dry vacuum cleaner	920; 926	268 269 100		
THOMAS	wet/dry vacuum cleaner	931 SL	268 269 100		
THOMAS	wet/dry vacuum cleaner	Bravo 20 Biturbo	268 269 100		
THOMAS	wet/dry vacuum cleaner	Compact 20; 20R; 20S	268 269 100		
THOMAS	wet/dry vacuum cleaner	Hobby 1000	268 269 100		
THOMAS	wet/dry vacuum cleaner	Hobby Vac	268 269 100		
THOMAS	wet/dry vacuum cleaner	Inox 1220	268 269 100		
THOMAS	wet/dry vacuum cleaner	Inox 20 Professional	268 269 100		
THOMAS	wet/dry vacuum cleaner	Inox 30 Professional	268 269 100		
THOMAS	wet/dry vacuum cleaner	Junior 1216; 1230; 1516	268 269 100		

Symbols (TYP) type


Cartridge filter allocation for cleaning devices

Manufacturer	TYP	device	absolute filter	micro filter	filter screen
THOMAS	wet/dry vacuum cleaner	Multivac Studio 1030 E	268 269 100		
THOMAS	wet/dry vacuum cleaner	Multivac Studio 1035	268 269 100		
THOMAS	wet/dry vacuum cleaner	Multivac Studio 1235	268 269 100		
THOMAS	wet/dry vacuum cleaner	Power Boy 1218	268 269 100		
THOMAS	wet/dry vacuum cleaner	Power Edition 1530	268 269 100		
THOMAS	wet/dry vacuum cleaner	Silverstar 1220; 1235	268 269 100		
THOMAS	wet/dry vacuum cleaner	Studio 1030	268 269 100		
THOMAS	wet/dry vacuum cleaner	Super 30	268 269 100		
THOMAS	wet/dry vacuum cleaner	Super 30 R	268 269 100		
THOMAS	wet/dry vacuum cleaner	Super 30 S	268 269 100		
THOMAS	wet/dry vacuum cleaner	Syntho	268 269 100		
THOMAS	wet/dry vacuum cleaner	Twin	268 269 100		
THOMAS	wet/dry vacuum cleaner	Vario 20	268 269 100		
THOMAS	wet/dry vacuum cleaner	Vario 20 S	268 269 100		
TOP-CRAFT	wet/dry vacuum cleaner	NT 0506; NT 0507; NT 0609	268 269 300		

Vacuum motors

Applies to all wet and dry motors

- » 2-ball bearings
- » Double insulation
- » Insulation class "B"

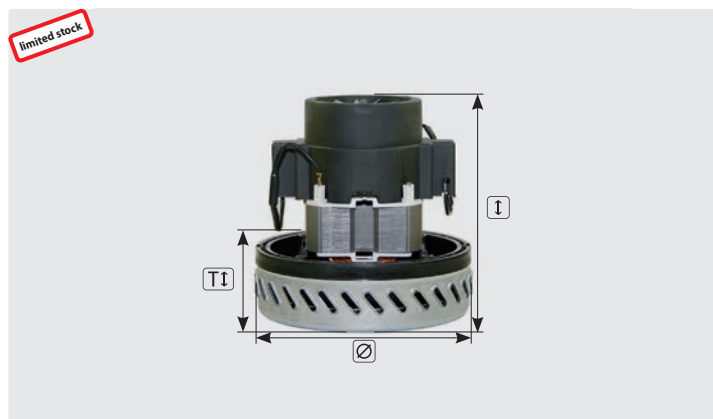

1 stage. 230 V / 50 Hz.

Cable type 3 enclosed

R+M Nr.	TYP	W	I	TI	Ø	VPE
262 101	069200001	1,000	144	45	144	1



1 stage. 230 V / 50 Hz.

Cable pre-installed

R+M Nr.	TYP	W	I	TI	Ø	VPE
262 110 004	universal	1,100	136	50	144	1
262 110 004 006	universal	1,100	136	50	144	6



1 stage with waste air pipe & base. Voltage: 24 V.

Cable pre-installed

R+M Nr.	TYP	W	I	TI	Ø	VPE
262 037 131	119 652-29	370	166	52	144	1
262 037 132	universal	370	166	52	144	1
262 037 132 006	universal	370	166	52	144	6



1 stage with waste air pipe and base.

230 V / 50 Hz. Cable type 3 enclosed

R+M Nr.	TYP	W	I	TI	Ø	VPE
262 090 131	069400001	1,000	147	49	144	1

Symbols W watt I height TI turbine height Ø diameter TYP type VPE Verpackungseinheit

Vacuum motors



1 stage. 230 V / 50 Hz.
Cable type 2 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 110 101	061200219 / 6110930052	1,100	133	49	148	1



2 stage. 24 V.
Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 050 230	069103006	500	171	68	144	1



2 stage. 230 V / 50 Hz.
Cable type 1 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 080 103	universal	800	168	67	144	1
262 080 103 006	universal	800	168	67	144	6
262 100 103	universal	1,000	174	67	144	1
262 100 103 006	universal	1,000	174	67	144	6
262 120 103	universal	1,200	178	72	144	1
262 120 103 006	universal	1,200	178	72	144	6
262 120 303	universal	1,200	163	72	144	1
262 120 303 006	universal	1,200	163	72	144	6
262 120 704	universal	1,200	170	67	144	1
262 120 704 006	universal	1,200	170	67	144	6

With thermal safety device

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 203	universal	1,200	178	72	144	1
262 120 203 006	universal	1,200	178	72	144	6
262 140 103	universal	1,400	176	72	144	1
262 140 103 006	universal	1,400	176	72	144	6



2 stage. 230 V / 50 Hz.
Cable type 1 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 080 102	361	800	163	72	144	1
262 100 102	7568	1,000	170	72	144	1
262 120 102	7778-5	1,200	178	72	144	1
262 120 702	586-2	1,200	170	67	144	1

With thermal safety device

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 202	7778-4	1,200	178	72	144	1
262 140 102	7788	1,400	176	72	144	1



2 stage. 230 V / 50 Hz.
Cable type 2 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 100 202	BDS 10302 / 6110930135	1,000	167	70	144	1
262 120 602	BDS 12382 / 6110930141	1,200	176	70	144	1

Vacuum motors




2 stage. 230 V / 50 Hz.
Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 110 103	universal	1,100	170	69	145	1
262 110 103 006	universal	1,100	170	69	145	6



2 stage. 230 V / 50 Hz.
Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 110 002	570	1,100	175	60	144	1

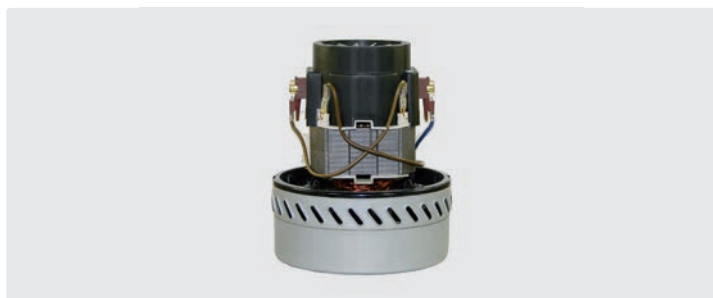

2 stage. 230 V / 50 Hz.
Cable type 2 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 502	A210	1,200	181	67	144	1



2 stage. 230 V / 50 Hz.
Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 802	universal	1,200	170	66	144	1
262 120 804 006	universal	1,200	170	66	144	6



3 stage with waste air pipe. 230 V / 50 Hz.
Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 160 103	116 136-00	1,600	198	87	183	1



2 stage. 230 V / 50 Hz.
Cable pre-installed

R+M Nr.	VPE	W	I	Ti	Ø	VPE
262 120 902	universal	1,200	172	66	148	1
262 120 902 006	universal	1,200	172	66	148	6

Symbols W watt I height Ti turbine height Ø diameter TYP type VPE packing unit

Vacuum motors



2 stage with waste air pipe and base.

Voltage: 24 V. Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 043 213	universal	430	165	69	145	1
262 043 213 006	universal	430	165	69	145	6



3 stage with waste air pipe. Cable pre-installed.

262 064 113 : 24/50 Hz. 262 074 113 : 36/50 Hz

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 064 113	116 515-13	640	199	91	144	1
262 074 113	116 513-13	740	199	91	144	1



2 stage with waste air pipe. 24 V.

Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 043 112	116 157-00	430	165	69	145	1
262 043 113	universal	430	165	69	145	1
262 043 113 006	universal	430	165	69	145	6



1 stage. 230 V / 50 Hz.

Cable pre-installed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 104	402-6	1,200	128	42	134	1



1 stage. 230 V / 50 Hz.

Cable type 1 enclosed

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 150 104	404-2	1,500	128	42	134	1



1 stage. 230 V / 50 Hz.

Without cable, (Cable type 1 optional)

R+M Nr.	TYP	W	I	Ti	Ø	VPE
262 120 703	063700003 / 6110930052	1,200	136	46	143	1
262 120 701	064200001 / 6110820039	1,200	131	45	127	1

Vacuum motors



1 stage. 230 V / 50 Hz.

Without cable, (Cable type 1 optional)

R+M Nr.	TYP	W	I	TI	Ø	VPE
262 100 001	063200074 / 6210820033	1,050	122	45	130	1
262 100 002	universal	1,050	122	45	130	1
262 100 002 006	universal	1,050	122	45	130	6




1 stage. 230 V / 50 Hz.

Without cable, (Cable type 1 optional)

R+M Nr.	TYP	W	I	TI	Ø	VPE
262 120 801	063200085 / 6210820036	1,200	128	51	132	1

Further vacuum motors are available on request.

Vacuum motor cable

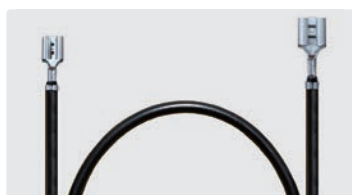


Cable lug 6.3 : cable lug 4.8.

Cable 500 mm.

Cable type 1

R+M Nr.
262 000 001




Fork 3.5 : open.

Cable 300 mm.

Cable type 2

R+M Nr.
262 000 002



Wire end ferrule 2.8 : open.

Cable 300 mm.

Cable type 3

R+M Nr.
262 000 003

Carbon brushes



R+M Nr.	suitable for R+M Nr.
262 000 102	262 080 102
262 000 102	262 100 102
262 000 102	262 120 102
262 000 102	262 120 202
262 000 102	262 120 302
262 000 202	262 140 102
262 000 202	262 120 702
262 000 402	262 100 202
262 000 402	262 120 602

R+M Nr.	suitable for R+M Nr.
262 000 502	262 100 001
262 000 101	262 110 002
262 120 1	262 101
262 120 1	262 120
262 120 3	262 120 902

Seal



Rubber ring. For sealing and heightening the motor

R+M Nr.	Ø	I
267 158 0	144 mm	20 mm

Motor cover



Cover for vacuum motors: 262 101, 262 120, 262 120 402, 262 120 502, 262 120 104

R+M Nr.
262 000 600

Motor allocation for vacuum motors

There are many new vacuum motors in the range - further models are available on request!

R+M Nr.	suitable for	VPE	TYP
262 100 102	Ackermann & Schmitt	1	Flex S 34
262 100 103 006	Ackermann & Schmitt	6	Flex S 34
262 120 802	Ackermann & Schmitt	1	Flex S 36 . S 38 K
262 120 804 006	Ackermann & Schmitt	6	Flex S 36 . S 38 K
262 160 103	Active	1	Pro . Pro Plus
262 050 230*	Adiatek	1	Amber 66 - 24 Volt . Jade 50 . Jade 55 . Jade 55 C . Ruby 45 . Ruby 55
262 064 113	Adiatek	1	Coral 65
262 100 102	AL-CO	1	Jet Stream
262 100 103 006	AL-CO	6	Jet Stream
262 110 001*	AL-CO	1	Alto-Nr. 47751
262 110 004 006	AL-CO	6	Alto-Nr. 47751
262 043 213 006	Alto	6	Encore L 17 . Encore S 17
262 050 112*	Alto	1	SSB 430 . SSB 540 . SSB 540 S . SSB 600 . SSE 600 . SSB 660 M . SSB 800 . SSE 800
262 050 112*	Alto	1	Vision 17 E . Vision 17 B . Vision 20 E . Vision 21i . Vision V . Vision 26i . Vision 26 ix
262 080 102	Alto	1	M 1 . M 2 . M 2S-FA . M 2 AE . M 2 SW-K1
262 080 103 006	Alto	6	M 1 . M 2 . M 2S-FA . M 2 AE . M 2 SW-K1
262 100 102	Alto	1	1001 . 1001 Euro . 1001 KL . 1001 SA . 1001AE . 1001AE F . 1001 SA-K1 . 1001-SW-ICH . 1001-SWE-ICH
262 100 102	Alto	1	XL . XL-E . XL-25 . XL-SW-IH . XL-SWE-IH . XL-SW-K1
262 100 102	Alto	1	SQ 450-1H . SQ 650-1H . turbo 1001 . turbo 1001 Euro . turbo 1001 KI . turbo 1001 SA . turbo 1001 AE . turbo 1001 AE/F . turbo 1001 SA/KI . turbo 1001 SW/ICH . turbo 1001 SWE/ICH . turbo M1 . turbo M2 . turbo XL...
262 100 103 006	Alto	6	1001 . 1001 Euro . 1001 KL . 1001 SA . 1001AE . 1001AE F . 1001 SA-K1 . 1001-SW-ICH . 1001-SWE-ICH
262 100 103 006	Alto	6	XL . XL-E . XL-25 . XL-SW-IH . XL-SWE-IH . XL-SW-K1
262 100 103 006	Alto	6	SQ 450-1H . SQ 650-1H . turbo 1001 . turbo 1001 Euro . turbo 1001 KI . turbo 1001 SA . turbo 1001 AE . turbo 1001 AE/F . turbo 1001 SA/KI . turbo 1001 SW/ICH . turbo 1001 SWE/ICH . turbo M1 . turbo M2 . turbo XL...
262 120 202	Alto	1	SB 680 . SB 710 . SB 711
262 120 203 006	Alto	6	SB 680 . SB 710 . SB 711
262 120 202	Alto	1	Attix 3 (until model 2007) . Attix 4 . Attix 5 (until model 2007) . Attix 6 . Attix 7 . Attix 9 (until model 2007) . Attix 350-01/Attix 360-21/Attix 360-2M
262 120 203 006	Alto	6	Attix 3 (until model 2007) . Attix 4 . Attix 5 (until model 2007) . Attix 6 . Attix 7 . Attix 9 (until model 2007) . Attix 350-01/Attix 360-21/Attix 360-2M
262 120 202	Alto	1	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 203 006	Alto	6	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 102	Alto	1	Attix 3.. (bis 2007), Attix 4.., Attix 5.. (bis 2007), Attix 6.., Attix 7.., Attix 9.. (until 2007), SB 710, SB 711, SB 680, SQ 400, SQ 450-11, SQ 450-21, SQ 450-31, SQ 450-1M, SQ 450-3M, SQ 450-3H, SQ 500, SQ 550-11, SQ 550-21, SQ 550-31, SQ 600, SQ 650-11, SQ 650-61, SQ 650-71, SQ 650-1M, SQ 650-3M, SQ 650-3H, SQ 651-11, Turbo SR-C, Turbo SR-U
262 120 103 006	Alto	6	Attix 3.. (until 2007), Attix 4.., Attix 5.. (until 2007), Attix 6.., Attix 7.., Attix 9.. (until 2007), SB 710, SB 711, SB 680, SQ 400, SQ 450-11, SQ 450-21, SQ 450-31, SQ 450-1M, SQ 450-3M, SQ 450-3H, SQ 500, SQ 550-11, SQ 550-21, SQ 550-31, SQ 600, SQ 650-11, SQ 650-61, SQ 650-71, SQ 650-1M, SQ 650-3M, SQ 650-3H, SQ 651-11, Turbo SR-C, Turbo SR-U
262 140 102	Alto	1	SB Station 2000 . SB Station TA 00 . SQ 850-11
262 140 103 006	Alto	6	SB Station 2000 . SB Station TA 00 . SQ 850-11
262 064 113	Alto Clarke	1	V17 . V20 . V21 . Vision V . Encore 24 . Encore 26 . Encore 20L . Encore 20S
262 074 113	Alto Clarke	1	V26 . V32 . Encore 28 . Encore 33 . Encore 38
262 110 001*	Alto Wap	1	ST 10.20
262 110 004 006	Alto Wap	6	ST 10.20
262 120 701	Alto Wap	1	Maxxi WD
262 160 103	Ashbys	1	Commander
262 080 102	AWA	1	Saugboy
262 080 103 006	AWA	6	Saugboy
262 100 102	AWA	1	Saugboy Compact
262 100 103 006	AWA	6	Saugboy Compact
262 120 102	BOSCH	1	GAS 25 GAS 50 GAS 50M

* limited stock

Symbols watt height turbine height diameter type packing unit

Motor allocation for vacuum motors

R+M Nr.	suitable for	VPE	TYP
262 120 103 006	BOSCH	6	GAS 25 GAS 50 GAS 50M
262 110 102	CFM	1	127 (2 motors) . 137 (3 motors)
262 110 103 006	CFM	6	127 (2 motors) . 137 (3 motors)
262 050 230*	Cimex	1	EB 600
262 043 112	Clarke	1	1700 . 2000
262 043 113 006	Clarke	6	1700 . 2000
262 043 212	Clarke	1	2000
262 043 213 006	Clarke	6	
262 050 112*	Clarke	1	1700
262 050 230*	Clarke	1	TB 18
262 064 113	Clarke	1	AD 240 . V 20 . V 21 . Vision V
262 074 113	Clarke	1	AD 280 . V 26 . V 32
262 043 213 006	Cleanfix	6	RA 400 . RA 530 B
262 050 112*	Cleanfix	1	RA 55 B 50 . RA 80 B . RA 410 B . RA 430 B . RA 501 B . RA 561 B . RA 700 B . RA 800 . RA 900
262 100 001	Cleanfix	1	RS 05 . S 12+
262 100 002 006	Cleanfix	6	RS 05 . S 12+
262 043 112	Cleanfix	1	RA 430 B
262 043 113 006	Cleanfix	6	RA 430 B
262 100 001	Cleanfix	1	RS 05 . S 12+ . RA 430 B
262 100 002 006	Cleanfix	6	RS 05 . S 12+ . RA 430 B
262 043 112	Columbus	1	RA 55 B 50 . RA 80 B
262 043 113 006	Columbus	6	RA 55 B 50 . RA 80 B
262 050 112*	Columbus	1	RA 55 B 50 . RA 80 B
262 050 230*	Columbus	1	BF 42
262 064 113	Columbus	1	RA 66 . ARA 80 BM 100 . ARA 80 BM 150
262 110 102	Columbus	1	RA 43 . SW 2000 . SW 3000 . SW 53
262 110 103 006	Columbus	6	RA 43 . SW 2000 . SW 3000 . SW 53
262 120 801	Columbus	1	ST 7
262 120 701	Columbus	1	RS 27 . ST 22
262 120 702	Columbus	1	RS 27 . ST 22
262 120 704 006	Columbus	6	RS 27 . ST 22
262 037 131	Comac	1	Abila 17 . Abila 42 . Abila 45 . Abila 52
262 037 132 006	Comac	6	Abila 17 . Abila 42 . Abila 45 . Abila 52
262 043 112	Comac	1	CB 40 . CB 50 . L 17 B . L 17-41 B . S 42 B . L17 . 41B . Simpla 45 . Simpla 50
262 043 113 006	Comac	6	CB 40 . CB 50 . L 17 B . L 17-41 B . S 42 B . L17 . 41B . Simpla 45 . Simpla 50
262 050 112*	Comac	1	CB 40 . CB 50 . L 17 B . L 17-41 B . S 42 B . L17 . 41B . Simpla 45 . Simpla 50
262 050 230*	Comac	1	L 20 . L 24 B . LB 20
262 074 113	Comac	1	C 83 B . C 85 B . C 100 B . C 104 B . C 125 . Flexy 75 . Flexy 85 . Tripla 65 . Tripla 75
262 100 102	Comac	1	CA 30 . CA 80
262 100 103 006	Comac	6	CA 30 . CA 80
262 043 213 006	Comac	6	Simpla 45 . Simpla 50
262 043 112	Dulevo	1	Hydro 18 . Hydro 20
262 043 113 006	Dulevo	6	Hydro 18 . Hydro 20
262 043 213 006	Electrolux	6	34 SB . 355 B
262 100 001	Elektrolux	1	Z 910
262 100 002 006	Elektrolux	6	Z 910
262 160 103	Elite	1	dl . 2000
262 120 102	Fein	1	SQ 450-21
262 120 103 006	Fein	6	SQ 450-21
262 120 202	Fein	1	SQ 450-21
262 120 203 006	Fein	6	SQ 450-21
262 110 001*	Festo / Festool	1	CTL Midi
262 110 004 006	Festo / Festool	6	CTL Midi
262 100 102	Festool	1	SR 5 E . SR 5 E-AS . SR 5 LE-AS . SR 6 E-AS . SR 12 E-AS . SR 12 LE-AS . SR 13 E . SR 14 E-AS
262 100 103 006	Festool	6	SR 5 E . SR 5 E-AS . SR 5 LE-AS . SR 6 E-AS . SR 12 E-AS . SR 12 LE-AS . SR 13 E . SR 14 E-AS
262 100 102	Festool	1	SR 14 LE-AS . SR 15 E
262 100 103 006	Festool	6	SR 14 LE-AS . SR 15 E
262 120 102	Festool	1	CTL 22 E . SR 212 LE-AS . SRH 204 E-AS
262 120 103 006	Festool	6	CTL 22 E . SR 212 LE-AS . SRH 204 E-AS
262 120 202	Festool	1	SR 151E-AS . SR 151 LE-AS . SRM 152 E-AS . SRH 153 . SR 200 E . SR 201 E-AS . SR 201 LE-AS
262 120 203 006	Festool	6	SR 151E-AS . SR 151 LE-AS . SRM 152 E-AS . SRH 153 . SR 200 E . SR 201 E-AS . SR 201 LE-AS

Motor allocation for vacuum motors

There are many new vacuum motors in the range - further models are available on request!

R+M Nr.	suitable for	VPE	TYP
262 120 202	Festool	1	SR 202 E-AS . SE 203 E-AS . SR 203 LE-AS . SR 301 L-AS . SE 301 LE-AS . SR 302 E-AS . SR 303 E-AS
262 120 203 006	Festool	6	SR 202 E-AS . SE 203 E-AS . SR 203 LE-AS . SR 301 L-AS . SE 301 LE-AS . SR 302 E-AS . SR 303 E-AS
262 120 202	Festool	1	SR 212 . SR 312 . SRH 204 E-AS . SR 212 LE-AS . SRH 204 E-AS
262 120 203 006	Festool	6	SR 212 . SR 312 . SRH 204 E-AS . SR 212 LE-AS . SRH 204 E-AS
262 120 802	Festool	1	CT 22, CT 33, CTL 22 E/SR 15 TE-AS, SR 151 LE-AS, SR 200 E, SR 201 LE-AS, SR 202 LE-AS, SR 202 E-AS, SR 212,
262 120 804 006	Festool	6	CT 22, CT 33, CTL 22 E/SR 15 TE-AS, SR 151 LE-AS, SR 200 E, SR 201 LE-AS, SR 202 LE-AS, SR 202 E-AS, SR 212
262 120 802	Festool	1	SR 212 LE-AS, SR 301 L-AS, SR 302 E-AS, SR 303 E-AS, SRM152 E-AS, SRH 153, SHR 201 E-AS, SE 203 E-AS, SE 203
262 120 804 006	Festool	6	SR 212 LE-AS, SR 301 L-AS, SR 302 E-AS, SR 303 E-AS, SRM152 E-AS, SRH 153, SHR 201 E-AS, SE 203 E-AS, SE 203
262 120 802	Festool	1	LE-AS, SHR 204 E-AS, SE 301 LE-AS
262 120 804 006	Festool	6	LE-AS, SHR 204 E-AS, SE 301 LE-AS
262 037 131	Fimap	1	Mini
262 037 132 006	Fimap	6	Mini
262 043 213 006	Fimap	6	42 . 452 . 52 . 502 . 53 BTM . Gamma 50
262 064 113	Fimap	1	Gamma 65
262 074 113	Fimap	1	Magna 100 S
262 050 112*	Fiorentini	1	Monodisco S 45 B . Monodisco S 53 B
262 050 230*	Fiorentini	1	ICM 21 . ICM 26 B
262 120 702	Flex	1	S 47
262 120 704 006	Flex	6	S 47
262 100 102	Flex-Ackermann	1	Flex S 34
262 100 103 006	Flex-Ackermann	6	Flex S 34
262 120 102	Flex-Ackermann	1	Flex S 38 K
262 120 103 006	Flex-Ackermann	6	Flex S 38 K
262 120 202	Flex-Ackermann	1	Flex S 38 K
262 120 203 006	Flex-Ackermann	6	Flex S 38 K
262 043 213 006	Floor	6	Shark 45 . Shark 54 . Shark 60
262 050 112*	Floor	1	54 ECO
262 074 113	Floor	1	450 . 530
262 037 131	Floordress	1	S 12 +
262 037 132 006	Floordress	6	S 12 +
262 100 001	Floordress	1	S 12 +
262 100 002 006	Floordress	6	S 12 +
262 043 112	Floorpul	1	AM116157.13
262 043 113 006	Floorpul	6	AM116157.13
262 043 213 006	Floorpul	6	AM116157.29
262 064 113	Floorpul	1	AM116515.13
262 074 113	Floorpul	1	AM116513.13
262 120 502	Früh	1	Ronda 200
262 043 112	Gansow	1	35 BF 46
262 043 113 006	Gansow	6	35 BF 46
262 050 112*	Gansow	1	35 BF 46
262 110 102	Ghibli	1	AS10 . AS27 . AS59 . AS59P . AS60
262 110 103 006	Ghibli	6	AS10 . AS27 . AS59 . AS59P . AS60
262 120 502	Ghibli	1	AS 400
262 120 701	Ghibli	1	GHIBLI 2505325
262 120 702	Ghibli	1	Hilti VC20 . VC 40 (older model)
262 120 704 006	Ghibli	6	Hilti VC20 . VC 40 (older model)
262 120 902	Ghibli	1	AS 400
262 100 001	Ghibli	1	AS 6
262 100 002 006	Ghibli	6	AS 6
262 120 701	Ghibli	1	AS 9 . SP 8
262 064 113	Gutbrod	1	NRA 600 BAE
262 043 212	Hako	1	B 43 . B 43 Super . B 55 . B 65 . B 75 . B 85 . B 450 . B 530 . B 550 . B 650 . B 750 . B 850
262 043 213 006	Hako	6	B 43 . B 43 Super . B 55 . B 65 . B 75 . B 85 . B 450 . B 530 . B 550 . B 650 . B 750 . B 850
262 050 230*	Hako	1	SBR 50 . SBR 60

* limited stock

Symbols **TYP** type **VPE** packing unit

Motor allocation for vacuum motors

R+M Nr.	suitable for	VPE	TYP
262 074 113	Hako	1	B 90 . BS 100 . Hakomatic 100 . Hakomatic 130 . Hakomatic 1000-100 . Hakomatic 1000-130
262 110 102	Hako	1	E 350
262 110 103 006	Hako	6	E 350
262 120 102	Hako	1	VC 380 H . VC 380 W . VC 500 W . VC 640 S . VC 640 W
262 120 103 006	Hako	6	VC 380 H . VC 380 W . VC 500 W . VC 640 S . VC 640 W
262 120 202	Hako	1	VC 380 H . VC 380 W . VC 500 W . VC 640 S . VC 640 W
262 120 203 006	Hako	6	VC 380 H . VC 380 W . VC 500 W . VC 640 S . VC 640 W
262 120 701	Hako	1	Super Vac L 1-30
262 120 802	Hako	1	VC 380 H, VC 380 W, VC 500 W, VC 640 S, VC 640 W
262 120 804 006	Hako	6	VC 380 H, VC 380 W, VC 500 W, VC 640 S, VC 640 W
262 140 102	Hako	1	VC 800 W
262 140 103 006	Hako	6	VC 800 W
262 064 113	Hefter	1	ST 81 . ST 111
262 043 112	Henkel	1	BA 4300
262 043 113 006	Henkel	6	BA 4300
262 120 102	Hilti	1	WVC 40-M
262 120 103 006	Hilti	6	WVC 40-M
262 120 202	Hilti	1	WVC 40-M
262 120 203 006	Hilti	6	WVC 40-M
262 120 802	Hilti	1	WVC 40-M
262 120 804 006	Hilti	6	WVC 40-M
262 100 001	Hitachi	1	CV 200 CV 300
262 100 002 006	Hitachi	6	CV 200 CV 300
262 120 801	Igefa	1	VC 14
262 100 001	Igefa	1	VC 14
262 100 002 006	Igefa	6	VC 14
262 110 102	IPC	1	Cleantime 12
262 110 103 006	IPC	6	Cleantime 12
262 043 112	Kärcher	1	BD 450 . BD 550 . BR 530 . BR 550 . BR 700 (24V-BAT)
262 043 113 006	Kärcher	6	BD 450 . BD 550 . BR 530 . BR 550 . BR 700 (24V-BAT)
262 050 112*	Kärcher	1	B 60 . BD 90/140 R . BD 550 . BD 750 . BR 75/140 R ECO . BR 90/140 R . BR 530 . BR 550 (24V-BAT) . BR 700 . BR 750
262 074 113	Kärcher	1	BD 700 . BR 700
262 080 102	Kärcher	1	BR 400 . DUO SB
262 080 103 006	Kärcher	6	BR 400 . DUO SB
262 101*	Kärcher	1	NT 221 . NT 351 . NT 361
262 110 101	Kärcher	1	6.490-110
262 110 102	Kärcher	1	NT 601 . NT 651 . NT 800 . NT 801
262 110 103 006	Kärcher	6	NT 601 . NT 651 . NT 800 . NT 801
262 120 102	Kärcher	1	DUO SB Serie
262 120 103 006	Kärcher	6	DUO SB Serie
262 120 104	Kärcher	1	A 2200 . WD 5.400 . WD 5.500 . WD 5.600
262 120 702	Kärcher	1	NT 361 ECO . NT 561 ECO . NT65/2 ECO . NT 72/2 ECO
262 120 703	Kärcher	1	NT 14-1 . NT 25-1 . NT 35-1 . NT 45-1 . NT 55-1 . 6.490-166.0
262 120 704 006	Kärcher	6	NT 14-1 . NT 25-1 . NT 35-1 . NT 45-1 . NT 55-1 . 6.490-166.0
262 120 802	Kärcher	1	T 201
262 120 804 006	Kärcher	6	T 201
262 160 103	Kärcher	1	Puzzi Profi K . Puzzi Profi 200
262 110 001*	Kärcher	1	2501 . 2801 . A 2800 . 2001 . 2501 . NT 200 . NT 221 . NT 301 . NT 351 . NT 27-1
262 110 004 006	Kärcher	6	2501 . 2801 . A 2800 . 2001 . 2501 . NT 200 . NT 221 . NT 301 . NT 351 . NT 27-1
262 100 001	Kärcher	1	T12-1
262 100 002 006	Kärcher	6	T12-1
262 120 701	Kärcher	1	SV 1902 . SV 1820
262 100 001	Kenter Kenbo	1	Silent 25 S Plus
262 100 002 006	Kenter Kenbo	6	Silent 25 S Plus
262 140 102	Kistool	1	1515 N
262 140 103 006	Kistool	6	1515 N
262 074 113	Kleenrite	1	HX 5120
262 100 102	Makita	1	441
262 100 103 006	Makita	6	441
262 120 102	Makita	1	443 . 444 M . 447 L

Motor allocation for vacuum motors

R+M Nr.	suitable for	VPE	TYP
262 120 103 006	Makita	6	443 . 444 M . 447 L
262 120 202	Makita	1	443 . 444 M . 447 L
262 120 203 006	Makita	6	443 . 444 M . 447 L
262 120 802	Makita	1	443, 444 M
262 120 804 006	Makita	6	443, 444 M
262 043 112	Minuteman	1	170
262 043 113 006	Minuteman	6	170
262 064 113	Minuteman	1	200 . 340
262 074 113	Minuteman	1	320 . 3200 . 3800
262 043 213 006	Nilco	6	E 400 . E 410 . E 480
262 050 112*	Nilco	1	430 B
262 101*	Nilco	1	S 18
262 110 102	Nilco	1	445
262 110 103 006	Nilco	6	445
262 140 102	Nilco	1	GS 1725
262 140 103 006	Nilco	6	GS 1725
262 110 001*	Nilco	1	S 17 NT . S 18 . S 32
262 110 004 006	Nilco	6	S 17 NT . S 18 . S 32
262 043 112	Nilfisk-Advance	1	BA 450 . BA 530 . BA 600 . BA 650 . SSB 430 . SSB 480 . SSB 540 . SSB 540 S . SSB 600 . SSE
262 043 113 006	Nilfisk-Advance	6	BA 450 . BA 530 . BA 600 . BA 650 . SSB 430 . SSB 480 . SSB 540 . SSB 540 S . SSB 600 . SSE
262 043 213 006	Nilfisk-Advance	6	W 345
262 050 112*	Nilfisk-Advance	1	BA 430 . BA 450 . BA 451 . BA 530 . BA 531 . BA 600 . BA 650
262 064 113	Nilfisk-Advance	1	BR 700 . BR 750 . BR 850 . BR 1000 . Trac 240
262 074 113	Nilfisk-Advance	1	AR 4100 . Trac 280 . BA 700 S . BA 800 . BR 850
262 100 001	Nilfisk-Advance	1	GD 1000 . GMP Serie . Viking GD 110 . GM 80
262 100 002 006	Nilfisk-Advance	6	GD 1000 . GMP Serie . Viking GD 110 . GM 80
262 100 102	Nilfisk-Advance	1	UZ 878
262 100 103 006	Nilfisk-Advance	6	UZ 878
262 120 102	Nilfisk-Advance	1	IVB . 3
262 120 103 006	Nilfisk-Advance	6	IVB . 3
262 120 202	Nilfisk-Advance	1	IVB . 3
262 120 203 006	Nilfisk-Advance	6	IVB . 3
262 120 502	Nilfisk-Advance	1	WD 200
262 120 701	Nilfisk-Advance	1	GWD 375 . GWD 350
262 120 801	Nilfisk-Advance	1	Bacuum . GD 1000 . GD 2000 . GMP Serie . GS 82 . King GM 200 . King GM 300 . GM 80
262 120 802	Nilfisk-Advance	1	IVB/3
262 120 804 006	Nilfisk-Advance	6	IVB/3
262 120 902	Nilfisk-Advance	1	WD 200
262 043 213 006	Nilfisk-Alto	6	2000 . Encore S 17 . L 17
262 050 112*	Nilfisk-Alto	1	SSB 400 . SSB 430 . SSB 480 . SSB 480 W . SSB 540 . SSB 540 S . SSB 600 . SSE 600 . SSB 660 M . SSB 80 [...]
262 050 112*	Nilfisk-Alto	1	Scrubtec 343 B . B Combi . E . Vision 17 E+B . Vision 20 E . Vision 21i . Vision V . Vision 26i + [...]
262 064 113	Nilfisk-Alto	1	Encore 24 . Encore 26 . Encore L 20 (24 version) . Encore S 20 (24 Volt)
262 074 113	Nilfisk-Alto	1	Encore 28 . Encore 33 . Encore 38 . R 38 . Scrubtec 770 S . Vision 26 . Vision 32
262 110 001*	Nilfisk-Alto	1	ST 10.20 . ST Aero . Alto-Nr. 47751
262 110 004 006	Nilfisk-Alto	6	ST 10.20 . ST Aero . Alto-Nr. 47751
262 080 102	Nilfisk-Alto	1	M 1 . M 2 . M 2S-FA . M 2 AE . M 2 SW-K1
262 080 103 006	Nilfisk-Alto	6	M 1 . M 2 . M 2S-FA . M 2 AE . M 2 SW-K1
262 100 102	Nilfisk-Alto	1	SQ 450-1H . SQ 650-1H . turbo 1001 . turbo 1001 Euro . turbo 1001 KI . turbo 1001 SA . turbo 1001 AE
262 100 102	Nilfisk-Alto	1	turbo 1001 AE/F . turbo 1001 SA/KI . turbo 1001 SW/ICH . turbo 1001 SWE/ICH . turbo M1 . turbo M2 turbo XL...
262 100 103 006	Nilfisk-Alto	6	SQ 450-1H . SQ 650-1H . turbo 1001 . turbo 1001 Euro . turbo 1001 KI . turbo 1001 SA . turbo 1001 AE
262 100 103 006	Nilfisk-Alto	6	turbo 1001 AE/F . turbo 1001 SA/KI . turbo 1001 SW/ICH . turbo 1001 SWE/ICH . turbo M1 . turbo M2
262 100 103 006	Nilfisk-Alto	6	turbo XL...
262 120 102	Nilfisk-Alto	1	SB 680 . SB 710 . SB 711
262 120 103 006	Nilfisk-Alto	6	SB 680 . SB 710 . SB 711
262 120 102	Nilfisk-Alto	1	Attix 3 (until 2007) . Attix 4 . Attix 5 (until model 2007) . Attix 6 . Attix 7 . Attix 9 (until 2007)
262 120 103 006	Nilfisk-Alto	6	Attix 3 (until 2007) . Attix 4 . Attix 5 (until 2007) . Attix 6 . Attix 7 . Attix 9 (until 2007)
262 120 102	Nilfisk-Alto	1	Attix 350-01/Attix 360-21/Attix 360-2M

* limited stock

Symbols TYP type VPE packing unit

Motor allocation for vacuum motors

R+M Nr.	suitable for	VPE	TYP
262 120 103 006	Nilfisk-Alto	6	Attix 350-01/Attix 360-21/Attix 360-2M
262 120 102	Nilfisk-Alto	1	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 103 006	Nilfisk-Alto	6	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 202	Nilfisk-Alto	1	SB 680 . SB 710 . SB 711
262 120 203 006	Nilfisk-Alto	6	SB 680 . SB 710 . SB 711
262 120 202	Nilfisk-Alto	1	Attix 3 (until 2007) . Attix 4 . Attix 5 (until 2007) . Attix 6 . Attix 7 . Attix 9 (until 2007)
262 120 203 006	Nilfisk-Alto	6	Attix 3 (until 2007) . Attix 4 . Attix 5 (until 2007) . Attix 6 . Attix 7 . Attix 9 (until 2007)
262 120 202	Nilfisk-Alto	1	Attix 350-01/Attix 360-21/Attix 360-2M
262 120 203 006	Nilfisk-Alto	6	Attix 350-01/Attix 360-21/Attix 360-2M
262 120 202	Nilfisk-Alto	1	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 203 006	Nilfisk-Alto	6	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 701	Nilfisk-Alto	1	Maxxi WD . Maxxi WD 7
262 120 702	Nilfisk-Alto	1	Maxxi GWD 300 . GWD 375
262 120 704 006	Nilfisk-Alto	6	Maxxi GWD 300 . GWD 375
262 120 802	Nilfisk-Alto	1	Attix 3.. (until 2007), Attix 4.., Attix 5.. (until 2007), Attix 6.., Attix 7.., Attix 9.. (until 2007), SB 710, SB 711, SB 680
262 120 804 006	Nilfisk-Alto	6	Attix 3.. (until 2007), Attix 4.., Attix 5.. (until 2007), Attix 6.., Attix 7.., Attix 9.. (until 2007), SB 710, SB 711, SB 680
262 120 802	Nilfisk-Alto	1	SQ 400, SQ 450-11, SQ 450-21, SQ 450-31, SQ 450-1M, SQ 450-3M, SQ 450-3H, SQ 500, SQ 550-11 SQ 550-21,
262 120 804 006	Nilfisk-Alto	6	SQ 400, SQ 450-11, SQ 450-21, SQ 450-31, SQ 450-1M, SQ 450-3M, SQ 450-3H, SQ 500, SQ 550-11 SQ 550-21
262 120 802	Nilfisk-Alto	1	SQ 550-31, SQ 600, SQ 650-11, SQ 650-61, SQ 650-71, SQ 650-1M, SQ 650-3M, SQ 650-3H, SQ 651-11
262 120 804 006	Nilfisk-Alto	6	SQ 550-31, SQ 600, SQ 650-11, SQ 650-61, SQ 650-71, SQ 650-1M, SQ 650-3M, SQ 650-3H, SQ 651-11
262 120 802	Nilfisk-Alto	1	Turbo SR-C, Turbo SR-U
262 120 804 006	Nilfisk-Alto	6	Turbo SR-C, Turbo SR-U
262 140 102	Nilfisk-Alto	1	SB Station 2000 . SB Station TA 00 . SQ 850-11
262 140 103 006	Nilfisk-Alto	6	SB Station 2000 . SB Station TA 00 . SQ 850-11
262 043 112	Nobles	1	1700 . 2000
262 043 113 006	Nobles	6	1700 . 2000
262 050 112*	Nobles	1	1700 . 2000
262 064 113	Nobles	1	2400 . 2700
262 080 102	Numatic	1	WVD 2002 P
262 080 103 006	Numatic	6	WVD 2002 P
262 100 001	Numatic	1	Henry HVR 200
262 100 002 006	Numatic	6	Henry HVR 200
262 100 102	Numatic	1	WVD 900
262 100 103 006	Numatic	6	WVD 900
262 110 102	Numatic	1	WVD572 . WV 900
262 110 103 006	Numatic	6	WVD572 . WV 900
262 120 802	Numatic	1	TTB 3450
262 120 804 006	Numatic	6	TTB 3450
262 100 001	Numatic	1	Henry HVR 200
262 100 002 006	Numatic	6	Henry HVR 200
262 120 502	Portotecnica	1	Lavamatic 450
262 074 113	Power Boss	1	TSS 65
262 120 801	Profi-Europe	1	Profi 1
262 120 102	Protool	1	VCP 450 E-L
262 120 103 006	Protool	6	VCP 450 E-L
262 110 001*	Protool	1	VCP 30 E
262 110 004 006	Protool	6	VCP 30 E
262 043 213 006	Pulimat	6	
262 050 230*	Pulimat	1	355 . 365 . 375
262 050 230*	RCM	1	LB 530
262 120 102	Renfert	1	Vortex Compact 2 L 230 . Vortex Compact 2 EC 230 . Vortex Compact 2 L 120 . Vortex EC 2 M 230 V
262 120 103 006	Renfert	6	Vortex Compact 2 L 230 . Vortex Compact 2 EC 230 . Vortex Compact 2 L 120 . Vortex EC 2 M 230 V
262 120 202	Renfert	1	Vortex Compact 2 L 230 . Vortex Compact 2 EC 230 . Vortex Compact 2 L 120 . Vortex EC 2 M 230 V
262 120 203 006	Renfert	6	Vortex Compact 2 L 230 . Vortex Compact 2 EC 230 . Vortex Compact 2 L 120 . Vortex EC 2 M 230 V
262 120 802	Renfert	1	Vortex Compact 2 L 230 . Vortex Compact 2 EC 230 . Vortex Compact 2 L 120 . Vortex EC 2 M 230 V
262 120 804 006	Renfert	6	Vortex Compact 2 L 230 . Vortex Compact 2 EC 230 . Vortex Compact 2 L 120 . Vortex EC 2 M 230 V
262 050 112*	Rotofill	1	R 36 AT SS

Motor allocation for vacuum motors

R+M Nr.	suitable for	VPE	TYP
262 120 502	Rotofill	1	R 31 AL SS
262 120 502	Ruwac	1	WS 2000
262 120 902	Ruwac	1	WS 2000
262 120 102	Scheppach	1	Wovota 4
262 120 103 006	Scheppach	6	Wovota 4
262 120 202	Scheppach	1	Wovota 4
262 120 203 006	Scheppach	6	Wovota 4
262 100 102	SIA	1	Siaclean UE-1
262 100 103 006	SIA	6	Siaclean UE-1
262 120 102	SIA	1	Siaclean CE 3H . Siaclean CP 3 H
262 120 103 006	SIA	6	Siaclean CE 3H . Siaclean CP 3 H
262 120 202	SIA	1	Siaclean CE 3H . Siaclean CP 3 H
262 120 203 006	SIA	6	Siaclean CE 3H . Siaclean CP 3 H
262 050 230*	Sorma	1	Kobra 5064 . Kobra 4100
262 064 113	Sorma	1	Kobra 5560
262 074 113	Sorma	1	5152 K
262 120 102	Sorma	1	520
262 120 103 006	Sorma	6	520
262 120 202	Sorma	1	520
262 120 203 006	Sorma	6	520
262 120 802	Sorma	1	520
262 120 804 006	Sorma	6	520
262 120 502	Sorma	1	Kobra 600
262 100 202	Soteco	1	BDS35
262 120 602	Soteco	1	BDS45
262 120 801	Sprintus	1	T 11
262 110 001*	Starmix	1	AS 1232
262 110 004 006	Starmix	6	AS 1232
262 100 102	Stihl	1	SE 100, SE 200, SE 201, SE 202
262 100 103 006	Stihl	6	SE 100, SE 200, SE 201, SE 202
262 101	Stihl	1	SE 50-90 . SE 60-60E
262 120 102	Stihl	1	SE 120 . SE 120 E . SE 121 . SE 121E . SE 122 . SE 122E . SE 61 . SE 61E
262 120 103 006	Stihl	6	SE 120 . SE 120 E . SE 121 . SE 121E . SE 122 . SE 122E . SE 61 . SE 61E
262 120 202	Stihl	1	SE 120 . SE 120 E . SE 121 . SE 121E . SE 122 . SE 122E . SE 61 . SE 61E
262 120 203 006	Stihl	6	SE 120 . SE 120 E . SE 121 . SE 121E . SE 122 . SE 122E . SE 61 . SE 61E
262 120 802	Stihl	1	SE 61, SE 61 E, SE 120, SE 120 E, SE 121, SE 121 E, SE 122, SE 122 E, SE 1211
262 120 804 006	Stihl	6	SE 61, SE 61 E, SE 120, SE 120 E, SE 121, SE 121 E, SE 122, SE 122 E, SE 1211
262 110 001*	Stihl	1	SE 50 - 90 . SE 60 - 60 E
262 110 004 006	Stihl	6	SE 50 - 90 . SE 60 - 60 E
262 140 102	Swiss Vacuum	1	PU 120
262 140 103 006	Swiss Vacuum	6	PU 120
262 043 112	Taski	1	110 . Combimat 600 . Combimat 800 BMS . 600 . 1100
262 043 113 006	Taski	6	110 . Combimat 600 . Combimat 800 BMS . 600 . 1100
262 050 112*	Taski	1	110 . Combimat 600 . Combimat 800 BMS
262 050 230*	Taski	1	Swingo 750 . Swingo 1250
262 110 102	Taski	1	S 3 K
262 110 103 006	Taski	6	S 3 K
262 043 113 006	Tennant	6	T 3
262 043 213 006	Tennant	6	5100
262 064 113	Tennant	1	2001 . 2401 . 5400 . T5
262 074 113	Tennant	1	510 . 515 . 5680 . 5700 . 7100 . 7200 . 7300 . 7400
262 160 103	Truvox	1	Valet
262 100 001	Vermop	1	Jet Vac
262 100 002 006	Vermop	6	Jet Vac
262 120 102	WAP	1	SQ 4 . SQ 450-11 . SQ 550-11 . SQ 650-11 . SQ 651-11 . SQ 850-11
262 120 103 006	WAP	6	SQ 4 . SQ 450-11 . SQ 550-11 . SQ 650-11 . SQ 651-11 . SQ 850-11
262 120 802	WAP	1	M2 L

* limited stock

Symbols **TYP** type **VPE** packing unit

Motor allocation for vacuum motors

R+M Nr.	suitable for	VPE	TYP
262 120 804 006	WAP	6	M2 L
262 110 001*	WAP	1	RA 500 E
262 110 004 006	WAP	6	RA 500 E
262 101*	WAP Alto	1	ST . Aero
262 120 102	WAP Alto	1	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 103 006	WAP Alto	6	SQ 400 . SQ 450 . SQ 450 . SQ 500 . SQ 550 . SQ 600 . SQ 650 . SQ 651-11 . Turbo SR-C . Turbo SR-U
262 120 104	WAP Alto	1	Attix 30 . 40 . 50
262 120 202	WAP Alto	1	SQ 400-600 . Attix 350 . 550 . 560 . 7
262 120 203 006	WAP Alto	6	SQ 400-600 . Attix 350 . 550 . 560 . 7
262 140 102	WAP Alto	1	SQ 651-11 . SQ 850
262 140 103 006	WAP Alto	6	SQ 651-11 . SQ 850
262 100 102	Wap-ALTO	1	SQ 450-1H . SQ 650-1H . turbo 1001 . turbo 1001 Euro . turbo 1001 KI . turbo 1001 SA . turbo 1001 AE . turbo 1001 AE/F . turbo 1001 SA/KI . turbo 1001 SW/ICH . turbo 1001 SWE/ICH . turbo M1 . turbo M2 . turbo XL...
262 100 103 006	Wap-ALTO	6	SQ 450-1H . SQ 650-1H . turbo 1001 . turbo 1001 Euro . turbo 1001 KI . turbo 1001 SA . turbo 1001 AE . turbo 1001 AE/F . turbo 1001 SA/KI . turbo 1001 SW/ICH . turbo 1001 SWE/ICH . turbo M1 . turbo M2 . turbo XL...
262 043 112	Weidner	1	Comet (all battery-powered models)
262 043 113 006	Weidner	6	Comet (all battery-powered models)
262 050 112	Weidner	1	Comet (all battery-powered models)
262 100 001	Wetroc	1	Monovac 6 . Monovac 9
262 100 002 006	Wetroc	1	Monovac 6 . Monovac 9
262 050 230*	Wetrok	1	Duomatic 430 B . Duomatic 501 BM
262 064 113	Wetrok	1	500 . 650
262 074 113	Wetrok	1	800
262 100 001	Wetrok	1	Monovac 6 . Monovac 9
262 100 002 006	Wetrok	1	Monovac 6 . Monovac 9
262 110 102	Wetrok	1	Duovack 18 . 34
262 110 103 006	Wetrok	6	Duovack 18 . 34
262 120 701	Wetrok	1	Twin Vac 18
262 120 701	Wetrok	1	Twin Vac 18
262 120 702	Wetrok	1	Twin Vac
262 120 704 006	Wetrok	6	Twin Vac
262 050 230*	Wirbel	1	Rapid 380 24 Volt Version
262 120 102	Würth	1	ISS 35 . ISS 35-S
262 120 103 006	Würth	6	ISS 35 . ISS 35-S
262 120 202	Würth	1	ISS 35 . ISS 35-S
262 120 203 006	Würth	6	ISS 35 . ISS 35-S
262 120 702	Würth	1	ISS 35-S . ISS 45 . ISS 55
262 120 704 006	Würth	6	ISS 35-S . ISS 45 . ISS 55

* limited stock

Vacuum filter

Filter cloth with frame



2 micron

R+M Nr.	Ø	↑
267 073 0	400 mm	340 mm

Diaphragm fabric filter



R+M Nr.	Ø	↑
267 070 5	330 mm	400 mm
267 070 6	360 mm	500 mm

Accessories for spray-ex-sucker

Pre-spraying pumps



Pump for spray-ex-sucker EP7

R+M Nr.
267 191 0

Upholstery tools



R+M Nr.	Ø
263 626	36 + 40 mm

Accessories for floor cleaning machines

Superpads

white = soft . black = hard



white M33	red M34	green M30	blue M35	brown M36	black M32

Ø	VPE *	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
12" - 305 mm	5 pieces	930 101 019	930 102 019	930 103 019	930 104 019	930 105 019	930 106 019
13" - 325 mm	5 pieces	930 101 021	930 102 021	930 103 021	930 104 021	930 105 021	930 106 021
14" - 355 mm	5 pieces	930 101 025	930 102 025	930 103 025	930 104 025	930 105 025	930 106 025
15" - 380 mm	5 pieces	930 101 027	930 102 027	930 103 027	930 104 027	930 105 027	930 106 027
16" - 410 mm	5 pieces	930 101 029	930 102 029	930 103 029	930 104 029	930 105 029	930 106 029
17" - 430 mm	5 pieces	930 101 031	930 102 031	930 103 031	930 104 031	930 105 031	930 106 031
18" - 460 mm	5 pieces	930 101 033	930 102 033	930 103 033	930 104 033	930 105 033	930 106 033
19" - 480 mm	5 pieces	930 101 035	930 102 035	930 103 035	930 104 035	930 105 035	930 106 035
20" - 510 mm	5 pieces	930 101 037	930 102 037	930 103 037	930 104 037	930 105 037	930 106 037
21" - 530 mm	5 pieces	930 101 039	930 102 039	930 103 039	930 104 039	930 105 039	930 106 039

Attractive bulk prices for Superpads are available on request.

Vacuum bags



Ordering example for paper filter:

10 x 268 143 7 paper filter 10 pieces = 1 VPE

350 x 268 143 7 paper filter 350 pieces = 1 VPE

Ordering example for fleece filter:

1 x 268 304 708 0 fleece filter 80 pieces = 1 VPE

1 x 268 304 700 5 fleece filter 5 pieces = 1 VPE

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper		M	D	VPE *	VPE *	VPE **	ME
268 304 700 5	ALTO	Aero 20-01, 20-11, 20-21, 25-11, 25-21, Buddy 15, 18	V	✓					5	
268 304 708 0	ALTO	Aero 20-01, 20-11, 20-21, 25-11, 25-21, Buddy 15, 18	V	✓					80 (4x20)	
268 164 8	ALTO	Aero 400/440 (61.156)	P2	✓	10	140			pieces	
268 164 9	ALTO	Aero 640/840 (60.910)	P2	✓	10	120			pieces	
268 156 7	ALTO	Attix 3 (30.2000.449)	P2	✓	10	150			pieces	
268 304 800 5	ALTO	Attix 30, Attix 350/360, Attix 8 Gallon, Centix 60	V	✓					5	
268 304 808 0	ALTO	Attix 30, Attix 350/360, Attix 8 Gallon, Centix 60	V	✓					80	
268 300 200 5	ALTO	Attix 40/50, Attix 550/590, Attix 12 Gallon	V	✓					5	
268 300 206 0	ALTO	Attix 40/50, Attix 550/590, Attix 12 Gallon	V	✓					60	
268 156 8	ALTO	Attix 5	P2	✓	10	80			pieces	
268 300 000 5	ALTO	Attix 751/761/791/19 Gallon/961/965	V	✓					5	
268 300 003 5	ALTO	Attix 751/761/791/19 Gallon/961/965	V	✓					35	
268 142 7	ALTO	Saltix	P2	✓	10	200			pieces	
268 301 501 0	ALTO	Saltix 10	V	✓					10	
268 301 511 0	ALTO	Saltix 10	V	✓					110	
268 149 9	ALTO	Saltix 10; 9 liter	P2	✓	10	200			pieces	
268 150 2	BLITZ	T 5	P2	✓	10	300			pieces	
268 301 608 0	BLITZ	T 6	V	✓					80	
268 156 2	BLITZ	T 6	P2	✓	10	200			pieces	
268 301 700 5	BLITZ	T 9	V	✓					5	
268 131 0	BOSCH	SK 2	P2	✓	10	280			pieces	
268 301 200 5	BROENDUM	Ronda 200	V	✓					5	
268 301 206 0	BROENDUM	Ronda 200	V	✓					60	
268 141 0	CLEANFIX	BS 350/460 (355.001)	P2	✓	10	350			pieces	
268 300 401 0	CLEANFIX	BS 350/460	V	✓					10	
268 155 3	CLEANFIX	RS 05 (025.430)	P2	✓	10	280			pieces	
268 301 800 5	CLEANFIX	RS 05	V	✓					5	
268 301 900 5	CLEANFIX	RS 05; 5 pieces in PE-bag incl. 1 motor protection filter	V	✓					5+1	
268 161 71	CLEANFIX	S 10 plus Hepa (022.433); 10 pieces in PE-bag incl. 2 motor protection filter	P2	✓	10+2	250			pieces	
268 302 000 5	CLEANFIX	S 10 plus Hepa	V	✓					5	
268 302 101 0	CLEANFIX	S 10, SW 15 (022.431)	V	✓					10	
268 302 113 0	CLEANFIX	S 10, SW 15 (022.431)	V	✓					130	
268 102 300 1	CLEANFIX	S 10, SW 15, (022.430)	P2	✓	10	200			pieces	
268 102 300 11	CLEANFIX	S 10, SW 15, (022.430); 10 pieces in PE-bag incl. 2 motor protection filter	P2	✓	10+2	200			pieces	
268 161 7	CLEANFIX	S10 plus Hepa (022.433)	P2	✓	10	280			pieces	
268 302 301 0	CLEANFIX	Silence 180	V	✓					10	
268 142 7	CLEANFIX	Silence 180	P2	✓	10	180			pieces	
268 142 2	COLUMBUS	Junior (= Elfo Junior 15 S + 28 SLB)	P1	✓	10	250			pieces	
268 155 31	COLUMBUS	RS 27 (20.811.530); 10 pieces in PE-bag incl. 2 motor protection filter	P2	✓	10+2	250			pieces	
268 301 800 5	COLUMBUS	RS 27	V	✓					5	
268 155 3	COLUMBUS	RS 27	P2	✓	10	280			pieces	
268 301 917 0	COLUMBUS	RS 27; 5 pieces in PE-bag incl. 1 motor protection filter	V	✓					170	
268 301 900 5	COLUMBUS	RS 27; 5 pieces in PE-bag incl. 1 motor protection filter	V	✓					5+1	
268 102 300 1	COLUMBUS	ST 1000, 3000, M 157, 158, 159 (20.237.230)	P2	✓	10	200			pieces	
268 302 101 0	COLUMBUS	ST 1000, 3000, M 157, 158, 159	V	✓					10	
268 302 113 0	COLUMBUS	ST 1000, 3000, M 157, 158, 159	V	✓					130	

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 302 212 0	COLUMBUS	ST 1000, 3000, M 157, 158, 159; 10 pieces in PE-bag incl. 2 motor protection filter	V	✓				120	
268 302 301 0	COLUMBUS	ST 11, ST 11 pro, ST 11 pro+; 10 pieces in PE-bag incl. 1 motor protection filter	V	✓				10+1	
268 111 9	COLUMBUS	ST 12 (old version 20511230)	P2		10	180		pieces	
268 301 001 0	COLUMBUS	ST 12 (old version)	V					5	
268 302 401 0	COLUMBUS	ST 12 (new version), SW 20, SW 20 P	V	✓				10	
268 150 9	COLUMBUS	ST 12 (new version), SW 20	P2		10	200		pieces	
268 302 000 5	COLUMBUS	ST 22	V	✓				5	
268 302 500 5	COLUMBUS	SW 30, SW 30 P, SW 30 S	V					5	
268 302 801 0	COLUMBUS	SW 32 P	V					10	
268 301 100 5	COLUMBUS	SW 50 P, SW 50 S, SW 52 P, SW 52 S, SW 53 P, SW 53 S	V					5	
268 301 104 0	COLUMBUS	SW 50 P, SW 50 S, SW 52 P, SW 52 S, SW 53 P, SW 53 S	V					40	
268 141 0	COLUMBUS	TK 25, 25e, 36, 36e, 46e, BS 360/460 (20.208.430)	P2	✓	10	350		pieces	
268 300 401 0	COLUMBUS	TK 25, 25e, 36, 36e, 46e, BS 360/460	V	✓				10	
268 302 000 5	COMAC	CA 15, CA 15P, CA 15S, CA 15 Silenzio, 15 Ecoplus	V	✓				5	
268 301 200 5	COMAC	CA 60	V	✓				5	
268 301 206 0	COMAC	CA 60	V	✓				60	
268 301 300 5	COMAC	CA 80, CA 100	V	✓				5	
268 301 304 0	COMAC	CA 80, CA 100	V	✓				40	
268 302 901 0	COMAC	Silent 25 S plus, CA 30	V	✓				10	
268 302 908 0	COMAC	Silent 25 S plus, CA 30	V	✓				80	
268 131 0	ELEKTROLUX	L/Z 169-SK 2	P2		10	280		pieces	
268 303 001 0	ELEKTROLUX	UZ 873, UZ 932, UZ 934	V					10 268 143	
268 143 0	ELEKTROLUX	UZ 964	P2		10	400		pieces	
268 143 7	ELEKTROLUX	DU 135	P2	✓	10	350		pieces	
268 142 9	ELEKTROLUX	UZ 873, UZ 932, UZ 934	P2		10	160		pieces	
268 303 101 0	ELEKTROLUX	UZ 920, 921, 922, 923, 925, 930, 930/S, 945, Z 951, HZ 173, DP 9000, DP 9000 D, P 9000 Classic, Panther, Powerprof	V					10	
268 303 112 0	ELEKTROLUX	UZ 920, 921, 922, 923, 925, 930, 930/S, 945, Z 951, HZ 173, DP 9000, DP 9000 D, P 9000 Classic, Panther, Powerprof	V					120	
268 110 9	ELEKTROLUX	UZ 920, 921, 922, 923, 925, 930, 930/S, 945, Z 951, HZ 173, DP 9000, DP 9000 D, P 9000 Classic, Panther, Powerprof	P2		10	200		pieces	
268 302 101 0	ELEKTROMA	S 100	V					10	
268 302 113 0	ELEKTROMA	S 100	V					130	
268 102 300 1	ELEKTROMA	S 100	P2	✓	10	200		pieces	
268 107 5	ELEKTROMA	S 120	P2	✓	10	240		pieces	
268 111 3	FAKIR	07, 1107, 1207, 1407; 10 pieces in PE-bag with round motor protection filter	P2	✓	10+1	300		pieces	
268 111 31	FAKIR	1117, 1217, 1417; 10 pieces in PE-bag with square motor protection filter	P2	✓	10+1	300		pieces	
268 131 0	FAKIR	200-250, 300-350, 380, 400, 420, 450, Automatic 500, 520, 530, SEL 380, 430, 550, 2 S, 3 SE, 3 SF, 3 SL, 171, 271, 275, 300 RX, 325 RX+, 350 RX	P2		10	280		pieces	
268 300 900 5	FAKIR	IC 314, IC 315	V					5	
268 300 905 0	FAKIR	IC 314, IC 315	V					50	
268 111 8	FAKIR	IC 314, IC 315	P2		10	120		pieces	
268 136 1	FAKIR	S 12, S 20, S 20 L, S 20 Super, S 22, S 30, S 38, S 120, GS 1700	P2	✓	10	200		pieces	
268 301 001 0	FAKIR	S 17, S 18, IC 215	V					5	
268 111 9	FAKIR	S 17, S 18, IC 215	P2		10	180		pieces	
268 166 4	FAST	pure Q, C6	P2	✓	10	200		pieces	
268 303 300 5	FESTOOL	Midi CT/CTL # 494105, Mini CT/CTL # 498410	V	✓				5	
268 303 306 0	FESTOOL	Midi CT/CTL # 494105, Mini CT/CTL # 498410	V	✓				60	
268 167 2L	FESTOOL	Midi CT/CTL # 494105	P2	✓	10	180		pieces	
268 302 000 5	FIMAP	FA 15 Eco, FA 15 Plus, FA 15 Silenzio	V	✓				5	
268 155 5	FIMAP	FA 15 Eco, FA 15 Plus, FA 15 Silenzio	P2	✓	10	260		pieces	
268 157 3	FIMAP	FV 30	P2	✓	10	180		pieces	
268 301 200 5	FIMAP	FV 60	V	✓				5	
268 301 206 0	FIMAP	FV 60	V	✓				60	
268 157 3	FIMAP	FV 60	P2	✓	10	180		pieces	
268 301 300 5	FIMAP	FV 80	V	✓				5	

* Price per piece ** Price per VPE

Symbols ① height ② diameter TYP type M material D sealable ME quantity unit VPE packing unit

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 301 300 5	FIMAP	FV 80		V	ü			5	
268 301 304 0	FIMAP	FV 80		V	✓			40	
268 111 31	FIMAP	UP36/46; 10 pieces in PE-bag with square motor protection filter		P2	✓	10+1	300		pieces
268 147 8	FLOORDRESS	35/46, QFM 35/46		P2	✓	10	300		pieces
268 143 3	FLOORDRESS	S 142/152, QP 152, S 12, S 22		P2	✓	10	300		pieces
268 163 5	FLOORMATIC	Blue Vac XL		P2	✓	10	120		pieces
268 302 000 5	FLOORMATIC	FBV 10, Blue Vac 11, Piccolo		V	✓			5	
268 155 5	FLOORMATIC	FBV 10, Blue Vac 11, Piccolo		P2	✓	10	260		pieces
268 302 000 5	GANSOW	Glob, Yvo		V	✓			5	
268 302 010 0	GANSOW	Glob, Yvo		V	✓			100	
268 300 900 5	GANSOW	Jet Line NT 127		V				5	
268 300 905 0	GANSOW	Jet Line NT 127		V				50	
268 111 8	GANSOW	Jet Line NT 127		P2		10	120		pieces
268 301 100 5	GANSOW	Jet NT 278, Jet NT 378		V				5	
268 301 104 0	GANSOW	Jet NT 278, Jet NT 378		V				40	
268 302 401 0	GANSOW	Jet T 117, YP1300/9, G 10 P+		V				10	
268 142 71	GANSOW	Jet T 117, YP1300/9, G 10 P+		P2		10	220		pieces
268 150 2	GHIBLI	AS 5, Cod. (P.N.) 2512043		P2	✓	10	300		pieces
268 301 300 5	GHIBLI	AS 59, AS 590, AS 60 P, AS 600 P		V	✓			5	
268 301 304 0	GHIBLI	AS 59, AS 590, AS 60 P, AS 600 P		V	✓			40	
268 156 2	GHIBLI	AS 6, Cod. (P.N.) 2512044		P2	✓	10	200		pieces
268 301 600 5	GHIBLI	AS 6		V	✓			5	
268 301 608 0	GHIBLI	AS 6		V	✓			80	
268 302 901 0	GHIBLI	AS 7, AS 10, AS 10 P, ASL 7, ASL 10, M 7		V	✓			10	
268 302 908 0	GHIBLI	AS 7, AS 10, AS 10 P, ASL 7, ASL 10, M 7		V	✓			80	
268 102 336 1	GHIBLI	AS 7, AS 10, AS 10 P, ASL 7, ASL 10, M 7		P2	✓	10	180		pieces
268 301 200 5	GHIBLI	AS 8, AS 9, AS 12, AS 27, AS 30, AS 400, SP 8, SP 9		V	✓			5	
268 301 206 0	GHIBLI	AS 8, AS 9, AS 12, AS 27, AS 30, AS 400, SP 8, SP 9		V	✓			60	
268 157 3	GHIBLI	AS 8, AS 9, AS 27		P2	✓	10	180		pieces
268 301 400 5	GHIBLI	T 1		V				5	
268 300 401 0	HAKO	440		V	✓			10	
268 141 0	HAKO	440		P2	✓	10	350		pieces
268 143 7	HAKO	Carpovac		P2	✓	10	350		pieces
268 302 901 0	HAKO	Clean 7231		V	✓			10	
268 302 908 0	HAKO	Clean 7231		V	✓			80	
268 102 336 1	HAKO	Clean 7231		P2	✓	10	180		pieces
268 302 101 0	HAKO	Supervac 100		V	✓			10	
268 302 113 0	HAKO	Supervac 100		V	✓			130	
268 102 300 1	HAKO	Supervac 100		P2	✓	10	200		pieces
268 302 212 0	HAKO	Supervac 100; 10 pieces in PE-bag incl. 2 motor protection filter		V	✓			120	
268 302 201 0	HAKO	Supervac 100; 10 pieces in PE-bag incl. 2 motor protection filter		V	✓			10+2	
268 302 000 5	HAKO	Supervac D 5 (7206-00)		V	✓			5	
268 302 010 0	HAKO	Supervac D 5 (7206-00)		V	✓			100	
268 155 5	HAKO	Supervac D 5 (7206-00)		P2	✓	10	260		pieces
268 301 600 5	HAREMA	HV 13 S		V	✓			5	
268 301 608 0	HAREMA	HV 13 S		V	✓			80	
268 156 2	HAREMA	HV 13 S		P2	✓	10	200		pieces
268 302 101 0	HAREMA	HV 9 S		V	✓			10	
268 302 113 0	HAREMA	HV 9 S		V	✓			130	
268 102 300 1	HAREMA	HV 9 S		P2	✓	10	200		pieces
268 303 400 5	HERKULES	Bauhaus SR 20, SR 30		V				5	
268 303 414 0	HERKULES	Bauhaus SR 20, SR 30		V				140	
268 303 501 0	HITACHI	CV-200 P, CV-300 P		V				10	
268 303 524 0	HITACHI	CV-200 P, CV-300 P		V				240	
268 302 901 0	JANSER	Janvac 1600		V	✓			10	
268 302 908 0	JANSER	Janvac 1600		V	✓			80	
268 149 7	KÄRCHER	2001, 3011		P2		10	200		pieces

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper . P3 = three-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 150 71	KÄRCHER	2101, 2101 TE, 2301, 2111, 2105, 4000 plus, 4000 TE, A 2101, A 2131 pt, A 2111		P2	✓	10	240		pieces
268 150 7	KÄRCHER	2501, 2501 TE, 2601, 2601 plus, 3001, SE 3001, 3001 hot		P2	✓	10	160		pieces
268 150 7V	KÄRCHER	2501, 2501 TE, 2601, 2601 plus, 3001, SE 3001, 3001 hot; 10 pieces in PE-bag incl. 2 motor protection filter		P2	✓	10+2	160		pieces
268 301 001 0	KÄRCHER	2701		V					5
268 111 9	KÄRCHER	2701		P2		10	180		pieces
268 150 72	KÄRCHER	A 2003, A 2004, A 2014 CV, A 2024 pt, A 2054 Me, A 2064 pt, A 2074 pt		P2	✓	10	250		pieces
268 159 8	KÄRCHER	A 2204, A 2254 Me, A 2234 pt, A 2504, A 2534 pt, A 2554 Me, A 2604, A 2654 Me, 2201 F, A 2201, A 2231 pt, A 2251 Me, A 2901, 2901 F, 3000 plus, A 3100, K 2150		P2		10	150		pieces
268 300 301 0	KÄRCHER	CV 30/1, CV 38/1, CV 38/2, CV 48/2		V					10
268 160 3	KÄRCHER	CV 30/1, CV 38/1, CV 38/2, CV 48/2		P2		10	350		pieces
268 300 401 0	KÄRCHER	CV 36/2 (CW 50), CV 46/2 (CW 100)		V	✓				10
268 158 7	KÄRCHER	NT 27/1		P2		10	140		pieces
268 300 900 5	KÄRCHER	NT 301, 2801		V					5
268 300 905 0	KÄRCHER	NT 301, 2801		V					50
268 111 8	KÄRCHER	NT 301, 2801		P2		10	120		pieces
268 151 9	KÄRCHER	NT 351 eco, 2000 E		P2	✓	10	150		pieces
268 300 700 5	KÄRCHER	NT 361 Eco/Eco TE/Eco M/Eco TEA/Eco MA		V					5
268 300 707 0	KÄRCHER	NT 361 Eco/Eco TE/Eco M/Eco TEA/Eco MA		V					70
268 154 2	KÄRCHER	NT 361, NT 35/1		P2	✓	10	120		pieces
268 303 600 5	KÄRCHER	NT 48/1, NT 65/2 Eco, NT 65/2 Eco Me, NT 65/2 Eco Tc, NT 72/2 Eco Tc		V					5
268 303 604 0	KÄRCHER	NT 48/1, NT 65/2 Eco, NT 65/2 Eco Me, NT 65/2 Eco Tc, NT 72/2 Eco Tc		V					40
268 152 3	KÄRCHER	NT 501/551		P2		10	100		pieces
268 153 2	KÄRCHER	NT 561		P2	✓	10	120		pieces
268 152 2	KÄRCHER	NT 700, NT 702		P2		10	90		pieces
268 300 501 0	KÄRCHER	T 10/1, T 12/1		V	✓				10
268 300 511 0	KÄRCHER	T 10/1, T 12/1		V	✓				110
268 143 5	KÄRCHER	T 101, T 151, Europa T 111		P2		10	250		
268 157 8	KÄRCHER	T 12/1		P2	✓	10	200		pieces
268 300 801 0	KÄRCHER	T 15/1, T 17/1		V	✓				10
268 300 807 0	KÄRCHER	T 15/1, T 17/1		V	✓				70
268 164 7	KÄRCHER	T 15/1		P2	✓	10	150		pieces
268 152 8	KÄRCHER	T 191, T 191 K		P2		10	320		pieces
268 143 6	KÄRCHER	T 201, T 201 + ESB 24		P2		10	200		pieces
268 143 61	KÄRCHER	T 201, T 201 + ESB 24; 10 Stk. im PE-Beutel mit 2 Stück Motorschutzfilter		P2		10+2	200		pieces
268 159 0	KÄRCHER	T 7/1, T 10/1		P2		10	250		pieces
268 300 601 0	KÄRCHER	T 7/1, T 9/1 Bp, BV 5/1, BV 5/1 Bp		V					10
268 300 616 0	KÄRCHER	T 7/1, T 9/1 Bp, BV 5/1, BV 5/1 Bp		V					160
268 141 0	KÄRCHER	TBS 32 e, 42 e, TBS 25-35, CV 36/2, CV 46/2, CW 50, CW 100		P2	✓	10	350		pieces
268 303 701 0	KÄRCHER	VC 6, VC 6 Premium, VC 6100, VC 6150, VC 6200, VC 6250 PET, VC 6300, VC 6300 B, VC 6350, VC 6400, VC 6400 ESB; 10 pieces in PE-bag incl. 1 motor protection filter		V					10+1
268 302 000 5	KENBO	Eco plus 15		V	✓				5
268 163 5	KENBO	Eco plus 25		P2	✓	10	120		pieces
268 154 1	KENBO	Silent 25 S plus		P2	✓	10	160		pieces
268 143 7	LINDHAUS	RX 4, RX 380		P2	✓	10	350		pieces
268 300 401 0	LORITO	250/450		V	✓				10
268 141 0	LORITO	250/450		P2	✓	10	350		pieces
268 166 4	LORITO	Compacto 6		P2	✓	10	200		pieces
268 154 4	LORITO	Compacto 9		P2	✓	10	200		pieces
268 147 8	LORITO	UP 350/450, BS 35/46		P2	✓	10	300		pieces
268 150 9	MARCO	Modell Luxus		P2	✓	10	200		pieces
268 163 2	MINATOL	RS Micro		P1		10	230		pieces
268 301 001 0	MOBILO	S 900		V					5
268 111 9	MOBILO	S 900		P2		10	180		pieces
268 111 3	NILCO	07, 1107, 1207, 1407; 10 pieces in PE-bag with round motor protection filter		P2	✓	10+1	300		pieces
268 111 31	NILCO	1117, 1217, 1417; 10 pieces in PE-bag with square motor protection filter		P2	✓	10+1	300		pieces
268 131 0	NILCO	171/271/275		P2		10	280		pieces

* Price per piece ** Price per (VPE)

Symbols TYP type M material D sealable ME quantity unit VPE packing unit

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 302 401 0	NILCO	IC 213		V				10	
268 302 418 0	NILCO	IC 213		V				80	
268 142 71	NILCO	IC 213		P2		10	220	pieces	
268 301 001 0	NILCO	IC 215, S 17, S 18, S 26 NT		V				5	
268 301 006 0	NILCO	IC 215, S 17, S 18, S 26 NT		V				60	
268 111 9	NILCO	IC 215, S 17, S 18, S 26 NT		P2		10	180	pieces	
268 300 900 5	NILCO	IC 314, IC 315		V				5	
268 300 905 0	NILCO	IC 314, IC 315		V				50	
268 111 8	NILCO	IC 314, IC 315		P2		10	120	pieces	
268 163 2	NILCO	Micro		P1		10	230	pieces	
268 136 1	NILCO	S 20, S 20 E, S 20 el., S 20 Eco Power, S 30, S 38, GS 1025, GS 1700		P2	✓	10	200	pieces	
268 304 700 5	NILFISK	Aero 20-01, 20-11, 20-21, 25-11, 25-21, Buddy 15, 18, VL 200 30 PC INOX		V	✓			5	
268 304 708 0	NILFISK	Aero 20-01, 20-11, 20-21, 25-11, 25-21, Buddy 15, 18, VL 200 30 PC INOX		V	✓			80	
268 164 8	NILFISK	Aero 400/440		P2		10	150	pieces	
268 164 9	NILFISK	Aero 640/840		P2		10	120	pieces	
268 156 7	NILFISK	Attix 3		P2	✓	10	150	pieces	
268 156 8	NILFISK	Attix 5		P2	✓	10	80	pieces	
268 303 101 0	NILFISK	GD 930 (1.407.019.040), GD 930 S, GD 930 S2 Panther, GD 936		V				10	
268 303 112 0	NILFISK	GD 930 (1.407.019.040), GD 930 S, GD 930 S2 Panther, GD 936		V				120	
268 110 9	NILFISK	GD 930 (1.407.019.040), GD 930 S, GD 930 S2 Panther, GD 936		P2		10	200	pieces	
268 303 001 0	NILFISK	GM, 110, GM 130, Cubic, UZ 934		V				10	
268 303 014 0	NILFISK	GM, 110, GM 130, Cubic, UZ 934		V				140	
268 142 9	NILFISK	GM, 110, GM 130, Cubic, UZ 934		P2		10	160	pieces	
268 300 200 5	NILFISK	IVB 5, IVB 40, IVB 50		V	✓			5	
268 300 206 0	NILFISK	IVB 5, IVB 40, IVB 50		V	✓			60	
268 303 400 5	NILFISK	Multi 20, Multi 30		V				5	
268 302 500 5	NILFISK	VL 500-35 BSF, VL 500-35 EDF, VL 500-55-1 BDF, VL 500-55-1 EDF, VL 500-55-2 EDF, MAXXI II 35-1, MAXXI II 55-1, MAXXI II 55-2		V				5	
268 301 100 5	NILFISK	VL 500-75-1 BSF, VL 500-75-2 BSF, VL 500-75-2 EDF, MAXXI II 75-1, MAXXI II 75-2		V				5	
268 301 104 0	NILFISK	VL 500-75-1 BSF, VL 500-75-2 BSF, VL 500-75-2 EDF, MAXXI II 75-1, MAXXI II 75-2		V				40	
268 151 1	NILFISK	Dorsal Backuum (22.198.000); 5 pieces in PE-bag incl. 1 motor protection filter		P2		5+1	200	pieces	
268 136 7	NILFISK	GA 70, GS 80, GM 80, GD 90, GM 90, GS 90, BRM 545, (816.200)		P2		10	280	pieces	
268 165 4	NILFISK	GD 10 Back, Ref. 1471097500; 5 pieces in PE-bag incl. 1 motor protection filter		P2		5+1	150	pieces	
268 150 8	NILFISK	GD 1000 serie, GD 1005, (82.017.201), VP 600 Basic EU, VP 600 STD 2 EU, VP 600 STD 3 EU; 6 L.		P2	✓	10	250	pieces	
268 301 501 0	NILFISK	GD 111, GD 710, GD 910, GD 911, GD 1000 series, GD 1005, GD 1010, GNS 1010, GD 2000, HDS 2000, Saltix 3, Saltix 10, VC 300, VC 300 Hepa, VP 300, VP 300 Hepa, VP 600 Basic EU, VP 600 STD 2 EU, VP 600 STD 3 EU		V	✓			10	
268 301 514 0	NILFISK	GD 111, GD 710, GD 910, GD 911, GD 1000 series, GD 1005, GD 1010, GNS 1010, GD 2000, HDS 2000, Saltix 3, Saltix 10, VC 300, VC 300 Hepa, VP 300, VP 300 Hepa, VP 600 Basic EU, VP 600 STD 2 EU, VP 600 STD 3 EU		V	✓			110	
268 149 9	NILFISK	GD 111, GD 710, GD 910, GD 911, GD 1010, GNS 1010, GD 2000, HDS 2000, Saltix 3, Saltix 10, VC 300, VC 300 Hepa, VP 300, VP 300 Hepa, (82.017.401); 9 L.		P2		10	200	pieces	
268 165 3	NILFISK	GD 5 Back, Ref.Nr. 1471098500; 5 pieces in PE-bag incl. 1 motor protection filter		P2		5+1	200	pieces	
268 163 0	NILFISK	GU 305/355/455 Dual, GU 15 DMU, Nr. 1471058000		P2		10	350	pieces	
268 143 7	NILFISK	GU 350A/450A (82.040.400)		P2	✓	10	350	pieces	
268 304 800 5	NILFISK	IVB 3, IVB 30		V	✓			5	
268 304 808 0	NILFISK	IVB 3, IVB 30		V	✓			90	
268 153 3	NILFISK	Viking, GD 110, VD 10 (1.408.007.020)		P2	✓	10	240	pieces	
268 100 1	NOVIMEX	Picovac		P1	✓	10	250	pieces	
268 108 6	NUMATIC	NVM-1C/2 (604.100) NVH 180-2, NVP 180-2, NRV 200-22, NRV 200 T-2, Henry HVR 200-22, NVQ 200-22, Henry Xtra HVX 200-22, NQS 250 B-22, SSV 250-22, AVQ 250, RSAV 130, RSB 140, RSV 130, RSV 200, Nuvac Plus NNR 200-2, Nuvac NNH 180-2		P2	✓	10	300	pieces	
268 303 901 0	NUMATIC	NVM-1CH (604.015), Hepa-Flo NVH 180-2, NVP 180-2, NRV 200-22, NRV 200 T-2, Henry HVR 200-22, NVQ 200-22, Henry Xtra HVX 200-22, NQS 250 B-22, SSV 250-22, AVQ 250, RSAV 130, RSB 140, RSV 130, RSV 200, Nuvac Plus NNR 200-2, Nuvac NNH 180-2		V	✓			10	

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 303 920 0	NUMATIC	NVM-1CH (604.015), Hepa-Flo NVH 180-2, NVP 180-2, NRV 200-22, NRV 200 T-2, Henry HVR 200-22, NVQ 200-22, Henry Xtra HVX 200-22, NQS 250 B-22, SSV 250-22, AVQ 250, RSAV 130, RSB 140, RSV 130, RSV 200, Nuvac Plus NNR 200-2, Nuvac NNH 180-2		V	✓			200	
268 144 3	NUMATIC	NVM-2B/2 (604.102) NVP 370-2, NRV 370-22, NVQ 370-22, NVQ 370T-2, MFQ 370-22, NQS 350B-22, WV 370-2, George GVE 370-2		P2	✓	10	250		pieces
268 304 001 0	NUMATIC	NVM-2BH (604.016), Hepa-Flo NVP 370-2, NRV 370-22, NVQ 370-22, NVQ 370 T-2, MFQ 370-22, NQS 350B-22, WV 370-2, George GVE 370-2		V	✓			10	
268 304 008 0	NUMATIC	NVM-2BH (604.016), Hepa-Flo NVP 370-2, NRV 370-22, NVQ 370-22, NVQ 370 T-2, MFQ 370-22, NQS 350B-22, WV 370-2, George GVE 370-2		V	✓			80	
268 304 101 0	NUMATIC	RSB 140-1, RSB 140-2, RSAV 130, RSV 130, RSV 130-1, RSV 130-11		V	✓			10	
268 304 120 0	NUMATIC	RSB 140-1, RSB 140-2, RSAV 130, RSV 130, RSV 130-1, RSV 130-11		V	✓			200	
268 143 3	NUMATIC	System 12		P2	✓	10	300		pieces
268 302 401 0	POOL	T 110		V				10	
268 144 4	POOL	T 110		P2		10	220		pieces
268 136 1	POOL	T 115		P2	✓	10	200		pieces
268 154 4	POOL	T 210		P2		10	200		pieces
268 107 5	PROCLEAN	PC 20 K		P2	✓	10	240		pieces
268 301 600 5	PROCLEAN	T 111 Piccolino		V	✓			5	
268 301 608 0	PROCLEAN	T 111 Piccolino		V	✓			80	
268 156 2	PROCLEAN	T 111 Piccolino		P2	✓	10	200		pieces
268 301 700 5	PROFI-EUROPE	Profi 1, Profi 1.1, Profi 1 Lux, Profi 3		V				5	
268 131 0	ROWENTA	Rotocraft RK 20 S, RK 21, RK 30 SL, RK 31, RK 40 SLX		P2		10	280		pieces
268 300 900 5	ROWENTA	ZR 80, Vorace, RU 30-46, RU 520 S, RU 521, BP 61, Allround W&D-Models, (29 ltr.)		V				5	
268 300 905 0	ROWENTA	ZR 80, Vorace, RU 30-46, RU 520 S, RU 521, BP 61, Allround W&D-Models, (29 ltr.)		V				50	
268 111 8	ROWENTA	ZR 80, Vorace, RU 30-46, RU 520 S, RU 521, BP 61, Allround W&D-Models, (29 ltr.)		P2		10	120		pieces
268 301 001 0	ROWENTA	ZR 81, RU 01-15, RB 50-52, Collecto, (19 ltr.)		V				5	
268 111 9	ROWENTA	ZR 81, RU 01-15, RB 50-52, Collecto, (19 ltr.)		P2		10	180		pieces
268 300 401 0	SEBO	Evolution 300/350/450, 360/460		V	✓			10	
268 141 0	SEBO	Evolution 300/350/450, 360/460		P2	✓	10	350		pieces
268 111 9	SIEMENS	VM 10000		P2		10	180		pieces
268 131 0	SIEMENS	VU 30		P2		10	280		pieces
268 300 401 0	SORMA	RS 310, TM 430, TM 260		V	✓			10	
268 141 0	SORMA	RS 310, TM 430, TM 260		P2	✓	10	350		pieces
268 302 401 0	SORMA	SM 110		V				10	
268 144 4	SORMA	SM 110		P2		10	220		pieces
268 302 101 0	SORMA	SM 115, SM 118, SM 515		V	✓			10	
268 302 113 0	SORMA	SM 115, SM 118, SM 515		V	✓			130	
268 102 300 1	SORMA	SM 115, SM 118, SM 515		P2	✓	10	200		pieces
268 150 2	SORMA	SM 125		P2	✓	10	300		pieces
268 151 2	SORMA	SM 505 (=Tennant 3400)		P2	✓	10	200		pieces
268 107 5	SORMA	SM 510 (=Tennant 3410)		P2	✓	10	240		pieces
268 154 4	SORMA	SM 510 (=Tennant 3410)		P2	✓	10	200		pieces
268 144 5	SORMA	TM 375/455 (sebo automatic)		P2		10	300		pieces
268 302 401 0	SOTECO	15-20 Liter, 2er Serie, Base 101, 103, Supercondor, Amsterdam 115 HP, Europa Rocky I, Yes Play 202		V				10	
268 302 500 5	SOTECO	20-45 L., 3er & 5er Serie		V				5	
268 301 100 5	SOTECO	45-90 L., 4er & 6er Serie		V				5	
268 301 104 0	SOTECO	45-90 L., 4er & 6er Serie		V				40	
268 142 7	SOTECO	Base 101, 103, Supercondor, Amsterdam 115 HP, Europa Rocky I		P2		10	180		pieces
268 142 2	SOTECO	Box		P1		10	250		pieces
268 149 7	SOTECO	Europa 115/300, Rocky II		P2		10	140		pieces
268 302 000 5	SOTECO	Leo, Leo Eco		V	✓			5	
268 163 2	SOTECO	Micro		P1		10	230		pieces
268 300 900 5	SOTECO	Nevada 215, 503 R		V				5	

* Price per piece ** Price per VPE

Symbols TYP type M material D sealable ME quantity unit VPE packing unit

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 300 905 0	SOTECO	Nevada 215, 503 R		V				50	
268 111 8	SOTECO	Nevada 215, 503 R		P2		10	120		pieces
268 301 001 0	SOTECO	T 110, Nevada 103 RAD		V				5	
268 111 9	SOTECO	T 110, Nevada 103 RAD		P2		10	180		pieces
268 142 71	SOTECO	Yes Play 202		P2		10	220		pieces
268 144 4	SOTECO	Yes Play 202		P2		10	220		pieces
268 302 301 0	SPRINTUS	Maximus, Maximus pro, Maximus pt, T 11 EVO; 10 pieces in PE-bag incl. 1 motor protection filter		V	✓			10+1	
268 304 308 0	SPRINTUS	N 20/1 K, N 27/1 E, N 27/1 ERT, N 30/1 KPT, N 30/1 KS		V	✓			80	
268 148 6	TASKI	Bora 12 "S" (8504150)		P2	✓	10	200		pieces
268 149 5	TASKI	Dorsalino (8504190)		P2	✓	10	400		pieces
268 302 101 0	TASKI	S 4, S 6, Babybora, Hurricane (8.500.600)		V	✓			10	
268 302 113 0	TASKI	S 4, S 6, Babybora, Hurricane (8.500.600)		V	✓			130	
268 102 300 1	TASKI	S 4, S 6, Babybora, Hurricane (8.500.600)		P2	✓	10	200		pieces
268 143 7	TASKI	Tapitronic, Tapiset 38/45 (8502160)		P2	✓	10	350		pieces
268 304 405 0	TASKI	Vento 15 (7514888), Vento 15 S		V				50	
268 161 6	TASKI	Vento 15 (7514888), Vento 15 S		P2		10	100		pieces
268 151 2	TENNANT	3400 (=Sorma SM 505), V 5		P2	✓	10	200		pieces
268 154 4	TENNANT	3410 (=Sorma SM 510)		P2	✓	10	200		pieces
268 107 5	TENNANT	3410 (Sorma SM 510)		P2		10	240		pieces
268 147 8	TENNANT	CV 141		P2	✓	10	300		pieces
268 149 7	TENNANT	V 10		P2		10	140		pieces
268 300 900 5	TENNANT	V 12		V				5	
268 300 905 0	TENNANT	V 12		V				50	
268 111 8	TENNANT	V 12		P2		10	120		pieces
268 301 100 5	TENNANT	V 14		V				5	
268 301 104 0	TENNANT	V 14		V				40	
268 166 9	TENNANT	V 6		P2		12	240		pieces
268 303 901 0	VIPER	DSU 1, DSU 8, DSU 10, Smartness DV-10, GVD 10		V	✓			10	
268 303 920 0	VIPER	DSU 1, DSU 8, DSU 10, Smartness DV-10, GVD 10		V	✓			200	
268 304 001 0	VIPER	DSU 12, DSU 15		V	✓			10	
268 304 008 0	VIPER	DSU 12, DSU 15		V	✓			80	
268 301 200 5	VIPER	LSU 135, LSU 135P		V	✓			5	
268 301 206 0	VIPER	LSU 135, LSU 135P		V	✓			60	
268 301 300 5	VIPER	LSU 155, LSU 155P, LSU 255, LSU 255P, LSU 275, LSU 275P,		V	✓			5	
268 301 304 0	VIPER	LSU 155, LSU 155P, LSU 255, LSU 255P, LSU 275, LSU 275P,		V	✓			40	
268 108 6	VIPER	Smartness DV-10, GVD 10		P2	✓	10	300		pieces
268 304 700 5	WAP	Aero 20-01, 20-11, 20-21, 25-11, 25-21, Buddy 15, 18		V	✓			5	
268 304 708 0	WAP	Aero 20-01, 20-11, 20-21, 25-11, 25-21, Buddy 15, 18		V	✓			80	
268 164 8	WAP	Aero 400/440		P2	✓	10	140		pieces
268 164 9	WAP	Aero 640/840		P2	✓	10	120		pieces
268 156 7	WAP	Attix 3		P2	✓	10		150	
268 304 808 0	WAP	Attix 30, Attix 350/360, Attix 8 Gallon, Centix 60		V	✓			90	
268 300 200 5	WAP	Attix 40/50, Attix 550/590, Attix 12 Gallon		V	✓			5	
268 300 206 0	WAP	Attix 40/50, Attix 550/590, Attix 12 Gallon		V	✓			60	
268 156 8	WAP	Attix 5		P2	✓	10	80		pieces
268 301 501 0	WAP	Saltix 10; 9 L.		V	✓			10	
268 301 514 0	WAP	Saltix 10; 9 L.		V	✓			110	
268 149 9	WAP	Saltix 10; 9 L.		P2	✓	10	200		pieces
268 142 7	WAP	Saltix		P2		10	200		pieces
268 161 5	WAP	SQ4, SQ450-11, SQ450-21, SQ450-31, SQ4501M, SQ4502M, SQ4503M, SQ490-31		P2	✓	10	160		pieces
268 302 901 0	WEBER	15-1 STBL Jack Line, 15-1 STBL Vac Line		V	✓			10	
268 302 908 0	WEBER	15-1 STBL Jack Line, 15-1 STBL Vac Line		V	✓			80	
268 102 336 1	WEBER	15-1 STBL Jack Line, 15-1 STBL Vac Line		P2	✓	10	180		pieces
268 301 200 5	WEBER	30-1-STBL Jack Line, 30-1-STBL Vac Line		V	✓			5	
268 301 206 0	WEBER	30-1-STBL Jack Line, 30-1-STBL Vac Line		V	✓			60	
268 301 100 5	WEBER	90-3-STBL, 90-3-PTBL		V				5	
268 301 104 0	WEBER	90-3-STBL, 90-3-PTBL		V				40	
268 301 300 5	WEBER	Vac Line 70-2-STBL, 70-2-STBL SF, 70-3-STBL, 70-3-PTBL, 80-3-STBL		V	✓			5	

Vacuum bags

R+M Nr.	suitable for	TYP	V = fleece filter . P1 = one-ply paper . P2 = two-ply paper	M	D	VPE *	VPE *	VPE **	ME
268 301 304 0	WEBER	Vac Line 70-2-STBL, 70-2-STBL SF, 70-3-STBL, 70-3-PTBL, 80-3-STBL	V	✓				40	
268 302 801 0	WEBER	x2-Aqua	V					10	
268 111 3	WETROK	Karpawel 350; Combisauger, 10 pieces in PE-bag with round motor protection filter	P2	✓	10+1	300			
268 304 601 0	WETROK	Monovac 6, Monovac 6 Plus, Bantam 6/9	V	✓				10	
268 139 61	WETROK	Monovac 6, Monovac 6 Plus, Bantam 6/9	P2	✓	10	150			pieces
268 153 01	WETROK	Monovac 9, Monovac 11 Plus	P2	✓	10	120			pieces
268 302 401 0	WIRBEL	814, 815	V					10	
268 301 001 0	WIRBEL	814, 815	V	✓				5	
268 111 9	WIRBEL	814, 815	P2		10	180			pieces
268 302 500 5	WIRBEL	819, 829	V					5	
268 300 900 5	WIRBEL	819, 829	V					5	
268 300 905 0	WIRBEL	819, 829	V					50	
268 111 8	WIRBEL	819, 829	P2		10	120			pieces
268 301 200 5	WIRBEL	935, 936, 938	V	✓				5	
268 301 206 0	WIRBEL	935, 936, 938	V	✓				60	
268 301 300 5	WIRBEL	98, 960, 962, 980	V	✓				5	
268 301 304 0	WIRBEL	98, 960, 962, 980	V	✓				40	
268 301 400 5	WIRBEL	W 1	V					5	

* Price per piece ** Price per VPE

Symbols TYP type M material D sealable ME quantity unit VPE packing unit



easyp Protect365+ protection for high pressure cleaning	582
Gloves	583
R+M / Suttner team wear.....	580
Safety spectacles, safety goggles and face shields	581

R+M / Suttner team wear

Polo-shirt



- » Design: Breathable
- » High-quality business-polo-shirt
- » 100% cotton, approximately 210 g/m²
- » Color: Navy / blue

R+M Nr.	size
980 015 1	S
980 016 1	M
980 017 1	L
980 018 1	XL
980 019 1	2XL
980 020 1	3XL
980 020 11	4XL

Sweat-shirt



- » Design: zipper, collar, long sleeve
- » High-quality work-sweat-shirt
- » 70 % cotton, 30 % polyester 320 g/m²
- » Color: Navy / blue

R+M Nr.	size
980 021 1	S
980 022 1	M
980 023 1	L
980 024 1	XL
980 025 1	2XL
980 026 1	3XL
980 027 1	4XL

Softshell-jacket



- » Design: Waterproof, breathable, warm inside, wind resistant
- » 2 zippered side pockets
- » 1 chest pocket
- » Material: Shell: 96 % Polyester, 4 % Elastane
- » Color: Navy / grey

R+M Nr.	size
980 040 1	S
980 041 1	M
980 042 1	L
980 043 1	XL
980 044 1	2XL
980 045 1	3XL
980 046 1	4XL

T-shirt



- » Design: Short sleeve
- » High-quality work-shirt
- » 100 % cotton about 195 g/m²
- » Color: Navy / blue

R+M Nr.	size
980 060 1	S
980 061 1	M
980 062 1	L
980 063 1	XL
980 064 1	2XL
980 065 1	3XL
980 066 1	4XL

Team jacket 3 in 1 with softshell inner jacket



- » Design: Outer jacket: Waterproof, breathable, windproof
- » Mesh lining in the upper body area, taped seams, integrated hood, adjustable cuffs, Velcro stormflap, security pocket with zipper, unisex
- » 2 zippered side pockets, 2 side pockets with zipper
- » Soft shell inner jacket with a warm interior
- » Material: Outer: Isotex 5000 polyester fabric
- » Material: Interior: Softshell
- » Color: Navy / black (always plain, no color combinations)

R+M Nr.	size
980 050	S
980 051	M
980 052	L
980 053	XL
980 054	2XL
980 055	3XL

Caps



- » Yupoong 5 Panel, One size(55-60 cm)
- » 100 % cotton
- » Adjustable plastic closure
- » Reinforced front

R+M Nr.	Color	Logo
980 005 837	Blue	large
980 005 836	Blue	small

R+M Nr.	Color	Logo
980 005 839	black	large
980 005 838	black	small

Safety spectacles, safety goggles and face shields

Safety spectacles



- » Anti-fog, scratch-proof and anti-static polycarbonate lens
- » Panoramac field of vision
- » EN166 - EN170
- » Protected against shock, splinters and solid particle
- » Weight 30 g

R+M Nr.

985 600 891 5



- » Anti-fog and scratch-proof polycarbonate smoke lens
- » Panoramac field of vision
- » 100 % UV-protection
- » Protected against shock, splinters and solid particle
- » Weight 30 g

R+M Nr.

956 002 820

Flip-up face shields



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Adjustable headgear
- » 100 % UV-protection
- » Protected against shock, splinters, solid particle and chemical danger (dangerous drops)
- » Weight 200 g

R+M Nr.

956 003 487

Safety goggles with temples



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Straight temples with adjustable strap. Integrated side protection. Exchangeable plastic foam rim with indirect ventilation
- » Including microfibre cloth
- » 100 % UV-protection
- » Shockproof in case of extreme temperatures
- » Protected against shock, splinters, solid particle and liquids
- » Weight 52 g

R+M Nr.

956 004 828

Safety goggles with adjustable strap



- » Anti-fog, scratch-proof and antistatic polycarbonate lens
- » Fits over prescription spectacles. Ball-pivot. Fits with respiratory half mask
- » 100 % UV-protection
- » Shockproof in case of extreme temperatures. Resistant to chemical drops, toxic gases, small and big toxic particle, melting metals and hot solids
- » Weight 105 g

R+M Nr.

985 600 996 6

The accident prevention regulations of the Employer's Liability Insurance Association regarding "the use of high pressure cleaner" (BGV D15) and "tasks with liquid jets" (BGV D26) prescribe that adequate eye and face protection have to be worn in case of an operating pressure of 25 bar and more.

easyprotect365+ protection for high pressure cleaning

easyprotect365+ professional protective clothing for abrasive blasting operations up to 500 bar / 7,500 psi.

The strongest fiber in the world for the toughest demands of the world. Thanks Dyneema any application grown to safely master the most difficult tasks.

The perfect protection for people who work professionally with high-pressure cleaner not only in the industry.

Comfort, function and safety

Until now there has been no adequate protection for high pressure cleaning.

Nothing that corresponded to the achievements of modern devices or user requirements on comfort and functionality. Our experience with water blasting work at high pressures (up to 500 bar / 7,500 psi) and other personal protective equipment are the basis for our new clothing range. **easyprotect365+ protection for high pressure cleaning.**

Ideal protection for abrasive blasting of concrete rehabilitation works, shipyards, petrochemical and steel industry.

Apron

- » 3-layer apron with CE certification
- » Security for blasting work up to 500 bar
- » Ideal for work in warm environments
- » Adjustable carrying band, waist band
- » Easy to put on and waterproof
- » Weight 0.7 kg
- » One Size
- » Protection class 5/5/2

Special gloves

- » Special gloves with CE certification
- » Security for blasting work up to 500 bar
- » Sand-rubber coating for maximum grip
- » Extra inner glove made of nylon
- » Protection class 5 cut 4 abrasion, tear and cut resistance
- » In two sizes 8 / 11
- » Protection class 5/5/2

Protective boots

- » Protective boots with CE Certification
- » Security for blasting work up to 500 bar
- » Designed for long working in rough conditions
- » Textile lining for maximum comfort
- » Waterproof and anti-slip sole
- » Weight 2.8 kg
- » Sizes 42 - 48
- » Protection class 5/5/3

R+M Nr.

956 123 501

R+M Nr.

956 100 502

size

11

Protection class 5/5/3

- rotating nozzle 500 bar/7,500 psi
- flat jet 500 bar/7,500 psi
- point jet 300 bar/4,350 psi

CE 89/686/EEC

Protection class 5/5/2

- rotating nozzle 500 bar/7,500 psi
- flat jet 500 bar/7,500 psi
- point jet 200 bar/3,000 psi

CE 89/686/EEC

R+M Nr.	EUR	US	UK
956 152 501	42	9	8
956 152 502	43	9,5	9
956 152 503	44	10,5	10
956 152 504	45	11,5	11
956 152 505*	46	12	11,5

Note - load capacity for point jet:
300 bar / 4,350 psi

* limited stock

Gloves

Chemistry Glove Solvex®



Category III -Protection Glove Alpha-Tec® Solvex® 37-675.

Very durable nitrile glove for use with hazardous chemicals. The reversed lozenge finish further enhances levels of grip. Cotton-flock liner to the glove



R+M Nr.	VPE	☒	size	↔
956 067 511	1 pair	0.38	11	330 mm
956 167 511	12 pairs	0.38	11	330 mm
956 267 511	144 pairs	0.38	11	330 mm

Protective work gloves Pro-Fit



- » PU glove, white / white
- » Palm and fingertips with PU coating
- » Polyamide liner
- » Circular knit seamless, knitted cuff
- » Comfortable to wear, breathable
- » Secure grip with excellent sense of touch
- » High abrasion resistance for long service life
- » Excellent fit

Category II protective glove,
EN 388:2016, Level 3.1.3.1.X

R+M Nr.	VPE	size
980 030	12 pairs	8
980 031	12 pairs	9

Symbols VPE packing unit ☒ thickness mm ↔ length

Reference list manufacturer number to R+M number



Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
2.042-001.0	24	110 00	2.113-042.0	301	127 015 034	2.637-750.0	434	740 201
2.042-001.0	-	110 05	2.113-043.0	301	127 015 034	2.637-750.0	434	750 201
2.110-021.0	186	200 146 919	2.113-044.0	301	127 015 040	2.637-767.0	196	400 047 015
2.110-022.0	186	200 146 920	2.113-045.0	302	126 015 040	2.637-767.0	196	410 047 015
2.110-023.0	186	200 146 931	2.113-045.0	301	127 015 040	2.637-926.0	-	540 31
2.113-000.0	301	127 025 034	2.113-046.0	302	126 015 045	2.638-183.0	427	590 163
2.113-000.0	302	126 025 034	2.113-046.0	301	127 015 045	2.638-183.0	424	593 16
2.113-001.0	302	126 100 040	2.113-047.0	302	126 015 055	2.638-792.0	-	520 91
2.113-003.0	302	126 040 040	2.113-047.0	301	127 015 055	2.638-821.0	-	521 042 301
2.113-006.0	302	126 025 040	2.113-049.0	302	126 015 070	2.638-974.0	98	852 12
2.113-007.0	302	126 025 040	2.113-049.0	301	127 015 070	2.638-976.0	-	852 14
2.113-008.0	301	127 025 045	2.113-051.0	302	126 015 080	2.639-919.0	435	740 005
2.113-010.0	301	127 025 050	2.113-053.0	302	126 040 045	2.639-919.0	435	740 009
2.113-011.0	301	127 025 055	2.113-054.0	302	126 040 050	2.640-679.0	336	521 052 400
2.113-015.0	302	126 025 080	2.113-055.0	302	126 040 055	2.640-679.0	334	521 052 302
2.113-016.0	302	126 025 090	2.114-013.0	531	200 097 700	2.640-692.0	278	200 175 411
2.113-017.0	302	126 025 100	2.637-064.0	-	521 201	2.640-693.0	367	200 075 482
2.113-021.0	301	127 025 040	2.637-065.0	-	521 201	2.641-374.0	27	734 10
2.113-021.0	302	126 025 040	2.637-108.0	268	561 41	2.641-706.0	-	390 061 209
2.113-022.0	302	126 025 045	2.637-120.0	-	109 506	2.641-706.0	-	460 061 209
2.113-023.0	302	126 025 050	2.637-121.0	-	109 31	2.641-721.0	148	460 010 420 9
2.113-025.0	302	126 025 055	2.637-177.0	500	109 760 973	2.641-740.0	529	276 284 380
2.113-028.0	301	127 025 070	2.637-238.0	434	750 141	2.641-798.0	320	545 505 0
2.113-033.0	302	126 100 045	2.637-238.0	434	740 141	2.641-866.0	437	764 434 34
2.113-034.0	302	126 100 050	2.637-691.0	31	200 033 700	2.641-867.0	439	763 430 06
2.113-035.0	302	126 100 055	2.637-728.0	-	520 91	2.642-305.0	290	200 330 600
2.113-037.0	302	126 100 075	2.637-729.0	-	400 047 008	2.642-728.0	-	653 330 011
2.113-042.0	302	126 015 034	2.637-729.0	196	410 047 008	2.642-729.0	-	653 335 011

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
2.642-729.0	-	653 340 011	2.884-533.0	300	600 10	4.440-092.0	138	330 104 310
2.642-997.0	334	521 030 300	2.884-534.0	300	600 20	4.440-117.0	478	330 012 701 001
2.643-037.0	130	559 908 221	2.884-535.0	300	600 30	4.440-120.0	-	330 012 701 008
2.643-577.0	343	108 809 71	2.884-536.0	300	600 40	4.440-120.0	-	330 012 701 004
2.643-633.0	148	460 010 421 0	2.884-537.0	300	600 50	4.440-122.0	-	330 012 701 009
2.683-974.0	98	852 12	2.884-540.0	300	600 75	4.440-122.0	-	330 012 701 005
2.780-001.0	27	950 10	2.884-541.0	300	600 80	4.440-123.0	-	330 012 701 010
2.880-001.0	-	790 952 010 0	2.884-543.0	300	601 10	4.440-123.0	-	330 012 701 012
2.880-001.0	-	780 919 262	2.884-544.0	-	601 11	4.440-123.0	-	330 012 701 007
2.880-001.0	115	790 100	2.884-897.0	186	200 088 518	4.440-123.0	-	330 012 701 006
2.880-154.0	-	790 103	2.884-899.0	187	316 96	4.440-172.0	168	355 500 310
2.880-168.0	115	790 100	2.884-924.0	186	200 088 518	4.440-416.0	-	330 012 701 021
2.880-177.0	98	852 10	2.884-925.0	187	316 96	4.440-417.0	-	330 012 701 022
2.880-194.0	84	200 006 436	2.884-963.0	186	200 088 518	4.440-807.0	478	330 012 701 001
2.880-208.0	-	790 120	2.884-964.0	186	200 088 518	4.440-808.0	478	330 012 701 002
2.880-296.0	-	790 105	2.885-012.0	281	200 085 400	4.440-809.0	478	330 012 701 003
2.880-990.0	-	790 105	2.885-133.0	300	605 70	4.440-810.0	-	330 012 701 008
2.883-027.0	300	602 50	2.885-170.0	300	606 20	4.440-810.0	-	330 012 701 004
2.883-043.0	300	605 05	2.885-224.0	300	602 55	4.440-811.0	-	330 012 701 009
2.883-099.0	112	568 001 1	2.885-255.0	300	605 05	4.440-811.0	-	330 012 701 005
2.883-388.0	300	602 60	2.885-459.0	300	606 40	4.440-812.0	-	330 012 701 010
2.883-389.0	300	602 70	2.885-494.0	300	604 95	4.440-812.0	-	330 012 701 006
2.883-390.0	300	602 90	2.889-117.0	-	264 013	4.440-813.0	-	330 012 701 012
2.883-391.0	300	603 00	2.889-118.0	542	263 613	4.440-813.0	-	330 012 701 007
2.883-392.0	300	603 20	2.889-152.0	-	263 605	4.481-039.0	290	200 330 600
2.883-393.0	300	603 25	3.415-641.0	99	665 70	4.580-144.0	427	706 151
2.883-394.0	300	603 30	3.631-039.0	529	276 284 380	4.580-160.0	427	706 05
2.883-395.0	300	603 50	3.637-170.0	81	200 160 802	4.580-163.0	-	707 36
2.883-396.0	300	603 60	4.111-029.0	133	569 23	4.610-026.0	557	262 080 102
2.883-397.0	300	605 10	4.111-030.0	133	561 022 220	4.610-066.0	560	262 120 801
2.883-398.0	300	605 20	4.111-030.0	133	568 022 220	4.624-032.0	559	262 120 104
2.883-399.0	300	605 30	4.111-030.0	133	568 022 221	4.624-034.0	559	262 120 104
2.883-400.0	300	605 30	4.111-031.0	133	561 022 220	4.680-063.0	101	200 080 512
2.883-401.0	300	605 40	4.111-031.0	133	568 022 220	4.680-070.0	-	200 080 532
2.883-402.0	300	605 50	4.111-031.0	133	568 022 221	4.680-077.0	101	200 080 502
2.883-403.0	300	605 60	4.111-032.0	133	565 688	4.680-081.0	-	200 080 532
2.883-404.0	300	605 70	4.111-034.0	133	565 681	4.680-081.3	-	200 080 532
2.883-405.0	300	605 75	4.111-036.0	133	565 686	4.680-084.0	-	200 080 552
2.883-406.0	300	605 80	4.111-037.0	133	569 22	4.680-097.0	101	200 080 522
2.883-407.0	300	606 00	4.111-046.0	133	200 301 100	4.680-098.0	-	200 080 532
2.883-408.0	300	606 10	4.114-030.0	307	200 456 870	4.680-114.0	101	200 080 114
2.883-785.0	-	606 11	4.114-036.0	307	200 456 850	4.680-114.3	101	200 080 114
2.883-791.0	97	805 50	4.114-042.0	307	200 456 845	4.680-123.0	-	200 080 532
2.883-803.0	300	605 05	4.119-002.0	131	202 600 748	4.680-123.0	101	200 080 123
2.883-804.0	300	605 30	4.119-005.0	149	340 117 242 10	4.680-123.3	101	200 080 522
2.883-805.0	300	605 10	4.119-006.0	149	340 117 242 20	4.680-123.3	101	200 080 123
2.883-821.0	300	605 05	4.119-017.0	149	340 117 242 15	4.680-126.0	101	200 080 126
2.883-829.0	300	605 20	4.119-019.0	-	350 117 242 20	4.680-126.0	101	200 080 512
2.883-893.0	300	605 10	4.363-691.0	-	790 581	4.680-126.3	101	200 080 126
2.883-894.0	300	605 20	4.401-041.0	112	568 10	4.680-127.0	101	200 080 502
2.883-926.0	300	605 70	4.401-076.0	112	568 10	4.680-127.3	101	200 080 502
2.883-927.0	300	605 40	4.401-091.0	112	568 10	4.680-127.3	-	200 080 542
2.884-007.0	98	852 12	4.402-022.0	268	561 41	4.680-135.0	101	200 080 522
2.884-085.0	98	852 12	4.402-024.0	-	200 040 700	4.680-135.0	-	200 080 542
2.884-522.0	300	607 60	4.402-025.0	114	561 90	4.680-135.3	101	200 080 145
2.884-523.0	300	607 70	4.402-078.0	268	561 41	4.680-135.3	101	200 080 522
2.884-524.0	300	607 80	4.403-002.0	130	569 40	4.680-135.3	-	200 080 542
2.884-525.0	300	608 10	4.415-040.0	99	665 71	4.680-144.0	-	200 080 144
2.884-525-0	300	607 90	4.421-739.0	130	316 961 2	4.680-144.3	-	200 080 144
2.884-526.0	300	608 25	4.421-739.3	130	316 961 2	4.680-144.3	-	200 080 146
2.884-527.0	300	608 30	4.440-038.0	-	305 107 5	4.680-145.0	101	200 080 145

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
4.680-146.0	-	200 080 146	4.760-584.0	270	514 529	4.760-859.0	-	330 100 322 0
4.680-147.3	-	200 080 532	4.760-584.0	270	514 549	4.760-859.0	136	330 100 320
4.730-012.0	27	734 10	4.760-584.0	271	514 529 1	4.760-867.0	306	200 357 330
4.730-019.0	27	732 90	4.760-609.0	-	514 849	4.760-868.0	306	200 357 335
4.730-029.0	32	734 50	4.760-609.0	-	514 849 1	4.760-869.0	306	200 357 340
4.730-059.0	31	200 033 900	4.760-660.0	269	514 519	4.760-870.0	306	200 357 350
4.730-059.0	31	200 033 700	4.760-660.0	269	514 519 1	4.760-871.0	306	200 357 360
4.760-048.0	269	514 10	4.760-660.0	270	514 549 1	4.760-872.0	306	200 357 380
4.760-049.0	269	514 50	4.760-660.0	270	514 549 1	4.760-873.0	393	200 073 516
4.760-049.0	269	514 59	4.760-660.0	270	514 529	4.760-874.0	-	200 073 901
4.760-049.0	269	514 501	4.760-660.0	270	514 529	4.760-876.0	334	521 042 350
4.760-052.0	269	514 80	4.760-660.0	269	514 510	4.760-890.0	-	330 100 321 5
4.760-052.0	269	514 801	4.760-660.0	270	514 549	4.760-890.0	136	330 100 315
4.760-058.0	-	514 00	4.760-660.0	271	514 529 1	4.760-891.0	-	750 202 204
4.760-073.0	289	513 112	4.760-660.0	271	514 529 1	4.760-892.0	136	350 100 320
4.760-101.0	269	514 519	4.760-660.0	269	514 511	4.760-892.0	142	350 600 322 0
4.760-101.0	269	514 519 1	4.760-661.0	270	514 749	4.760-893.0	-	350 600 324 0
4.760-101.0	269	514 510	4.760-661.0	270	514 749 1	4.760-894.0	136	343 100 315
4.760-101.0	269	514 511	4.760-661.0	269	514 719 1	4.760-894.0	-	343 100 321 5
4.760-102.0	269	514 11	4.760-661.0	269	514 711	4.762-003.0	-	930 002 908
4.760-102.0	269	514 119	4.760-661.0	269	514 71	4.762-010.0 + 2.637-900.0	327	520 854 0
4.760-103.0	269	514 819	4.760-662.0	269	514 80	4.762-010.0 + 2.637-901.0	327	520 854 5
4.760-103.0	269	514 81	4.760-662.0	269	514 801	4.762-010.0 + 2.637-902.0	327	520 855 0
4.760-103.0	269	514 811	4.760-662.0	-	514 849	4.762-010.0 + 2.637-903.0	327	520 855 5
4.760-129.0	269	514 719 1	4.760-662.0	269	514 819	4.762-010.0 + 2.637-904.0	327	520 856 0
4.760-129.0	269	514 711	4.760-662.0	269	514 81	4.762-010.0 + 2.637-905.0	327	520 856 5
4.760-129.0	269	514 71	4.760-662.0	269	514 811	4.762-015.0	324	522 20
4.760-132.0	-	523 98	4.760-662.0	269	514 819 1	4.762-047.0	36	523 70
4.760-134.0	-	523 98	4.760-662.0	-	514 849 1	4.762-062.0	255	559 980 500
4.760-156.0	-	516 11	4.760-663.0	269	514 30	4.762-065.0	-	522 501 1
4.760-157.0	-	516 81	4.760-663.0	269	514 39	4.762-249.0	-	930 002 908
4.760-180.0	-	516 61	4.760-663.0	269	514 301	4.762-252.0	-	930 002 822
4.760-182.0	269	514 19	4.760-663.0	269	514 391	4.762-283.0	324	522 40
4.760-182.0	269	514 10	4.760-664.0	270	514 149	4.762-284.0	324	522 40
4.760-212.0	289	515 01	4.760-664.0	-	514 219 1	4.762-287.0	324	522 20
4.760-220.0	269	514 519 1	4.760-667.0	-	514 00	4.762-288.0	324	522 20
4.760-245.0	490	200 097 801	4.760-679.0	271	200 146 550	4.762-510.0	324	522 20
4.760-245.0	289	515 01	4.760-691.0	270	514 149	4.762-536.0	324	523 001
4.760-268.0	269	514 30	4.760-694.0	270	514 749	4.762-559.0	324	522 40
4.760-268.0	269	514 39	4.760-694.0	270	514 749 1	4.762-559.0	324	522 40
4.760-268.0	269	514 301	4.760-832.0	-	330 100 321 0	4.762-560.0	324	522 20
4.760-268.0	269	514 391	4.760-832.0	136	330 100 310	4.762-560.0	324	522 20
4.760-269.0	-	658 103 51	4.760-834.0	136	343 100 410	4.762-561.0	324	522 40
4.760-355.0	269	514 519 1	4.760-834.0	136	343 100 310	4.762-561.0	324	522 40
4.760-361.0	286	523 962	4.760-834.0	-	343 100 321 0	4.762-562.0	324	522 20
4.760-364.0	-	514 219 1	4.760-835.0	136	350 100 310	4.762-562.0	324	522 20
4.760-365.0	269	514 719 1	4.760-835.0	142	350 600 321 0	4.763-039.0	315	658 105 04
4.760-366.0	269	514 819 1	4.760-843.0	228	200 860 520	4.763-058.0	315	658 105 54
4.760-397.3	286	523 963	4.760-843.0	220	202 300 710	4.763-078.0	306	200 357 355
4.760-402.0	286	523 962	4.760-843.0	231	507 001 580	4.763-078.0	306	200 458 355
4.760-434.0	286	523 962	4.760-855.0	270	514 549	4.763-082.0	306	200 357 345
4.760-550.0	269	514 519 1	4.760-856.0	270	514 249	4.763-082.0	306	200 458 345
4.760-550.0	270	514 549 1	4.760-857.0	136	343 100 320	4.763-083.0	306	200 458 365
4.760-550.0	271	514 529 1	4.760-857.0	-	343 100 322 0	4.763-084.0	306	200 458 345
4.760-584.0	270	514 549 1	4.760-858.0	-	343 100 323 0	4.763-085.0	306	200 458 310

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
4.763-093.0	306	200 357 350	4.767-116.0	306	200 357 335	5.762-008.0	-	930 002 932
4.763-123.0	306	200 357 350	4.767-116.0	307	200 456 635	5.762-112.0	-	930 002 247
4.763-124.0	316	657 555 1	4.767-117.0	306	200 458 340	5.762-125.0	-	930 002 249
4.763-130.0	316	657 560 1	4.767-117.0	307	200 456 640	5.762-126.0	-	930 002 907
4.763-146.0	306	200 357 355	4.767-117.0	306	200 357 340	5.762-127.0	-	930 002 244
4.763-170.0	306	200 458 340	4.767-145.0	315	658 104 54	5.762-133.0	-	930 002 825
4.763-170.0	306	200 357 340	4.767-229.0	306	200 357 330	5.762-169.0	-	930 002 932
4.763-174.0	315	658 104 54	4.767-229.0	306	200 357 330	5.762-171.0	-	930 002 823
4.763-184.0	310	653 040 011	4.767-230.0	306	200 357 335	5.762-208.0	-	930 002 252
4.763-184.0	-	653 340 011	4.767-230.0	306	200 357 335	5.762-299.0	-	930 002 910
4.763-211.0	316	657 545 1	4.767-231.0	306	200 357 340	5.763-011.0	-	651 861
4.763-228.0	-	653 335 011	4.767-231.0	306	200 357 340	5.763-012.0	-	651 481
4.763-228.0	-	653 340 011	4.767-232.0	306	200 357 345	5.763-013.0	-	651 851
4.763-229.0	-	653 340 011	4.767-232.0	306	200 357 345	5.763-015.0	200	650 09
4.763-250.0	306	200 458 360	4.767-233.0	306	200 357 350	5.763-015.0	200	650 10
4.763-250.0	307	200 456 660	4.775-012.0	221	202 600 710	5.763-016.0	200	650 50
4.763-250.0	307	200 456 655	4.775-016.0	228	200 860 520	5.763-019.0	200	650 40
4.763-250.0	306	200 357 355	4.775-018.0	221	202 600 710	5.763-020.0	200	650 50
4.763-250.0	306	200 458 355	4.775-026.0	228	200 860 520	5.763-087.0	-	651 861
4.763-250.0	306	200 458 355	4.775-029.0	-	202 300 820	5.765-030.0	300	600 10
4.763-252.0	306	200 458 340	4.775-036.0	231	507 001 590	5.765-031.0	300	600 20
4.763-252.0	306	200 458 340	4.775-037.0	-	202 300 820	5.765-032.0	300	600 30
4.763-252.0	307	200 456 640	4.775-056.0	-	202 300 820	5.765-033.0	300	600 40
4.763-252.0	307	200 456 640	4.775-079.0	231	507 001 590	5.765-034.0	300	600 50
4.763-252.0	306	200 357 340	4.775-080.0	231	507 001 590	5.765-035.0	300	600 60
4.763-252.0	306	200 357 340	4.775-120.0	-	202 300 820	5.765-036.0	300	600 70
4.763-253.0	307	200 456 650	4.775-152.0	-	202 300 820	5.765-037.0	300	600 75
4.763-253.0	306	200 458 350	4.775-191.0	231	507 001 590	5.765-038.0	300	600 80
4.763-253.0	306	200 357 350	4.775-194.0	-	202 300 820	5.765-039.0	300	601 00
4.763-254.0	307	200 456 670	4.775-204.0	-	202 300 820	5.765-040.0	300	601 10
4.763-254.0	307	200 456 680	4.775-213.0	231	507 001 590	5.777-023.0	-	930 000 172
4.763-254.0	306	200 458 380	4.775-251.0	-	202 300 820	6.025-253.0	326	200 555 565
4.763-254.0	306	200 458 370	4.775-271.0	-	202 300 820	6.110-011.0	149	343 116 782 20
4.763-930.0	306	200 458 310	4.775-273.0	-	202 300 820	6.110-018.0	149	343 116 782 15
4.763-931.0	306	200 357 335	4.775-282.0	221	202 600 710	6.110-030.0	149	343 117 242 15
4.763-931.0	307	200 456 635	4.775-282.0	228	200 860 520	6.110-031.0	149	343 117 242 10
4.763-931.0	307	200 456 635	4.775-282.0	220	202 300 710	6.110-032.0	149	343 117 242 20
4.763-977.0	-	653 330 011	4.775-463.0	-	202 300 820	6.110-035.0	149	330 117 242 10
4.763-988.0	307	200 456 645	4.775-463.0	-	202 300 820	6.110-036.0	149	330 116 782 15
4.763-988.0	306	200 458 345	4.775-466.0	221	202 600 720	6.110-037.0	149	330 116 782 15
4.763-988.0	306	200 458 345	4.775-466.0	220	202 300 720	6.110-038.0	149	345 617 242 10
4.763-988.0	306	200 458 345	4.775-466.0	221	202 600 710	6.110-038.0	-	335 117 242 10
4.764-012.0	289	200 056 500	4.775-466.0	228	200 860 520	6.110-053.0	149	346 617 242 10
4.764-066.0	316	657 555 1	4.775-466.0	220	202 300 710	6.110-054.0	149	346 617 242 20
4.764-208.0	306	200 458 310	4.775-466.0	-	202 300 820	6.110-083.0	-	345 116 782 20
4.764-208.0	306	200 458 310	4.775-825.0	234	202 715 580	6.233-017.0	-	107 008 0
4.767-002.0	316	657 545 1	5.181-041.0	-	930 001 905	6.273-207.0	-	930 001 906
4.767-005.0	316	657 555 1	5.401-129.0	294	519 60	6.286-466.0	424	594 16
4.767-022.0	306	200 357 335	5.401-153.0	294	519 60	6.287-024.0	-	950 20
4.767-023.0	306	200 357 340	5.401-210.0	294	519 60	6.287-025.0	27	950 40
4.767-024.0	306	200 357 350	5.403-034.0	130	569 50	6.288-044.0	-	953 50
4.767-041.0	306	200 357 330	5.403-128.0	424	593 16	6.290-215.0	27	950 10
4.767-066.0	316	657 555 1	5.403-175.0	130	569 40	6.295-303.0	27	950 40
4.767-066.0	316	657 555 1	5.403-175.0	130	569 50	6.295-303.0	27	950 40
4.767-067.0	316	657 560 1	5.762-004.0	36	523 72	6.295-305.0	-	950 20
4.767-076.0	306	200 458 390	5.762-008.0	-	930 002 932	6.295-624.0	27	950 10

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
6.317-011.0	494	109 767 921	6.369-471.0	569	930 104 031	6.389-051.0	162	330 117 304
6.362-083.0	437	764 434 38	6.369-472.0	569	930 103 031	6.389-056.0	138	330 110 310
6.362-092.0	51	161 289 0	6.369-473.0	569	930 106 031	6.389-063.0	139	460 010 210
6.362-092.0	51	161 288 0	6.369-475.0	-	930 000 198	6.389-088.0	138	335 110 315
6.362-092.0	-	050 000 540	6.369-476.0	-	930 000 196	6.389-092.0	139	460 004 210
6.362-151.0	115	790 10	6.369-477.0	-	930 000 195	6.389-103.0	478	330 012 701 023
6.362-392.0	115	790 20	6.369-479.0	-	930 000 194	6.389-103.0	478	330 012 701 025
6.362-406.0	51	161 277 0	6.369-900.0	-	930 001 618	6.389-104.0	478	330 012 701 024
6.362-406.0	-	793 305 178	6.370-007.0	36	523 72	6.389-104.0	478	330 012 701 026
6.362-406.0	51	161 276 0	6.370-122.0	-	930 000 919	6.389-160.0	138	335 110 315
6.362-427.0	-	050 000 590	6.370-125.0	-	930 000 917	6.389-176.0	138	340 110 410
6.362-472.0	-	796 15	6.370-126.0	-	930 000 777	6.389-190.0	136	345 111 410
6.362-478.0	-	050 000 330	6.370-127.0	-	930 000 947	6.389-301.0	136	340 101 415
6.362-481.0	131	791 42	6.370-129.0	-	930 000 776	6.389-351.0	138	330 110 310
6.362-482.0	112	568 011	6.370-130.0	-	930 000 946	6.389-354.0	139	460 010 210
6.362-484.0	51	161 282 0	6.370-131.0	-	930 000 920	6.389-479.0	143	341 101 610
6.362-484.0	51	161 283 0	6.370-132.0	-	930 000 781	6.389-479.0	146	342 101 510
6.362-484.0	-	903 616 00	6.370-133.0	-	930 000 950	6.389-479.0	148	347 601 121 0
6.362-524.0	112	568 010	6.370-970.0	-	930 001 376	6.389-479.0	148	347 601 121 07
6.362-534.0	-	551 502 43	6.371-200.0	36	523 73	6.389-479.0	146	342 100 510
6.362-547.0	-	050 002 050	6.371-279.0	36	523 72	6.389-555.0	-	460 010 810
6.362-577.0	129	050 000 020	6.386-125.0	130	569 20	6.389-571.0	138	340 110 420
6.362-586.0	-	050 000 260	6.386-356.0	425	583 161 6	6.389-574.0	139	460 010 210
6.363-607.0	51	161 282 0	6.386-465.0	424	595 16	6.389-581.0	146	342 101 520
6.363-607.0	51	161 283 0	6.386-466.0	424	594 16	6.389-581.0	143	346 100 620 7
6.363-607.0	-	903 616 00	6.388-057.0	146	342 100 510	6.389-581.0	146	347 100 520 7
6.363-615.0	129	050 000 020	6.388-060.0	148	460 000 210	6.389-581.0	-	346 100 620 9
6.365-052.0	-	156 157 0	6.388-071.0	136	340 100 420	6.389-581.0	-	347 100 520 9
6.365-053.0	51	161 281 0	6.388-083.0	136	345 101 410	6.389-581.0	146	342 100 520
6.365-053.0	51	161 280 0	6.388-083.0	142	345 601 121 0	6.389-582.0	139	390 010 210
6.365-053.0	-	156 151 0	6.388-083.0	142	345 601 121 0	6.389-597.0	136	335 111 310
6.365-055.0	51	161 284 0	6.388-083.0	136	345 101 310	6.389-609.0	146	342 100 520
6.365-055.0	51	161 285 0	6.388-455.0	12	720 20	6.389-646.0	138	345 110 410
6.365-330.0	51	161 279 0	6.388-458.0	12	722 40	6.389-709.0	136	345 101 315
6.365-330.0	51	161 278 0	6.388-460.0	12	722 20	6.389-709.0	142	345 601 121 5
6.365-330.0	-	156 139 0	6.388-461.0	12	720 10	6.389-709.0	136	345 101 415
6.365-332.0	51	161 274 0	6.388-462.0	12	720 50	6.389-720.0	136	345 101 415
6.365-332.0	51	161 275 0	6.388-465.0	12	720 30	6.389-786.0	136	340 100 410
6.365-332.0	-	156 254 0	6.388-473.0	12	722 30	6.389-853.0	139	390 010 210
6.365-332.0	-	156 156 0	6.388-474.0	12	723 01	6.389-853.0	138	330 110 310
6.365-333.0	51	161 273 0	6.388-483.0	13	728 310	6.389-853.0	138	330 110 310
6.365-333.0	51	161 272 0	6.388-547.0	24	735 40	6.389-856.0	136	345 111 410
6.365-333.0	-	156 136 0	6.388-548.0	24	735 50	6.389-891.0	136	343 100 410
6.365-347.0	51	161 291 0	6.388-576.0	13	728 311	6.390-010.0	142	343 600 321 5
6.365-347.0	51	161 290 0	6.388-803.0	174	301 50	6.390-010.0	136	343 100 415
6.365-432.0	51	161 264 0	6.388-803.0	-	301 52	6.390-010.0	136	343 100 315
6.365-432.0	51	161 265 0	6.388-813.0	136	345 100 420	6.390-023.0	142	350 600 321 5
6.365-438.0	51	161 271 0	6.388-813.0	136	340 100 420	6.390-023.0	136	350 100 315
6.365-438.0	51	161 270 0	6.388-825.0	136	345 100 410	6.390-023.0	136	350 100 415
6.369-001.0	569	930 106 025	6.388-825.0	137	345 600 410	6.390-025.0	142	343 611 321 0
6.369-002.0	569	930 103 025	6.388-826.0	136	340 100 410	6.390-025.0	136	335 111 310
6.369-003.0	569	930 102 025	6.388-831.0	195	400 000 020	6.390-025.0	136	343 111 410
6.369-022.0	569	930 106 033	6.388-832.0	195	400 000 030	6.390-026.0	-	345 100 420 8
6.369-023.0	569	930 103 033	6.388-854.0	139	460 010 210	6.390-026.0	136	345 100 410
6.369-024.0	569	930 102 033	6.388-860.0	195	410 000 020	6.390-026.0	-	345 100 410 8
6.369-077.0	569	930 106 035	6.388-860.0	195	420 300 020	6.390-027.0	136	345 101 420
6.369-078.0	569	930 103 035	6.388-934.0	139	390 010 215	6.390-027.0	142	345 601 122 0
6.369-079.0	569	930 102 037	6.388-987.0	539	264 048 20	6.390-027.0	136	345 101 320
6.369-469.0	569	930 101 031	6.389-028.0	-	345 100 401 5	6.390-027.0	136	345 100 420
6.369-470.0	569	930 102 031	6.389-034.0	139	390 010 210	6.390-027.0	136	340 100 420

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
6.390-028.0	195	400 000 020	6.391-417.0	154	390 036 815	6.391-885.0	143	346 111 610
6.390-028.0	195	410 000 020	6.391-419.0	136	343 100 310	6.391-886.0	145	346 611 322 07
6.390-028.0	195	420 300 020	6.391-419.0	136	343 100 410	6.391-886.0	143	346 111 620
6.390-028.0	197	420 300 322 0	6.391-419.0	142	343 600 321 0	6.391-887.0	145	346 600 322 07
6.390-029.0	195	410 000 030	6.391-420.0	138	330 110 310	6.391-887.0	143	346 100 620 7
6.390-029.0	195	420 300 030	6.391-421.0	438	763 534 31	6.391-888.0	143	331 111 615
6.390-029.0	195	400 000 030	6.391-421.0	438	763 434 31	6.391-924.0	142	343 611 321 0
6.390-029.0	197	420 300 323 0	6.391-424.0	136	345 111 420	6.391-924.0	136	343 111 410
6.390-030.0	195	420 300 020	6.391-424.0	-	345 111 420 8	6.392-074.0	434	750 201
6.390-031.0	136	343 100 320	6.391-478.0	195	420 300 010	6.392-074.0	-	764 434 317
6.390-031.0	142	343 600 322 0	6.391-479.0	195	420 300 020	6.392-076.0	440	764 434 502
6.390-031.0	136	343 100 420	6.391-480.0	195	420 300 030	6.392-076.0	435	740 009
6.390-031.0	136	340 100 420	6.391-481.0	-	345 100 410 8	6.392-083.0	434	740 201
6.390-078.0	138	330 110 310	6.391-482.0	-	345 100 420 8	6.392-105.0	-	764 434 317
6.390-096.0	139	390 004 210	6.391-483.0	-	345 111 410 8	6.392-106.0	435	740 005
6.390-171.0	136	343 111 420	6.391-484.0	138	330 110 310	6.392-203.0	437	764 434 33
6.390-171.0	142	343 611 322 0	6.391-510.0	-	350 100 340	6.392-203.0	437	764 434 32
6.390-174.0	138	330 110 315	6.391-510.0	-	355 500 340	6.392-204.0	439	763 430 06
6.390-178.0	-	345 100 401 5	6.391-512.0	136	350 100 415	6.392-206.0	136	335 100 310
6.390-185.0	142	343 611 321 5	6.391-513.0	-	350 100 425	6.392-207.0	136	335 111 310
6.390-185.0	136	343 111 415	6.391-513.0	-	350 100 325	6.392-210.0	-	202 600 552
6.390-208.0	142	345 611 322 0	6.391-516.0	143	341 100 610 7	6.392-369.0	136	330 100 310
6.390-208.0	136	345 111 420	6.391-516.0	-	346 100 610 9	6.392-965.0	437	764 434 38
6.390-293.0	-	343 601 123 0	6.391-516.0	146	347 100 510 7	6.394-559.0	271	200 085 686
6.390-293.0	-	343 101 330	6.391-516.0	-	347 100 510 9	6.394-561.0	-	525 085 1
6.390-293.0	-	343 100 430	6.391-516.0	143	346 100 610 7	6.394-564.0	-	200 601 650
6.390-294.0	-	345 111 430	6.391-516.0	145	346 600 321 07	6.394-610.0	271	517 608 5
6.390-294.0	-	345 601 123 0	6.391-517.0	143	341 100 620 7	6.394-610.0	-	517 608 0
6.390-294.0	-	345 101 330	6.391-517.0	143	346 100 620 7	6.394-611.0	394	540 505
6.390-372.0	139	390 010 215	6.391-517.0	146	347 100 520 7	6.394-654.0	271	200 085 935
6.390-445.0	146	332 110 515	6.391-517.0	-	346 100 620 9	6.394-655.0	271	200 085 646
6.390-463.0	148	460 028 209	6.391-517.0	-	347 100 520 9	6.394-665.0	271	517 608 5
6.390-544.0	138	330 110 315	6.391-520.0	438	763 534 31	6.394-665.0	-	517 608 0
6.390-704.0	146	342 111 510	6.391-520.0	438	763 434 31	6.394-665.0	-	516 11
6.390-704.0	148	347 611 321 07	6.391-520.0	437	764 434 34	6.394-665.0	-	516 61
6.390-705.0	148	347 611 322 07	6.391-522.0	-	345 111 000 05	6.394-688.0	394	540 505
6.390-705.0	146	342 111 520	6.391-522.0	130	316 961 1	6.394-697.0	-	200 601 660
6.390-726.0	136	350 100 320	6.391-545.0	439	763 430 06	6.394-770.0	394	540 505
6.390-726.0	136	350 100 420	6.391-646.0	-	302 052	6.394-968.0	393	200 073 520
6.390-726.0	142	350 600 322 0	6.391-646.0	175	302 05	6.394-969.0	393	200 073 618
6.391-168.0	138	330 110 310	6.391-646.0	-	302 06	6.396-534.0	148	460 010 420 8
6.391-172.0	154	330 136 815	6.391-647.0	174	301 50	6.401-412.0	112	568 10
6.391-172.0	154	390 036 815	6.391-647.0	-	301 52	6.401-417.0	254	559 103
6.391-238.0	142	390 011 321 0	6.391-648.0	-	420 300 040	6.401-418.0	255	565 67
6.391-238.0	136	330 111 310	6.391-676.0	136	343 100 420	6.402-011.0	560	262 100 001
6.391-238.0	136	330 111 310	6.391-843.0	-	343 111 142 0	6.412-043.0	68	200 280 646
6.391-342.0	136	343 100 410	6.391-843.0	136	343 111 420	6.412-449.0	425	581 80
6.391-342.0	136	343 100 410	6.391-843.0	142	343 611 322 0	6.412-490.0	424	591 16
6.391-342.0	142	343 600 321 0	6.391-843.0	195	420 300 020	6.412-578.0	27	734 10
6.391-351.0	142	345 611 321 0	6.391-849.0	168	365 500 315	6.412-601.0	69	533 31
6.391-351.0	-	345 111 410 8	6.391-864.0	145	346 601 121 0	6.412-601.0	69	533 351
6.391-351.0	136	345 111 410	6.391-864.0	143	346 100 610 7	6.412-601.0	68	200 280 510
6.391-354.0	142	345 600 321 0	6.391-864.0	145	346 600 321 07	6.414-389.0	31	200 033 700
6.391-354.0	-	345 100 420 8	6.391-865.0	-	365 500 340	6.414-413.0	96	829 05
6.391-354.0	136	345 100 410	6.391-875.0	-	390 011 210	6.414-413.0	96	829 00
6.391-354.0	-	345 100 410 8	6.391-875.0	142	390 011 321 0	6.414-498.0	550	268 228 200
6.391-354.0	136	345 100 310	6.391-882.0	136	335 111 310	6.414-824.0	573	268 303 701 0
6.391-394.0	142	390 011 321 5	6.391-883.0	136	335 101 310	6.414-956.0	27	732 60
6.391-394.0	136	330 111 315	6.391-883.0	136	335 100 310	6.414-956.0	28	200 035 630
6.391-417.0	154	330 136 815	6.391-885.0	145	346 611 321 07	6.414-956.0	27	732 90

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
6.415-001.0	99	675 51	6.415-327.0	300	605 60	6.541-027.0	430	107 608 0
6.415-001.0	99	665 61	6.415-328.0	300	600 60	6.541-028.0	431	107 708 0
6.415-002.0	99	665 71	6.415-336.0	300	600 10	6.541-039.0	-	107 808 0
6.415-004.0	99	665 91	6.415-337.0	300	602 60	6.541-039.0	430	107 908 0
6.415-006.0	99	675 81	6.415-338.0	300	607 60	6.610-212.0	560	262 000 102
6.415-010.0	99	666 21	6.415-359.0	300	605 40	6.622-055.0	-	800 20
6.415-030.0	99	668 01	6.415-419.0	300	600 75	6.622-086.0	97	805 00
6.415-040.0	99	675 61	6.415-420.0	300	603 25	6.622-132.0	97	805 50
6.415-040.0	99	665 70	6.415-421.0	300	605 75	6.631-105.0	84	200 006 436
6.415-040.0	99	665 71	6.415-422.0	300	608 25	6.631-726.0	-	912 245
6.415-050.0	99	666 11	6.415-424.0	-	635 70	6.631-739.0	-	912 245
6.415-051.0	99	668 61	6.415-424.0	-	635 80	6.631-792.0	87	912 00
6.415-053.0	99	668 71	6.415-428.0	201	200 049 840	6.632-190.0	90	901 522
6.415-058.0	99	667 90	6.415-440.0	201	200 049 840	6.651-646.0	116	565 50
6.415-082.0	300	601 10	6.415-452.0	99	666 00	6.651-647.0	115	561 50
6.415-086.0	99	675 36	6.415-492.0	99	665 30	6.651-648.0	114	564 60
6.415-092.0	99	665 71	6.415-503.0	-	635 30	6.651-649.0	114	561 98
6.415-099.0	-	678 31	6.415-504.0	-	635 40	6.685-868.0	90	910 12
6.415-150.0	300	600 80	6.415-505.0	-	635 50	6.685-949.0	90	910 13
6.415-151.0	300	603 30	6.415-520.0	99	665 40	6.686-591.0	73	010 000 02
6.415-152.0	300	605 80	6.415-530.0	99	665 91	6.778-198.0	-	200 072 614
6.415-153.0	300	608 30	6.415-539.0	99	665 90	6.900-222.0	544	265 020
6.415-157.0	300	608 40	6.415-564.0	99	666 01	6.900-384.0	540	263 623 1
6.415-160.0	300	606 00	6.415-572.0	99	666 21	6.900-385.0	544	263 619
6.415-162.0	300	605 30	6.415-622.0	293	623 10	6.900-425.0	543	263 618 1
6.415-163.0	300	607 80	6.415-641.0	99	675 60	6.900-514.0	540	263 623
6.415-171.0	300	603 90	6.415-641.0	99	679 213 1	6.902-074.0	540	263 623
6.415-172.0	300	606 40	6.415-641.0	99	665 70	6.903-034.0	543	263 620
6.415-173.0	300	608 80	6.415-651.0	99	675 82	6.903-035.0	543	263 629
6.415-251.0	300	603 60	6.415-660.0	99	665 50	6.903-036.0	543	263 628
6.415-252.0	300	606 10	6.415-667.0	99	665 15	6.903-234.0	544	265 019
6.415-253.0	300	608 60	6.415-676.0	99	665 11	6.903-345.0	-	930 000 476
6.415-257.0	300	600 50	6.415-682.0	99	679 212 1	6.903-347.0	-	930 002 662
6.415-277.0	300	605 20	6.415-686.0	99	666 50	6.903-403.0	544	263 219
6.415-278.0	300	600 20	6.415-693.0	99	666 21	6.903-409.0	-	930 002 152
6.415-279.0	300	602 70	6.415-716.0	99	675 70	6.903-862.0	543	263 617 2
6.415-280.0	300	607 70	6.421-133.0	85	548 37	6.903-887.0	543	263 217
6.415-287.0	300	605 70	6.472-113.0	95	822 50	6.904-045.0	573	268 152 3
6.415-288.0	300	608 20	6.472-123.0	95	822 40	6.904-051.0	-	268 150 6
6.415-295.0	300	605 50	6.472-128.0	95	822 15	6.904-058.0	571	268 111 8
6.415-296.0	300	600 30	6.472-344.0	95	821 10	6.904-059.0	570	268 141 0
6.415-297.0	300	600 70	6.472-925.0	95	821 10	6.904-060.0	573	268 143 5
6.415-301.0	300	608 00	6.490-076.0	556	262 101	6.904-068.0	550	268 280 210
6.415-304.0	300	601 00	6.490-087.0	-	262 120	6.904-072.0	573	268 151 9
6.415-305.0	300	603 20	6.490-110.0	557	262 110 101	6.904-097.0	570	268 141 0
6.415-307.0	300	603 00	6.490-166.0	557	262 120 702	6.904-123.0	550	268 280 220
6.415-308.0	300	605 10	6.490-215.0	559	262 120 703	6.904-123.0	573	268 152 2
6.415-309.0	300	603 50	6.492-029.0	73	010 000 03	6.904-143.0	573	268 150 7V
6.415-310.0	300	600 70	6.495-166.0	557	262 120 704	6.904-143.0	573	268 150 7
6.415-311.0	300	605 40	6.495-166.0	557	262 120 704 006	6.904-167.0	573	268 150 7
6.415-312.0	300	607 90	6.541-011.0	430	107 208 0	6.904-206.0	550	268 228 300
6.415-313.0	300	602 90	6.541-012.0	430	107 108 0	6.904-208.0	573	268 153 2
6.415-314.0	300	600 40	6.541-025.0	431	107 408 0	6.904-210.0	573	268 154 2
6.415-325.0	300	609 052	6.541-026.0	431	107 308 0	6.904-218.0	573	268 152 8

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number

Kärcher

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
6.904-263.0	573	268 150 7	6.907-409.0	541	263 612 4	6.903-234.0	544	265 019
6.904-283.0	550	268 228 600	6.907-512.0	542	263 613	6.903-345.0	-	930 000 476
6.904-284.0	550	268 228 620	6.951-073.0	-	930 000 182	6.903-347.0	-	930 002 662
6.904-290.0	573	268 158 7	6.951-073.0	-	930 000 183	6.903-403.0	544	263 219
6.904-294.0	573	268 160 3	6.951-073.0	-	930 000 183	6.903-409.0	-	930 002 152
6.904-312.0	573	268 157 8	6.951-073.0	-	930 000 183	6.903-862.0	543	263 617 2
6.904-322.0	573	268 150 72	6.951-164.0	-	930 000 183	6.903-887.0	543	263 217
6.904-329.0	573	268 303 701 0	6.958-170.0	-	930 001 245	6.904-045.0	573	268 152 3
6.904-333.0	573	268 159 0	6.958-171.0	-	930 001 243	6.904-051.0	-	268 150 6
6.904-360.0	550	268 228 330	6.958-172.0	-	930 001 247	6.904-058.0	571	268 111 8
6.904-367.0	550	268 228 310	6.958-173.0	-	930 001 246	6.904-059.0	570	268 141 0
6.904-367.0	550	268 228 300	6.958-234.0	-	930 001 371	6.904-060.0	573	268 143 5
6.904-488.0	570	268 141 0	6.958-235.0	-	930 001 369	6.904-068.0	550	268 280 210
6.905-506.0	-	930 002 255	6.959-130.0	573	268 159 8	6.904-072.0	573	268 151 9
6.905-587.0	-	930 002 694	6.989-903.0	255	559 94	6.904-097.0	570	268 141 0
6.905-622.0	-	930 000 606	6.989-903.0	255	559 95	6.904-123.0	550	268 280 220
6.905-624.0	-	930 000 691	6.996-003.0	-	930 001 482	6.904-123.0	573	268 152 2
6.905-625.0	-	930 001 158	7.362-501.0	-	050 001 361	6.904-143.0	573	268 150 7V
6.905-651.0	-	930 000 692	7.367-000.0	-	157 465 0	6.904-143.0	573	268 150 7
6.905-864.0	-	930 001 499	7.373-022.0	24	735 50	6.904-167.0	573	268 150 7
6.905-877.0	541	263 612 43	8.300-481.0	115	561 30	6.904-206.0	550	268 228 300
6.905-878.0	541	263 612 42	9.315-002.0	-	519 501	6.904-208.0	573	268 153 2
6.905-982.0	-	930 002 744	9.872-250.0	326	200 555 565	6.904-210.0	573	268 154 2
6.905-986.0	-	930 001 588	6.541-025.0	431	107 408 0	6.904-218.0	573	268 152 8
6.906-007.0	-	930 000 912	6.541-026.0	431	107 308 0	6.904-263.0	573	268 150 7
6.906-028.0	-	930 002 234	6.541-027.0	430	107 608 0	6.904-283.0	550	268 228 600
6.906-029.0	-	930 002 152	6.541-028.0	431	107 708 0	6.904-284.0	550	268 228 620
6.906-054.0	-	930 001 494	6.541-039.0	-	107 808 0	6.904-290.0	573	268 158 7
6.906-055.0	-	930 001 492	6.541-039.0	430	107 908 0	6.904-294.0	573	268 160 3
6.906-076.0	-	930 002 747	6.610-212.0	560	262 000 102	6.904-312.0	573	268 157 8
6.906-078.0	-	930 001 496	6.622-055.0	-	800 20	6.904-322.0	573	268 150 72
6.906-085.0	-	930 001 503	6.622-086.0	97	805 00	6.904-329.0	573	268 303 701 0
6.906-097.0	570	268 141 0	6.622-132.0	97	805 50	6.904-333.0	573	268 159 0
6.906-101.0	573	268 151 9	6.631-105.0	84	200 006 436	6.904-360.0	550	268 228 330
6.906-104.0	573	268 152 3	6.631-726.0	-	912 245	6.904-367.0	550	268 228 310
6.906-104.0	573	268 152 3	6.631-739.0	-	912 245	6.904-367.0	550	268 228 300
6.906-106.0	571	268 111 8	6.631-792.0	87	912 00	6.904-488.0	570	268 141 0
6.906-117.0	573	268 143 5	6.632-190.0	90	901 522	6.905-506.0	-	930 002 255
6.906-118.0	573	268 143 61	6.651-646.0	116	565 50	6.905-587.0	-	930 002 694
6.906-118.0	573	268 143 6	6.651-647.0	115	561 50	6.905-622.0	-	930 000 606
6.906-132.0	-	930 001 156	6.651-648.0	114	564 60	6.905-624.0	-	930 000 691
6.906-206.0	-	930 001 588	6.651-649.0	114	561 98	6.905-625.0	-	930 001 158
6.906-332.0	-	930 001 496	6.685-868.0	90	910 12	6.905-651.0	-	930 000 692
6.906-332.0	-	930 001 496	6.685-949.0	90	910 13	6.905-864.0	-	930 001 499
6.906-346.0	-	930 002 914	6.686-591.0	73	010 000 02	6.905-877.0	541	263 612 43
6.906-383.0	-	264 012 5	6.778-198.0	-	200 072 614	6.905-878.0	541	263 612 42
6.906-384.0	-	263 612 6	6.900-222.0	544	265 020	6.905-982.0	-	930 002 744
6.906-512.0	-	263 612 3	6.900-384.0	540	263 623 1	6.905-986.0	-	930 001 588
6.906-513.0	541	263 612 4	6.900-385.0	544	263 619	6.906-007.0	-	930 000 912
6.906-523.0	573	268 143 6	6.900-425.0	543	263 618 1	6.906-028.0	-	930 002 234
6.906-563.0	-	930 002 913	6.900-514.0	540	263 623	6.906-029.0	-	930 002 152
6.906-755.0	543	263 615 1	6.902-074.0	540	263 623	6.906-054.0	-	930 001 494
6.907-276.0	550	268 228 900	6.903-034.0	543	263 620	6.906-055.0	-	930 001 492
6.907-277.0	550	268 228 910	6.903-035.0	543	263 629	6.906-076.0	-	930 002 747
6.907-409.0	541	263 612 41	6.903-036.0	543	263 628	6.906-078.0	-	930 001 496

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number

Kärcher

Manuf. Nr.	page	R+M Nr.	Manuf. Nr.	page	R+M Nr.	Manuf. Nr.	page	R+M Nr.
6.906-085.0	-	930 001 503	6.632-190.0	90	901 522	6.905-864.0	-	930 001 499
6.906-097.0	570	268 141 0	6.651-646.0	116	565 50	6.905-877.0	541	263 612 43
6.906-101.0	573	268 151 9	6.651-647.0	115	561 50	6.905-878.0	541	263 612 42
6.906-104.0	573	268 152 3	6.651-648.0	114	564 60	6.905-982.0	-	930 002 744
6.906-104.0	573	268 152 3	6.651-649.0	114	561 98	6.905-986.0	-	930 001 588
6.906-106.0	571	268 111 8	6.685-868.0	90	910 12	6.906-007.0	-	930 000 912
6.906-117.0	573	268 143 5	6.685-949.0	90	910 13	6.906-028.0	-	930 002 234
6.906-118.0	573	268 143 61	6.686-591.0	73	010 000 02	6.906-029.0	-	930 002 152
6.906-118.0	573	268 143 6	6.778-198.0	-	200 072 614	6.906-054.0	-	930 001 494
6.906-132.0	-	930 001 156	6.900-222.0	544	265 020	6.906-055.0	-	930 001 492
6.906-206.0	-	930 001 588	6.900-384.0	540	263 623 1	6.906-076.0	-	930 002 747
6.906-332.0	-	930 001 496	6.900-385.0	544	263 619	6.906-078.0	-	930 001 496
6.906-332.0	-	930 001 496	6.900-425.0	543	263 618 1	6.906-085.0	-	930 001 503
6.906-346.0	-	930 002 914	6.900-514.0	540	263 623	6.906-097.0	570	268 141 0
6.906-383.0	-	264 012 5	6.902-074.0	540	263 623	6.906-101.0	573	268 151 9
6.906-384.0	-	263 612 6	6.903-034.0	543	263 620	6.906-104.0	573	268 152 3
6.906-512.0	-	263 612 3	6.903-035.0	543	263 629	6.906-104.0	573	268 152 3
6.906-513.0	541	263 612 4	6.903-036.0	543	263 628	6.906-106.0	571	268 111 8
6.906-523.0	573	268 143 6	6.903-234.0	544	265 019	6.906-117.0	573	268 143 5
6.906-563.0	-	930 002 913	6.903-345.0	-	930 000 476	6.906-118.0	573	268 143 61
6.906-755.0	543	263 615 1	6.903-347.0	-	930 002 662	6.906-118.0	573	268 143 6
6.907-276.0	550	268 228 900	6.903-403.0	544	263 219	6.906-132.0	-	930 001 156
6.907-277.0	550	268 228 910	6.903-409.0	-	930 002 152	6.906-206.0	-	930 001 588
6.907-409.0	541	263 612 41	6.903-862.0	543	263 617 2	6.906-332.0	-	930 001 496
6.907-409.0	541	263 612 4	6.903-887.0	543	263 217	6.906-332.0	-	930 001 496
6.907-512.0	542	263 613	6.904-045.0	573	268 152 3	6.906-346.0	-	930 002 914
6.951-073.0	-	930 000 182	6.904-051.0	-	268 150 6	6.906-383.0	-	264 012 5
6.951-073.0	-	930 000 183	6.904-058.0	571	268 111 8	6.906-384.0	-	263 612 6
6.951-073.0	-	930 000 183	6.904-059.0	570	268 141 0	6.906-512.0	-	263 612 3
6.951-073.0	-	930 000 183	6.904-060.0	573	268 143 5	6.906-513.0	541	263 612 4
6.951-164.0	-	930 000 183	6.904-068.0	550	268 280 210	6.906-523.0	573	268 143 6
6.958-170.0	-	930 001 245	6.904-072.0	573	268 151 9	6.906-563.0	-	930 002 913
6.958-171.0	-	930 001 243	6.904-097.0	570	268 141 0	6.906-755.0	543	263 615 1
6.958-172.0	-	930 001 247	6.904-123.0	550	268 280 220	6.907-276.0	550	268 228 900
6.958-173.0	-	930 001 246	6.904-123.0	573	268 152 2	6.907-277.0	550	268 228 910
6.958-234.0	-	930 001 371	6.904-143.0	573	268 150 7V	6.907-409.0	541	263 612 41
6.958-235.0	-	930 001 369	6.904-143.0	573	268 150 7	6.907-409.0	541	263 612 4
6.959-130.0	573	268 159 8	6.904-167.0	573	268 150 7	6.907-512.0	542	263 613
6.989-903.0	255	559 94	6.904-206.0	550	268 228 300	6.951-073.0	-	930 000 182
6.989-903.0	255	559 95	6.904-208.0	573	268 153 2	6.951-073.0	-	930 000 183
6.996-003.0	-	930 001 482	6.904-210.0	573	268 154 2	6.951-073.0	-	930 000 183
7.362-501.0	-	050 001 361	6.904-218.0	573	268 152 8	6.951-073.0	-	930 000 183
7.367-000.0	-	157 465 0	6.904-263.0	573	268 150 7	6.951-164.0	-	930 000 183
7.373-022.0	24	735 50	6.904-283.0	550	268 228 600	6.958-170.0	-	930 001 245
8.300-481.0	115	561 30	6.904-284.0	550	268 228 620	6.958-171.0	-	930 001 243
9.315-002.0	-	519 501	6.904-290.0	573	268 158 7	6.958-172.0	-	930 001 247
9.872-250.0	326	200 555 565	6.904-294.0	573	268 160 3	6.958-173.0	-	930 001 246
6.541-025.0	431	107 408 0	6.904-312.0	573	268 157 8	6.958-234.0	-	930 001 371
6.541-026.0	431	107 308 0	6.904-322.0	573	268 150 72	6.958-235.0	-	930 001 369
6.541-027.0	430	107 608 0	6.904-329.0	573	268 303 701	6.959-130.0	573	268 159 8
6.541-028.0	431	107 708 0	6.904-333.0	573	268 159 0	6.989-903.0	255	559 94
6.541-039.0	-	107 808 0	6.904-360.0	550	268 228 330	6.989-903.0	255	559 95
6.541-039.0	430	107 908 0	6.904-367.0	550	268 228 310	6.996-003.0	-	930 001 482
6.610-212.0	560	262 000 102	6.904-367.0	550	268 228 300	7.362-501.0	-	050 001 361
6.622-055.0	-	800 20	6.904-488.0	570	268 141 0	7.367-000.0	-	157 465 0
6.622-086.0	97	805 00	6.905-506.0	-	930 002 255	7.373-022.0	24	735 50
6.622-132.0	97	805 50	6.905-587.0	-	930 002 694	8.300-481.0	115	561 30
6.631-105.0	84	200 006 436	6.905-622.0	-	930 000 606	9.315-002.0	-	519 501
6.631-726.0	-	912 245	6.905-624.0	-	930 000 691	9.872-250.0	326	200 555 565
6.631-739.0	-	912 245	6.905-625.0	-	930 001 158			
6.631-792.0	87	912 00	6.905-651.0	-	930 000 692			

Reference list manufacturer number to R+M number



IPC

Manuf. Nr.	page	R+M Nr.	Manuf. Nr.	page	R+M Nr.	Manuf. Nr.	page	R+M Nr.
AVTB39119	-	740 20	IPPR89429	-	202 300 677	LCPR12985	244	202 300 400
AVTB39119	-	740 009	KTRI00038	-	544 323 14	LCPR19891	-	520 95
FTAC23737	31	200 033 900	KTRI10689	218	202 000 044	LCPR24936	375	540 502
GUGO10368	-	520 800 7	KTRI14653	63	200 261 528	LCPR24937	-	200 070 510
GUGO10371	-	050 000 070	KTRI16958	63	200 261 526	LCPR24937	375	540 40
GUVVR16593	-	568 008	KTRI28914	-	109 620	LCPR24937	375	540 402
ioppr86137	-	202 300 676	KTRI43422	202	200 458 255	LCPR29360	-	515 00
IPIP08138	-	202 000 580	LAFN06313	-	200 080 635	LCPR33263	-	653 345 06
IPIP08138	230	202 000 500	LAGR44154	-	200 080 635	LCPR46571	-	070 000 420
IPIP19772	218	201 500 581	LCLC06368	-	106 921 00	LCTE00034	277	200 056 500
IPIP86827	-	202 300 840	LCLC41140	-	521 203	LCTE41970	292	200 357 545
IPIP89840	-	202 300 674	LCLC86829	-	200 000 240	LCTE41971	292	200 458 655
IPPR12973	-	202 000 820	LCPR04507	-	521 101	LCTE41971	292	200 458 655
IPPR18062	-	202 000 810	LCPR12975	249	513 203 1	LCTE47892	292	200 458 635
IPPR43065	-	202 300 780	LCPR12976	249	513 303 1	LPCR12985	-	202 300 390
IPPR45298	-	202 300 675	LCPR12977	249	513 403 1	MECI88352	-	200 261 480
IPPR45817	-	202 300 676	LCPR12978	-	513 503 1	MEPF06949	-	200 005 500
IPPR86137	-	202 300 685	LCPR12979	-	513 603 1	MEPF17533	63	200 261 513

Reference list manufacturer number to R+M number

IPC

Manuf. Nr.	page	R+M Nr.	Manuf. Nr.	page	R+M Nr.	Manuf. Nr.	page	R+M Nr.
MEPF88344	63	200 261 517	RCIN17663	108	200 044 510	UGLN02300	287	618 30
MLML13335	63	200 261 513	RCIN17663	108	568 00	UGLN02302	287	610 70
MPVR46562	-	020 008 615	RCIN88940	108	200 044 510	UGLN02304	287	618 40
MPVR46563	-	020 008 620	RCVR13030	-	010 006 70	UGLN02306	287	610 80
MPVR46570	-	020 003 400	RODS10201	-	010 003 165	UGLN02307	287	618 50
MPVR46572	-	020 003 410	SPID19889	-	522 506	UGLN02309	287	610 90
NBNB04978	-	106 000	SPID19890	-	523 10	UGLN02310	287	618 70
NBNB12340	-	106 100	TBAP09624	-	410 027 010	UGLN02311	287	611 10
PVVR08143	-	202 000 030	TBAP15631	132	345 101 310	UGLN02312	287	618 90
PVVR08149	-	502 912 0	TBAP15632	132	355 101 310	UGLN02313	287	611 30
PVVR08615	-	040 000 440	TBAP16291	132	343 101 310	UGLN02314	287	619 00
PVVR08617	-	020 001 290	TBAP16654	132	343 101 315	UGLN02316	287	611 40
PVVR08618	-	010 001 700	TBAP16655	132	343 101 320	UGLN02323	287	610 07
PVVR14120	-	010 002 561	TBAP16656	132	345 101 315	UGLN03327	287	618 00
PVVR14121	-	010 002 562	TBAP16657	132	345 101 320	UGLN03329	287	610 30
PVVR16955	-	020 002 850	TBAP20264	135	460 012 208	UGLN05172	287	610 40
PVVR16956	-	200 036 000	TBAP22182	-	355 101 330	UGLN05174	-	624 90
PVVR16957	-	040 001 490	TBAP23853	184	410 012 020	UGLN11304	287	610 10
PVVR17571	63	200 261 527	TBAP24406	184	410 012 010	UGLN11777	287	618 60
PVVR21711	-	020 001 910	TBAP25324	132	343 100 310	UGLN15293	287	611 00
PVVR37732	-	060 000 270	TBAP26473	-	330 112 308	UGLN21188	287	610 20
PVVR46566	211	202 300 490	TBAP28305	144	460 000 208	UGLN21878	287	617 65
PVVR46567	-	202 300 420	TBAP28590	-	340 100 308	UGLN28784	188	650 10
PVVR88350	-	020 001 860	UGLN00044	287	618 10	UGLN28785	188	650 20
PVVR88456	-	010 001 790	UGLN02287	287	617 90	VVAZ15529	62	200 261 655
RCGR08658	26	200 066 500	UGLN02293	287	610 50	VVAZ87716	62	200 261 551
RCIN10577	-	565 30	UGLN02295	287	618 20	VVAZ88040	62	200 261 660
RCIN10810	-	569 70	UGLN02297	287	610 60			

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Alto / WAP

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
1187	-	151 383 0	4011	12	723 20	7811	300	632 60
1310	12	722 10	5149	541	263 612 1	7813	-	635 40
1311	12	720 20	5253	543	265 016	7814	-	635 50
1381	131	791 42	5521	20	306 90	7825	300	639 57
1479	90	915 210 100 3	5521	20	305 20	7974	-	107 008 0
1479	-	915 122 0	5567	-	651 402	7975	430	107 208 0
1657	-	967 380 00	5709	24	110 00	7976	430	107 608 0
1716	12	720 10	5889	-	657 202	7979	431	107 408 0
1717	12	722 20	5895	114	564 50	7989	-	109 506
1718	12	722 30	6086	543	263 618 1	7990	503	109 516
1719	12	722 40	6149	-	790 30	8050	20	305 10
1753	95	822 50	6343	-	189 211 0	8051	28	200 035 500
1756	95	822 50	6425	30	701 403	8069	-	514 302
2463	12	723 30	6429	539	263 644 20	8070	-	514 502 9
2504	-	635 20	6465	-	305 50	8070	-	514 502
2506	-	635 60	6577	23	711 56	8071	-	514 702 9
2507	-	635 80	6698	90	910 15	8071	-	514 702
2803	-	967 014 00	6868	-	982 100 00	8072	-	514 802
3250	12	720 30	7102	544	265 020	8072	-	514 802 9
3251	12	723 40	7270	-	263 612 3	8074	-	514 502 91
3252	12	723 10	7599	548	265 046 30	8075	-	513 114
3329	126	552 001	7754	90	915 210 100 3	8076	23	711 51
3330	126	552 101	7754	-	915 122 0	8097	300	632 20

Reference list manufacturer number to R+M number

Alto / WAP

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
8301	27	950 50	26691	557	262 080 102	49600	557	262 080 102
8466	27	950 10	29582	45	903 847 00	52964	431	107 708 0
8526	-	514 102	29747	549	268 264 000	52966	431	107 308 0
8526	-	514 102 9	30063	549	268 263 610	53654	36	523 76
8528	-	635 30	30223	115	564 00	56875	-	200 860 570
8634	130	569 10	31314	-	850 52	56899	-	342 194 515
8675	-	569 12	31753	28	200 031 600	56899	-	341 194 610
9326	51	151 380 0	32541	13	727 10	56901	-	341 194 615
10022	549	268 264 300	32541	13	728 311	56901	-	342 194 520
10263	12	723 00	33308	99	679 46	56962	-	658 104 02
10356	36	523 72	33465	99	679 202	60076	549	268 264 210
11162	78	189 321 0	34641	549	268 263 800	60077	549	268 264 200
11375	324	524 10	37337	114	561 90	60356	541	263 612 4
11376	324	524 20	37450	123	108 300 01	61069	-	901 641 00
11618	549	268 263 620	37700	112	568 70	61074	-	441 200 41
11984	539	265 049 20	37700	113	108 700 07	61076	-	982 176 00
11985	539	263 649 20	37871	-	109 717	61077	45	340 123 01
14238	539	265 044 25	40455	543	263 618	61078	46	340 124 01
14240	539	263 249 20	40458	543	265 017	61079	45	340 088 01
14295	543	263 615	41164	549	268 263 710	61079	45	340 130 01
14577	110	581 70	41164	549	268 263 700	61115	-	340 194 310
14987	140	340 176 310	41171	102	200 080 600	61252	-	340 194 320
15101	-	264 052 3	41306	140	340 176 320	61256	28	731 21
15101	540	265 050	41394	300	632 40	61274	557	262 140 102
15307	-	262 549 20	42160	549	268 263 520	61369	23	711 55
15312	-	263 646 20	42160	549	268 263 510	61605	550	268 289 400
15326	539	262 548 30	42628	90	915 202 4	61659	99	675 41
15348	-	263 612 5	42628	-	915 102 4	61951	-	330 193 310
15349	542	263 612 52	43685	248	200 601 600	62012	557	262 140 102
15475	549	268 264 310	46918	201	200 049 970	62144	131	318 272 1
15518	75	121 412 92	46918	201	200 049 830	62201	61	133 362 8
16163	-	200 860 570	46920	196	411 015 010	62363	-	340 194 315
16208	116	567 30	46920	195	410 015 010	62381	45	001 560 01
16443	-	520 800 9	46921	200	650 10	62382	45	001 300 01
16741	-	121 413 22	47310	195	410 015 020	62383	45	001 760 01
16833	-	050 000 386	47310	196	411 015 020	62384	-	001 860 01
17211	-	200 055 626	48748	557	262 120 202	62455	-	001 120 02
17216	-	200 055 540	48872	306	200 458 450	62456	-	001 890 02
17387	300	630 40	48874	306	200 458 445	62457	-	015 110 02
18059	-	790 305	48875	306	200 458 455	62517	-	015 090 02
18430	294	519 32	48916	557	262 080 102	62518	-	015 100 02
19643	-	918 328 00	48967	-	679 19	62519	-	001 860 11
20316	-	599 121 5	48981	306	200 458 470	62520	-	001 560 02
20317	-	599 181 5	48982	306	200 458 460	63030	45	340 127 01
20446	434	740 14	48983	306	200 458 410	63060	45	340 096 01
20863	-	330 195 000	49181	196	411 015 030	63245	-	330 193 320
24855	86	833 00	49181	195	410 015 030	63347	30	701 405
24856	86	833 10	49283	306	200 357 435	63564	-	001 520 01
24865	-	110 05	49285	306	200 357 445	64195	541	263 612 2
25371	308	200 357 155	49287	306	200 357 455	64354	45	340 006 01
25372	308	200 357 145	49364	-	653 035 02	64355	45	340 028 01
25373	308	200 357 135	49366	-	653 045 02	64540	116	567 50
25447	-	522 102	49368	-	653 055 02	65437	306	200 357 440
25598	483	106 995 070 1	49587	131	903 598 00	66159	-	318 272 3
26635	97	805 40	49594	557	262 120 202	66161	254	559 101

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number

Alto / WAP

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
66162	-	559 261	6101766	147	357 144 510	106402171	314	653 855 014
80853	483	106 995 015 2	6101767	147	352 144 510	106402190	223	202 600 545
80919	27	950 40	6101767	144	351 144 610	106402190	222	202 300 570
1000001	424	596 153 8	6101767	147	357 144 510	106403011	274	200 054 630
1110790	222	202 300 560	6120486	255	559 20	106403168	438	763 534 30
1117076	-	516 055 5	6122411	-	653 050 05	106408234	392	200 073 528
1119402	222	202 300 570	6241288	87	912 540	106420191	221	202 600 632
1400274	127	200 045 505	6400000	28	200 035 510	107142542	154	330 110 081 5
1401983	144	351 144 615	6401050	314	653 850 014	107400052	539	264 049 20
1401983	147	352 144 515	6401051	314	653 855 014	107400562	550	268 268 710
1401983	147	357 144 515	6401052	314	653 860 014	301000173	31	734 40
1401991	144	351 144 620	6401053	314	653 865 014	301000487	116	565 50
1401991	147	352 144 520	6401067	-	559 102	301000488	115	564 30
1401991	147	357 144 520	6401242	82	200 167 850	301000645	254	559 262
1402007	-	357 144 525	6401243	82	200 167 855	301000886	99	675 71
1402015	-	357 144 530	6401244	82	200 160 615	301000887	99	676 01
1402064	144	356 144 615	6401244	82	200 160 616	301001108	306	200 357 450
1402064	141	355 644 315	6401246	82	200 160 617	301001146	55	170 275 7
1402064	147	357 144 515	6401247	82	200 167 860	301001148	55	170 185 7
1402072	144	356 144 620	6404368	-	200 072 646	301001149	58	170 188 7
1402072	141	355 644 320	6404368	-	200 072 651	301001153	55	170 286 4
1402072	147	357 144 520	6404368	-	200 072 648	301001489	-	170 186 6
1402080	-	355 644 325	6404369	-	200 072 647	301002490	196	411 035 010
1402098	-	355 644 330	6404369	-	200 072 649	301002491	196	411 035 020
1402759	-	355 644 350	6410755	-	653 045 05	301002492	196	411 035 030
1402890	127	200 045 505	6410762	-	522 505	301150009	98	850 60
1402932	-	355 644 303	6410763	-	515 05	302000449	570	268 156 7
1402940	-	355 144 305	6410765	-	523 805	302000527	570	268 156 8
1405569	140	340 144 310	6410766	196	400 032 015	302000658	549	268 268 600
1405666	140	340 144 320	6410792	-	400 032 008	302002509	543	263 617
1600493	127	557 204	6410884	-	658 104 55	302002798	542	263 813
1602945	-	527 003 004	6410885	-	658 103 55	302002880	542	265 814
1603101	127	557 209	6411013	255	559 55	302002892	570	268 300 003 5
1603612	424	593 15	7110020	397	106 024 600	302002892	570	268 300 000 5
1603620	424	595 15	8000115	196	400 032 010	302003384	559	262 120 104
1603638	424	594 15	8000205	196	400 032 020	302003794	542	265 000 452
1603760	-	593 30	8001115	196	410 037 010	302003795	542	265 000 451
1603786	-	594 30	8001155	196	410 037 015	302004000	-	268 300 100 5
1603794	-	595 30	8001205	196	410 037 020	302004000	-	268 300 109 0
30000031	-	792 025 100	8001255	196	410 037 025	302004004	570	268 300 200 5
3000049	-	791 825 100	8001305	196	410 037 030	302004004	570	268 300 206 0
3801024	-	825 45	8002405	196	410 037 040	309002061	-	200 129 135
3821492	-	200 015 512	8051390	293	200 009 600	1408244500	543	263 217
4810214	-	365 144 320	8065020	200	650 20	606410...	-	520 905
4810219	-	365 144 310	101405641	-	330 115 431 082	6400227 + 6402341	443	739 50
5301378	27	950 10	101406176	154	330 110 081 5			
6101766	141	355 644 310	102802856	306	200 458 410			
6101766	144	356 144 610	103822408	-	200 015 511			

Reference list manufacturer number to R+M number

Falch

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
8452137	28	200 031 610	d2565	300	618 40	s012	-	358 100 302 9
8452359	200	651 30	d2570	300	618 50	s108	-	420 312 008
8452965	289	200 056 500	d2575	300	618 60	s108	196	410 012 008
8453802	130	569 20	dk345	200	650 10	s115	196	420 312 015
8454312	-	200 006 500	dk355	200	650 20	s115	196	410 012 015
8454469	68	200 280 510	ds090	326	200 555 455	s352	24	735 60
8454579	28	200 035 510	ds110	326	200 555 475	v001	112	568 10
8455249	27	200 015 500	e0111202	-	180 602 70	v005	115	561 39
8455250	64	200 261 513	e0111830	45	520 400 09	v006	114	561 49
8455568	64	200 261 526	e0190039	-	200 015 505	v007	114	560 39
8455569	64	200 261 527	e0190040	27	200 015 535	v008	294	519 70
8455595	230	202 000 044	e0190041	26	200 066 500	v044	130	569 40
8455770	84	200 006 490	e0800008	200	651 10	z0000003	27	950 40
8455770	84	200 006 490	e0800010	200	651 20	z0000010	320	545 504 5
8455908	27	200 015 510	e0800019	326	200 555 430	z0000116	314	655 500 520
8456641	64	200 261 526	e0800030	300	611 40	z0000116	314	655 500 525
8457517	200	650 00	e0800031	300	619 00	z0000128	-	517 603 9
8457522	221	202 600 550	e0800139	200	651 15	z0000137	293	200 009 600
8457538	294	519 60	e0800217	300	618 70	Z0000160	326	200 555 555
8457598	324	522 10	e0800218	300	618 80	Z0000161	326	200 555 565
8457615	63	200 261 500	e0800219	300	618 90	Z0000162	326	200 555 575
c010	-	953 50	e0800220	-	618 95	z0000164	282	200 154 520
d0020	300	610 05	e0810029	294	200 000 003	Z0000167	326	200 555 555
d0025	300	610 07	e1190045	250	200 550 620	Z0000168	326	200 555 565
d0030	300	610 10	e1600007	33	734 55	Z0000169	326	200 555 575
d0035	300	610 20	e1600007	33	734 54	z0000180	306	200 458 645
d0040	300	610 30	e1600020	33	734 76	z0000181	306	200 458 655
d0045	300	610 40	e1600023	33	734 75	z0000209	241	202 750 535
d0050	300	610 50	e1600023	33	734 74	z0000210	220	202 300 760
d0055	300	610 60	e1700014	-	905 105	z0000210	221	202 600 760
d0060	300	610 70	f0000007	27	950 10	Z0000256	326	200 555 530
d0065	300	610 80	IP-KIT123	45	340 123 01	Z0000260	326	200 555 530
d0070	300	610 90	IP-KIT124	46	340 124 01	z0000400	114	561 69
d0075	300	611 00	IP-KIT125	-	340 125 01	z0000401	115	561 59
d0080	300	611 10	IP-KIT130	45	340 130 01	z0000510	434	750 40
d0085	300	611 20	IP-KIT137	-	340 137 01	z0000515	-	109 506
d0090	300	611 30	IP-KIT23	45	340 023 01	z0000516	503	109 516
D051	326	200 555 410	IP-KIT88	45	340 088 01	z0000517	-	109 526
D057	326	200 555 410	IP-KIT90	-	340 090 01	z0000518	503	109 536
d2510	-	617 40	mo59	-	200 505 560	z030	281	070 003 502
d2520	300	617 50	n003	-	565 29	z031	281	070 008 002
d2525	300	617 65	n005	116	565 39	z032	281	070 008 002
d2530	300	617 70	n006	116	565 59	z033	281	070 012 002
d2535	300	617 80	n099	104	518 39	z054	221	202 600 760
d2540	300	617 90	n220	105	570 49	z055	240	203 600 556
d2545	300	618 00	n260	427	706 03	z073	191	110 10
d2550	300	618 10	s001	171	358 100 310 9	z075	28	731 21
d2555	300	618 20	s002	171	358 100 320 9	z081	306	200 357 545
d2560	300	618 30	s003	171	358 100 330 9			

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number

Kränzle

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
12131	-	517 603	13291	26	535 15	41084	-	345 616 825
12131	-	517 603 9	13360	114	561 40	41104	320	545 505 5
12133	274	516 605	13365	116	565 30	41104	-	200 036 545
12133	273	517 054 630	13366	116	565 311	41105	334	521 030 300
12133	274	200 054 630	13367	-	565 10	41156	315	658 104 539
12204	228	200 810 530	13368	-	565 20	41156	315	658 104 53
12320	220	202 300 500	13368	118	565 251	41265	-	345 100 001
12320	229	201 100 500	13369	-	565 40	41631	50	156 375 0
12320	231	507 001 500	13370	118	565 80	41716	-	050 000 590
12320	231	201 500 500	13371	114	561 60	41716	-	124 171 6
12320	221	202 600 500	13372	115	561 30	43060	50	155 894 0
12326	220	202 300 520	13373	115	561 50	43081	-	156 376 0
12326	231	507 001 550	13374	118	560 50	43083	136	345 101 320
12326	-	200 810 710	13376	-	543 20	43098	-	155 895 0
12326	230	201 500 550	13377	-	544 301 1	43416	148	390 000 210
12326	221	202 600 520	13450	254	559 26	43416	136	330 100 310
12327	-	501 20	13451	254	559 26	44025	30	701 402
12328	222	202 300 684	13470	222	040 001 255	44077	99	679 45
12328	223	202 600 684	13471	254	559 103	44080	98	124 408 0
12391	224	202 300 860	13475	254	040 001 256	44140	78	189 321 0
12391	224	202 600 860	14121	-	121 412 1	44877	136	340 101 320
12393	261	513 103	14123	50	155 898 0	44878	136	340 101 310
12393	261	513 103 9	14141	69	533 31	44878	136	343 101 310
12420	267	511 505 905	14141	69	200 250 500	44879	136	340 101 315
12441	254	559 104	14142	69	533 351	46150	-	653 030 08
12442	337	512 495 90	15013	-	155 897 0	46150	-	653 030 089
12480	-	201 100 523	15018	87	912 00	47701	136	355 101 315
12480	224	202 300 701	15027	324	522 10	47702	136	355 101 320
12480	228	200 810 750	15028	324	524 10	47703	-	355 101 330
12480	224	202 300 860	15039	85	548 30	47704	-	355 101 340
12480	224	202 600 701	15040	324	524 20	47705	-	355 101 350
12480	224	202 600 860	26002	-	519 15	47750	446	200 071 705
12481	222	202 300 684	26002	294	200 010 700	48015	-	390 013 381 5
12481	223	202 600 684	40016	-	551 502 43	48015	155	330 113 381 5
12490	220	202 300 520	40026	-	903 608 00	49116	-	330 113 381 2
12490	231	507 001 550	40170	155	330 107 815	49116	-	390 013 381 2
12490	-	200 810 710	40170	155	390 007 815	53331	69	200 250 500
12490	230	201 500 550	40517	50	155 892 0	121311	273	517 054 610
12490	221	202 600 520	41031	-	156 374 0	121311	272	517 501 9
12491	220	202 300 760	41031	-	124 103 1	121311	272	517 501
12491	221	202 600 760	41051	197	412 012 008	121315	275	516 03
12491	230	201 500 760	41051	196	410 012 008	121316	-	516 13
12492	223	202 600 625	41058	197	412 012 015	123202	-	201 100 523
12492	231	507 001 562	41058	196	410 012 015	123202	224	202 300 701
12492	222	202 300 605	41068	327	520 805 5	123202	228	200 810 750
12493	220	202 300 500	41072	-	653 840 017	123202	224	202 300 860
12493	229	201 100 500	41072	-	653 840 018	123202	224	202 600 701
12493	231	507 001 500	41072	311	653 140 018 9	123202	224	202 600 860
12493	231	201 500 500	41075	-	515 00	123271	220	202 300 760
12493	221	202 600 500	41076	-	513 113	123271	221	202 600 760
12850	-	410 057 010	41080	155	345 616 830	123271	230	201 500 760
12850	-	400 057 010	41080	-	345 101 330	123272	223	202 600 625
13159	50	155 899 0	41081	136	345 101 310	123272	231	507 001 562
13201	289	657 20	41081	-	347 101 530	123272	222	202 300 605
13204	289	200 056 500	41081	136	345 100 310	123722	222	202 300 605
13220	-	542 20	41082	136	340 100 315	123922	261	513 203
13237	113	790 35	41083	155	345 616 820	123922	261	513 203 9
13286	130	569 20	41083	136	345 101 320	123925	-	513 043 9
13290	26	535 10	41084	-	345 101 325	123925	-	513 043

Reference list manufacturer number to R+M number



Kränzle

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
132506	255	559 93	150383	28	731 21	410725	310	653 040 039
132735	-	790 351 0	401701	-	332 107 815	410726	310	653 055 03
132736	113	790 351 00	401701	-	331 107 815	410727	-	653 870 017
132872	294	519 40	410132	-	155 945 0	410727	-	653 870 018
132874	114	561 96	410164	27	734 10	410728	311	653 880 016
132912	427	706 031	410491	50	155 890 0	410728	-	653 880 017
133601	112	568 00	410492	50	155 890 0	410728	-	653 880 018
133602	112	568 19	410500	-	523 704	410738	310	653 030 039
133602	112	568 10	410501	324	522 504	410738	310	653 030 03
133652	116	565 50	410501	-	522 504 9	410739	-	653 835 017
133824	-	543 30	410531	-	200 860 710	410739	-	653 835 018
133901	392	200 073 512	410541	148	390 000 208	410801	-	346 101 630
133902	392	200 073 514	410541	-	330 100 308	410801	-	347 101 530
133911	392	200 073 528	410541	148	460 000 208	410811	143	346 101 610
133912	392	200 073 530	410581	197	412 012 010	410811	146	347 101 510
133921	-	020 073 513	410581	196	410 012 010	410811	146	347 101 510
133922	393	020 073 520	410681	326	520 93	410821	146	347 101 515
135301	392	200 073 512	410713	306	200 357 545	410821	143	346 101 615
135302	392	200 073 751	410714	306	200 357 555	410831	143	346 101 620
135303	392	200 073 528	410723	311	653 145 018 9	410831	146	347 101 520
135311	392	200 073 514	410723	-	653 845 017	410833	-	342 100 530
135313	392	200 073 530	410723	-	653 845 018	410833	-	341 100 630
141232	-	155 900 0	410724	-	653 855 017	410841	-	346 100 625
141351	75	530 10	410724	-	653 855 018	410841	-	347 100 525
150041	-	513 111	410724	311	653 155 018 9	411561	315	658 105 539
150381	28	730 25	410725	310	653 040 03	411561	315	658 105 53

Reference list manufacturer number to R+M number

Kränze

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
411562	315	658 103 039	584019	-	263 624 2	12430-045	314	653 845 023
411562	315	658 103 03	584020	543	263 624 1	12430-050	314	653 850 023
412570	27	950 10	584021	-	263 612 3	12430-055	314	653 855 023
412597	434	740 201	584023	544	263 619 1	12430-07	314	653 870 023
412597	434	740 20	584026	542	265 007	12900-03	260	512 903 049
412598	434	740 30	584027	542	265 006	14141K	69	533 31
412598	434	740 301	584028	-	263 612 5	14141K	69	200 250 500
412601	435	741 01	584030	540	263 623	14142K	69	533 351
412602	435	741 011	584043	545	263 656	410581-F	-	410 012 010 1
412651	-	340 100 002	584101	543	265 017	410581-F	-	410 012 010 1
414161	136	330 100 320	584102	543	265 015	410582-F	197	412 012 020
416491	-	155 891 0	584104	545	265 025	410582-F	196	410 012 020
430831	146	347 101 520	584105	544	265 018	410583-F	197	412 012 025
434161	148	390 000 220	584105	544	265 019	410583-F	196	410 012 025
434161	136	330 100 320	584105	544	265 020	410584-F	197	412 012 030
434162	143	331 100 610	584106	540	265 023	410584-F	196	410 012 030
434162	146	332 100 510	12141291	69	200 250 490	41058-F	-	412 012 015 1
434163	146	332 100 520	123922-D2504	260	513 204 039	41058-F	-	410 012 015 1
434163	143	331 100 620	123922-D25045	260	513 204 539	41570-028	-	653 030 079
438291	143	331 100 615	123922-D2505	260	513 205 039	41570-03	-	653 030 079
438291	146	332 100 515	123922-D2506	260	513 206 039	41570-03	-	653 030 089
440773	99	679 47	123922-D2507	260	513 207 039	41570-042	-	653 040 089
443812	137	345 601 320	123922-M20035	260	513 203 539	41570-045	-	653 045 079
443813	146	357 601 520	123922-M20045	260	513 204 539	41570-07	-	653 070 079
443813	143	346 601 620	123922-M2008	260	513 208 039	41571-045	310	653 045 039
461501	-	653 045 089	123922-M2010	260	513 210 039	41571-045	310	653 045 03
461501	-	653 045 08	123922-M2011	260	513 211 039	41580-05	311	653 150 018
461502	-	653 060 089	123922-M20125	260	513 212 539	41580-05	311	653 150 018 9
461502	-	653 060 08	12393-D2507	260	513 107 539	41580-10	-	653 810 018
477021	155	355 115 332 0	12393-M20028	260	513 103 039	41580-10	306	200 458 610
480151	-	332 113 381 5	12393-M2003	260	513 103 039	41580-10	-	653 810 017
559104	254	559 104	12393-M20042	260	513 104 039	41580-11	307	200 458 830
584006	545	264 025	12393-M20045	260	513 104 539	41580-11	-	653 811 018
584007	544	263 619	12395-D2503	-	657 330 389	41580-11	-	653 811 017
584008	543	263 617	12395-D2504	-	657 340 389	42403-03	-	653 030 099
584009	543	263 615	12395-D25045	-	657 345 389	KKF04	200	122 370 170
584011	540	263 623 1	12395-D2505	-	657 350 389	KKF055	200	650 50
584012	544	264 019	12395-D25055	-	657 355 389	KNR045	201	200 049 825
584016	541	263 612 33	12425-055	-	653 055 023	KNR055	201	200 049 845
584017	543	263 618 1	12425-075	-	653 075 023			

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.

Reference list manufacturer number to R+M number



Weidner

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
390-1301030	-	832 00	HDA-112200	90	915 202 4	HDD-158800	300	610 30
390-9900297	128	203 100 655	HDA-113700	511	925 712 301	HDD-158900	300	610 40
390-9900300	128	040 005 467	HDA-113700	-	925 710 241	HDD-159000	300	610 50
EPA-IWS0201	45	002 010 01	HDA-132000	443	739 50	HDD-159100	300	610 60
EPI-34006201	45	340 062 01	HDA-132500	443	739 60	HDD-159200	300	610 70
EPI-4710005	-	471 000 51	HDA-133000	443	739 50	HDD-159500	300	611 30
EPI-9027050	-	902 705 00	HDA-201000	20	305 20	HDD-159600	300	611 40
EPI-9036160	-	903 616 00	HDA-202000	28	731 21	HDD-159800	300	610 80
EPI-9038470	45	903 847 00	HDA-202000	27	950 10	HDE-171910	261	070 000 050
EPKY-141291	69	121 412 91	HDA-202300	28	200 035 510	HDE-172500	264	070 000 190
ETD-200006490	84	200 006 490	HDA-203000	12	720 10	HDK-190000	196	410 012 010
ETD-200006490	84	200 006 490	HDA-204000	12	720 20	HDK-190100	196	410 012 015
ETD-4130	68	200 280 646	HDA-205000	12	724 15	HDK-190200	196	410 012 020
ETD-4135	68	200 280 526	HDA-208000	23	711 50	HDK-190300	196	410 012 025
ETD-434000	-	200 261 528	HDA-209000	23	711 55	HDK-190400	196	410 012 030
ETD-437100	-	534 902 1	HDD-156000	300	617 70	HDK-190600	196	410 012 040
ETD-510000	-	200 006 500	HDD-156100	300	617 80	HDK-190800	-	410 012 050
ETI-150300	116	565 501	HDD-156200	300	617 90	HDK-191110	200	651 15
ETI-150310	116	565 59	HDD-156300	300	618 00	HDK-191200	201	200 049 800
ETI-150800	114	564 40	HDD-156400	300	618 10	HDK-191200	201	200 049 830
ETI-152200	281	070 008 002	HDD-156500	300	618 20	HDK-194010	195	420 301 010
ETI-154000	104	518 32	HDD-156600	300	618 30	HDL-143000	327	520 804 5
ETM-R000110	73	995 000 00	HDD-156800	300	618 50	HDL-143000	327	520 815 0
ETM-R000112	-	100 446 01	HDD-156900	300	618 70	HDL-143500	326	520 93
ETM-R000119	-	947 346 00	HDD-157200	300	618 90	HDL-155500	394	540 300
HDA-112200	-	915 102 4	HDD-157300	300	619 20	HDL-155600	394	540 40

Reference list manufacturer number to R+M number

Weidner

Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.	Manufacturer Nr.	page	R+M Nr.
HDL-155600	-	200 070 644	HDL-202900	264	512 893 1	ISZ-003603	543	263 620
HDL-161500	-	656 503	HDP-170700	220	202 300 760	ISZ-003614	543	263 618
HDL-161900	-	653 340 03	HDP-170700	221	202 600 760	ISZ-003615	543	264 028
HDL-162000	310	653 035 03	HDP-170800	224	202 300 860	ISZ-003624+25+26	-	263 624
HDL-162300	310	653 045 03	HDP-170800	224	202 600 860	ISZ-003627	543	263 628
HDL-162500	310	653 050 03	HDS-183000	136	340 100 310	ISZ-003628	543	263 629
HDL-162600	310	653 055 03	HDS-183200	136	345 100 310	ISZ-003636	545	263 656
HDL-162700	310	653 045 03	HDS-184000	136	340 100 315	ISZ-003661	538	263 640
HDL-163100	-	657 300 3	HDS-184200	136	345 100 315	ISZ-003664	-	263 645
HDL-164000	315	658 103 53	HDS-185000	136	340 100 320	ISZ-003671	539	265 054
HDL-164050	315	658 103 03	HDS-185200	136	345 100 320	ISZ-003673	540	263 650
HDL-164100	315	658 104 03	HDS-186000	-	340 100 325	ISZ-003681	541	263 611
HDL-164200	315	658 104 53	HDS-186100	-	345 100 325	ISZ-003685	543	263 615
HDL-164400	315	658 105 53	HDS-186200	-	345 100 330	ISZ-003687	543	263 617
HDL-164500	-	657 545 03	HDS-186200	-	340 100 330	ISZ-004003	543	264 017
HDL-164510	-	657 555 03	HDS-186250	-	345 100 340	ISZ-004036	545	264 025
HDL-166000	-	522 103	HDS-186500	-	340 100 340	ISZ-004040	545	264 056
HDL-166000	-	523 10	HDS-187000	136	355 100 310	ISZ-004044	-	264 045
HDL-171700	268	511 203	HDS-187100	136	355 100 315	ISZ-004060	538	264 040
HDL-175000	272	517 501	HDS-187200	136	355 100 320	ISZ-004072	539	265 053
HDL-176000	-	513 113	HDS-188000	146	347 100 510	ISZ-004085	540	264 023
HDL-177000	-	515 00	HDS-188000	146	342 100 510	ISZ-006007	543	265 017
HDL-2002700	264	512 593 1	HDS-188100	146	347 100 515	ISZ-006013	544	265 019
HDL-200300	261	513 103 9	HDS-188100	146	342 100 515	ISZ-006013	544	265 020
HDL-200400	261	513 203 91	HDS-188200	146	347 100 520	ISZ-006018	543	265 015
HDL-200500	261	513 303 91	HDS-188200	146	342 100 520	ISZ-006044	-	265 045
HDL-200600	261	513 403 91	HDS-188300	-	342 100 525	ISZ-006060	545	265 056
HDL-200700	-	513 503 91	HDS-188300	-	347 100 525	ISZ-006061	539	265 055
HDL-200800	-	513 603 91	HDS-188500	146	357 100 510	ISZ-264019	544	264 019
HDL-202300	264	512 193	HDS-188600	146	357 100 515	ISZ-265023	540	265 023
HDL-202400	264	512 293	HDS-188700	146	357 100 520	SOZ-131000	434	740 141
HDL-202500	264	512 393 1	HDS-188800	-	357 100 525	SOZ-131110	434	740 20
HDL-202600	268	511 503 91	HDS-188900	-	357 100 530	SOZ-1311200	434	740 40
HDL-202600	264	512 493 1	HDS-189000	130	569 20	SOZ-131200	434	740 201
HDL-202800	268	511 703 91	HDS-189100	-	357 100 540	SOZ-131500	435	741 00
HDL-202800	264	512 693 1	IP4-7040409	45	470 404 09	SOZ-131500	435	741 01
HDL-202900	268	511 803 91	ISZ-003602	544	263 619	TWE-000710	544	263 621

R+M high quality spare parts are obtained from well-established manufacturers. As a rule they are not original spare parts. The original order numbers and the indication of other information are exclusively for your guidance and furthermore they are not intended for the general use, e.g. invoices addressed to end users. In case of mentioning the original order numbers in your orders it can not be assumed that the products ordered are original spare parts. Original spare parts are supplied when they are especially offered as those in our catalogue or in other mailing pieces such as special offers or newsletters.



Index



15C / 15N Crimp cartridges	188	25T black - wrapped thick cover	176
15N black - smooth cover	172	3-way	109
15N black - wrapped cover	172	90 °C-rails	430
15N blue - smooth cover	172	90° bended lances	289
15N blue - wrapped cover	172	90° elbow pipe	489
15N grey - wrapped cover	172	A	
15N red - wrapped cover	172	Accessories AK	30
15T black - wrapped thick cover	176	Accessories AK valves	30
15T blue - wrapped thick cover	176	Accessories and spare parts for lances and twin lances	293
15T Crimp cartridges	188	Accessories easyclean365+ Gun	481
2/3 hose tails	23	Accessories easyfoamer ST-73.1 & ST-73.2	393
24° DIN Compression pipe couplings stainless steel V4A 1.4571 / AISI 316 TI	424	Accessories electrically effertent	548
24° DIN Compression pipe couplings zinc-nickel coating	425	Accessories flow restrictor	346
2-component nozzle protector ST-10	294, 303	Accessories flow restrictor WEED DEVIL®	531
25C black - wrapped cover	174	Accessories for TD 300 & TD 410 & TD 410 INDUSTRIAL	337
25C blue - wrapped cover	174-175	Accessories for bayonet quick couplings	12
25C Crimp cartridges	188	Accessories for couplings "universal"	13
25C green - wrapped cover	175	Accessories for floor cleaning machines	569
25C grey - wrapped cover	175	Accessories for hose reels	435-436, 439-440, 443, 448-449
25C yellow - wrapped cover	175	Accessories for sprayer and foamer	396-397, 486-487
25N black - smooth cover	174	Accessories for spray-ex-sucker	569
25N blue - smooth cover	174	Accessories for ST-71	446
25N grey - smooth cover	174	Accessories for telescopic lances with coarse thread	35, 321
25T / 25N Crimp cartridges	188		

Index

Accessories for wall cleaner	290, 328	Ball valves	14, 25, 321, 365
Accessories fuel pumps	95	Ball valves with butterfly handle	25
Accessories injectors	81, 381-385	Barrel cleaner	529
Accessories quick connect spray nozzles	318	Bayonet quick couplings	12
Accessories STKI with electric drive	216, 444	Belt support kit	291, 328
Accessories thermometer	346	BERTOLINI high pressure pumps	62
Accessories thermometer WEED DEVIL®	531	Bicone rings	110, 426-427
Accessories wash brushes	324	BKX	73, 416
Accumulator	78	Blasting material barrel and suction kit for Sandblaster ST-555	327
Activator	134	Blasting nozzle	529
Adapter	530	blufood® - food hose	21, 362
Adapter connection ST-160	372, 462	blufood® per metre	362
Adapter for lances	257, 296	blufood365+®	176
Adaptor	323, 397, 464, 487	blufood365+® - food hose	165
Adaptor for lances with coarse thread	36	blufood365+® Fittings	165, 362
Adaptor for wash brushes with coarse thread	37	blufood365+® Fittings	165
Adaptor lances 500 bar	294, 303	blufood365+® per metre	165
Adhesives & sealing materials	134	blupur high pressure hoses per metre	180
Adjustable bracket in height + double wall angle	430-431	Bolt sets	436
Adjustable nozzle ST-51.1	289, 316	Bonded seals	129
Adjustable nozzles	316	Brush holder	24, 36, 324-325, 465
Air injector	323-324, 464	Brush set	515
Air injector for wash brushes	36	Brush with air injector turbofoam365+	324
Air spinner system Mosmatic	489	Brushes with hinge	324
Air spinner system, Mosmatic	488	Brushes with hinge and lance	324
Air system spinner LU-B for floor fastening	489	Brushes without hinge	324
Air system spinner LU-D for ceiling fastening	488	Bumpers	431
Air system spinner LU-W for wall fastening	488	Burner motors	96
AK	86, 428	Bypass valve with pneumatic control	429
AK with ball	30		
AK with ball horizontal	30	C	
AK with ball vertical	30	Cable with connector	96
AK with PE float	30	Cables with connector	95
Altemp Q NB 50	425	Canister holder	448
ALTO / WAP Reference list manufacturer number to R+M number	603-605	Car mat holder	469
Aluminum lances with coarse thread	35, 321	Car Wash vacuum hoses	547
Angle	305	Carbon brushes	560
Angle adaptor (without water flow)	321	Cartridge filter	33, 95
Angle adaptor for telescopic lances with coarse thread	35	Cartridge filter allocation for cleaning devices	551-556
Animal care set	543	Cartridge filter for cleaning devices	549-550
Annovi Reverberi high pressure motor pump combinations Car Wash	59	Cartridge for plugs	183
Annovi Reverberi high pressure pumps	58	CARWASH COMFORT - the proven hose marvel for self-service car washes	159-160, 474-475
Annovi Reverberi high pressure pumps Car Wash	59	CARWASH COMFORT - you are invited to experience our blue hose wonder in DN 8!	161, 476
Annovi Reverberi high pressure pumps with hydraulic motor	57	CARWASH COMFORT high pressure hoses per metre	180
Annovi Reverberi motor pumps	55-56	CARWASH COMFORT PREMIUM	156-158, 471-473
Apron	419	CARWASH COMFORT PREMIUM high pressure hoses per metre	179
Assembly on welding plate	422	Carwash low pressure foam lance	460
Assembly scheme easyfoam365+® bypass injectors ST-167 without compressed air module	387	Carwash low pressure foam lances	370
Assembly scheme easyfoam365+® bypass injectors ST-168 with compressed air module	389	CAT high pressure pumps	61
Assembly scheme easyfoam365+® injectors ST-164 with compressed air module	391	CEE Plug	92, 512
Assembly scheme easyfoam365+® injectors ST-164 without compressed air module	391	Ceiling support brackets	430-432
Attachment trolleys	431	Centering unit for filter housings	32
Automatic hose reel, mounted with pre-assembled HP-hoses	440-442	Centrifugal brake mechanism	440
Automatic hose reels	434-435, 438-439	Centrifugal pump	518
Automatic inlet window	440	Ceramic high pressure nozzles	301
AXEL	484	Ceramic sockets	48
		Check pressure gauges	95
B		Check Valve	65
Back ring	126	Check valves & intake filter	27
Backflow preventers	27	Chemical injectors	79
Bajonet adapter	255	Chemical injectors Suttner	78
Ball PEKI	30	Chemical spray gun ST-515	18, 398, 480
Ball ST-8	30	Chemical spray gun ST-515 with foam nozzle	18, 398, 480
Ball valve for telescopic lances with coarse thread	35	Chemical spray gun ST-515 with trigger guard	18, 398, 480

Index

Chemical spray guns ST-510 & lances	18, 398, 480	Create your individual Suttner vented handle	253
Chemical spray guns ST-515 with lances	18, 398, 480	Crevice tool holder	546
Chemistry Glove Solvex®	355	Crimp cartridges suitable for different hose models	188
Cleaning head TRS, Mosmatic	345	Crimp nipples	184-187, 199
Cleantecs rotating nozzles with carbide insert	314, 409	Crimp nipples premounted	186
Clear PVC hoses	20	Crimp nipples with pipe pieces	186
Clip flue	489	Crimp nipples with quick screw coupling	186
Clip flue, Mosmatic	535	Crimp nipples with quick screw coupling for hose reels	186
coarse thread	517	Crimp nipples with swivel	186
COFI without flange. Cable on side	97	Cross	109
Coil	95		
Coil type 5281-6213	26	D	
Coil type 6013	26	Danfoss (B)	99
Coils	100-102	Danfoss (H)	99
Coils suitable for Kärcher	101	Danfoss (S)	99
Coin box easywash365+® including control box	92, 512	Danfoss solenoid coil	86, 428
Coin meter	511	Danfoss VDHT	86, 428
Coin tester	513	Delavan (A)	99
Coin tester with light barrier	513	Delavan (B)	99
Coin tester with microswitch	513	Delavan (W)	99
COMET high pressure pumps	60	Descaling pumps and softening agents	27
COMET motor pumps	60	Diaphragm pressure switches SW 27	87
Compact seals	51	Diffusor nozzles	383
Comparison chart of metric, bsp and trapezoidal thread	130	Disinfection cold fog device ST-83.1	482
Compressed air guns	482	Disinfection cold fog device ST-83.1 / ST-83.2	395
Compressed air module ST-163	382	Distance in cm	305
Compressed air module ST-164	382	Distribution fittings	109
Compression fittings (bicone ring system)	110, 426	Distributor connector block	26, 447
Compression pipe couplings	427	Double crimp nipples	185
Condor / Fanal	87	Double nipples	61, 105
Connecting hoses	85	Double nipples / connectors	110, 426
Connecting hoses within ceiling boom 1 SN DN 8 black	478	Double nipples with 60° cone	410
Connecting rails	430-432	Drain jet extension	210
Connections for hobby half lances	255	Driver for rotating nozzles	212
Connector	26, 86, 97, 428	Dynaflex365+® 1SC black - smooth cover	173
Connector PG 9	87	Dynaflex365+® 1SC blue - smooth cover	173
Control box easywash365+®	92, 512	Dynaflex365+® 2SC black - smooth cover	173
Control cable	92, 512	Dynaflex365+® 2SC blue - smooth cover	173
Counterplates ST14/20/30/40	435	Dynaflex365+® Highly flexible high-pressure hoses	150-153, 173
Coupler plugs "universal"	13		
Coupling and plug ST-246-6	129	E	
Coupling and plug ST-246-8	129	easyclean365+ Gun	481
Coupling for shaft 6 mm	96	easyclean365+ microfibre cloth WA 1400	479
Coupling for shaft 8 mm long	96	easyclean365+ microfibre cloth WA 600	479
Coupling for shaft 8 mm short	96	easyclean365+ microfibre cloths	479
Coupling KW	222, 234	easyclean365+® washing brushes with coarse thread and water passage	35, 321
Coupling KW for spray guns	254	easyfarm365+®	520-521
Coupling KW with ST-52.1 Variopress	254, 289	easyfarm365+® high pressure hose for the agriculture	169
Couplings "B"	128, 356	easyfarm365+® high pressure hoses per metre	178
Couplings "universal"	13	easyfarm365+® spray guns	228
Couplings 25KB	126	easyfoam365+® bypass injectors ST-167	82, 378, 386
Couplings and plug ST-3100	128, 356, 523	easyfoam365+® bypass injectors ST-167 without compressed air module	386
Couplings and plug ST-45-250 KW	127	easyfoam365+® bypass injectors ST-168	388
Couplings and plug ST-45-600	129, 411	easyfoam365+® bypass injectors ST-168 with compressed air module	388
Couplings CEJN 322 and plug	126	easyfoam365+® foam and disinfectant units ST-164	390
Couplings SP-20 250 bar and plug	126	easyfoam365+® foam injector ST-160.2	379
Couplings with male and female thread	12	easyfoam365+® foam injector ST-160.3	379
Couplings with tail	12	easyfoam365+® Injector ST-162 panel mount version of ST-167/168	388
Coupling-system ST-245	208, 319	easyfoam365+® injector unit ST-160	376
Cover Suttner float tank	29	easyfoam365+® injectors	378
Covers	322, 463	easyfoam365+® injectors by Suttner	80-82, 376-377
Covers for wash brushes	34	easyfoam365+® Intake manifold ST-163.1	380
C-rails	430-432	easyfoamer ST-73.1 foam injector lances	392-393
Create your individual Suttner spray gun	252	easyfoamer ST-73.2 foam injector lances	393

Index

easyprotect365+ protection for high pressure cleaning	419
easyturn ST-9.4 – rotatable lances by Suttner	285
easyturn ST-9.7 – colored lances by Suttner	284
easywash365+ lances by Suttner	283, 286-287
easywash365+®	497
easywash365+® - ball bearing swivel ST-303	246, 453
easywash365+® twin lance holder	467
easywash365+® brush holder	36, 325, 465
easywash365+® car wash ceiling booms	494-495, 497
easywash365+® car wash ceiling booms with suspension	496
easywash365+® car wash ceiling boom-Z	495
easywash365+® car wash ceiling boom-Z with spring	496
easywash365+® car wash lance holder	467
easywash365+® double ceiling booms	494
easywash365+® double ceiling booms with suspension	497
easywash365+® foam lances	371, 461
easywash365+® foam sets	372-373, 462
easywash365+® freeze stop	245-246, 452-453
easywash365+® handles by Suttner	249, 456
easywash365+® holder	469
easywash365+® holder for Underbody Lance	490
easywash365+® lance holder	467
easywash365+® lance swivels ST-345 by Suttner	249, 456
easywash365+® lances by Suttner	457-458, 460
easywash365+® mat cleaner	469
easywash365+® mat cleaner available in 5 colors powder-coated	469
easywash365+® motorcycle ceiling booms	497
easywash365+® mounting plate	501
easywash365+® Prewashing trolley	466
easywash365+® spray guns by Suttner	245, 452
easywash365+® spray guns with swivels running in ball bearings by Suttner	246, 453
easywash365+® standard	245-246, 452-453, 494
easywash365+® standard with spring	496
easywash365+® suction swivel arm	493
easywash365+® swivels	122, 507
easywash365+® swivels 90°	122
easywash365+® vertical boom	493
easywash365+® wall and ceiling booms	501
easywash365+® wall boom counter plate	500
easywash365+® wall boom extension with ceiling boom	500
easywash365+® wash brushes - large areas are completely clean from now on!	34, 322, 463
easywash365+® weep	245-246, 452-453
Egg-type Nozzles	206
Egg-type Radial-Nozzles	206
Elbow	106-107
Elbow 45°, Mosmatic	535
Elbow 90°, Mosmatic	535
Elbow swivel	414
Elbow swivels	443
Elbows	110, 426
Electric appliance adapter	545
Emerson 1536	90
Emerson 8654	90
EMS-57	511
EMS-81	511
EMS-82	511
End clamp	433
End clamps	431
End stop	433
Ergo Industry	483
Ergonomic hand brush	514
Exchangeable	
Exchangeable nozzle inserts	80, 383, 482
Extension	489

Extension nipples	107
Extension plate, optional	448
F	
Falch Reference list manufacturer number to R+M number	605-606
Fiberglass lances with coarse thread	35, 321
Filter	23
Filter complete	95
Filter DN 17	31
Filter for chemical spray gun ST-515	18, 398, 480
Filter housings in brass / plastic	32
Filter housings made out of plastic	32
Filter housings without cartridge filter	32
Fitting grease	54
Fittings for bluflood365+®	165, 362
Fixing straps	85
FL-ABB 200	342
Flange	49
Flange for burner motors	96
Flange for hollow shaft motor	91
Flange with pump shaft 32 mm	96
Flat jet lances	260, 317
FL-DAR 200	345
FL-DAR 300	345
FL-EB 200	342
Flexible couplings	49
Flexible grout nozzles	544
flexy365+® high pressure hoses per metre	181
Flip-up face shields	418
Float tanks	29
Float valves	30
Float valves, plastic	30
Floor cleaner Driver 520	339
Floor cleaner Floater 520	339
Floor cleaner Floater 520 / Driver 520	339
Floor cleaner heart shape	338
Floor cleaner heart shape, 500 bar	420
Floor cleaner Mosmatic	343, 492
Floor cleaner with suction system, Mosmatic FL-ABB 200	492
Floor cleaner, Mosmatic FL-EB 200	492
Floor squeegees	515
Foam Chart	348
Foam gun	40, 394, 481
Foam head	396, 486
Foam head ST-75	366
Foam head ST-75.1 without foam pad	367
Foam hoses	396, 486
Foam injector lances	394
Foam injectors Suttner	78
Foam lance ST-3100	354
Foam lances	354-355, 365
Foam Nozzle Polypropylene	354
foamblaster ST-76	368, 521
Foamer with pressure tank	396-397, 486-487
Food high pressure hoses per metre	176-177
Food hoses	167
Foodjet - HP hose	21
Foodjet 1500 - HP hose	21
foodjet365+® - food hose with textile meshwork	166, 363
foodjet365+® high pressure hoses per metre	178
foodjet365+® 1500 - food hose with textile meshwork	166, 363
foodjet365+® 1500 high pressure hoses per metre	178
foodjet365+® 1500 per metre	166, 363
foodjet365+® per metre	166, 363

Index

Foot valves ST-540	199	High pressure hose reels	443, 445, 447
Frames for wash brushes	34, 322, 463	High pressure hose reels ST-71	446
Fuel filter	96	High pressure hose reels with electric drive	216, 444
Fuel nozzles	99	High pressure hoses	170
Fuel nozzles manufacturer comparison chart	99	High pressure hoses for hose reels	154-155
Fuel pumps Danfoss	95	High pressure hoses for self-service washing bays	162, 477
Fuel pumps Delta	94	High pressure hoses for special applications	168-170
Fuel pumps drive pegs	96	High pressure hoses per metre	178-179, 181
Fuel pumps SP	95	High pressure hoses per metre 1 ST	176
Fuel pumps Suntec	94	High pressure hoses per metre 1SN	172
Fuel solenoid valves	96	High pressure hoses per metre 2 SC	175
Functional principle of a flow switch	84	High pressure hoses per metre 2 SC / 2 SN	174
Furniture brush	543	High pressure hoses per metre 2 ST	176
Further information about high pressure nozzles	304-305	High pressure hoses with smooth cover	137, 138, 141-142, 145-148
G		High pressure hoses with smooth cover - 500 bar	139, 197
Gears for pumps	50	High pressure hoses with wrapped cover	136, 138, 140, 142, 144, 146-147
Glycerin filled Pressure gauges	28	High pressure hoses with wrapped cover and smooth cover	143
Grease for seals	134	High pressure nozzles	300-301, 337, 341
greyflex – high pressure hose	170	High pressure pipes	423
greyflex high pressure hoses per metre	178	High pressure quick couplings	126
Grip for vented handle ST-9	279	High pressure solenoid valves closed in off-position	86, 428
Grips	520, 523	High pressure spray guns	250
Grips for lances	293	High pressure spray guns for self-service car wash	454-455
Grout nozzles	544, 547	High-low wash brush	38, 513
Gun exit connections	254	High-pressure hoses for existing systems	149
Gun extensions	256, 295	High-pressure telescopic lances accessories	291, 328
Gun extensions with handle	257, 296	High-pressure telescopic lances made of carbon	292, 330
Gun with infinitely variable jet adjustment	14	High-pressure telescopic lances made of carbon, accessories	330
Gun with seven jet adjustments	14	HM 1000	314, 409
Gymatic 3/B regulation valve	71	HM 500	314, 409
H		HM 700	314, 409
H253 INTERPUMP regulation valves	72	HM INTERPUMP regulation valves	73
H284 INTERPUMP regulation valves	72	Hobby high pressure hoses	148
H450 INTERPUMP regulation valves	72	Hochdruckteleskopanlagen aus Carbon-Zubehör	292
H560	416	Holder for motorcycle helmets	469
H560 INTERPUMP regulation valves	72	Hollow (1 gal = 3.785 litres)	99
HACCP – Colour Coding Concept	399	Hose adaptor	130-131
HACCP - lances ST-29	399	Hose assemblies	168
HACCP - spray gun kits ST-2300, ST-2600, ST-2700	399	Hose bend restrictor	181-183
Half hollow (1 gal = 3.785 litres)	99	Hose bend restrictor - elastomer	182
Half lance exit connections	255	Hose bend restrictor - elastomer, short	181
Half-shell kits: Makeover of your gun	251	Hose bend restrictor - plastic	183
Hammer head screws	423	Hose bend restrictor - plastic / spiral	183
Hand grip	417	Hose bend restrictor in wave design - showing your company logo!	183
Hand grip for valves	66-67	Hose clamps	24, 79, 165, 362, 375
Hand squeegees	515	Hose connector	13
Hand wash brush	38, 513	Hose connectors	23, 130, 133, 410, 545
Handle ST-1200	16	Hose couplings "universal"	13
Handles with water flow	37, 517	Hose couplings "universal" - premium quality	13
Handles without water flow	37, 517	Hose end clamps	431
Hawk high pressure pumps	62	Hose fittings pre-assembled	190
Heated high pressure hoses (before 2005)	478	Hose guide system . stainless steel V2A / AISI 304 . 28 x 30 mm profile	431
Heated high pressure hoses 1 SN DN 8 black	478	Hose guide system . zinc-plated steel . 28 x 30 mm profile	430-431
Heated low pressure hoses	478	Hose guide system . zinc-plated steel . 32 x 30 mm profile	432-433
Heavy duty clamp	24, 165, 362	Hose guides	436
High pressure ball valves	427, 428	Hose hanger plastic	433
High pressure ball valves ST-3105	427	Hose holder	24, 191
High pressure ceiling boom including high pressure hose for walls and ceiling	501	Hose holder aluminium	24, 191
High pressure check valves ST-264	74	Hose press	191
High pressure Filter ST-33	79	Hose protection	183
High pressure gauges glycerine filled	85	Hose protection/shroud easyprotect365+	190, 413
High pressure hose for easywash365+® boom extension	500	Hose reel trolley	22, 448
		Hose scissors	22
		Hose stopper	502

Index

Hose stops	436
Hose tails	23
Hose trolleys	431, 503
Hose trolleys	431
Hose trolleys plastic	432
Hose trolleys plastic / galvanized steel	432
Hose with double wire braid - DIN standard	189
Hose with single wire braid - SAE 100	189
Hose with single wire braid and smooth cover	155
Hoses with double wire braid and smooth cover	137, 139, 141-143, 145-149, 155, 197
Hoses with double wire braid and wrapped cover	136, 138, 140, 142-144, 146-147, 154-155, 167
Hoses with one braid of high tensile steel wire and smooth cover	150-153
Hoses with single wire braid and smooth cover	137, 139, 141-143, 145, 148, 154, 195-197
Hoses with single wire braid and wrapped cover	136, 138, 140, 143-144, 146-147, 149, 154-155, 170, 373, 462
Hoses with single wire braid and wrapped thick cover	136, 138, 140, 143-144
Hoses with two braids of high tensile steel wire and smooth cover	150-153
Hot water kit	48
HP ball valves stainless steel	427
Hurricane	490
Hurricane Flip, 2 - in - 1 Mosmatic	491
Hurricane Mosmatic	490-491
Hydraulic motors Annovi Reverberi	57
Hydro Mole	203
Hydroblade® Nozzle System	302
Hydroblade® Nozzles	301
Hydro-Excavation Nozzles	214
Hydro-Excavation-Nozzle ST-458	214
I	
Ignition cables	97
Ignition electrodes	98
Ignition transformers	97
Index	612-624
Industrial water hose "WATER"	
Industry Line	483
Injector nozzles	383
Injectors by Suttner easyfoam365+®	80-82
Injectors ST-160	80, 82, 377-378
Injectors ST-160 with metering valve ST-161	81, 378
Injectors ST-166	80, 377
Injectors with compressed air module	390
Injectors without compressed air module	390
Inox automatic hose reels	437
Insulations for lances	257, 296
Insulations ST-9.9	257, 296
Intake filter for chemicals	28, 376
Intake manifold	380
integrated suction kit	327
Interior brush	514
INTERPUMP couplings and flanges	49
INTERPUMP high pressure pumps	45
INTERPUMP high pressure pumps for petrol engines	47
INTERPUMP high pressure pumps with built-in valve	46
INTERPUMP motor pumps	47
INTERPUMP regulation valves	72-73
INTERPUMP repair kits	48
INTERPUMP special high pressure pumps	46
IP ROTOMAX	315
IPC Reference list manufacturer number to R+M number	602
J	
Jetbreaker	77, 417
Jetter Valves	210

K	
K1 INTERPUMP regulation valves	72
K5 INTERPUMP regulation valves	72
K7 INTERPUMP regulation valves	72
K9 INTERPUMP regulation valves	72
Kärcher Reference list manufacturer number to R+M number	595-601
Keys for housing	32
Kit ST-85 Push & Pull	281
kommunal365+	242, 523-525
Kränzle Reference list manufacturer number to R+M number	606-608
L	
Lance bender	293
Lance clips	310, 399
Lance holder	297, 352, 431
Lance holder for floor mounting	467
Lance holder with suspension	467
Lance holder, Mosmatic	467
Lance holder, two-piece	296
Lance K	132, 268
Lance Mosmatic	457
Lance with stainless steel valve ST-53.2 on top	277
Lance with stainless steel valve ST-54.2 aside	273
Lance with valve ST-53 on top	275-276
Lance with valve ST-54 aside	272, 274-275
Lances	260-269, 520-525
Lances ST-29 HACCP	399
Lances with ergonomic swivel screw coupling	270-271, 281, 408
Lances with female thread	260, 364
Lances with insulation ST-22	270-271
Lances with valve ST-54	272
Lances with vented handle ST-9	270-271
LED-Controller	499
Level sensor LS809-51	30
Lip seal	129
Lip seals	254
Liquid gasketing	134
Locking bracket for elbow swivel joints	436
Locknut	109
Long cast foam head ST-75.2	368
Long Cast Nozzle	215, 529
Long hand brush	514
Longcast lances	15, 244, 288, 522
Longcast nozzle	243
Longcast nozzle holders for rotor arms	345
Low pressure foam head ST-75.3	367
Low pressure guns	17
Low pressure hoses	20
Low pressure injectors	25
Low pressure nozzle	293
Low pressure pre-spraying unit	470
Low pressure quick coupling ST-45	12
Low pressure valves	27
LS10 foam injector lances	394
LS3 foam injector lances	394
M	
M 28 E power-operated barrel cleaner with exhaust + CE	529
Manhole cleaner TXS-2f	530
maxpressure®	174-175
maxpressure® high pressure hoses per metre	179
Membrane	95
Metering valves	26, 78, 357, 376, 383
Metering valves ST-161	80, 382

Index

Micro Droplets Nozzle Holder	14, 368, 527	Nozzle holder	324
Milling Type Nozzles ST-49	207	Nozzle holder and protector hydroblade®	295
Mini adjustable nozzles	289, 316	Nozzle holder for nozzles 1/4" M NPT	294, 303
Mini Line	483	Nozzle holder for nozzles 1/8" M	294, 303
Mini-nozzles for sewer cleaning	203	Nozzle holder for tip nozzles	294, 303
Mosjet-Rotor-Nozzles	468	Nozzle Inserts	212, 395
Mosmatic	497	Nozzle protector	268, 293
Mosmatic car wash ceiling booms	498	Nozzle protector and nozzle holder	294-295, 303
Mosmatic car wash ceiling booms with LED	499, 535	Nozzle protector ST-11	293, 354, 399
Mosmatic car wash ceiling boom-Z with insulated high pressure hose	498	Nozzle tube	291, 328
Mosmatic car wash ceiling boom-Z with LED	499	Nozzles for longcast lances	15, 244, 288, 522
Mosmatic ceiling boom/ Wall boom extension	498	Nozzles for Micro Droplets Nozzle Holder	14, 368, 527
Mosmatic double ceiling booms with insulated high pressure hoses	498	Nozzles for sewer cleaning	415
Mosmatic double ceiling booms with LED	499	Nuts	110, 426
Mosmatic duct cleaner	530	Nut for nozzle	397, 487
Mosmatic EVM wall boom for charging cable	536		
Mosmatic flex-brush wand – no more washing without coin slot!	465	O	
Mosmatic high RPM swivels DY-Series	124, 509-510	Oil seal kits	50
Mosmatic manhole cleaner	530	Oil seal kits INTERPUMP	48
Mosmatic quick screw swivel couplings	113	Oil seals	51
Mosmatic seal kits	124, 509	Operating cylinder	383
Mosmatic standard with LED	499	O-rings	222
Mosmatic swivel joints DGR	509	O-ring for coupling KW	254
Mosmatic swivels DGE / DGEI	123, 508	O-ring for Filter housings	32
Mosmatic swivels DGL	124, 509	O-rings for valve plugs	48
Mosmatic swivels DGS / DGV / DGK	123, 508	O-rings for Kärcher	51
Mosmatic swivels DGVI	123, 508		
Mosmatic swivels WDG	122, 507	P	
Mosmatic swivels WDRS	125, 510	Pad brown	515
Mosmatic tank cleaner	528	Pad holder with swivel	515
Mosmatic wall-mount EV-Boom for e-charging stations	534	Pad white	515
Mosmatic wall-mount EV-Boom LU-W	534	Parbacks	50
Mosmatic wall-mount EV-Boom LU-W bended	534	PEKI without ball	30
Motor allocation for vacuum motors	561-568	Pipe clamps	423
Motor control easywash365+®	92, 512	Pipe Cleaning Program Overview	194
Motor cover	560	Pipe dusting nozzle	543
Motor protection switches	90	Pipe holder	422
Motor pump	47	Pipe holder for assembly on support	422
Motor pump combinations	56, 59-60	Pipe pieces	110, 426
Motor pumps series 198 Anнови Reverberi	55	Piston rod R+M EcoLine No. ONE	231
Motor pumps series 228 Anнови Reverberi	55	Pivotable nozzle holder	290
Motor with hollow shaft	91	Plastic caps for rotating nozzles ST-357	308
Motor with pump shaft 32 mm	96	Plastic caps for rotating nozzles ST-456	308
Motor with solid shaft	91	Plastic caps for rotating nozzles ST-458	308
Motors with internal flexible joint RVJ Series	91	Plastic Crimp cartridges	188
Mount base for flat iron	430	Plastic high pressure hoses per metre	180
Mounting bracket	427	Plastic hoses with single fabric braid	139, 148, 195-197
Mounting brackets	430-431	Plastic hoses with single wire braid	196
Mounting brackets for filters	32	Plastic hoses yellow	20
Mud suckers	320	Plastic plugs for rotating nozzles ST-357	399
Multi brush	514	Plastic plugs for rotating nozzles ST-456	399
		Plastic plugs for rotating nozzles ST-458	399
N		Plastic plugs, Mosmatic	535
Nail brushes	515	Plastic sewer hoses with single fabric braid	195-197
Nipple ST-245	319	Plastic sewer hoses with single wire braid	196
Nipples	410	Plug KW	320
Nipples with cone, metric thread CEL	185	Plug KW for ST-2300 / ST-2600 with coupling KW	222
Nipples with cone, metric thread DKOL / DKOS	184	Plugs	109, 381
Nipples with cone, pipe thread DKR / AGR	184	Plugs 25SB	126
Nipples, pipe thread RR	185	Plugs for spray guns with coupling KW	254
Nozzles	396-397, 486-487	Positioner	497
Nozzle filter VV	301	Power 1/4" M NPT - PMEG	301
Nozzle filters	397, 487	Power 1/8" M NPT - PMEG	301
Nozzle for coarse dirt	543	powershield365+®	168

Index

powershield365+® high pressure hoses per metre	179	Quick couplings suitable for Nito system	38, 516
PR 5	87	Quick screw couplings	114-115, 118, 167, 410, 412
Pre-spraying kits	25	Quick screw couplings ST-241	113
Pressure gauge fitting	86, 427	Quick screw couplings ST-740 and nipples ST-741	111, 411
Pressure gauges	28	Quick screw couplings suitable for system 2000	117
Pressure in bar	304-305	Quick screw couplings US	117
Pressure regulating valve-set	375	Quick screw couplings with internal o-ring	113
Pressure regulator	383	Quick screw couplings with long centric nipple	118
Pressure switches	87	Quick screw for crimp nipples	187
Pressure switches ST-7.1	87	Quick screw nipples	116
Principle of function sandblast kit	326	Quick screws	187
Probe pocket PS1	90		
Probe with screw	90	R	
Protection cap	410	R+M / Suttner high-pressure telescopic lances	291, 329
Protective boots	419	R+M 1 / Bronze high pressure hoses per metre	181
Protective gloves	470	R+M 150	315
Protective gloves in dispenser box	470	R+M 300	79
Protector ST-10	520, 523	R+M 300 with quick screw coupling	79
Pump accessories	54	R+M 434	438
Pump accessories Hawk	62	R+M 534	438
Pump allocation according to flow rate	43	R+M 544	439
Pump allocation according to pressure	42	R+M 564	439
Pump BERTOLINI	62	R+M adjustable nozzles	289, 316
Pump feet	51	R+M booms with hose carrier	503
Pump Hawk	62	R+M booms with hose reel ST 14	502
Pump series 132 Annovi Reverberi	58	R+M booms with pressure pipe	502
Pump series 178 Annovi Reverberi	58	R+M car wash booms	502-503
Pump series 194 Annovi Reverberi	58	R+M Crimp cartridges	188
Pump series 228, type "JK"	59	R+M EcoLine No. ONE	231
Pump series 228, type "JR"	59	R+M filter	31
Pump series 228, type "RK" Annovi Reverberi	58	R+M service	441
Pump UDOR	48	R+M swivels	125, 414, 510
Pump unit with power take-off (p.t.o.) shaft gearbox	50	Radiator brush	543
Pump/motor assignment	44, 59	Rapa BV 01 without cable	96
Pump/motor assignment on page 44	91	Rapa SV 04	86, 428
Pumps	57	Ravel motors	91
Pumps with hydraulic motor	57	RB35 Low pressure guns	17
Pumps with solenoid valve	94-95	RB65 Low pressure guns	17
Pumps without solenoid valve	94-95	Reducing pieces	545
PURClean365+® - 40 food hoses with automatic hose reel and ST-3225 - Food Special Set	361	Reduction double nipples	104
PURClean365+® - 65 food hoses with the professional flat ST-3225	360	Reduction extension nipples	107
PURClean365+® - food hose	164-165, 359-360	Reduction nipple	131, 199, 414
PURClean365+® 150 high pressure hoses per metre	177	Reduction nipples	105, 397, 487
PURClean365+® 150 per metre	163, 358	Reduction sockets	104
PURClean365+® 150, DN 11	163, 358	Reference list manufacturer number to R+M number	378
PURClean365+® 65	164, 359	Reference list manufacturer number to R+M number Alto	82
PURClean365+® 65 - food hose	21	Regulation valves	69-71
PURClean365+® 65 blue per metre	164, 359	Regulation valves Suttner	68
PURClean365+® 65 green per metre	164, 359	Reinforced PVC hoses blue	20, 81, 384
PURClean365+® 65 high pressure hoses per metre	177	Reinforced PVC hoses clear	20, 384
PURClean365+® 65 red per metre	164, 359	Reinforced PVC hoses yellow	20, 384
PURClean365+® 65 yellow per metre	164, 359	Relief valves / pressure regulation valves	75-77
PURClean365+® blue	361	Remote thermometers	90
PURClean365+® green	361	Remote thermostats	90
PURClean365+® Power and 150 - food hose	163, 358	Removable screw connections	111
PURClean365+® Power DN 8	163, 358	Rep. Kit BKX	73
PURClean365+® Power high pressure hoses per metre	177	Rep. Kit ST-250	69
PURClean365+® Power per metre	163, 358	Rep. Kit ST-265 Check Valve	65
PURClean365+® red	361	Rep. Kit ST-54.2	273
PURClean365+® yellow	361	Rep. Kit UL 250	69
		Rep. Kit VB85	70
Q		Rep. kits Sandblaster ST-555	326
QSC with hexagon centric nipple	118	Repair kits	186, 375-376, 417
Quick connect nozzle set by Suttner	318	Repair kit bypass ST-285	67

Index

Repair kit ST-1500	230	Rubber hoses black	20
Repair Kit ST-164	383	Rubber pads	
Repair kit ST-2320	235	Rubber protected ball valves	364
Repair kit ST-285	67	Rubber suction pipe	543
Repair kit ST-322	436	Rubber tool sleeve	540
Repair kits Annovi Reverberi	55-56, 58-59	RX ALKA battery operated, mobile	485
Repair kits CAT	61		
Repair kits chemical injectors	78	S	
Repair kits COMET	60	S 250 valve	75
Repair kits foam injectors	78	S3	416
Repair kits for CAT high pressure pumps	61	Safety goggles with adjustable strap	418
Repair kits Hawk	62	Safety goggles with temples	418
Repair kits INTERPUMP	45-47	Safety spectacles	418
Repair kits INTERPUMP regulation valves	73	Safety spectacles, safety goggles and face shields	418
Repair kits ST-1200	16	Sand nozzle ST-55	327
Repair kits ST-230	77	Sandblast head ST-55 with regulator	327
Repair kits ST-261	64	Sandblast kits	326-327
Repair kits ST-280	68	Sandblaster ST-555	326
Repair kits ST-291	68	Screen housings	32
Repair kits suitable for Kärcher high pressure pumps	52-53	Screw cartridges	189
Repair kits suitable for Kränzle	50	Screw clamps / fixing material	423
Repair kits suitable for Speck high pressure pumps	54	Screw connections	291, 328
Repair kits suitable for WAP	51	Screw fittings for blufood®	189
Repair kits UDOR	48	Screw fittings for blufood365+®	165, 362
Repair kits valve S 250	75	Screw fittings for PUREClean365+®	165, 189, 360
Repair/retrofit kit switch		Seal	111, 397, 411, 487, 560
Repair/retrofit kit switch for		Seal for quick screw couplings US	117
Repair/retrofit kit switch ST-265	65	Seal kit	242
Repair/retrofit kit switch ST-275	66, 417	Seal kit for operating cylinder	383
Repair/retrofit kit switch ST-285	67	Seal kit PEKI	30
Replacement brushes	324	Seal kit ST-1100	229
Replacement hoses	497	Seal kit ST-3600	240
Replacement hoses	501	Seal kit ST-44	187
Replacement scraper	516	Seal kits	48, 52, 454, 523
Replacement spring	497	Seal kits CAT	61
Retaining	134	Seal kits crimp nipples	187
Retrofit kit Venturi suction ST-36	340	Seal kits Kärcher	52-53
Return valves	381	Seal kits Speck	54
Re-usable screw nipples	189	Seal kits ST-3600	238, 402, 404
Re-usable screw nipples with metric thread	189	Seal kits ST-740	238, 402
Re-usable screw nipples, BSP thread	189	Seals for QSC	115
RG1 throttle control	73	Seals ST-44	112
Rim brush for trucks / busses	38, 513	Seamless per metre	423
Rim brushes	514	Self-service air dryer Mosmatic	489
Ring for suction marking	382	Self-service lances	286
Rinsing lance with insulated grip	364	Sewer cleaning hose assemblies	195-198
Rinsing lance, bended with insulated grip	364	Sewer cleaning hose assemblies with mini-nozzle	197
Rinsing lances	364	Sewer cleaning hoses with single wire braid and smooth cover	195
RL22 high pressure spray guns	250	Sewer cleaning nozzles	213, 415
Roof cleaner DR-520 Mosmatic	343	Sewer cleaning nozzles with female thread	202-203
Rotating brushes	324	Sewer cleaning nozzles with male thread	202
Rotating nozzle adaptor	209	Sewer Cleaning Program Overview	194
Rotating nozzles	315	Sewer hoses with double wire braid and smooth cover	197
Rotating nozzles driver	212	Sewer hoses with single wire braid and smooth cover	196-197
Rotating nozzles RH . 1,000 bar	415	sewerclean365+ PU-sewer cleaning hose	198
Rotating nozzles RT . 1,000 bar	415	sewerstar365+ rubber-sewer cleaning hose	198
Rotating nozzles ST-49.2	211	Short hand brush	514
Rotating nozzles ST-49.2 VIBRA	211	Shoulder support	242
Rotating nozzles with drivers	212	Shoulder support ST-3900	243
Rotating nozzles with integrated drivers	213	Shoulder supports	241, 405, 523
Rotating PV and solar system cleaner	532	Shovels	516
Rotating socket	489	Shower head	14
Rotor arms Mosmatic	345	Simple assembly	422
Rubber casing ST-1200	16	Single seals suitable for Kärcher	51

Index

Sleeve	547	ST-160 Injectors	82
Sleeve kit	51	ST-160 wall mount	80, 377
Sleeve kits	48, 50	ST-1700	225
Sleeves for windscreen wipers	470	ST-175 Foam & Clean	278, 369
Sliding Balls Superball / Suttner	181	ST-2000	242
Slot Drain Cleaner	215	ST-220	417
Small plough jet nozzle	209	ST-220 Pressure regulating valve	76
Snowbrooms	516	ST-220 Pressure regulating valve with green spring	76
Socket	61	ST-2200	225
Socket Kärcher	52	ST-230	
Socket Kärcher	53	ST-230 Pressure regulating valve with green spring	77
Sockets	104	ST-230 Pressure regulating valves	77
SocketSpeck	54	ST-230 Repair kits	77
Softening agents	27	ST-2300	220, 222-224
Solar cleaning	39, 532, 533	ST-2300 freeze stop	247, 454
Solar telescopic brush set for PV and solar systems	39, 533	ST-2300 weep	247, 454
Solenoid valves Bürkert normally closed NC	26	ST-230-700 Pressure regulating valve	77, 417
Solid (1 gal = 3.785 litres)	99	ST-2315	226
SoST 14 / SoST 20	435	ST-2320	235
Space holder	293	ST-2320	242
Spare coils Rapa	96	ST-2320 with adjustable nozzle ST-51.1	235
Spare parts Danfoss fuel pumps	95	ST-2320 with coupling ST-3100	235
Spare parts filter inserts	39, 533	ST-245 Coupling / wear cone ST-245	319
Spare parts flow switches	84	ST-247 coupling system	132
Spare parts flow switches ST-7	84	ST-247 couplings	132
Spare parts Industry Line	483	ST-247 with insulation ST-9.9	267
Spare parts nozzle head	355	ST-250 regulation valve	69
Spare parts ST-3100	355	ST-250 Rep. Kit	69
Spare parts Suntec and Delta fuel pumps	94	ST-26 Cool & Soft	262
Spare pressing jaws powercrimp365+	191	ST-2600	131, 221, 223-224, 226
Spare washer	12	ST-2600 freeze stop	247
Special gloves	419	ST-2600 weep	247
Special oil	48	ST-2605	226
Spiral line hoses	20	ST-261 for panel mounting	63
Splash guard	290, 355	ST-261 for panel mounting with pressure switch	63
Spray guns	14	ST-261 with chemical injector	63
Spray guns without sign	252	ST-261 with pressure switch	63
Spray hoses	396, 486	ST-261 with pressure switch four core	63
Spray nozzles	14	ST-261 with pressure switch three-core	63
Spray width depending on spray angle and distance	305	ST-261 without chemical injector	63
Sprayer	483-485	ST-261.2	64
Sprayer with pressure tank	396-397, 486-487	ST-261.2 with switch	64
Spraying protection flap	513	ST-2615	226
SR valve	75	ST-2620	236, 351
ST / SoST	436, 443	ST-2635 Industrial	227, 527
ST 14 / ST 20 / ST 30 / ST 40	434	ST-264 High pressure check valves	74
ST-001	261	ST-265	65
ST-001 with insulation ST-9.9	267	ST-265 AIR	429
ST-001 with vented handle ST-9	265-266, 268	ST-265 with green spring	65
ST-002 ultra high pressure lances	281, 406	ST-265 with green spring (240 bar)	65
ST-007	263-264	ST-265 with green spring (240 bar) and with switch	65
ST-10 nozzle protector	294, 303	ST-265 with switch	65
ST-1100	229, 247	ST-2700	234, 350
ST-1100 weep	247, 454	ST-2700 KW	233, 350
ST-1100 without trigger	247, 454	ST-2715	234, 350,
ST-1200 spray guns	16	ST-2720	234, 236, 350-351
ST-15 descaling softening pumps	27	ST-2720 with coupling ST-3100	236-351
ST-1500	230	ST-2725	236, 351
ST-1500 freeze stop	248, 455	ST-2725 with coupling ST-3100	236, 351
ST-1500 weep	248, 455	ST-275	66, 417
ST-1500 without trigger	248, 455	ST-275 with switch	66, 417
ST-1500C	248	ST-2750	241, 404-405
ST-154	281, 293, 406	ST-2750 - the lightweight among the 500 bar spray guns	241, 404-405
ST-160 Adapter connection	372, 462	ST-28 Cool & Compact	262

Index

ST-280	68	ST-54	293
ST-280 Repair kits	68	ST-54.2 valve	273
ST-285	67	ST-540 foot valves	199, 250, 414
ST-285 AIR	429	ST-550 AIR 2/2 valve – Pneumatically operated high pressure valve	429
ST-285 repair kit bypass	67	ST-550 foot valves	250, 345, 414
ST-285 with switch	67	ST-559	307, 408
ST-29 Cool & Compact	262-263	ST-559 Suttner rotating nozzles with carbide insert	307, 408
ST-29 Cool & Compact with splash guard	355	ST-56 twin nozzle holder	289
ST-29 Lances HACCP	399	ST-58 change-over valves	289
ST-291	68	ST-6 flow switches	84
ST-291 Repair kits	68	ST-60	78
ST-291 with switch	68	ST-60.1	78, 376
ST-300 swivels	119, 230-231, 242, 248, 455, 504	ST-60.1 with quick screw coupling	78
ST-301 swivel	248	ST-601 linear freeze stop	248, 455
ST-301 swivel - easywash365+®	245	ST-601 linear standard	248, 455
ST-301 swivels	119, 371, 452, 454, 451, 504,	ST-62	78
ST-3100	237, 352	ST-66 with check valve	26, 357
ST-3100 Coupling : Plug		ST-66 without check valve	26, 357
ST-3100 foam lance	354	ST-7 flow switches	84
ST-311 swivel	120, 227, 505, 527	ST-71 hose reel with sewer cleaning hose	199
ST-3225 / PReClean365+® 65 blue	360	ST-71 hose reels with sewer cleaning hose assembly	446
ST-3225 / PReClean365+® 65 green	360	ST-72 foam lances with air injector	365
ST-3225 / PReClean365+® 65 red	360	ST-72.1 foam lances with air injector	365
ST-3225 / PReClean365+® 65 yellow	360	ST-74 foam lances with air injector	354
ST-3225 HP	233, 353	ST-76 foamlaster	368, 521
ST-3225 LP	233, 353	ST-8 Adapter	29
ST-3240	243	ST-8 with ball	30
ST-33 High Pressure Filter	79, 199, 308	ST-810	228
ST-33 water intake filters	31	ST-810 low pressure gun	17
ST-330 swivel nozzle holder	290	ST-82 e25 / 21 power-operated barrel cleaner CE	529
ST-3300	237, 352	ST-82 h16/120 self rotating tank cleaner	528
ST-340	237, 352	ST-82 h16/40 self rotating tank cleaner	528
ST-340 swivels	228, 234, 242, 120,350, 505, 520, 523	ST-83 adapter for canisters	395, 482
ST-345 lance swivel	223	ST-83 cold fog hand tool accessories	395, 482
ST-345 swivels	120, 505	ST-83 window bracket	482
ST-35 intake filter for water	28	ST-83.1 window bracket	395
ST-350 swivel	120, 241, 105, 405, 414, 505	ST-85 Push & Pull lances	279-280, 520-524
ST-3500 high-flow spray guns	243, 526	ST-860	228
ST-3500 with Long Cast Nozzle	529	ST-860 low pressure gun	17
ST-351 swivel	120, 238, 402, 505	ST-860D steam gun	19, 232
ST-355 hobby	326	ST-860D steam gun with lance	19, 232
ST-357.1	306, 308	ST-97 floor cleaner	342
ST-3600	238-240, 402-403	Stainless steel filter housings	32
ST-3600 with lance	403	Standard	427
ST-4000 steam gun weep version with lance	232	Standard stainless steel	427
ST-4000 steam gun with lance	19	Steam gun ST-860D	19
ST-4000 steam guns with lance	232	Steam gun with lance ST-4000	19
ST-456	307	Steam gun with lance ST-860D	19
ST-458.1	306-308, 526	Steinen (H)	99
ST-49 Ball type nozzle, 20°	205	Steinen (S/ST)	99
ST-49 Ball type nozzle, 30°	204	Sting extension	210
ST-49 nozzles for sewer cleaning	202-203	STK	445
ST-49.2 Rotating nozzles	211	STKI	443
ST-49.2 VIBRA Rotating nozzles	211	STKI mini	445
ST-5 flow switches 350 bar	83	STKI with electric drive	444
ST-5 flow switches ST-5 "High-Flow" 210 bar	83	Stop nuts	427
ST-505 flow switches	83	Stop with rubber buffer, Mosmatic	535
ST-505 flow switches 600 bar	83, 416	Straight screw connectors	110, 426
ST-51 adjustable nozzles	289, 316	Straight screw connectors (bicone ring system, heavy duty series)	410
ST-515 chemical spray guns with lances	18	Suction filter ST-31	81
ST-52.1 Variopress	289	Suction kit for blasting material container/barrel	327
ST-52.1 Variopress, TR22	131	Suction sets with suction filter ST-35	28
ST-53	293	Suction swivel arm easywash365+	546
ST-53.2 valve	277	Suitable for Mazzoni	102

Index

Suitable for Portotecnica	102	Suttner ultra high pressure quick couplings ST-45-600 KW	129
Suitable for Sirio	100	Swivel connectors	109
Suitable for WAP	102	Swivel ST-322	444
Superball	168	Swivels for easywash365+® ceiling booms	497
Superball-Sliding Balls	168	Swivels ST-322	436, 439, 446
Superglue	134		
Support pipe holder	422	T	
Surface and underbody cleaner Hurricane Flip, 2 - in - 1 Mosmatic	343	Tank sleeve	539
Surface cleaner Aqua Pro with integrades water recovery system, Mosmatic	344	T-connections	108
Surface cleaner FL-AHY 520 Mosmatic	343	Technical specifications	191
Surface cleaner FL-SAR 300 Mosmatic	343	Telescopic lances and easyclean365+® wash brushes	321
Surface cleaner TD 300 BASIC	334	Telescopic lances and wash brushes easyclean365+®	35
Surface cleaner TD 410 BASIC	334	Tension screws	48
Surface cleaner TD 410 INDUSTRIAL	335-336	Thermal relief valves	74
Surface cleaner TD 410 INDUSTRIAL with suction system	336	Thread seal tape	134
Surface cleaner TD 420 with suction	340	Threadlocking	134
Surface cleaner TD 520 BASIC	334	Threadsealing	134
Surface cleaner TD 520 INDUSTRIAL	336	Threadsealing/threadlocking R+M	134
Surface cleaner TD 750 INDUSTRIAL	337	Throttle control	73
Surface cleaner with air recovery system and integrated gum remover, Mosmatic	344, 492	TIMAX INTERPUMP	73
Surface cleaner with recovery system for steam generator, Mosmatic	345	Time hour meter	90
Suttner 500 bar ultra high pressure guns	240, 404	Tip cleaner	210, 300
Suttner 600 bar ultra high pressure guns	238-239, 402-403	Tip nozzle	300
Suttner barrel cleaner	529	titan	484
Suttner chemical injectors	78	Token	513
Suttner chemical suction set	375	Tool sleeve PVC	540
Suttner chemical suction sets	79	Towing-Eye Kit ST-49	210
Suttner float tank	29	TR20 adapter	306
Suttner flow switches	83-84, 416	TR20 adapters lances	133
Suttner foam guns	233, 236-237, 351-353	TR22 adapters (old : new)	133
Suttner foam injectors	78, 375-376	TR22 K-lock system	131-132
Suttner high pressure quick couplings ST-246	129	Trigger guard for chemical spray gun ST-515	18, 398, 480
Suttner high pressure quick couplings ST-3100	128, 356, 523	Triple nozzle	357
Suttner high pressure quick couplings ST-45-250 KW	127	Trolley	385, 449
Suttner high pressure spray guns	218-230, 242-243, 248, 527	TurboDevil® - agriculture cleaner Big Wheel	335
Suttner high pressure spray guns for self-service car wash	247	TurboDevil® - BASIC	334
Suttner intake filter & suction sets	28	TurboDevil® - INDUSTRIAL	335
Suttner low pressure guns	17	TurboDevil® - our new TurboDevil® floor cleaner series	334-337
Suttner low pressure guns	16	turbofoam365+ lances by Suttner	374, 459
Suttner mini rotating nozzles for sewer cleaning ST-49.3	201	Twin and adjustable nozzle holder	289
Suttner nozzles for sewer cleaning ST-49	200	Twin assembly	422
Suttner nozzles for sewer cleaning ST-49.3	415	Twin hose trolleys	431
Suttner quick screw swivel couplings ST-44	112	Twin lances	272-277
Suttner regulation valve ST-220 with green spring	65	Twin lances with moulded handle	271
Suttner regulation valve ST-261.2	64	Two component inlet	381
Suttner regulation valve ST-265	65	Type 6013 without connector	26
Suttner regulation valve ST-285	67	Type 6213 without connector	26
Suttner regulation valves	68	Type B 18 for petrol engines	50
Suttner regulation valves ST-261	63-64	Type EGVD-R-WD, cone 24°	424-425
Suttner rotating nozzles for sewer cleaning ST-49.1	201	Type ELVD, cone 24°	424-425
Suttner rotating nozzles in 4 colours	399	Type ETVD, cone 24°	424-425
Suttner rotating nozzles in different colours	308	Type EWVD, cone 24°	424-425
Suttner rotating nozzles ST-458.1 with ceramic insert	526	Type G, cone 24°	424-425
Suttner rotating nozzles with ceramic insert	306-214	Type GAI, cone 24°	424-425
Suttner rotating nozzles without plastic cap	308	Type GE, cone 24°	424-425
Suttner spray guns	233-235, 350	Type M 261 for p. t. o. shafts	50
Suttner stainless steel regulation valve ST-275	66, 417	Type of hazard according to DIN EN 1717 (DIN 1988-4)	27
Suttner steam guns	19, 232	Type OKN	90
Suttner swivels	119-120, 504-505	Type REDV, cone 24°	424-425
Suttner swivels ST-320	121, 506	Type RS 500 for petrol engines	50
Suttner swivels ST-322	121, 506	Type T, cone 24°	424-425
Suttner tank cleaner	528	Type W, cone 24°	424-425
Suttner ultra high pressure lances	281-282, 406-408, 526	Type WIMEX	90
Suttner ultra high pressure quick couplings ST-45-600	411	TYR 2f	530

Index

TYR 2s	530	VB53/500 regulation valve	70
U		VB56 regulation valve	69
UDOR high pressure pumps	48	VB60/600	416
UL 250 for panel mounting	69	VB60/600 regulation valve	71
UL 250 regulation valve	69	VB7 regulation valve	69
UL 250 Rep. Kit	69	VB75 regulation valve	70
U-lances	263	VB80 regulation valve	70
Ultra high pressure ball valves ST-3105	415	VB80/150 regulation valve	70
Ultra high pressure couplings 500 bar	410	VB85 regulation valve	70
Ultra High Pressure Filter	79, 381	VB9 regulation valve	69
Ultra high pressure hoses	171, 412	Vented handles ST-9	257, 296
Ultra high pressure lance	239-241, 403-405	Version "BV" INTERPUMP	46
Ultra high pressure lances ST-3600 - 600 bar	282, 407, 526	Version "V" INTERPUMP	46
Ultra high pressure regulation valves	416-417	Vibrationdampner	62
Ultra high pressure relief valves	416	Vorwerk lances & wash brushes	323, 464
Ultra high pressure swivels	414	Vorwerk lances and wash brushes	36
Ultra high pressure twin lances	281-282, 406	Vorwerk wash brushes	36, 323, 464
Undamped pressure gauges	28	VRT100/190 regulation valve	70
Underbody cleaner with ramp set-up, Mosmatic	491	VS 240 valve	75
Underbody lance ST-97.1	490	VS 500	416
Universal bracket	297, 316	VS 500 valve	75
Universal hose guide ST-71	447	VX ALKA battery operated, mobile	485
Universal with solenoid valve. Left/right	94	W	
Upholstery suction nozzle	543	Wall & floor cleaner	342
U-rings Kärcher	51	Wall boom extension with ceiling boom	500
V		Wall bracket	62, 532
Vacuum bags	570-577	Wall bracket for injectors	384
Vacuum cups	470	Wall bracket for wall cleaner TurboDevil® WW 301	341
Vacuum filter	569	Wall brackets	24, 377, 439
Vacuum hoses	539	Wall brackets for canisters	377, 384
Vacuum hoses assembled	538	Wall cleaner	290, 328, 341
Vacuum hoses oil-resistant	546	Wall cleaner Mosmatic	342
Vacuum motor cable	560	Wall mount	351
Vacuum motors	556-560	Wall mount base	430, 432
Vacuum tools	541-544	Wall mount for protective gloves	470
Vacuum tubes	540	Wall mount for Suttner high pressure guns with lance or twin lance	236
Valve	455	Wall mount for Suttner high pressure spray guns with lance or twin lance	255
Valve "easystart"	73	Wall mounts	497, 516
Valve complete	405	Wall swivel brackets	439
Valve complete R+M EcoLine No. ONE	231	Wall swivel brackets ST 14 / ST 20	435
Valve complete ST-2000	242	Wall swivel brackets ST 30 / ST 40	435
Valve complete ST-2300	454	Wall swivel brackets ST 40	435
Valve complete ST-2750	241	Wash brush	38, 513
Valve lock	80, 377	Wash brush swivelling	38, 513
Valve plugs INTERPUMP	48	Wash brush with cover	34, 322, 463
Valves	48	Wash brushes	34, 322-323, 463-464
Valves CAT	61	Wash brushes with water flow	38, 513
Valves complete	234, 350, 455	Wash brushes without water flow	514-515
Valves complete - easywash365+®	245-246, 371, 452-453, 461	Water filter 3"	31
Valves complete easyfarm365+®, ST-2635 Industrial, ST-2315, ST-2615 ST-2600, ST-2605	228	Water inlet quick couplings "universal"	13
Valves complete for ST-1500	230	Water intake filters	31
Valves complete ST-2300 / ST-2600	223-224	Water reduction stainless steel	357
Valves for Suttner high pressure spray guns	248	Water tank for wall mounting	447
Valves INTERPUMP	48	Water tank for wall mounting, 60 liters	29
Valves Kärcher	52-53	WC / gutter lances	289
Valves Speck	54	WEED DEVIL® – Our new device for weed control	531
Valves with connections	427	WEED DEVIL® – weed killer	532
Valves with spindle	26	weeddevil® – Our new device for weed control	346
Vario nozzles	315	Weidner Reference list manufacturer number to R+M number	609-610
Vario nozzles and triple nozzles	315-316	Wheel scrubber	466
VB26 regulation valve	70	Wheel scrubber WHEELBLASTER PRO	466
VB350 regulation valve	71	Whip-stop easyprotect365+	190, 413
		Window brushes and accessories	515-516

Index

[illegible]







