



WEAVER

EQUIPMENT

COMPLETE YOUR RANGE

2026-01
CATALOGUE



A BRAND BY
Cattini
OLEOPNEUMATICA

CE EAC



Cattini

OLEOPNEUMATICA



Our jacks have marked their presence over the years thanks to their high reliability and long life, practicality and elegance.

Each jack, made with special prime quality materials, is inspected and tested before leaving our factory.

Thanks to our high-quality products, we are the forefront of leading European and non-European markets.

Weaver joins our jacks as a complementary range to offer those who choose the Cattini brand everything they need for a safe, easy, fast and environmentally friendly maintenance.

At Cattini, all efforts are made to assure our products meet high-quality and durability standards.


The WEAVER range is covered by a 12 month warranty, valid from the date appearing on the purchase document.

The warranty certificate can be found in the end user manual provided along with the shipment.



COMPLETE YOUR RANGE

WEAVER SERIES



www.cattini.eu

HYDRAULIC BOTTLE JACKS

Our bottle jacks fully comply with European Standard (EN1494:2000+A1:2008) for mobile, movable jacks and lifting equipment.

The Weaver bottle jacks are engineered with an hold-to-run relief valve to ensure the highest safety standards.

Since 1967 we have been developing and testing products to ensure that the operator does not run any risks during the maintenance process of the vehicles.

Our passion for creating the most reliable, fastest, easiest-to-use product without sacrificing the highest quality, has been combined with the pleasure of selling and interacting with anyone who trusts our company.





WBJ041840

Capacity	Min. height	Max. height	Action	Dimensions	Weight
4 t 4.4 ton	185 mm 7.28 in	405 mm 15.94 in	2 pistons	155 x 145 x 185 mm 6.10 x 5.7 x 7.28 in	6.7 kg 14.7 lb



WBJ121533

Capacity	Min. height	Max. height	Action	Dimensions	Weight
12 t 13.2 ton	150 mm 5.9 in	330 mm 12.99 in	2 pistons	238 x 156 x 150 mm 9.37 x 6.14 x 5.9 in	9.6 kg 21.1 lb





WBJ122554

Capacity	Min. height	Max. height	Action	Dimensions	Weight
12 t 13.2 ton	250 mm 9.84 in	435 mm (+ 105 mm) 17.12 in (+ 4.13 in)	1 piston (+ extension screw)	150 x 145 x 250 mm 5.9 x 5.7 x 9.84 in	8.5 kg 18.7 lb



WBJ152349

Capacity	Min. height	Max. height	Action	Dimensions	Weight
15 t 16.5 ton	230 mm 9.05 in	385 mm (+ 105 mm) 15.15 in (+ 4.13 in)	1 piston (+ extension screw)	155 x 145 x 230 mm 6.1 x 5.7 x 9.05 in	6.7 kg 14.7 lb





WBJ201628



Capacity	Min. height	Max. height	Action	Dimensions	Weight
20 t	165 mm	245 mm (+ 40 mm)	1 piston (+ extension screw)	170 x 160 x 165 mm	8.3 kg
22 ton	6.49 in	9.64 in (+ 1.5 in)		6.69 x 6.29 x 6.49 in	18.2 lb



WBJ202449



Capacity	Min. height	Max. height	Action	Dimensions	Weight
20 t	240 mm	395 mm (+ 100 mm)	1 piston (+ extension screw)	160 x 170 x 240 mm	11.1 kg
22 ton	9.44 in	15.55 in (+ 3.93 in)		6.29 x 6.69 x 9.44 in	24.4 lb



WBJ301627

Capacity	Min. height	Max. height	Action	Dimensions	Weight
30 t	165 mm	235 mm (+ 40 mm)	1 piston (+ extension screw)	170 x 185 x 165 mm	12 kg
33 ton	6.49 in	9.25 in (+ 1.5 in)		6.69 x 7.28 x 6.49 in	26.4 lb



WBJ302550

Capacity	Min. height	Max. height	Action	Dimensions	Weight
30 t	250 mm	400 mm (+ 100 mm)	1 piston (+ extension screw)	170 x 185 x 250 mm	16 kg
33 ton	9.84 in	15.74 in (+ 3.93 in)		6.69 x 7.28 x 9.84 in	35.2 lb





WBJ352752

Capacity	Min. height	Max. height	Action	Dimensions	Weight
35 t 38.5 ton	270 mm 10.62 in	420 mm (+ 100 mm) 16.53 in (+ 3.93 in)	1 piston (+ extension screw)	290 x 195 x 270 mm 11.41 x 7.67 x 10.62 in	21.2 kg 46.73 lb



WBJ502540

Capacity	Min. height	Max. height	Action	Dimensions	Weight
50 t 55.1 ton	250 mm 9.84 in	400 mm 15.74 in	1 piston (+ extension screw)	270 x 200 x 250 mm 10.62 x 7.87 x 9.84 in	28 kg 61.7 lb



LIFTING BAGS

Our lifting bags are designed for maximum efficiency and safety and range from compact models for precision work to powerful options for lifting heavy loads.

Find the ideal solution for your needs.

Some features of our durable lifting bags:

- Excellent performance
- User-friendly
- Strong: cushions made with high-quality compounds with aramid reinforcement
- Light: the largest cushion 100 x 100 cm, 76T weighs only 24 kg
- Low maintenance
- Safe: each lifting bag is tested before shipping
- CE marking
- Standard EN 13731: 2007
- Made in Europe
- Low profile: 23-25 mm thickness





ROUND LIFTING BAGS

Code	Capacity	Max. height	Air volume	Size	Weight
WLB001R08	1 t 1.1 ton	75 mm 2.95 in	0.96 l	140 x 140 x 23 mm 5.51 x 5.51 x 0.9 in	0.4 kg 0.8 lb
WLB003R08	3 t 3.3 ton	100 mm 3.93 in	5.16 l	200 x 260 x 23 mm 7.87 x 10.23 x 0.9 in	1 kg 2.2 lb
WLB006R08	6 t 6.6 ton	170 mm 6.69 in	13.3 l	300 x 300 x 23 mm 11.81 x 11.81 x 0.9 in	2 kg 4.4 lb
WLB010R08	10 t 11 ton	210 mm 8.26 in	28.3 l	380 x 380 x 23 mm 14.96 x 14.96 x 0.9 in	3.8 kg 8.3 lb
WLB018R08	18 t 19.8 ton	290 mm 11.41 in	66 l	500 x 500 x 23 mm 19.68 x 19.68 x 0.9 in	6.4 kg 14 lb

Working pressure: 8 bar



COMPLETE YOUR RANGE

ROUND LIFTING BAGS

Code	Capacity	Max. height	Air volume	Size	Weight
WLB027R08	27 t 29.7 ton	360 mm 14.17 in	126.6 l	600 x 600 x 25 mm 23.62 x 23.62 x 0.98 in	9.8 kg 21.6 lb
WLB037R08	37 t 40.7 ton	420 mm 16.53 in	210 l	700 x 700 x 25 mm 27.55 x 27.55 x 0.98 in	13.5 kg 29.7 lb
WLB048R08	48 t 52.9 ton	470 mm 18.5 in	315 l	800 x 800 x 25 mm 31.49 x 31.49 x 0.98 in	17.8 kg 39.2 lb
WLB062R08	62 t 68.3 ton	500 mm 19.68 in	483.3 l	900 x 900 x 25 mm 35.43 x 35.43 x 0.98 in	21 kg 46.2 lb
WLB076R08	76 t 83.7 ton	590 mm 23.22 in	526.6 l	1000 x 1000 x 25 mm 39.37 x 39.37 x 0.98 in	24.5 kg 54 lb

Working pressure: 8 bar





FLAT LIFTING BAGS

Code	Capacity	Max. height	Air volume	Size	Weight
WL B023F08	23 t 25.3 ton	220 mm 8.66 in	126 l	600 x 600 x 25 mm 23.62 x 23.62 x 0.98 in	9.8 kg 21.6 lb
WL B033F08	33 t 36.3 ton	220 mm 8.66 in	190 l	700 x 700 x 25 mm 27.55 x 27.55 x 0.98 in	15.5 kg 34.1 lb
WL B048F08	48 t 52.9 ton	220 mm 8.66 in	210 l	800 x 800 x 25 mm 31.49 x 31.49 x 0.98 in	17.8 kg 39.2 lb
WL B062F08	62 t 68.3 ton	220 mm 8.66 in	330 l	900 x 900 x 25 mm 35.43 x 35.43 x 0.98 in	21 kg 46.2 lb
WL B072F08	72 t 79.3 ton	220 mm 8.66 in	370 l	1000 x 1000 x 25 mm 39.37 x 39.37 x 0.98 in	24.5 kg 54 lb

Working pressure: 8 bar



COMPLETE YOUR RANGE

LIFTING BAGS ACCESSORIES

We offer a choice of accessories compatible with our lifting bags to ensure an even safer and more productive workflow.



WLBA101S

Single output remote control
8 bar

WLBA102D

Dual output remote control
8 bar



WLBA201S

Shut Off Valve



WLBA301Y

5 m yellow hose
max 25 bar



WLBA301R

5 m red hose
max 25 bar



WLBA301B

5 m blue hose
max 25 bar



WLBA302Y

10 m yellow hose
max 25 bar



WLBA302R

10 m red hose
max 25 bar



WLBA302B

10 m blue hose
max 25 bar

STABILITY SOLUTIONS

Weaver outrigger pads are strong, rigid and easy equipment made of engineered thermoplastic material.

These pads spread the weight over a larger surface offering better support while also protecting the surface.


This table allows you to calculate the maximum load applicable on a certain ground without sinking.

Increasing the size of the pad increases the load bearable without sinking.


For example: a 400x400 pad on hard clay soil ($0.4 \text{ N} / \text{mm}^2$) starts sinking at $400 \times 400 \times 0.4 = 64000 \text{ N} = 6.5 \text{ t}$.

A 600x600 pad on the same ground instead begins to sink at $600 \times 600 \times 0.4 = 14.7 \text{ t}$.

TYPE OF SOIL	MAXIMUM ALLOWED PRESSURE LOAD	
	N/mm ²	psi
Sand	0.05 ÷ 0.3	7.2 ÷ 43.5
Gravel	0.3 ÷ 0.4	43.5 ÷ 58
Clay soil	0.04 ÷ 0.4	5.8 ÷ 58
Rock	1 ÷ 3	145 ÷ 435
Regular concrete	10 ÷ 40	1450 ÷ 5800

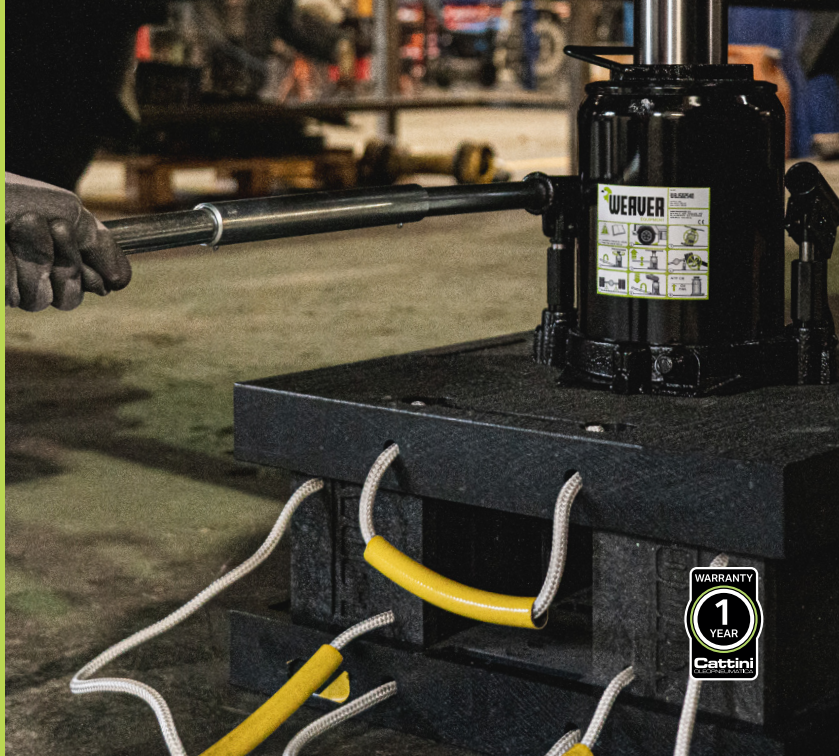

PADS



Code	Max load	Size	Weight
M-SP0300180-01	180 t 198 ton	300 x 300 x 30 mm 11.8 x 11.8 x 1.1 in	2.5 kg 5.5 lb
M-SP0300320-01	200 t 220 ton	400 x 400 x 30 mm 15.7 x 15.7 x 1.1 in	4.5 kg 9.9 lb
M-SP040010-01	200 t 220 ton	400 x 400 x 40 mm 15.7 x 15.7 x 1.5 in	6 kg 13.2 lb
M-SP060015-01	200 t 220 ton	400 x 400 x 60 mm 15.7 x 15.7 x 2.3 in	9 kg 19.8 lb
M-SP080020-01	200 t 220 ton	400 x 400 x 80 mm 15.7 x 15.7 x 3.1 in	12 kg 26.4 lb
M-SP0400040-01	200 t 220 ton	500 x 500 x 40 mm 19.6 x 19.6 x 1.5 in	9 kg 19.8 lb
M-SP0500500-01	200 t 220 ton	500 x 500 x 50 mm 19.6 x 19.6 x 1.9 in	12 kg 26.4 lb
M-SP060020-01	200 t 220 ton	550 x 550 x 60 mm 19.6 x 19.6 x 2.3 in	17 kg 37.4 lb

PADS



M-SP040025-01



M-RP060040-01

Code	Max load	Size	Weight
M-SP040020-01	200 t 220 ton	600 x 600 x 40 mm 23.6 x 23.6 x 1.5 in	14 kg 30.8 lb
M-SP0500720-01	200 t 220 ton	600 x 600 x 50 mm 23.6 x 23.6 x 1.9 in	17 kg 37.4 lb
M-SP060025-01	200 t 220 ton	600 x 600 x 60 mm 23.6 x 23.6 x 2.3 in	20 kg 44 lb
M-SP040025-01 with ramp	200 t 220 ton	600 x 1000 x 40 mm 23.6 x 39.3 x 1.5 in	23 kg 50.7 lb
M-SP060035-01	200 t 220 ton	800 x 800 x 60 mm 31.4 x 31.4 x 2.3 in	37 kg 81.5 lb
M-SP0602000-01	200 t 220 ton	1000 x 1000 x 60 mm 39.3 x 39.3 x 2.3 in	58 kg 127.8 lb
M-SP0802000-01	200 t 220 ton	1000 x 1000 x 80 mm 39.3 x 39.3 x 3.1 in	78 kg 171.9 lb
M-RP060040-01	200 t 220 ton	Ø 1000 x 60 mm Ø 39.3 x 2.3 in	46 kg 101.4 lb

STACK PADS



Code	Max load	Size	Weight
M-STP805	25 t 28 ton	500 x 250 x 80 mm 19.6 x 9.8 x 3.1 in	10 kg 22 lb
M-STP8010	25 t 28 ton	1000 x 250 x 80 mm 39.3 x 9.8 x 3.1 in	19 kg 42 lb

Stack pads are often used in combination with other pads. Stack several pads allows to reach the requested height which would not be reachable with a normal outrigger pad. This will result in constructions of 2-3 levels to reach the desired height. Stack pads have a standard 2-sided anti-slip finishing.

STABILITY BLOCKS



Code	Max compression	Size	Weight
M-SBB0060	3 N/mm ²	448 x 140 x 140 mm 17.6 x 5.5 x 5.5 in	8 kg 17.6 lb
M-SBB0061	3 N/mm ²	1174 x 140 x 140 mm 46.2 x 5.5 x 5.5 in	17 kg 37.4 lb

Suggestions:

- always set up a full layer at the base
- use our top/bottom pads in order to have a better weight distribution

Some examples of possible structures:

3+2 Max load*: 20 t



3+3 Max load*: 45 t



8+6 Max load*: 180 t




8+8 Max load*: 320 t



* The maximum load is calculated under conditions of uniform load distribution on the entire surface with the pad placed on a flat, smooth surface with a compressive strength greater than 20 N / mm² (e.g. concrete).

COMPLETE YOUR RANGE

TOP/BOTTOM BLOCKS



Code

M-SBB0040

Size

1200 x 1200 x 80 mm
47.2 x 47.2 x 3.1 in

Weight

10 kg
22 lb

M-SBB0050

500 x 500 x 60 mm
19.6 x 19.6 x 2.3 in

12 kg
26.4 lb

WEDGE PADS



Code

M-SBB0030

Size

400 x 120 x 120 mm
15.7 x 4.7 x 4.7 in

Weight

3 kg
6.6 lb



CE EAC



2026-01



CATTINI OLEOPNEUMATICA S.r.l.
VIA G. VERDI, 41 - Z.I. Vecchia Puglia
42043 GATTATICO (RE) - ITALY
PH.+39 0522 909750 - info@cattini.eu
www.cattini.eu

